

SONY®

DME SWITCHER

DFS-700
DFS-700P

DIGITAL/ANALOG INPUT BOARD

BKDF-701

ANALOG COMPOSITE INPUT BOARD

BKDF-702/702P

DIGITAL MULTI EFFECTS BOARD

BKDF-711

3D VIDEO MAPPING EFFECTS BOARD

BKDF-712

SERVICE MANUAL

Volume 2 1st Edition

⚠ 警告

このマニュアルは、サービス専用です。

お客様が、このマニュアルに記載された設置や保守、点検、修理などを行うと感電や火災、人身事故につながる可能性があります。

危険をさけるため、サービストレーニングを受けた技術者のみご使用ください。

設置や保守、点検、修理などを行う前に、別冊のサービスマニュアルVolume 1の「安全のために」と別冊のサービスマニュアルに掲載してある取扱説明書の「安全のために」を必ずお読みください。

⚠ WARNING

This manual is intended for qualified service personnel only.

To reduce the risk of electric shock, fire or injury, do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so. Refer all servicing to qualified service personnel.

⚠ WARNUNG

Die Anleitung ist nur für qualifiziertes Fachpersonal bestimmt.

Alle Wartungsarbeiten dürfen nur von qualifiziertem Fachpersonal ausgeführt werden. Um die Gefahr eines elektrischen Schlages, Feuergefahr und Verletzungen zu vermeiden, sind bei Wartungsarbeiten strikt die Angaben in der Anleitung zu befolgen. Andere als die angegebenen Wartungsarbeiten dürfen nur von Personen ausgeführt werden, die eine spezielle Befähigung dazu besitzen.

⚠ AVERTISSEMENT

Ce manuel est destiné uniquement aux personnes compétentes en charge de l'entretien. Afin de réduire les risques de décharge électrique, d'incendie ou de blessure n'effectuer que les réparations indiquées dans le mode d'emploi à moins d'être qualifié pour en effectuer d'autres. Pour toute réparation faire appel à une personne compétente uniquement.

目次

このマニュアルについて

本書の目的	5 (J)
関連マニュアル	5 (J)
構成	5 (J)

1. Spare Parts

1-1. 補修部品注意事項	1-1
1-2. Exploded Views	1-2
1-3. Electrical Parts List	1-10
1-3-1. Each Board List	1-10
1-3-2. Frame List	1-133
1-3-3. Cables/Harnesses List	1-133
1-3-4. External Connectors List	1-134
1-4. Supplied Accessories List	1-134
1-5. Optical Fixtures List	1-134

2. Semiconductor Pin Assignments

3. Block Diagrams

Overall (Processor)	3-2
Overall (Control Panel)	3-3
CMB-12	3-4
CPU-305	3-5
DD-37	3-6
IPM-96/96P	3-7
KY-466/467	3-10
KY-468	3-12
OPM-39/39P	3-13
VIF-19/19P	3-16
VIF-20/20P	3-18
VSE-36	3-20
VSW-69	3-21

4. Schematic Diagrams

CMB-12	4-2
CN-1921	4-11
CN-1942	4-12
CPU-305	4-13
DD-37	4-17
IPM-96/96P	4-18
KY-466	4-42
KY-467	4-49
KY-468	4-50
LC-40	4-52
LE-227	4-53
LE-233	4-54
LE-234	4-55
LE-235	4-56
MB-874	4-58
OPM-39/39P	4-60
VIF-19/19P (Suffix -12 and Higher)	4-75
VIF-19 (Suffix -11)	4-99
VIF-19P (Suffix -11)	4-123
VIF-20/20P	4-146
VR-263	4-165
VR-264	4-165
VSE-36	4-166
VSW-69/69P	4-175
FRAME WIRING	4-196

5. Board Layouts

CMB-12	5-2
CN-1921	5-4
CN-1942	5-6
CPU-305	5-7
DD-37	5-9
IPM-96	5-10
KY-466	5-14
KY-467	5-16
KY-468	5-17
LC-40	5-18
LE-227	5-18
LE-233	5-18

LE-234	5-18
LE-235	5-18
MB-874	5-19
OPM-39	5-21
VIF-19	5-24
VIF-20	5-28
VR-263	5-32
VR-264	5-32
VSE-36	5-33
VSW-69	5-37

このマニュアルについて

本書の目的

本書は、DMEスイッチャDFS-700 (プロセッサユニットおよびコントロールユニット) と別売り基板のサービスマニュアル Vol.2 です。

サービスマニュアル (Vol.1 および Vol.2) は、システム/サービスエンジニアの方々にご使用いただくことを想定し、DFS-700 の納入設置時に必要な情報および保守に関する情報、部品レベルまでのサービスを前提とした情報を記載しています。

本書 (Vol.2) では、部品表、半導体情報、ブロック図、回路図、マウント図を記載しています。

関連マニュアル

DFS-700には、この「サービスマニュアル Vol.2」の他に、下記のマニュアルが用意されています。

- ・ サービスマニュアル Vol.1

部品番号: 9-967-896-01 (J 向)

本機の取扱説明、サービスインフォメーション、自己診断、電気調整要項を記載したマニュアルです。

- ・ “Semiconductor Pin Assignments” CD-ROM 版 (別途用意)

この “Semiconductor Pin Assignments” CD-ROM 版は、コミュニケーションシステムソリューションネットワークカンパニーの機器に使用されている半導体を検索することができます。

この CD-ROM で検索できない半導体は、その半導体を使用されている機種 of サービスマニュアルに記載されています。サービスマニュアルには、その機種に使用されているすべての半導体一覧とその ID 番号を記載していますので、この CD-ROM 版と合わせて使用してください。

部品番号: 9-968-546-XX

構成

本書の構成を把握していただくために、全章の概略を以下に説明します。

第1章 Spare Parts

本機の機構部品を対象とした分解図、電気部品リスト、標準付属品リストを記載しています。

第2章 Semiconductor Pin Assignments

本機で使用されている半導体のピンアサインを記載しています。

第3章 Block Diagrams

本機のオーバーオールブロックダイアグラムおよび各基板のブロック図を記載しています。

第4章 Schematic Diagrams

本機の回路図、フレーム図を記載しています。

第5章 Board Layouts

本機のマウント図を記載しています。

Table of Contents

Manual Structure

Purpose of this manual	5 (E)
Related manuals	5 (E)
Contents	5 (E)

1. Spare Parts

1-1. Notes on Repair Parts	1-1
1-2. Exploded Views	1-2
1-3. Electrical Parts List	1-10
1-3-1. Each Board List	1-10
1-3-2. Frame List	1-133
1-3-3. Cables/Harnesses List	1-133
1-3-4. External Connectors List	1-134
1-4. Supplied Accessories List	1-134
1-5. Optical Fixtures List	1-134

2. Semiconductor Pin Assignments

3. Block Diagrams

Overall (Processor)	3-2
Overall (Control Panel)	3-3
CMB-12	3-4
CPU-305	3-5
DD-37	3-6
IPM-96/96P	3-7
KY-466/467	3-10
KY-468	3-12
OPM-39/39P	3-13
VIF-19/19P	3-16
VIF-20/20P	3-18
VSE-36	3-20
VSW-69/69P	3-21

4. Schematic Diagrams

CMB-12	4-2
CN-1921	4-11
CN-1942	4-12
CPU-305	4-13
DD-37	4-17
IPM-96/96P	4-18
KY-466	4-42
KY-467	4-49
KY-468	4-50
LC-40	4-52
LE-227	4-53
LE-233	4-54
LE-234	4-55
LE-235	4-56
MB-874	4-58
OPM-39/39P	4-60
VIF-19/19P (Suffix -12 and Higher)	4-75
VIF-19 (Suffix -11)	4-99
VIF-19P (Suffix -11)	4-123
VIF-20/20P	4-146
VR-263	4-165
VR-264	4-165
VSE-36	4-166
VSW-69/69P	4-175
FRAME WIRING	4-196

5. Board Layouts

CMB-12	5-2
CN-1921	5-4
CN-1942	5-6
CPU-305	5-7
DD-37	5-9
IPM-96	5-10
KY-466	5-14
KY-467	5-16
KY-468	5-17
LC-40	5-18
LE-227	5-18
LE-233	5-18

LE-234	5-18
LE-235	5-18
MB-874	5-19
OPM-39	5-21
VIF-19	5-24
VIF-20	5-28
VR-263	5-32
VR-264	5-32
VSE-36	5-33
VSW-69	5-37

Manual Structure

Purpose of this manual

This manual is the service manual Vol.2 of the DME Switcher DFS-700/700P and their optional boards.

The service manuals (Vol.1 and Vol.2) are intended for use by trained system and service engineers, and describes the information on installing, maintenance, and detailed service.

This manual (Vol.2) describes the spare parts list, information on the semiconductor pin assignments, block diagrams, schematic diagrams, and board layouts.

Related manuals

Besides this Service Manual Vol.2, the following manuals are available for the DFS-700/700P.

- **Service Manual Vol.1**

Part No. 9-967-897-01 (for UC, CE)

Contains the operating instructions, service overviews, diagnostic, electrical alignment.

- **"Semiconductor Pin Assignments" CD-ROM (available on request)**

This "Semiconductor Pin Assignments" CD-ROM allows you to search for semiconductors used in Communication System Solutions Network Company equipment.

Semiconductors that cannot be searched for on this CD-ROM are listed in the service manual for the corresponding unit. The service manual contains a complete list of all semiconductors and their ID Nos., and thus should be used together with the CD-ROM.
Part number: 9-968-546-XX

Contents

This manual is organized by following sections.

Section 1 Spare Parts

Describes the exploded views, mechanical parts list, electrical parts list, and supplied accessories list.

Section 2 Semiconductor Pin Assignments

Describes the pin assignments of semiconductor.

Section 3 Block Diagrams

Describes the block diagrams of the overall and each board.

Section 4 Schematic Diagrams

Describes the schematic diagrams for each board.

Section 5 Board Layouts

Describes the board layouts for each board.

Section 1

Spare Parts

1-1. Notes on Repair Parts

1. Safety Related Components Warning

WARNING

Components marked Δ are critical to safe operation. Therefore, specified parts should be used in the case of replacement.

2. Standardization of Parts

Some repair parts supplied by Sony differ from those used for the unit. These are because of parts commonality and improvement.

Parts list has the present standardized repair parts.

3. Stock of Parts

Parts marked with "o" at SP (Supply Code) column of the spare parts list may not be stocked. Therefore, the delivery date will be delayed.

4. Harness

Harnesses with no part number are not registered as spare parts.

In need of repair, get components shown in the list and repair using them.

1-1. 補修部品注意事項

1. 安全重要部品

Δ 警告

Δ 印のついた部品は安全性を維持するために重要な部品です。したがって、交換する時は必ず指定の部品を使ってください。

2. 部品の共通化

ソニーから供給する補修用部品は、セットに使われているものと異なることがあります。

これは部品の共通化、改良等によるものです。

部品表には現時点での共通化された補修用部品が記載されています。

3. 部品の在庫

部品表のSP (Supply code) 欄に "o" で示される部品は在庫していないことがあり、納期が長くなることがあります。


4. ハーネス

部品番号が記載されていないハーネスは、サービス部品として登録されていません。

これらは、リストに展開されているコンポーネント部品で補修してください。

Front Panel & Boards


1-2. Exploded Views

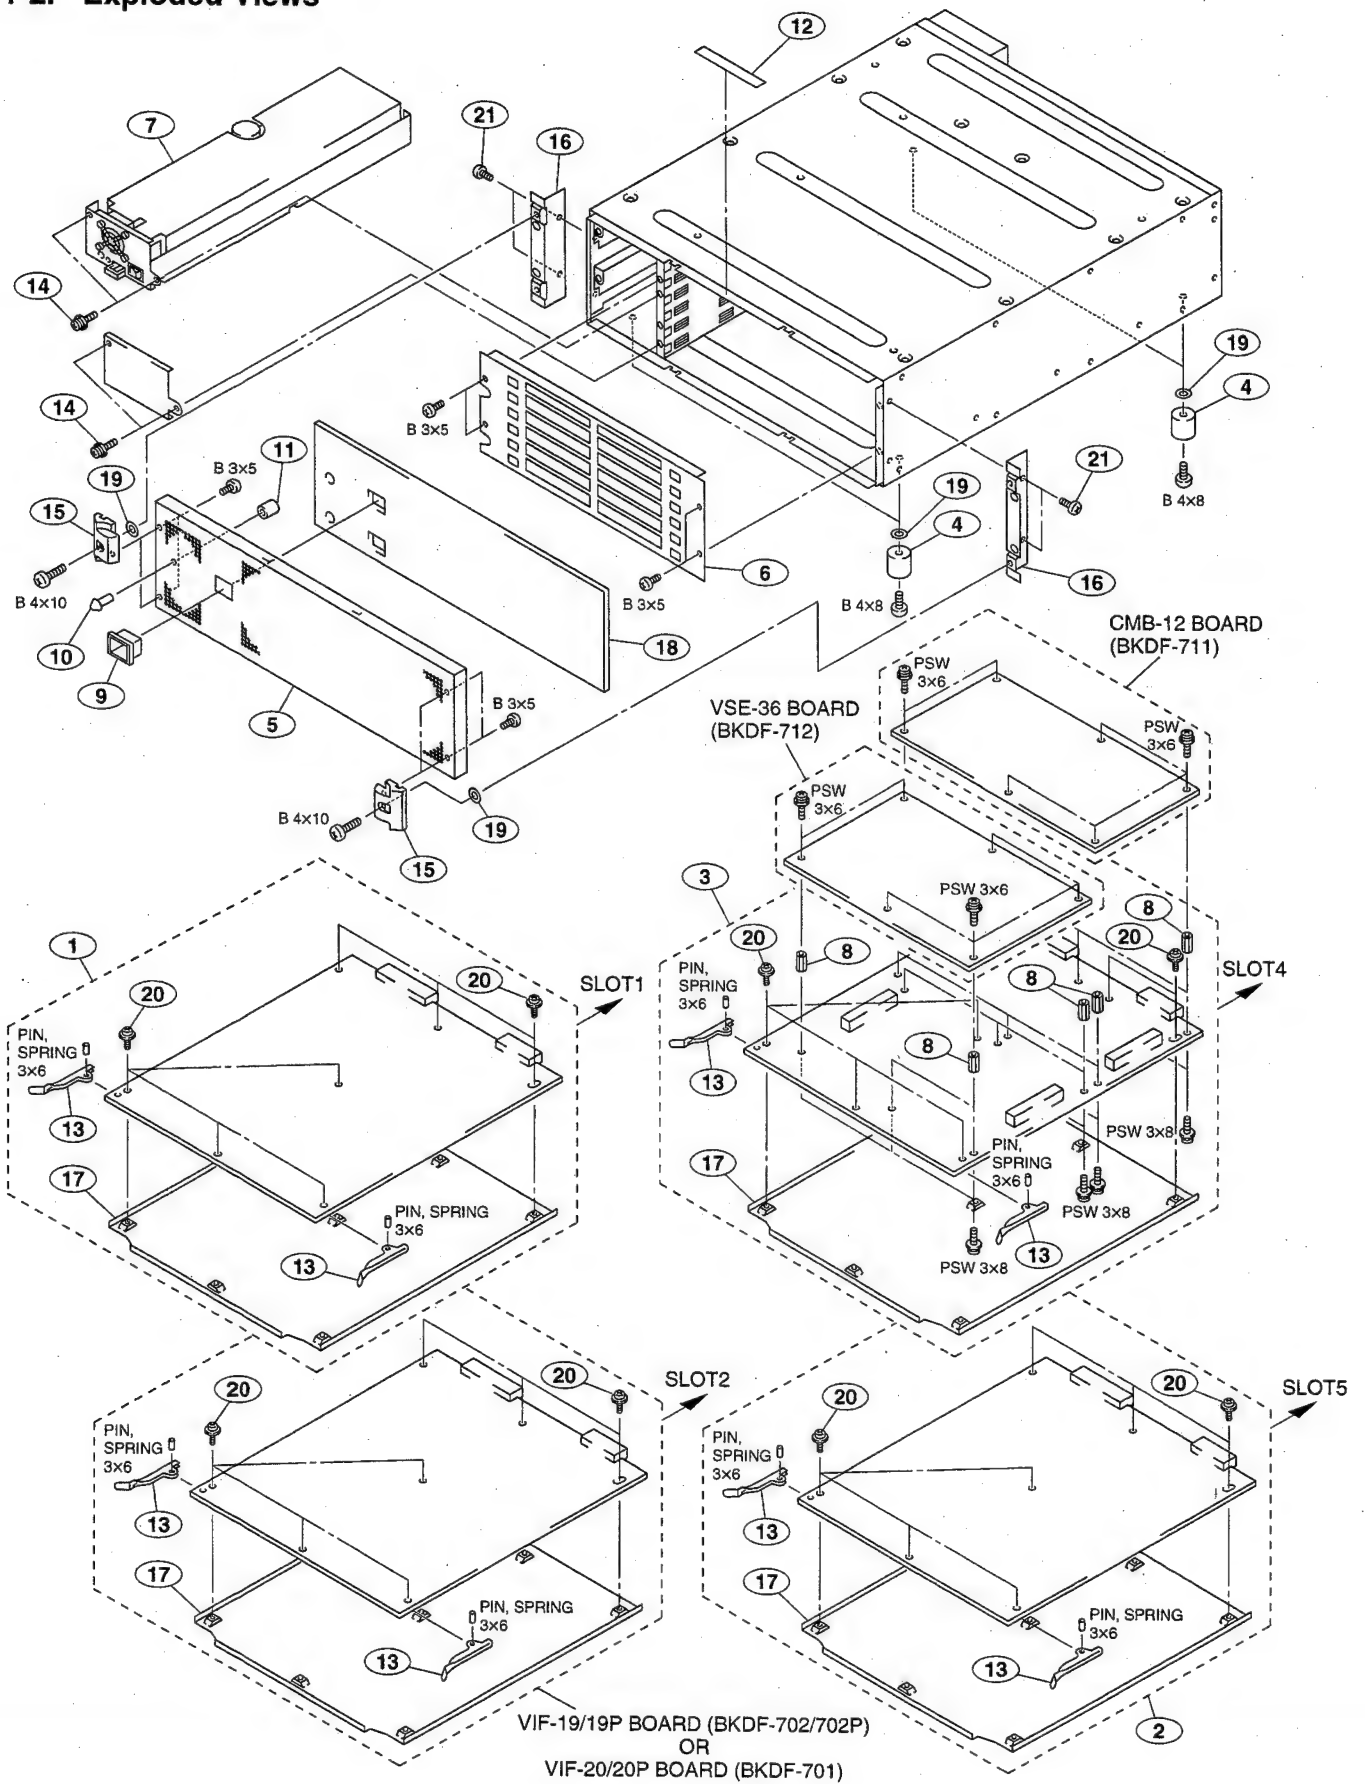

Front Panel & Boards

No.	Part No.	SP Description
1	A-8324-720-A	o MOUNTED CIRCUIT BOARD, IPM-96 (for NTSC)
	A-8324-731-A	o MOUNTED CIRCUIT BOARD, IPM-96P (for PAL)
2	A-8324-722-A	o MOUNTED CIRCUIT BOARD, OPM-39 (for NTSC)
	A-8324-733-A	o MOUNTED CIRCUIT BOARD, OPM-39P (for PAL)
3	A-8324-724-A	o MOUNTED CIRCUIT BOARD, VSW-69 (for NTSC)
	A-8325-191-A	o MOUNTED CIRCUIT BOARD, VSW-69P (for PAL)
4	X-3605-751-1	s FOOT ASSY (ABS)
5	X-3605-825-1	o PANEL ASSY, FRONT
6	X-3605-826-1	o STOPPER ASSY, SWITCH BOARD
7	Δ 1-468-480-11	s REGULATOR, SWITCHING
8	2-280-622-51	o SUPPORT (M3), HEXAGON
9	3-189-023-02	o COVER, SW
10	3-193-264-01	o ACRYLIC, PW
11	3-200-188-01	o FRAME, OUTER
12	3-627-892-01	o E SHIELD(S) (for PAL)
13	3-624-100-02	o LEVER, PWB
14	3-624-821-01	s +PSW3X6 (CU, NI)
15	3-624-859-02	o BRACKET, PANEL
16	3-625-953-02	o BRACKET (3U), RACK MOUNT
17	3-625-954-01	o PLATE, SHIELD
18	3-625-956-01	o FILTER
19	3-650-537-00	o WASHER (PLA)
20	3-703-249-01	s SCREW, S TIGHT, +PTTWH 3X6
21	3-733-690-01	s SCREW +B 4X6 (ST)
	7-626-300-54	o SPRING PIN 3X6
	7-682-546-04	s SCREW +B3X5
	7-682-561-09	s SCREW +B4X8
	7-682-562-04	s SCREW +B4X10
	7-682-947-01	s SCREW +PSW 3X6
	7-682-948-01	s SCREW +PSW 3X8


Rear Panel

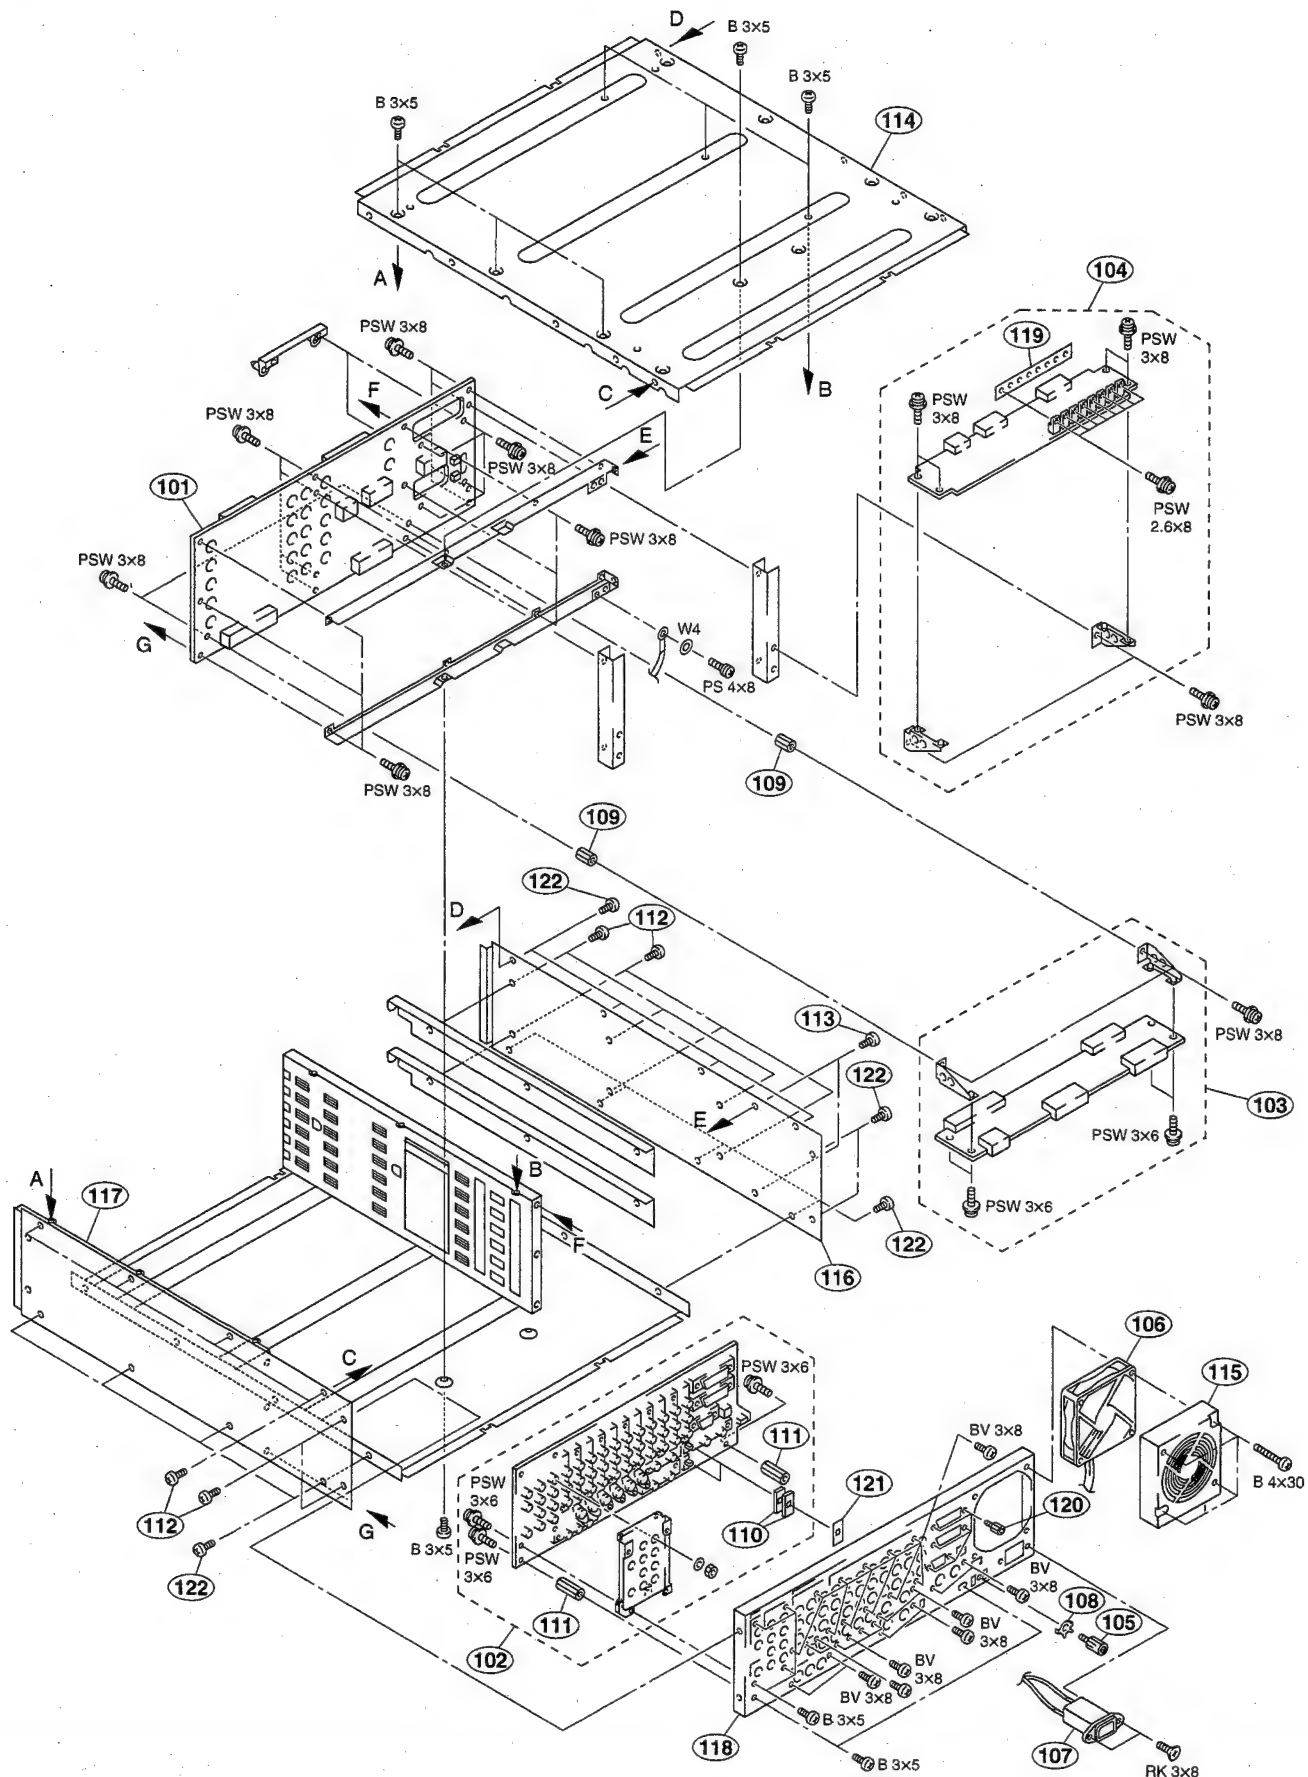

Rear Panel

No.	Part No.	SP Description
101	A-8324-726-A	o MOUNTED CIRCUIT BOARD, MB-874
102	A-8324-727-A	o MOUNTED CIRCUIT BOARD, CN-1921
103	A-8324-728-A	o MOUNTED CIRCUIT BOARD, CN-1942
104	A-8324-729-A	o MOUNTED CIRCUIT BOARD, DD-37
105	X-2068-004-0	s TERMINAL ASSY
106	1-698-080-11	s MOTOR, DC FAN (ASF9038001)
107	Δ 1-960-443-11	o HARNESS (WITH INLET)
108	2-068-008-00	s WASHER
109	2-280-622-31	o SUPPORT (M3), HEXAGON
110	3-173-384-01	o SPACER, ORNAMENTAL PLATE
111	3-311-625-01	o SHAFT, FITTING, PC BOARD
112	3-624-821-01	s +PSW3X6 (CU, NI)
113	3-624-822-01	s +PSW3X8 (CU, NI)
114	3-625-957-01	o PLATE, TOP
115	3-625-959-01	o COVER, FAN
116	3-625-960-01	o SIDE PLATE L
117	3-625-961-01	o SIDE PLATE R
118	3-625-964-01	o PANEL, REAR
119	3-625-974-01	o NUT PLATE
120	3-673-910-31	s SCREW, CONNECTOR
121	3-717-394-03	o PLATE (SMALL), ORNAMENTAL, SW
122	3-733-690-01	s SCREW +B 4X6 (ST)
	7-621-759-65	s SCREW +PSW 2.6X8
	7-682-348-09	s SCREW +RK 3X8
	7-682-546-04	s SCREW +B3X5 (SILVER)
	7-682-546-09	s SCREW +B3X5 (BLACK)
	7-682-568-04	s SCREW +B4X30
	7-682-661-01	s SCREW, +PS 4X8
	7-682-947-01	s SCREW +PSW 3X6
	7-682-948-01	s SCREW +PSW 3X8
	7-685-646-79	s SCREW +BVTP 3X8
	7-688-004-11	o WASHER W4


Control Panel (1)

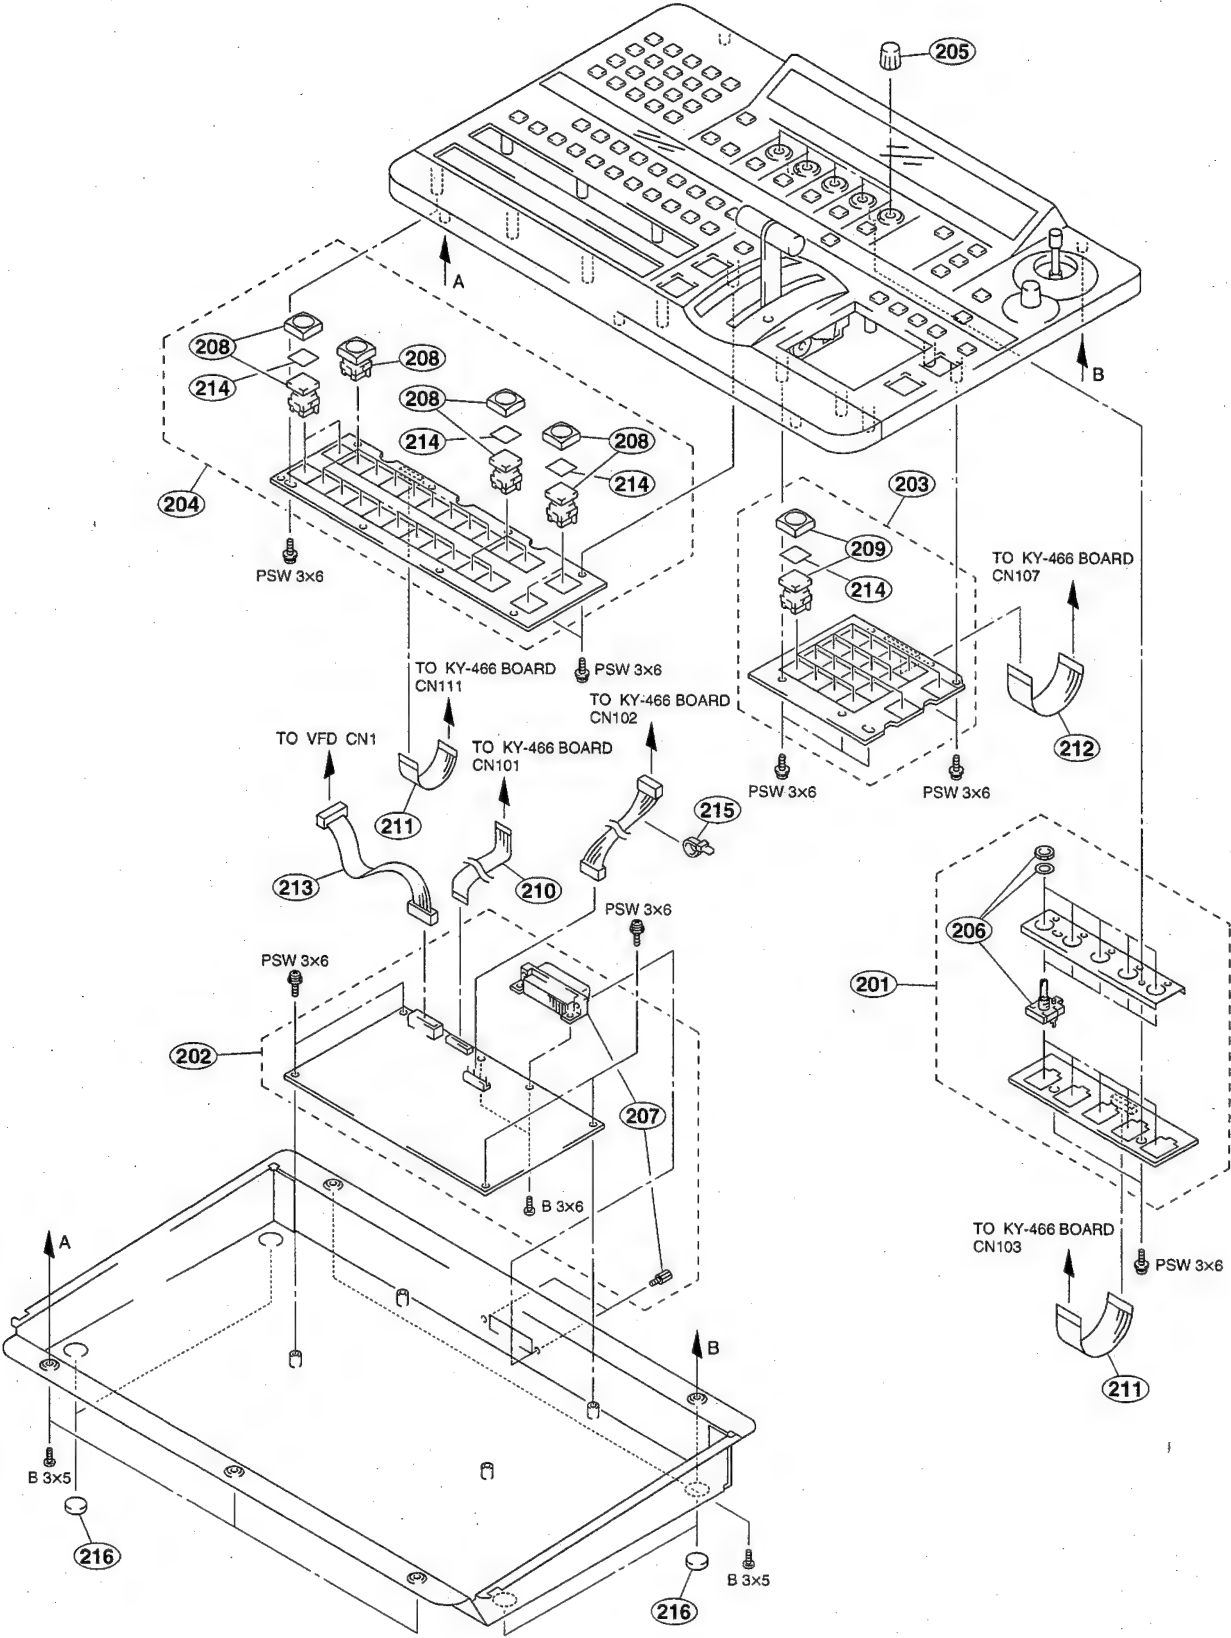

Control Panel (1)

No.	Part No.	SP Description
201	A-8323-730-A	o MOUNTED CIRCUIT BOARD, VR-263
202	A-8324-713-A	o MOUNTED CIRCUIT BOARD, CPU-305
203	A-8324-715-A	o MOUNTED CIRCUIT BOARD, KY-467
204	A-8324-716-A	o MOUNTED CIRCUIT BOARD, KY-468
205	X-3167-051-1	s KNOB ASSY,VOLUME
206	1-467-809-21	s ENCODER, ROTARY (SWITCH)
207	1-563-772-11	o SOCKET,D-SUB CONNECTOR 25P
208	1-771-886-11	s SWITCH, TACTILE
209	1-771-935-11	s SWITCH, PUSH
210	1-792-572-11	s CABLE, FLAT (WITH SHIELD)
211	1-792-573-11	s CABLE, FLAT (WITH SHIELD)
212	1-792-574-11	s CABLE, FLAT (WITH SHIELD)
213	1-960-442-11	o HARNESS (VFD)
214	3-625-951-01	s CHIP(A),SW
215	3-701-822-00	s HOLDER, WIRE
216	3-714-101-01	s LEG (FRONT)
	7-682-546-09	s SCREW +B3X5
	7-682-547-04	s SCREW +B3X6
	7-682-947-01	s SCREW +PSW 3X6

Control Panel (2)

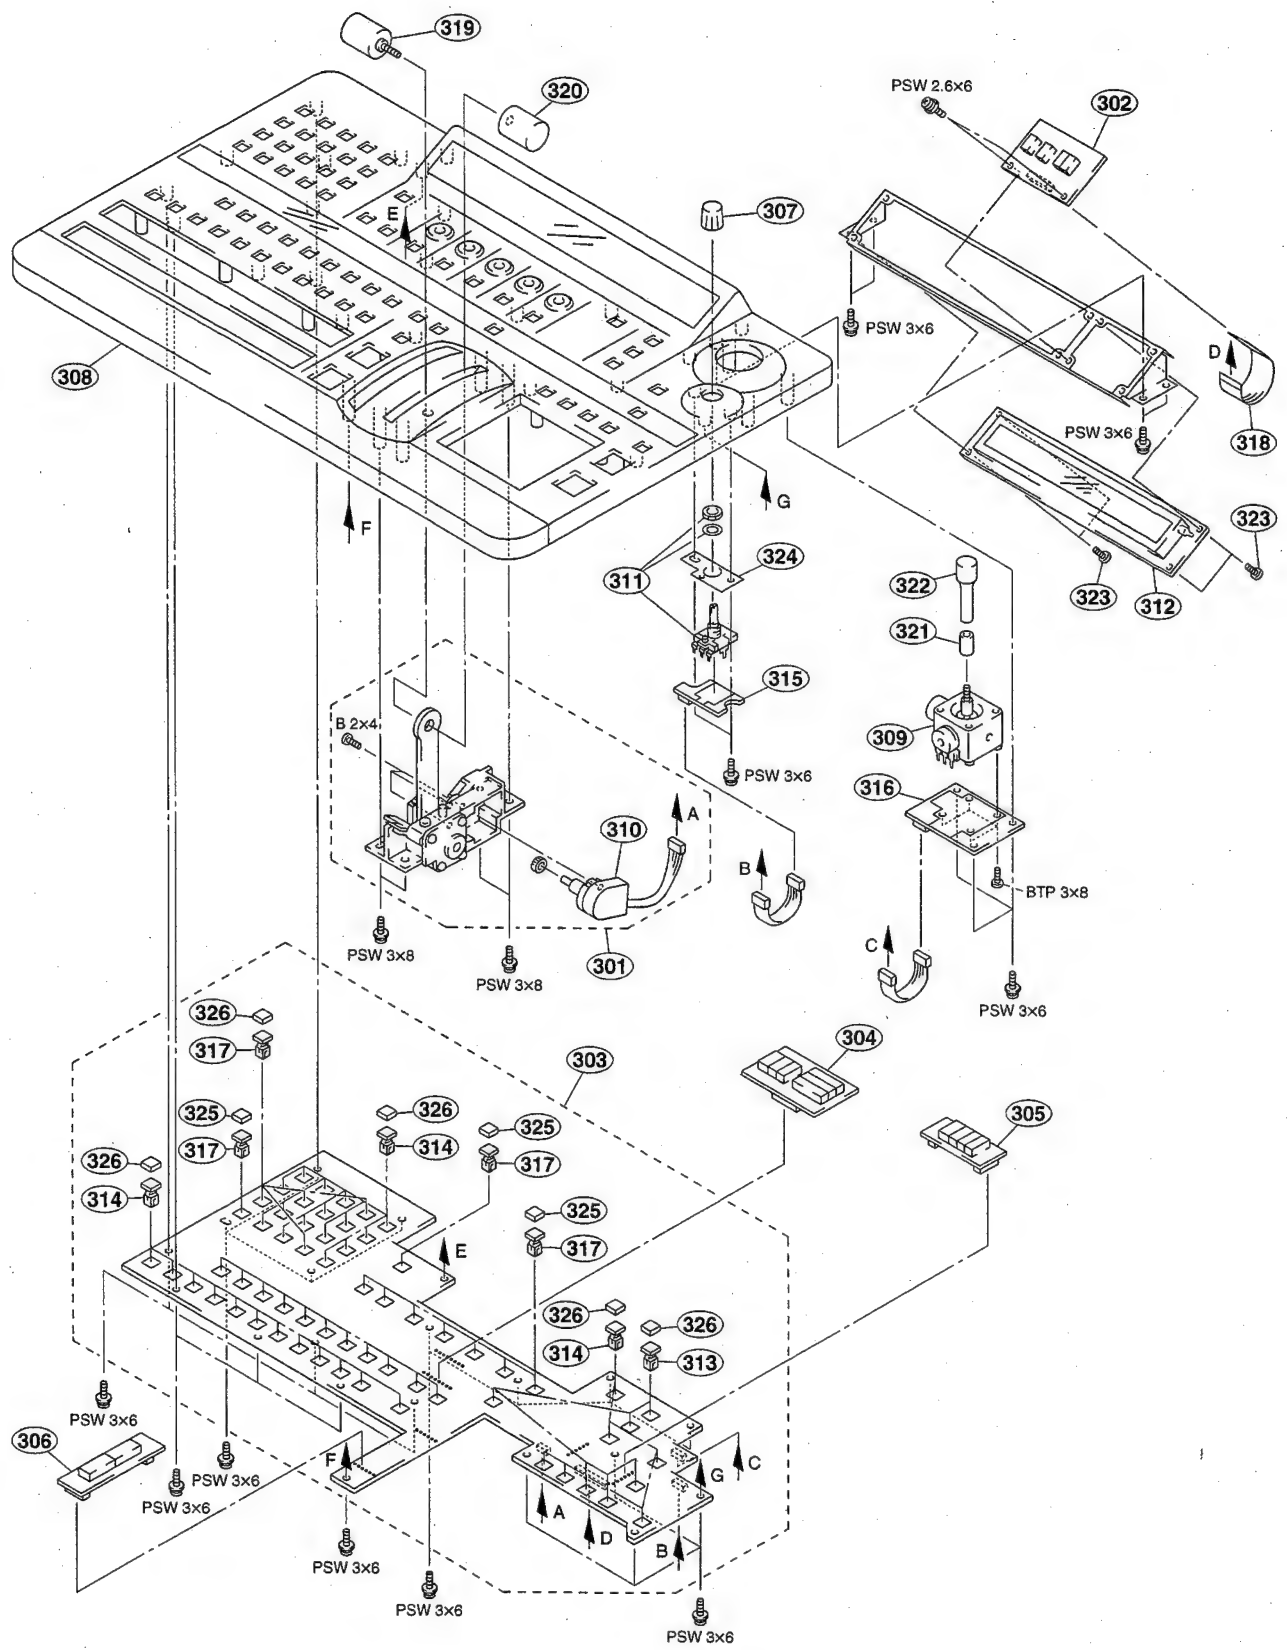

Control Panel (2)

No.	Part No.	SP Description
301	A-6279-486-G	s FADER ASSY
302	A-8323-732-A	o MOUNTED CIRCUIT BOARD, LE-227
303	A-8324-714-A	o MOUNTED CIRCUIT BOARD, KY-466
304	A-8324-717-A	o MOUNTED CIRCUIT BOARD, LE-233
305	A-8324-718-A	o MOUNTED CIRCUIT BOARD, LE-234
306	A-8324-719-A	o MOUNTED CIRCUIT BOARD, LE-235
307	X-3167-051-1	s KNOB ASSY,VOLUME
308	X-3605-823-1	o PANEL ASSY
309	1-238-724-11	s RESISTOR, VAR, CARBON 10K
310	1-467-705-11	s ENCODER, ROTARY
311	1-467-809-21	s ENCODER, ROTARY (SWITCH)
312	1-517-970-11	s VFD (WITH DRIVER, 40X2 LINE)
313	1-570-878-21	s SWITCH,PUSH (1 KEY)
314	1-570-878-31	s SWITCH,PUSH (1 KEY)
315	1-675-963-11	o PRINTED WIRING BOARD, VR-264
316	1-675-965-11	o PRINTED WIRING BOARD, LC-40
317	1-771-934-11	s SWITCH, PUSH
318	1-792-573-11	s CABLE, FLAT (WITH SHIELD)
319	2-139-115-01	o GRIP (B), F
320	2-139-116-01	o GRIP (A), F
321	3-166-428-01	s COVER, JOG
322	3-178-151-01	s LEVER, JOG
323	3-364-941-01	s SCREW (+B) (2.6X5),NYLOK
324	3-625-949-01	o BRACKET(2),VR
325	3-626-867-01	s KEY TOP
326	3-708-964-01	s COLOR BUTTON (LZ 6000)
	7-621-759-40	s SCREW +PSW 2.6X6
	7-621-772-10	s SCREW +B2X4
	7-682-947-01	s SCREW +PSW 3X6
	7-682-948-01	s SCREW +PSW 3X8
	7-685-546-14	s SCREW +BTP 3X8

1-3-1. Each Board List

(CMB-12 BOARD ;for BKDF-711)

[illegible]

(CMB-12 BOARD ;for BKDF-711)

Ref. No. or Q'ty	Part No.	SP Description
CN101	1-774-879-21	s CONNECTOR, PC BOARD 100P
CN102	1-774-879-21	s CONNECTOR, PC BOARD 100P
F1	Δ 1-576-329-11	s FUSE CHIP 10A/125V (6125)
IC11	8-759-676-59	o IC EPC1PC8-CMB1-V1.00
IC12	8-759-667-44	o IC AT27C010-WGH-V1.00
IC13	8-759-667-45	o IC AT27C010-WGL-V1.00
IC41	8-759-676-60	o IC EPC1PC8-CMB2-V1.00
IC100	8-759-549-13	s IC SN74LV240APWR
IC101	8-759-549-13	s IC SN74LV240APWR
IC102	8-759-549-22	s IC SN74LV574APWR
IC103	8-759-660-47	s IC EPF10K20TC144-3(04)
IC104	8-759-660-47	s IC EPF10K20TC144-3(04)
IC105	8-759-392-82	s IC CXD8613Q
IC106	8-759-667-43	o IC AT27C010-TH-V1.00
IC107	8-759-451-89	s IC IDT74FCT157ATQ-TL
IC108	8-759-451-89	s IC IDT74FCT157ATQ-TL
IC109	8-759-451-89	s IC IDT74FCT157ATQ-TL
IC110	8-759-451-89	s IC IDT74FCT157ATQ-TL
IC111	8-759-663-46	o IC CXD8709R
IC113	8-759-660-47	s IC EPF10K20TC144-3(04)
IC201	8-759-663-48	o IC CXD8711R
IC202	8-759-667-50	o IC AT27C010-GAM-V1.00
IC203	8-759-437-50	s IC IDT72201L25J
IC204	8-759-385-57	s IC CXD8560Q
IC205	8-759-385-57	s IC CXD8560Q
IC206	8-759-385-57	s IC CXD8560Q
IC207	8-759-385-56	s IC CXD8559Q
IC208	8-759-445-73	s IC M66256FP (E2)
IC209	8-759-445-73	s IC M66256FP (E2)
IC210	8-759-445-73	s IC M66256FP (E2)
IC211	8-759-445-73	s IC M66256FP (E2)
IC212	8-759-445-73	s IC M66256FP (E2)
IC213	8-759-445-73	s IC M66256FP (E2)
IC214	8-759-385-56	s IC CXD8559Q
IC215	8-759-445-73	s IC M66256FP (E2)
IC216	8-759-445-73	s IC M66256FP (E2)
IC217	8-759-445-73	s IC M66256FP (E2)
IC218	8-759-445-73	s IC M66256FP (E2)
IC219	8-759-445-73	s IC M66256FP (E2)
IC220	8-759-445-73	s IC M66256FP (E2)
IC221	8-759-385-56	s IC CXD8559Q
IC222	8-759-445-73	s IC M66256FP (E2)
IC223	8-759-445-73	s IC M66256FP (E2)
IC224	8-759-445-73	s IC M66256FP (E2)
IC225	8-759-445-73	s IC M66256FP (E2)
IC226	8-759-445-73	s IC M66256FP (E2)
IC227	8-759-445-73	s IC M66256FP (E2)
IC301	8-759-663-46	o IC CXD8709R
IC302	8-759-667-46	o IC AT27C010-YH-V1.00
IC303	8-759-667-47	o IC AT27C010-YL-V1.00
IC304	8-759-667-48	o IC AT27C010-XH-V1.00
IC305	8-759-667-49	o IC AT27C010-XL-V1.00
IC306	8-759-451-89	s IC IDT74FCT157ATQ-TL
IC307	8-759-451-89	s IC IDT74FCT157ATQ-TL
IC308	8-759-451-89	s IC IDT74FCT157ATQ-TL
IC309	8-759-451-89	s IC IDT74FCT157ATQ-TL
IC310	8-759-663-47	o IC CXD8710R
IC311	8-759-436-44	s IC IDT71024S20Y-TL

(CMB-12 BOARD ;for BKDF-711)

Ref. No. or Q'ty	Part No.	SP Description
IC312	8-759-436-44	s IC IDT71024S20Y-TL
IC313	8-759-436-44	s IC IDT71024S20Y-TL
IC314	8-759-436-44	s IC IDT71024S20Y-TL
IC315	8-759-663-47	o IC CXD8710R
IC316	8-759-436-44	s IC IDT71024S20Y-TL
IC317	8-759-436-44	s IC IDT71024S20Y-TL
IC318	8-759-436-44	s IC IDT71024S20Y-TL
IC319	8-759-436-44	s IC IDT71024S20Y-TL
IC320	8-759-663-47	o IC CXD8710R
IC321	8-759-436-44	s IC IDT71024S20Y-TL
IC322	8-759-436-44	s IC IDT71024S20Y-TL
IC323	8-759-436-44	s IC IDT71024S20Y-TL
IC324	8-759-436-44	s IC IDT71024S20Y-TL
IC402	8-759-482-20	s IC IDT71V124S15Y-TL
IC403	8-759-389-45	s IC 74LCX16244MTDX
IC404	8-759-570-63	s IC IDT71V416S15PH-TL
IC406	8-759-660-47	s IC EPF10K20TC144-3(04)
IC407	8-759-660-47	s IC EPF10K20TC144-3(04)
IC451	8-759-663-46	o IC CXD8709R
IC452	8-759-292-78	s IC CXD8890Q
IC456	8-759-663-81	s IC IDT74FCT374ATQ-TL
IC457	8-759-385-57	s IC CXD8560Q
IC458	8-759-385-57	s IC CXD8560Q
IS11	1-526-652-21	o SOCKET, IC 8P
IS12	1-540-151-21	s SOCKET, IC
IS13	1-540-151-21	s SOCKET, IC
IS41	1-526-652-21	o SOCKET, IC 8P
IS302	1-540-151-21	s SOCKET, IC
IS303	1-540-151-21	s SOCKET, IC
IS304	1-540-151-21	s SOCKET, IC
IS305	1-540-151-21	s SOCKET, IC
L1	1-469-529-11	s INDUCTOR, (SMD) 10UH
L2	1-406-864-21	s COIL,CHOKE 4.7UH
PS2	Δ 1-576-123-21	s CIRCUIT PROTECTOR 0.8A(IC LINK)
R101	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R102	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R103	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R104	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R105	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R106	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R401	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R402	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R403	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R404	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R701	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R702	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R703	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R704	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R705	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R706	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
RB101	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB102	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB103	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB104	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB105	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB106	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB107	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB108	1-239-309-11	s RESISTOR ARRAY,CHIP 100K

(CMB-12 BOARD ;for BKDF-711)

Ref. No. or Q'ty	Part No.	SP Description
RB109	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB110	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB201	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB202	1-239-306-11	s RESISTOR ARRAY,CHIP 10K
RB203	1-239-306-11	s RESISTOR ARRAY,CHIP 10K
RB401	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB402	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB403	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB404	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB405	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB701	1-239-306-11	s RESISTOR ARRAY,CHIP 10K
RB702	1-239-306-11	s RESISTOR ARRAY,CHIP 10K
RB703	1-239-306-11	s RESISTOR ARRAY,CHIP 10K
RB704	1-239-306-11	s RESISTOR ARRAY,CHIP 10K
RB705	1-239-306-11	s RESISTOR ARRAY,CHIP 10K

CN-1921 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8324-727-A	o MOUNTED CIRCUIT BOARD, CN-1921
2pcs	3-311-625-01	o SHAFT, FITTING, PC BOARD
6pcs	7-682-947-01	s SCREW +PSW 3X6(EP-FE/ZN/CM2)
C1	1-128-499-11	s CAPACITOR,ELECT 220MF/16V
C2	1-128-499-11	s CAPACITOR,ELECT 220MF/16V
CN1	1-573-584-11	s CONNECTOR, BNC (RECEPTACLE)
CN2	1-573-584-11	s CONNECTOR, BNC (RECEPTACLE)
CN3	1-573-584-11	s CONNECTOR, BNC (RECEPTACLE)
CN4	1-573-584-11	s CONNECTOR, BNC (RECEPTACLE)
CN5	1-573-584-11	s CONNECTOR, BNC (RECEPTACLE)
CN6	1-573-584-11	s CONNECTOR, BNC (RECEPTACLE)
CN7	1-573-584-11	s CONNECTOR, BNC (RECEPTACLE)
CN8	1-573-584-11	s CONNECTOR, BNC (RECEPTACLE)
CN9	1-573-590-13	s CONNECTOR, (S) TERMINAL 4P
CN10	1-573-590-13	s CONNECTOR, (S) TERMINAL 4P
CN11	1-573-590-13	s CONNECTOR, (S) TERMINAL 4P
CN12	1-573-590-13	s CONNECTOR, (S) TERMINAL 4P
CN13	1-573-584-11	s CONNECTOR, BNC (RECEPTACLE)
CN14	1-573-584-11	s CONNECTOR, BNC (RECEPTACLE)
CN15	1-573-584-11	s CONNECTOR, BNC (RECEPTACLE)
CN16	1-573-590-13	s CONNECTOR, (S) TERMINAL 4P
CN17	1-573-590-13	s CONNECTOR, (S) TERMINAL 4P
CN18	1-764-274-11	s CONNECTOR, COAXIAL (BNC TYPE)
CN19	1-764-274-11	s CONNECTOR, COAXIAL (BNC TYPE)
CN20	1-764-274-11	s CONNECTOR, COAXIAL (BNC TYPE)
CN21	1-764-274-11	s CONNECTOR, COAXIAL (BNC TYPE)
CN22	1-764-274-11	s CONNECTOR, COAXIAL (BNC TYPE)
CN23	1-764-274-11	s CONNECTOR, COAXIAL (BNC TYPE)
CN24	1-764-274-11	s CONNECTOR, COAXIAL (BNC TYPE)
CN25	1-764-274-11	s CONNECTOR, COAXIAL (BNC TYPE)
CN26	1-764-274-11	s CONNECTOR, COAXIAL (BNC TYPE)
CN27	1-764-274-11	s CONNECTOR, COAXIAL (BNC TYPE)
CN28	1-764-274-11	s CONNECTOR, COAXIAL (BNC TYPE)
CN29	1-573-582-11	s CONNECTOR, BNC (RECEPTACLE)
CN30	1-573-582-11	s CONNECTOR, BNC (RECEPTACLE)
CN31	1-573-584-11	s CONNECTOR, BNC (RECEPTACLE)
CN32	1-568-676-11	o CONNECTOR,D-SUB 9P
CN33	1-560-357-11	o CONNECTOR POST HEADER,ILG (3P)
CN34	1-568-677-11	o CONNECTOR,D-SUB 25P
CN35	1-568-677-11	o CONNECTOR,D-SUB 25P
CN39	1-794-293-11	s CONNECTOR, USB (B)
CN40	1-573-582-11	s CONNECTOR, BNC (RECEPTACLE)
FB1	1-469-130-11	s FERRITE, EMI (SMD)
FB2	1-469-130-11	s FERRITE, EMI (SMD)
FB3	1-469-130-11	s FERRITE, EMI (SMD)
FB4	1-469-130-11	s FERRITE, EMI (SMD)
FB5	1-469-130-11	s FERRITE, EMI (SMD)
FB6	1-469-130-11	s FERRITE, EMI (SMD)
FB7	1-469-130-11	s FERRITE, EMI (SMD)
FB8	1-469-130-11	s FERRITE, EMI (SMD)
FB9	1-469-130-11	s FERRITE, EMI (SMD)
FB10	1-469-130-11	s FERRITE, EMI (SMD)
FB11	1-469-130-11	s FERRITE, EMI (SMD)
FB12	1-469-130-11	s FERRITE, EMI (SMD)
FB13	1-469-130-11	s FERRITE, EMI (SMD)
FB14	1-469-130-11	s FERRITE, EMI (SMD)
FB15	1-469-130-11	s FERRITE, EMI (SMD)

(CN-1921 BOARD)

Ref. No.
or Q'ty Part No. SP Description

FB16 1-469-130-11 s FERRITE, EMI (SMD)
FB17 1-469-130-11 s FERRITE, EMI (SMD)
FB18 1-469-130-11 s FERRITE, EMI (SMD)
FB19 1-469-130-11 s FERRITE, EMI (SMD)
FB20 1-469-130-11 s FERRITE, EMI (SMD)

FB21 1-469-130-11 s FERRITE, EMI (SMD)
FB22 1-469-130-11 s FERRITE, EMI (SMD)
FB23 1-469-130-11 s FERRITE, EMI (SMD)
FB24 1-469-130-11 s FERRITE, EMI (SMD)
FB25 1-469-130-11 s FERRITE, EMI (SMD)

FB26 1-469-130-11 s FERRITE, EMI (SMD)
FB27 1-469-130-11 s FERRITE, EMI (SMD)
FB28 1-469-130-11 s FERRITE, EMI (SMD)
FB29 1-469-130-11 s FERRITE, EMI (SMD)
FB30 1-469-130-11 s FERRITE, EMI (SMD)

L1 1-412-525-31 s MICRO INDUCTOR 10UH
L2 1-412-525-31 s MICRO INDUCTOR 10UH

R1 1-216-624-11 s RESISTOR,CHIP 75 1/10W(2012)
R2 1-216-624-11 s RESISTOR,CHIP 75 1/10W(2012)

S1 1-570-157-51 s SWITCH,SLIDE (1-1-3)
S2 1-570-157-51 s SWITCH,SLIDE (1-1-3)

CN-1942 BOARD

Ref. No.
or Q'ty Part No. SP Description

1pc A-8324-728-A o MOUNTED CIRCUIT BOARD, CN-1942
4pcs 7-682-947-01 s SCREW +PSW 3X6 (EP-FE/ZN/CM2)

CPU-305 BOARD

Ref. No.
or Q'ty Part No. SP Description

1pc A-8324-713-A o MOUNTED CIRCUIT BOARD, CPU-305
2pcs 7-682-547-04 s SCREW +B3X6

BZ61 1-529-070-11 s BUZZER,PIEZO

C1 1-127-531-11 s CAPACITOR,ELECT 33MF/20V
C2 1-126-394-11 s CAPACITOR,ELECT 10MF/16V(CHIP)
C3 1-127-516-11 s CAPACITOR,ELECT (SOLID)220MF
C4 1-127-531-11 s CAPACITOR,ELECT 33MF/20V
C5 1-163-038-00 s CAPACITOR, CERAMIC 0.1MF/25V

C6 1-163-038-00 s CAPACITOR, CERAMIC 0.1MF/25V
C7 1-163-038-00 s CAPACITOR, CERAMIC 0.1MF/25V
C8 1-107-420-11 s CAPACITOR,ELECT 47MF/35V(105C)
C9 1-163-038-00 s CAPACITOR, CERAMIC 0.1MF/25V
C11 1-126-396-11 s CAPACITOR,ELECT 47MF/16V(CHIP)

C12 1-128-416-11 s CAPACITOR ELECT 100MF/16V(105C)
C13 1-163-038-00 s CAPACITOR, CERAMIC 0.1MF/25V
C14 1-163-038-00 s CAPACITOR, CERAMIC 0.1MF/25V
C15 1-163-009-11 s CAPACITOR,CERAMIC 1000PF/50V
C16 1-163-009-11 s CAPACITOR,CERAMIC 1000PF/50V

C17 1-163-009-11 s CAPACITOR,CERAMIC 1000PF/50V
C18 1-163-009-11 s CAPACITOR,CERAMIC 1000PF/50V
C19 1-163-239-11 s CAPACITOR,CHIP CERAMIC33PF/50V
C20 1-163-239-11 s CAPACITOR,CHIP CERAMIC33PF/50V
C21 1-163-038-00 s CAPACITOR, CERAMIC 0.1MF/25V

C22 1-163-009-11 s CAPACITOR,CERAMIC 1000PF/50V
C23 1-126-394-11 s CAPACITOR,ELECT 10MF/16V(CHIP)
C24 1-126-394-11 s CAPACITOR,ELECT 10MF/16V(CHIP)
C25 1-163-038-00 s CAPACITOR, CERAMIC 0.1MF/25V
C26 1-126-395-11 s CAPACITOR,ELECT 22MF/16V(CHIP)

C27 1-163-038-00 s CAPACITOR, CERAMIC 0.1MF/25V
C28 1-163-038-00 s CAPACITOR, CERAMIC 0.1MF/25V
C29 1-163-038-00 s CAPACITOR, CERAMIC 0.1MF/25V
C30 1-163-038-00 s CAPACITOR, CERAMIC 0.1MF/25V
C31 1-163-038-00 s CAPACITOR, CERAMIC 0.1MF/25V

C32 1-126-396-11 s CAPACITOR,ELECT 47MF/16V(CHIP)
C33 1-163-038-00 s CAPACITOR, CERAMIC 0.1MF/25V
C34 1-163-038-00 s CAPACITOR, CERAMIC 0.1MF/25V
C37 1-163-038-00 s CAPACITOR, CERAMIC 0.1MF/25V
C38 1-163-038-00 s CAPACITOR, CERAMIC 0.1MF/25V

C39 1-163-038-00 s CAPACITOR, CERAMIC 0.1MF/25V
C40 1-163-038-00 s CAPACITOR, CERAMIC 0.1MF/25V
C41 1-163-038-00 s CAPACITOR, CERAMIC 0.1MF/25V
C42 1-163-038-00 s CAPACITOR, CERAMIC 0.1MF/25V
C43 1-163-038-00 s CAPACITOR, CERAMIC 0.1MF/25V

C51 1-163-038-00 s CAPACITOR, CERAMIC 0.1MF/25V
C52 1-163-038-00 s CAPACITOR, CERAMIC 0.1MF/25V
C53 1-163-038-00 s CAPACITOR, CERAMIC 0.1MF/25V
C54 1-163-038-00 s CAPACITOR, CERAMIC 0.1MF/25V
C61 1-163-038-00 s CAPACITOR, CERAMIC 0.1MF/25V

C62 1-163-009-11 s CAPACITOR,CERAMIC 1000PF/50V
C63 1-163-038-00 s CAPACITOR, CERAMIC 0.1MF/25V
C64 1-128-416-11 s CAPACITOR ELECT 100MF/16V(105C)
C65 1-163-038-00 s CAPACITOR, CERAMIC 0.1MF/25V
C66 1-163-038-00 s CAPACITOR, CERAMIC 0.1MF/25V

C67 1-163-038-00 s CAPACITOR, CERAMIC 0.1MF/25V
C68 1-163-038-00 s CAPACITOR, CERAMIC 0.1MF/25V
C69 1-163-038-00 s CAPACITOR, CERAMIC 0.1MF/25V

(CPU-305 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C70	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C71	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C72	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C73	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C74	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C75	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C81	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C82	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C83	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C84	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C85	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C86	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C91	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C92	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
CN21	1-563-772-11	o SOCKET,D-SUB CONNECTOR 25P
CN61	1-569-118-11	s CONNECTOR,BOARD TO BOARD 14P
CN62	1-580-838-11	o PIN,CONNECTOR (PC BOARD) 4P
CN63	1-565-198-11	o HEADER,CONNECTOR 14P
CN91	1-564-002-11	s PIN, CONNECTOR 3P
D1	8-719-404-35	s DIODE MA141WK
D2	8-719-404-35	s DIODE MA141WK
D3	8-719-210-39	s DIODE EC10QS04
D4	8-719-210-39	s DIODE EC10QS04
D5	8-719-064-52	s DIODE CL-191YG-CD-T
D6	8-719-064-52	s DIODE CL-191YG-CD-T
D21	8-719-064-52	s DIODE CL-191YG-CD-T
D22	8-719-404-35	s DIODE MA141WK
D23	8-719-404-35	s DIODE MA141WK
D61	8-719-159-10	s DIODE RD5.1SB-T2
D62	8-719-064-52	s DIODE CL-191YG-CD-T
D63	8-719-064-52	s DIODE CL-191YG-CD-T
D64	8-719-064-52	s DIODE CL-191YG-CD-T
D65	8-719-064-52	s DIODE CL-191YG-CD-T
D66	8-719-159-10	s DIODE RD5.1SB-T2
E21	1-535-881-21	o TERMINAL, TP (AUTO INSERTION)
E22	1-535-881-21	o TERMINAL, TP (AUTO INSERTION)
E23	1-535-881-21	o TERMINAL, TP (AUTO INSERTION)
E24	1-535-881-21	o TERMINAL, TP (AUTO INSERTION)
FB1	1-414-581-21	s INDUCTOR, CHIP
FB3	1-414-581-21	s INDUCTOR, CHIP
FB4	1-414-581-21	s INDUCTOR, CHIP
IC21	8-759-099-76	s IC TMP68301AFR-16
IC22	8-759-973-71	s IC TL7705CPS-B
IC23	8-759-549-15	s IC SN74LV245APWR
IC24	8-759-479-30	s IC SN75C1167NS (E05)
IC25	8-759-252-59	s IC MAX202CSE
IC26	8-759-665-08	o IC EPM7032SLC44-CPU305ADRV1.0
IC27	8-759-524-49	s IC TC74VHC540FT (EL)
IC28	8-759-523-95	s IC TC74VHC74FT (EL)
IC29	8-759-597-57	s IC LTC1628CG#TR
IC51	8-759-675-29	o IC MBM29F400BC-CPU305MONV1.0
IC52	8-759-497-04	s IC LC361000AMLL-70-TLA
IC53	8-759-497-04	s IC LC361000AMLL-70-TLA
IC54	8-759-537-83	s IC MBM29F400BC-70PFTN
IC61	8-759-549-15	s IC SN74LV245APWR
IC62	8-759-549-15	s IC SN74LV245APWR
IC63	8-759-549-15	s IC SN74LV245APWR
IC64	8-759-335-04	s IC CY7C136-55JC

(CPU-305 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC65	8-759-524-52	s IC TC74VHC574FT(EL)
IC66	8-759-524-20	s IC TC74VHC165FT (EL)
IC67	8-759-524-49	s IC TC74VHC540FT (EL)
IC68	8-759-529-76	s IC TC74VHC595FT(EL)
IC70	8-759-665-09	o IC EPM7064SLC44-CPU305PSCV1.0
IC71	8-759-523-78	s IC TC74VHC00FT(EL)
IC72	8-752-392-03	s IC CXD1095BR
L1	1-414-617-11	s INDUCTOR (POWER) 10UH
L2	1-412-533-21	s MICRO INDUCTOR 47UH
Q1	8-729-024-50	s TRANSISTOR SI9936DY
Q2	8-729-024-50	s TRANSISTOR SI9936DY
Q61	8-729-029-03	s TRANSISTOR DTC123EUA-T106
Q62	8-729-029-03	s TRANSISTOR DTC123EUA-T106
Q63	8-729-029-03	s TRANSISTOR DTC123EUA-T106
Q64	8-729-029-03	s TRANSISTOR DTC123EUA-T106
R1	1-219-796-11	s RESISTOR, CHIP(SQUARE)0.025 1W
R2	1-219-706-11	s RESISTOR, CHIP 0.10/1W
R3	1-218-745-11	s RESISTOR,CHIP 160K 1/16W(1608)
R4	1-218-751-11	s RESISTOR,CHIP 300K 1/16W(1608)
R5	1-218-727-11	s RESISTOR,CHIP 30K 1/16W(1608)
R6	1-218-730-11	s RESISTOR METAL FILM CHIP 39K
R7	1-216-077-00	s RESISTOR,CHIP 15K 1/10W(2012)
R8	1-216-077-00	s RESISTOR,CHIP 15K 1/10W(2012)
R9	1-216-049-91	s RESISTOR,CHIP 1K 1/10W(2125)
R10	1-216-049-91	s RESISTOR,CHIP 1K 1/10W(2125)
R11	1-218-614-11	s RESISTOR CHIP 10/1W (5331)
R13	1-216-121-91	s RESISTOR,CHIP 1M 1/10W (2012)
R14	1-216-121-91	s RESISTOR,CHIP 1M 1/10W (2012)
R20	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R21	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R22	1-216-037-00	s RESISTOR,CHIP 330 1/10W(2012)
R23	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R24	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R25	1-216-037-00	s RESISTOR,CHIP 330 1/10W(2012)
R26	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R27	1-216-049-91	s RESISTOR,CHIP 1K 1/10W(2125)
R28	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R29	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R30	1-216-101-00	s RESISTOR CHIP 150K 1/10W(2012)
R31	1-216-025-91	s RESISTOR,CHIP 100 1/10W(2125)
R32	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R35	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R36	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R39	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R40	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R41	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R42	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R43	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R44	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R45	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R46	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R47	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R48	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R49	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R50	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R51	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R52	1-216-298-00	s RESISTOR,CHIP 2.2 1/10(2012)

(CPU-305 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R55	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R61	1-216-121-91	s RESISTOR,CHIP 1M 1/10W (2012)
R62	1-216-101-00	s RESISTOR CHIP 150K 1/10W(2012)
R63	1-216-037-00	s RESISTOR,CHIP 330 1/10W(2012)
R64	1-216-049-91	s RESISTOR,CHIP 1K 1/10W(2125)
R65	1-216-049-91	s RESISTOR,CHIP 1K 1/10W(2125)
R66	1-216-049-91	s RESISTOR,CHIP 1K 1/10W(2125)
R67	1-216-049-91	s RESISTOR,CHIP 1K 1/10W(2125)
R68	1-216-065-91	s RESISTOR,CHIP 4.7K 1/10W(2012)
R69	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R70	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R71	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R72	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R73	1-216-025-91	s RESISTOR,CHIP 100 1/10W(2125)
R74	1-216-065-91	s RESISTOR,CHIP 4.7K 1/10W(2012)
R75	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
R76	1-216-073-00	s RESISTOR,CHIP 10K 1/10W(2012)
RB21	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB22	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB23	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB24	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB25	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB26	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB27	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB28	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB29	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB30	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB31	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB32	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB33	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB37	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB38	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB39	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB40	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB41	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB42	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB43	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB61	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB62	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB63	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB64	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB65	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB66	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB67	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB68	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB69	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB70	1-239-621-11	s NETWORK RESISTOR 22 (1608)
S22	1-572-473-11	s SWITCH, TACTIL
S61	1-692-536-11	s SWITCH DIP (8P)
X21	1-760-527-11	s OSCILLATOR, CRYSTAL

DD-37 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8324-729-A	o MOUNTED CIRCUIT BOARD, DD-37
1pc	3-625-974-01	o NUT PLATE
8pcs	7-621-759-65	s SCREW +PSW 2.6X8(EP-FE/ZN/CM2)
5pcs	7-682-948-01	s SCREW +PSW 3X8(EP-FE/ZN/CM2)
C1	1-128-601-11	s CAPACITOR ELECT 4700MF/35V
C2	1-128-601-11	s CAPACITOR ELECT 4700MF/35V
C3	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C4	1-126-399-11	s CAPACITOR ELECT 10MF/35V(CHIP)
C5	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C6	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C7	1-126-399-11	s CAPACITOR ELECT 10MF/35V(CHIP)
C8	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C9	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C10	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C11	1-163-037-11	s CAPACITOR,CHIP CERAMIC 0.022MF
C12	1-135-145-11	s CAPACITOR TANTALUM 0.47MF/35V
C13	1-135-145-11	s CAPACITOR TANTALUM 0.47MF/35V
C14	1-163-037-11	s CAPACITOR,CHIP CERAMIC 0.022MF
C15	1-163-037-11	s CAPACITOR,CHIP CERAMIC 0.022MF
C16	1-163-037-11	s CAPACITOR,CHIP CERAMIC 0.022MF
C17	1-135-145-11	s CAPACITOR TANTALUM 0.47MF/35V
C18	1-163-037-11	s CAPACITOR,CHIP CERAMIC 0.022MF
C19	1-135-145-11	s CAPACITOR TANTALUM 0.47MF/35V
C20	1-163-139-00	s CAPACITOR,CHIP CERAMIC 820PF
C21	1-135-145-11	s CAPACITOR TANTALUM 0.47MF/35V
C22	1-163-037-11	s CAPACITOR,CHIP CERAMIC 0.022MF
C23	1-135-145-11	s CAPACITOR TANTALUM 0.47MF/35V
C25	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C26	1-135-210-11	s CAPACITOR,TANTALUM 4.7MF/10V
C27	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C28	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C29	1-135-210-11	s CAPACITOR,TANTALUM 4.7MF/10V
C30	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C31	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C32	1-135-210-11	s CAPACITOR,TANTALUM 4.7MF/10V
C33	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C34	1-126-399-11	s CAPACITOR ELECT 10MF/35V(CHIP)
C35	1-126-399-11	s CAPACITOR ELECT 10MF/35V(CHIP)
C36	1-126-399-11	s CAPACITOR ELECT 10MF/35V(CHIP)
C37	1-126-399-11	s CAPACITOR ELECT 10MF/35V(CHIP)
C38	1-126-399-11	s CAPACITOR ELECT 10MF/35V(CHIP)
C39	1-126-399-11	s CAPACITOR ELECT 10MF/35V(CHIP)
C40	1-127-518-11	s CAPACITOR,ELECT 100MF/16V
C41	1-127-516-11	s CAPACITOR,ELECT (SOLID)220MF
C42	1-127-518-11	s CAPACITOR,ELECT 100MF/16V
C43	1-127-516-11	s CAPACITOR,ELECT (SOLID)220MF
C44	1-127-518-11	s CAPACITOR,ELECT 100MF/16V
C45	1-127-516-11	s CAPACITOR,ELECT (SOLID)220MF
C46	1-127-518-11	s CAPACITOR,ELECT 100MF/16V
C47	1-127-516-11	s CAPACITOR,ELECT (SOLID)220MF
C48	1-127-518-11	s CAPACITOR,ELECT 100MF/16V
C49	1-127-516-11	s CAPACITOR,ELECT (SOLID)220MF
C50	1-127-518-11	s CAPACITOR,ELECT 100MF/16V
C51	1-127-516-11	s CAPACITOR,ELECT (SOLID)220MF
C52	1-127-820-11	s CAPACITOR, SQUARE CHIP 4.7MF
C53	1-127-820-11	s CAPACITOR, SQUARE CHIP 4.7MF
D1	8-719-210-60	s DIODE F25P04QS
D2	8-719-210-60	s DIODE F25P04QS

(DD-37 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
D3	8-719-210-60	s DIODE F25P04QS
D4	8-719-210-60	s DIODE F25P04QS
D5	8-719-064-40	s DIODE DE5SC3ML-TA
D6	8-719-064-40	s DIODE DE5SC3ML-TA
F1	Δ 1-533-843-21	s FUSE, CHIP 10A (6125)
F2	Δ 1-533-843-21	s FUSE, CHIP 10A (6125)
F3	Δ 1-533-843-21	s FUSE, CHIP 10A (6125)
F4	Δ 1-533-477-11	s FUSE, CHIP 8A (6125)
F5	Δ 1-533-272-11	s FUSE, CHIP 4A (6125)
F6	Δ 1-533-272-11	s FUSE, CHIP 4A (6125)
IC1	8-759-983-69	s IC LM358PS
IC2	8-759-983-69	s IC LM358PS
IC3	8-759-937-36	s IC TL1451ACNS
IC4	8-759-937-36	s IC TL1451ACNS
IC5	8-759-937-36	s IC TL1451ACNS
L1	1-415-922-11	s COIL, CHOKE
L2	1-415-922-11	s COIL, CHOKE
L3	1-415-922-11	s COIL, CHOKE
L4	1-415-922-11	s COIL, CHOKE
L5	1-469-668-11	s INDUCTOR 33UH
L6	1-469-668-11	s INDUCTOR 33UH
L7	1-414-489-71	s INDUCTOR, MICRO 2.7UH
L8	1-414-489-71	s INDUCTOR, MICRO 2.7UH
L9	1-411-591-11	s COIL, CHOKE 3.7UH
L10	1-411-591-11	s COIL, CHOKE 3.7UH
L11	1-411-591-11	s COIL, CHOKE 3.7UH
L12	1-411-591-11	s COIL, CHOKE 3.7UH
L13	1-411-591-11	s COIL, CHOKE 3.7UH
L14	1-411-591-11	s COIL, CHOKE 3.7UH
Q1	8-729-117-32	s TRANSISTOR 2SC4177
Q2	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q3	8-729-117-32	s TRANSISTOR 2SC4177
Q4	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q5	8-729-117-32	s TRANSISTOR 2SC4177
Q6	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q7	8-729-117-32	s TRANSISTOR 2SC4177
Q8	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q9	8-729-117-32	s TRANSISTOR 2SC4177
Q10	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q11	8-729-117-32	s TRANSISTOR 2SC4177
Q12	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q13	8-729-142-68	s TRANSISTOR 2SJ143
Q14	8-729-142-68	s TRANSISTOR 2SJ143
Q15	8-729-142-68	s TRANSISTOR 2SJ143
Q16	8-729-142-68	s TRANSISTOR 2SJ143
Q17	8-729-045-53	s TRANSISTOR SI4431DY-T1
Q18	8-729-045-53	s TRANSISTOR SI4431DY-T1
R1	1-216-661-11	s RESISTOR,CHIP 2.7K 1/10W(2012)
R2	1-216-661-11	s RESISTOR,CHIP 2.7K 1/10W(2012)
R3	1-216-678-11	s RESISTOR,CHIP 13K 1/10W(2012)
R4	1-216-678-11	s RESISTOR,CHIP 13K 1/10W(2012)
R5	1-216-677-11	s RESISTOR,CHIP 12K 1/10W(2012)
R6	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R7	1-216-677-11	s RESISTOR,CHIP 12K 1/10W(2012)
R8	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R9	1-216-677-11	s RESISTOR,CHIP 12K 1/10W(2012)
R10	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)

(DD-37 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R11	1-216-677-11	s RESISTOR,CHIP 12K 1/10W(2012)
R12	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R13	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R14	1-218-760-11	s RESISTOR,CHIP 220K 1/10W(2012)
R15	1-216-681-11	s RESISTOR,CHIP 18K 1/10W (2012)
R16	1-216-687-11	s RESISTOR CHIP 33K 1/10W (2012)
R17	1-218-760-11	s RESISTOR,CHIP 220K 1/10W(2012)
R18	1-216-677-11	s RESISTOR,CHIP 12K 1/10W(2012)
R19	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R20	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R21	1-216-681-11	s RESISTOR,CHIP 18K 1/10W (2012)
R22	1-216-687-11	s RESISTOR CHIP 33K 1/10W (2012)
R23	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R24	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R25	1-218-760-11	s RESISTOR,CHIP 220K 1/10W(2012)
R26	1-218-760-11	s RESISTOR,CHIP 220K 1/10W(2012)
R27	1-216-677-11	s RESISTOR,CHIP 12K 1/10W(2012)
R28	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R29	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R30	1-218-760-11	s RESISTOR,CHIP 220K 1/10W(2012)
R31	1-216-681-11	s RESISTOR,CHIP 18K 1/10W (2012)
R32	1-216-687-11	s RESISTOR CHIP 33K 1/10W (2012)
R33	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R34	1-218-760-11	s RESISTOR,CHIP 220K 1/10W(2012)
R35	1-216-681-11	s RESISTOR,CHIP 18K 1/10W (2012)
R36	1-216-687-11	s RESISTOR CHIP 33K 1/10W (2012)
R37	1-216-681-11	s RESISTOR,CHIP 18K 1/10W (2012)
R38	1-216-687-11	s RESISTOR CHIP 33K 1/10W (2012)
R39	1-216-681-11	s RESISTOR,CHIP 18K 1/10W (2012)
R40	1-216-687-11	s RESISTOR CHIP 33K 1/10W (2012)
R41	1-216-669-11	s RESISTOR,CHIP 5.6K 1/10W(2012)
R42	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R43	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R45	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R46	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R47	1-216-603-11	s RESISTOR,CHIP 10 1/10W(2012)
R48	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R49	1-216-603-11	s RESISTOR,CHIP 10 1/10W(2012)
R50	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R51	1-216-603-11	s RESISTOR,CHIP 10 1/10W(2012)
R52	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R53	1-216-603-11	s RESISTOR,CHIP 10 1/10W(2012)
R54	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R55	1-216-603-11	s RESISTOR,CHIP 10 1/10W(2012)
R56	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R57	1-216-603-11	s RESISTOR,CHIP 10 1/10W(2012)
R58	1-216-682-11	s RESISTOR,CHIP 20K 1/10W (2012)
R59	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R60	1-216-682-11	s RESISTOR,CHIP 20K 1/10W (2012)
R61	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R62	1-216-682-11	s RESISTOR,CHIP 20K 1/10W (2012)
R63	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R64	1-216-676-11	s RESISTOR,CHIP 11K 1/10W(2012)
R65	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R66	1-216-688-11	s RESISTOR,CHIP 36K 1/10W(2012)
R67	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R68	1-216-676-11	s RESISTOR,CHIP 11K 1/10W(2012)
R69	1-216-695-11	s RESISTOR,CHIP 68K 1/10W(2012)
R70	1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012)

(DD-37 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R71	1-216-678-11	s RESISTOR,CHIP 13K 1/10W(2012)
R72	1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012)
R73	1-216-678-11	s RESISTOR,CHIP 13K 1/10W(2012)
R74	1-215-863-11	s RESISTOR,METAL 100/1W
R75	1-215-863-11	s RESISTOR,METAL 100/1W

IPM-96/96P BOARD

Ref. No. or Q'ty	Part No.	SP Description
---------------------	----------	----------------

*1:Suffix -11
*2:Suffix -12 and Higher

1pc	A-8324-720-A	o MOUNTED CIRCUIT BOARD, IPM-96 (for NTSC)
1pc	A-8324-731-A	o MOUNTED CIRCUIT BOARD, IPM-96P (for PAL)
2pcs	3-624-100-02	o LEVER,PWB
7pcs	4-886-821-11	s SCREW,M3X6 CASE (SILVER)
2pcs	7-626-300-54	o SPRING PIN 3X6
C101	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C102	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C103	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C104	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C105	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C106	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C107	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C108	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C109	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C110	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C111	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C112	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C113	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C114	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C115	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C116	*1 Not used	
	*2 1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C117	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C118	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C119	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C120	1-163-259-91	s CAPACITOR,CHIP CERAMIC 220PF
C121	1-163-259-91	s CAPACITOR,CHIP CERAMIC 220PF
C122	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C123	1-163-113-00	s CAPACITOR,CHIP CERAMIC 68PF/50
C124	*1 Not used	
	*2 1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C125	*1 Not used	
	*2 1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C127	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C128	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C130	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C131	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C132	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C134	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C135	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C136	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C137	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C138	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C139	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C140	1-164-161-11	s CAPACITOR, CERAMIC 2200PF/100V
C141	1-164-161-11	s CAPACITOR, CERAMIC 2200PF/100V
C142	1-164-161-11	s CAPACITOR, CERAMIC 2200PF/100V
C143	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C144	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C145	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C146	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C147	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C148	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C149	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C150	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V

(IPM-96/96P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C151	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C152	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C153	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C154	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C155	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C156	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C157	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C158	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C159	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C160	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C161	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C162	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C163	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C164	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C168	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C169	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C170	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C171	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C172	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C173	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C174	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C197	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C201	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C202	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C203	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C204	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C205	1-163-005-11	s CAPACITOR CHIP CERAMIC 470PF
C206	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C207	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C208	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C209	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C210	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C211	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C212	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C213	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C214	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C215	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C216	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C217	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C218	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C219	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C220	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C221	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C222	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C223	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C224	1-163-009-11	s CAPACITOR,CERAMIC 1000PF/50V
C225	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C226	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C227	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C228	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C229	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C230	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C231	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C233	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C234	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C235	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C236	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C237	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C238	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V

(IPM-96/96P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C239	1-163-037-11	s CAPACITOR,CHIP CERAMIC 0.022MF
C240	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C241	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C242	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C243	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C244	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C245	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C246	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C247	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C248	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C249	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C250	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C251	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C301	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C302	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C303	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C304	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C305	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C306	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C307	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C308	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C309	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C310	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C311	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C312	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C313	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C314	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C315	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C316	*1 Not used	
*2	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C317	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C318	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C319	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C320	1-163-259-91	s CAPACITOR,CHIP CERAMIC 220PF
C321	1-163-259-91	s CAPACITOR,CHIP CERAMIC 220PF
C322	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C323	1-163-113-00	s CAPACITOR,CHIP CERAMIC 68PF/50
C324	*1 Not used	
*2	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C325	*1 Not used	
*2	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C327	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C328	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C330	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C331	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C332	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C333	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C335	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C336	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C337	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C338	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C339	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C340	1-164-161-11	s CAPACITOR, CERAMIC 2200PF/100V
C341	1-164-161-11	s CAPACITOR, CERAMIC 2200PF/100V
C342	1-164-161-11	s CAPACITOR, CERAMIC 2200PF/100V
C343	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C344	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C345	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C346	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V

(IPM-96/96P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C347	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C348	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C349	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C350	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C351	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C352	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C353	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C354	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C355	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C356	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C357	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C358	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C359	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C360	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C361	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C362	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C363	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C364	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C368	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C369	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C370	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C371	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C372	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C373	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C374	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C397	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C401	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C402	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C403	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C404	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C405	1-163-005-11	s CAPACITOR CHIP CERAMIC 470PF
C406	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C407	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C408	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C409	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C410	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C411	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C412	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C413	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C414	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C415	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C416	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C417	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C418	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C419	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C420	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C421	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C422	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C423	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C424	1-163-009-11	s CAPACITOR,CERAMIC 1000PF/50V
C425	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C426	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C427	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C428	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C429	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C430	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C431	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C433	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C434	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V

(IPM-96/96P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C435	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C436	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C437	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C438	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C439	1-163-037-11	s CAPACITOR,CHIP CERAMIC 0.022MF
C440	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C441	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C442	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C443	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C444	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C445	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C446	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C447	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C448	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C449	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C450	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C451	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C501	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C502	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C503	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C504	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C505	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C506	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C507	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C508	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C509	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C510	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C511	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C512	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C513	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C514	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C515	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C516	*1 Not used	
C517	*2 1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C518	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C519	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C520	1-163-259-91	s CAPACITOR,CHIP CERAMIC 220PF
C521	1-163-259-91	s CAPACITOR,CHIP CERAMIC 220PF
C522	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C523	1-163-113-00	s CAPACITOR,CHIP CERAMIC 68PF/50
C524	*1 Not used	
C525	*2 1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C527	*1 Not used	
C528	*2 1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C530	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C531	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C532	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C533	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C534	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C535	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C536	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C537	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C538	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C539	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C540	1-164-161-11	s CAPACITOR, CERAMIC 2200PF/100V
C541	1-164-161-11	s CAPACITOR, CERAMIC 2200PF/100V
C542	1-164-161-11	s CAPACITOR, CERAMIC 2200PF/100V

(IPM-96/96P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C543	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C544	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C545	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C546	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C547	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C548	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C549	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C550	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C551	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C552	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C553	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C554	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C555	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C556	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C557	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C558	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C559	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C560	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C561	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C562	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C563	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C564	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C568	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C569	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C570	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C571	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C572	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C573	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C574	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C597	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C601	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C602	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C603	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C604	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C605	1-163-005-11	s CAPACITOR CHIP CERAMIC 470PF
C606	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C607	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C608	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C609	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C610	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C611	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C612	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C613	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C614	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C615	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C616	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C617	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C618	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C619	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C620	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C621	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C622	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C623	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C624	1-163-009-11	s CAPACITOR,CERAMIC 100PF/50V
C625	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C626	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C627	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C628	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C629	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V

(IPM-96/96P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C630	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C631	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C633	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C634	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C635	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C636	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C637	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C638	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C639	1-163-037-11	s CAPACITOR,CHIP CERAMIC 0.022MF
C640	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C641	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C642	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C643	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C644	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C645	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C646	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C647	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C648	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C649	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C650	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C651	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C701	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C702	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C703	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C704	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C705	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C706	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C707	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C708	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C709	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C710	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C711	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C712	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C713	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C714	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C715	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C716	*1 Not used	
	*2 1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C717	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C718	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C719	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C720	1-163-259-91	s CAPACITOR,CHIP CERAMIC 220PF
C721	1-163-259-91	s CAPACITOR,CHIP CERAMIC 220PF
C722	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C723	1-163-113-00	s CAPACITOR,CHIP CERAMIC 68PF/50
C724	*1 Not used	
	*2 1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C725	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C726	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C727	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C728	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C729	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C730	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C731	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C732	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C733	*1 Not used	
	*2 1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C734	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C735	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V

(IPM-96/96P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C736	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C737	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C738	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C739	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C740	1-164-161-11	s CAPACITOR, CERAMIC 2200PF/100V
C741	1-164-161-11	s CAPACITOR, CERAMIC 2200PF/100V
C742	1-164-161-11	s CAPACITOR, CERAMIC 2200PF/100V
C743	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C744	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C745	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C746	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C747	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C748	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C749	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C750	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C751	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C752	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C753	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C754	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C755	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C756	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C757	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C758	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C759	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C760	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C761	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C762	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C763	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C764	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C768	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C769	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C770	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C771	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C772	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C773	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C774	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C775	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C776	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C778	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C779	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C801	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C802	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C803	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C804	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C805	1-163-005-11	s CAPACITOR CHIP CERAMIC 470PF
C806	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C807	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C808	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C809	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C810	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C811	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C812	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C813	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C814	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C815	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C816	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C817	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C818	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C819	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V

(IPM-96/96P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C820	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C821	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C822	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C823	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C824	1-163-009-11	s CAPACITOR,CERAMIC 1000PF/50V
C825	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C826	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C827	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C828	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C829	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C830	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C831	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C833	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C834	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C835	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C836	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C837	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C838	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C839	1-163-037-11	s CAPACITOR,CHIP CERAMIC 0.022MF
C840	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C841	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C842	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C843	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C844	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C845	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C846	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C847	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C848	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C849	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C850	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C851	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C901	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C902	1-126-394-11	s CAPACITOR,ELECT 10MF/16V(CHIP)
C903	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C904	1-126-394-11	s CAPACITOR,ELECT 10MF/16V(CHIP)
C905	1-164-346-11	s CAPACITOR CHIP CERAMIC 1MF/16V
C906	1-164-346-11	s CAPACITOR CHIP CERAMIC 1MF/16V
C907	1-164-346-11	s CAPACITOR CHIP CERAMIC 1MF/16V
C908	1-164-346-11	s CAPACITOR CHIP CERAMIC 1MF/16V
C909	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C910	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C911	1-164-346-11	s CAPACITOR CHIP CERAMIC 1MF/16V
C912	1-164-346-11	s CAPACITOR CHIP CERAMIC 1MF/16V
C913	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C914	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C915	1-164-346-11	s CAPACITOR CHIP CERAMIC 1MF/16V
C916	1-164-346-11	s CAPACITOR CHIP CERAMIC 1MF/16V
C917	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C918	1-126-394-11	s CAPACITOR,ELECT 10MF/16V(CHIP)
C919	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C920	1-126-394-11	s CAPACITOR,ELECT 10MF/16V(CHIP)
C921	1-163-243-11	s CAPACITOR CHIP CERAMIC 47PF/50
C922	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C923	1-163-243-11	s CAPACITOR CHIP CERAMIC 47PF/50
C924	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C925	1-164-346-11	s CAPACITOR CHIP CERAMIC 1MF/16V
C926	1-164-346-11	s CAPACITOR CHIP CERAMIC 1MF/16V
C927	1-164-346-11	s CAPACITOR CHIP CERAMIC 1MF/16V
C928	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V

[illegible]

Ref. No. or Q'ty	Part No.	SP	Description
C1307	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1308	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1309	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1310	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1311	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1312	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1313	1-109-982-11	s	CAPACITOR,CHIP CERAMIC 1MF/10V
C1314	1-109-982-11	s	CAPACITOR,CHIP CERAMIC 1MF/10V
C1315	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1316	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1317	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1318	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1319	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1320	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1321	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1322	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1323	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1324	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1325	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1326	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1327	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1328	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1329	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1330	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1331	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1332	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1333	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1334	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1335	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1336	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1337	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1338	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1339	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1340	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1341	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1342	1-109-982-11	s	CAPACITOR,CHIP CERAMIC 1MF/10V
C1343	1-109-982-11	s	CAPACITOR,CHIP CERAMIC 1MF/10V
C1344	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1403	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C1404	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C1405	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C1406	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C1407	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C1408	1-109-982-11	s	CAPACITOR,CHIP CERAMIC 1MF/10V
C1409	1-109-982-11	s	CAPACITOR,CHIP CERAMIC 1MF/10V
C1410	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C1411	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C1412	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C1421	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C1422	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C1423	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C1424	1-109-982-11	s	CAPACITOR,CHIP CERAMIC 1MF/10V
C1425	1-109-982-11	s	CAPACITOR,CHIP CERAMIC 1MF/10V
C1426	1-109-982-11	s	CAPACITOR,CHIP CERAMIC 1MF/10V
C1427	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C1428	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C1429	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C1430	1-109-982-11	s	CAPACITOR,CHIP CERAMIC 1MF/10V
C1431	1-109-982-11	s	CAPACITOR,CHIP CERAMIC 1MF/10V

(IPM-96/96P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C1432	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C7701	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C7702	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C7703	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C7704	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C7705	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C7708	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C7709	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C7710	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C7711	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C7712	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C7713	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C7714	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C7717	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C7718	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C7797	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
D700	8-719-105-91	s DIODE RD5.6M-B2
F1401	Δ 1-576-329-11	s FUSE CHIP 10A/125V (6125)
F1402	Δ 1-576-329-11	s FUSE CHIP 10A/125V (6125)
FL101	1-233-599-11	s FILTER, LOW PASS
FL102	1-233-599-11	s FILTER, LOW PASS
FL103	1-239-913-41	s FILTER, LOW PASS
FL301	1-233-599-11	s FILTER, LOW PASS
FL302	1-233-599-11	s FILTER, LOW PASS
FL303	1-239-913-41	s FILTER, LOW PASS
FL501	1-233-599-11	s FILTER, LOW PASS
FL502	1-233-599-11	s FILTER, LOW PASS
FL503	1-239-913-41	s FILTER, LOW PASS
FL701	1-233-599-11	s FILTER, LOW PASS
FL702	1-233-599-11	s FILTER, LOW PASS
FL703	1-239-913-41	s FILTER, LOW PASS
IC101	8-759-573-91	s IC AD8055ART-REEL7
IC102	8-759-573-91	s IC AD8055ART-REEL7
IC103	8-759-573-91	s IC AD8055ART-REEL7
IC104	8-759-573-91	s IC AD8055ART-REEL7
IC105	8-759-700-78	s IC NJM082M
IC106	8-759-324-03	s IC HA17431UA(TL)
IC107	8-759-447-90	s IC TLC5733AIPM
IC108	8-759-175-27	s IC TC74VHC574F
IC109	8-759-175-27	s IC TC74VHC574F
IC110	8-759-175-27	s IC TC74VHC574F
IC111	8-759-081-48	s IC TC74VHC08F
IC112	8-759-186-38	s IC TC74VHC32F
IC113	8-759-175-27	s IC TC74VHC574F
IC114	8-759-186-51	s IC TC74VHC157F
IC115	8-759-186-51	s IC TC74VHC157F
IC116	8-759-175-27	s IC TC74VHC574F
IC117	8-759-676-03	o IC AT27C010-LEVT-V1.00
IC118	8-759-175-27	s IC TC74VHC574F
IC119	8-759-175-27	s IC TC74VHC574F
IC201	8-759-344-12	s IC GS4981CTA
IC202	8-759-239-58	s IC TC74HC221AF
IC203	8-759-927-46	s IC SN74HC00ANS
IC204	8-759-902-88	s IC SN74LS123NS
IC205	8-759-700-78	s IC NJM082M
IC206	8-759-239-58	s IC TC74HC221AF

(IPM-96/96P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC207	8-759-669-75	s IC TLC2932IPWR
IC208	8-759-925-74	s IC SN74HC04ANS
IC209	8-759-700-78	s IC NJM082M
IC210	8-759-186-39	s IC TC74VHC74F
IC211	8-759-081-44	s IC TC74VHC04F
IC212	8-759-186-53	s IC TC74VHC163F
IC213	8-759-186-53	s IC TC74VHC163F
IC214	8-759-186-53	s IC TC74VHC163F
IC215	8-759-081-44	s IC TC74VHC04F
IC216	8-759-186-54	s IC TC74VHC164F
IC217	8-759-186-54	s IC TC74VHC164F
IC218	8-759-186-39	s IC TC74VHC74F
IC219	8-759-186-39	s IC TC74VHC74F
IC301	8-759-573-91	s IC AD8055ART-REEL7
IC302	8-759-573-91	s IC AD8055ART-REEL7
IC303	8-759-573-91	s IC AD8055ART-REEL7
IC304	8-759-573-91	s IC AD8055ART-REEL7
IC305	8-759-700-78	s IC NJM082M
IC306	8-759-324-03	s IC HA17431UA(TL)
IC307	8-759-447-90	s IC TLC5733AIPM
IC308	8-759-175-27	s IC TC74VHC574F
IC309	8-759-175-27	s IC TC74VHC574F
IC310	8-759-175-27	s IC TC74VHC574F
IC311	8-759-081-48	s IC TC74VHC08F
IC312	8-759-186-38	s IC TC74VHC32F
IC313	8-759-175-27	s IC TC74VHC574F
IC314	8-759-186-51	s IC TC74VHC157F
IC315	8-759-186-51	s IC TC74VHC157F
IC316	8-759-175-27	s IC TC74VHC574F
IC317	8-759-676-03	o IC AT27C010-LEVT-V1.00
IC318	8-759-175-27	s IC TC74VHC574F
IC319	8-759-175-27	s IC TC74VHC574F
IC401	8-759-344-12	s IC GS4981CTA
IC402	8-759-239-58	s IC TC74HC221AF
IC403	8-759-927-46	s IC SN74HC00ANS
IC404	8-759-902-88	s IC SN74LS123NS
IC405	8-759-700-78	s IC NJM082M
IC406	8-759-239-58	s IC TC74HC221AF
IC407	8-759-669-75	s IC TLC2932IPWR
IC408	8-759-925-74	s IC SN74HC04ANS
IC409	8-759-700-78	s IC NJM082M
IC410	8-759-186-39	s IC TC74VHC74F
IC411	8-759-081-44	s IC TC74VHC04F
IC412	8-759-186-53	s IC TC74VHC163F
IC413	8-759-186-53	s IC TC74VHC163F
IC414	8-759-186-53	s IC TC74VHC163F
IC415	8-759-081-44	s IC TC74VHC04F
IC416	8-759-186-54	s IC TC74VHC164F
IC417	8-759-186-54	s IC TC74VHC164F
IC418	8-759-186-39	s IC TC74VHC74F
IC419	8-759-186-39	s IC TC74VHC74F
IC501	8-759-573-91	s IC AD8055ART-REEL7
IC502	8-759-573-91	s IC AD8055ART-REEL7
IC503	8-759-573-91	s IC AD8055ART-REEL7
IC504	8-759-573-91	s IC AD8055ART-REEL7
IC505	8-759-700-78	s IC NJM082M
IC506	8-759-324-03	s IC HA17431UA(TL)
IC507	8-759-447-90	s IC TLC5733AIPM
IC508	8-759-175-27	s IC TC74VHC574F

(IPM-96/96P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC509	8-759-175-27	s IC TC74VHC574F
IC510	8-759-175-27	s IC TC74VHC574F
IC511	8-759-081-48	s IC TC74VHC08F
IC512	8-759-186-38	s IC TC74VHC32F
IC513	8-759-175-27	s IC TC74VHC574F
IC514	8-759-186-51	s IC TC74VHC157F
IC515	8-759-186-51	s IC TC74VHC157F
IC516	8-759-175-27	s IC TC74VHC574F
IC517	8-759-676-03	o IC AT27C010-LEVT-V1.00
IC518	8-759-175-27	s IC TC74VHC574F
IC519	8-759-175-27	s IC TC74VHC574F
IC601	8-759-344-12	s IC GS4981CTA
IC602	8-759-239-58	s IC TC74HC221AF
IC603	8-759-927-46	s IC SN74HC00ANS
IC604	8-759-902-88	s IC SN74LS123NS
IC605	8-759-700-78	s IC NJM082M
IC606	8-759-239-58	s IC TC74HC221AF
IC607	8-759-669-75	s IC TLC2932IPWR
IC608	8-759-925-74	s IC SN74HC04ANS
IC609	8-759-700-78	s IC NJM082M
IC610	8-759-186-39	s IC TC74VHC74F
IC611	8-759-081-44	s IC TC74VHC04F
IC612	8-759-186-53	s IC TC74VHC163F
IC613	8-759-186-53	s IC TC74VHC163F
IC614	8-759-186-53	s IC TC74VHC163F
IC615	8-759-081-44	s IC TC74VHC04F
IC616	8-759-186-54	s IC TC74VHC164F
IC617	8-759-186-54	s IC TC74VHC164F
IC618	8-759-186-39	s IC TC74VHC74F
IC619	8-759-186-39	s IC TC74VHC74F
IC701	8-759-573-91	s IC AD8055ART-REEL7
IC702	8-759-573-91	s IC AD8055ART-REEL7
IC703	8-759-573-91	s IC AD8055ART-REEL7
IC704	8-759-573-91	s IC AD8055ART-REEL7
IC705	8-759-700-78	s IC NJM082M
IC706	8-759-324-03	s IC HA17431UA(TL)
IC707	8-759-447-90	s IC TLC5733AIPM
IC708	8-759-175-27	s IC TC74VHC574F
IC709	8-759-175-27	s IC TC74VHC574F
IC710	8-759-175-27	s IC TC74VHC574F
IC711	8-759-081-48	s IC TC74VHC08F
IC712	8-759-186-38	s IC TC74VHC32F
IC713	8-759-175-27	s IC TC74VHC574F
IC714	8-759-186-51	s IC TC74VHC157F
IC715	8-759-186-51	s IC TC74VHC157F
IC716	8-759-175-27	s IC TC74VHC574F
IC717	8-759-676-03	o IC AT27C010-LEVT-V1.00
IC718	8-759-710-86	s IC NJM2233BM
IC719	8-759-710-86	s IC NJM2233BM
IC720	8-759-710-86	s IC NJM2233BM
IC721	8-759-175-27	s IC TC74VHC574F
IC722	8-759-175-27	s IC TC74VHC574F
IC801	8-759-344-12	s IC GS4981CTA
IC802	8-759-239-58	s IC TC74HC221AF
IC803	8-759-927-46	s IC SN74HC00ANS
IC804	8-759-902-88	s IC SN74LS123NS
IC805	8-759-700-78	s IC NJM082M
IC806	8-759-239-58	s IC TC74HC221AF
IC807	8-759-669-75	s IC TLC2932IPWR

(IPM-96/96P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC808	8-759-925-74	s IC SN74HC04ANS
IC809	8-759-700-78	s IC NJM082M
IC810	8-759-186-39	s IC TC74VHC74F
IC811	8-759-081-44	s IC TC74VHC04F
IC812	8-759-186-53	s IC TC74VHC163F
IC813	8-759-186-53	s IC TC74VHC163F
IC814	8-759-186-53	s IC TC74VHC163F
IC815	8-759-081-44	s IC TC74VHC04F
IC816	8-759-186-54	s IC TC74VHC164F
IC817	8-759-186-54	s IC TC74VHC164F
IC818	8-759-186-39	s IC TC74VHC74F
IC819	8-759-186-39	s IC TC74VHC74F
IC901	8-752-078-34	s IC CXB1342R
IC902	8-759-360-60	s IC CXD8976AR
IC903	8-752-078-34	s IC CXB1342R
IC904	8-759-360-60	s IC CXD8976AR
IC905	8-759-524-10	s IC TC74VHC157FT (EL)
IC906	8-759-524-10	s IC TC74VHC157FT (EL)
IC907	8-759-524-10	s IC TC74VHC157FT (EL)
IC908	8-759-524-10	s IC TC74VHC157FT (EL)
IC911	8-759-456-03	s IC M66256GP (E2)
IC912	8-759-456-03	s IC M66256GP (E2)
IC913	8-759-456-03	s IC M66256GP (E2)
IC914	8-759-456-03	s IC M66256GP (E2)
IC917	8-759-456-03	s IC M66256GP (E2)
IC918	8-759-456-03	s IC M66256GP (E2)
IC919	8-759-456-03	s IC M66256GP (E2)
IC920	8-759-456-03	s IC M66256GP (E2)
IC921	8-759-524-10	s IC TC74VHC157FT (EL)
IC922	8-759-524-10	s IC TC74VHC157FT (EL)
IC923	8-759-524-10	s IC TC74VHC157FT (EL)
IC924	8-759-524-10	s IC TC74VHC157FT (EL)
IC925	8-759-523-81	s IC TC74VHC08FT(EL)
IC926	8-759-523-81	s IC TC74VHC08FT(EL)
IC1001	8-752-078-34	s IC CXB1342R
IC1002	8-759-360-60	s IC CXD8976AR
IC1003	8-752-078-34	s IC CXB1342R
IC1004	8-759-360-60	s IC CXD8976AR
IC1005	8-759-524-10	s IC TC74VHC157FT (EL)
IC1006	8-759-524-10	s IC TC74VHC157FT (EL)
IC1011	8-759-456-03	s IC M66256GP (E2)
IC1012	8-759-456-03	s IC M66256GP (E2)
IC1013	8-759-456-03	s IC M66256GP (E2)
IC1014	8-759-456-03	s IC M66256GP (E2)
IC1017	8-759-456-03	s IC M66256GP (E2)
IC1018	8-759-456-03	s IC M66256GP (E2)
IC1019	8-759-456-03	s IC M66256GP (E2)
IC1020	8-759-456-03	s IC M66256GP (E2)
IC1021	8-759-524-10	s IC TC74VHC157FT (EL)
IC1022	8-759-524-10	s IC TC74VHC157FT (EL)
IC1023	8-759-524-10	s IC TC74VHC157FT (EL)
IC1024	8-759-524-10	s IC TC74VHC157FT (EL)
IC1025	8-759-523-81	s IC TC74VHC08FT(EL)
IC1026	8-759-523-81	s IC TC74VHC08FT(EL)
IC1097	8-759-524-10	s IC TC74VHC157FT (EL)
IC1098	8-759-524-10	s IC TC74VHC157FT (EL)
IC1101	8-759-385-18	s IC CXD9002Q
IC1102	8-759-385-18	s IC CXD9002Q
IC1103	8-759-549-22	s IC SN74LV574APWR

(IPM-96/96P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC1104	8-759-549-22 s IC	SN74LV574APWR
IC1105	8-759-549-22 s IC	SN74LV574APWR
IC1106	8-759-549-22 s IC	SN74LV574APWR
IC1107	8-759-549-22 s IC	SN74LV574APWR
IC1108	8-759-524-10 s IC	TC74VHC157FT (EL)
IC1109	8-759-524-10 s IC	TC74VHC157FT (EL)
IC1110	8-759-524-10 s IC	TC74VHC157FT (EL)
IC1111	8-759-524-10 s IC	TC74VHC157FT (EL)
IC1112	8-759-549-20 s IC	SN74LV541APWR
IC1113	8-759-490-42 s IC	TC74VHCT574AFT (EL)
IC1115	8-759-490-42 s IC	TC74VHCT574AFT (EL)
IC1117	8-759-490-42 s IC	TC74VHCT574AFT (EL)
IC1119	8-759-490-42 s IC	TC74VHCT574AFT (EL)
IC1121	8-759-490-42 s IC	TC74VHCT574AFT (EL)
IC1124	8-759-490-42 s IC	TC74VHCT574AFT (EL)
IC1125	8-759-490-42 s IC	TC74VHCT574AFT (EL)
IC1128	8-759-524-10 s IC	TC74VHC157FT (EL)
IC1129	8-759-524-10 s IC	TC74VHC157FT (EL)
IC1130	8-759-524-10 s IC	TC74VHC157FT (EL)
IC1131	8-759-524-10 s IC	TC74VHC157FT (EL)
IC1201	8-759-490-42 s IC	TC74VHCT574AFT (EL)
IC1202	8-759-490-42 s IC	TC74VHCT574AFT (EL)
IC1203	8-759-549-22 s IC	SN74LV574APWR
IC1204	8-759-647-49 s IC	AL422B-TEL
IC1205	8-759-647-49 s IC	AL422B-TEL
IC1206	8-759-647-49 s IC	AL422B-TEL
IC1207	8-759-647-49 s IC	AL422B-TEL
IC1208	8-759-173-46 s IC	CXD8335AQ
IC1209	8-759-456-03 s IC	M66256GP (E2)
IC1210	8-759-549-20 s IC	SN74LV541APWR
IC1301	8-759-549-22 s IC	SN74LV574APWR
IC1302	8-759-549-20 s IC	SN74LV541APWR
IC1303	8-759-549-20 s IC	SN74LV541APWR
IC1304	8-759-549-15 s IC	SN74LV245APWR
IC1305	8-759-549-22 s IC	SN74LV574APWR
IC1306	8-759-549-22 s IC	SN74LV574APWR
IC1307	8-759-549-15 s IC	SN74LV245APWR
IC1308	8-759-549-22 s IC	SN74LV574APWR
IC1309	8-759-549-22 s IC	SN74LV574APWR
IC1310	8-759-549-13 s IC	SN74LV240APWR
IC1311	8-759-549-13 s IC	SN74LV240APWR
IC1312	8-759-673-99 o IC	XC1765E-IPMS-V1.00
IC1313	8-759-505-06 s IC	CXD8058Q
IC1314	8-759-549-13 s IC	SN74LV240APWR
IC1315	8-759-549-20 s IC	SN74LV541APWR
IC1316	8-759-549-13 s IC	SN74LV240APWR
IC1317	8-759-549-13 s IC	SN74LV240APWR
IC1318	8-759-549-20 s IC	SN74LV541APWR
IC1319	8-759-578-68 s IC	SN74LVCC4245APWR
IC1320	8-759-505-06 s IC	CXD8058Q
IC1321	8-759-505-06 s IC	CXD8058Q
IC1322	8-759-505-06 s IC	CXD8058Q
IC1323	8-759-505-06 s IC	CXD8058Q
IC1324	8-759-505-06 s IC	CXD8058Q
IC1325	8-759-505-06 s IC	CXD8058Q
IC1326	8-759-505-06 s IC	CXD8058Q
IC1327	8-759-665-33 o IC	XC5202-6PC84
IC1328	8-759-549-20 s IC	SN74LV541APWR
IC1329	8-759-524-10 s IC	TC74VHC157FT (EL)

(IPM-96/96P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC1330	8-759-505-06 s IC	CXD8058Q
IC1331	8-759-505-06 s IC	CXD8058Q
IC1332	8-759-549-20 s IC	SN74LV541APWR
IC1333	8-759-505-06 s IC	CXD8058Q
IC1334	8-759-081-48 s IC	TC74VHC08F
IC1335	8-759-524-10 s IC	TC74VHC157FT (EL)
IC1336	8-759-524-10 s IC	TC74VHC157FT (EL)
IC1337	8-759-524-10 s IC	TC74VHC157FT (EL)
IC1338	8-759-549-20 s IC	SN74LV541APWR
IC1402	8-759-358-38 s IC	NJM78M05DLA (TE1)
IC1403	8-759-358-38 s IC	NJM78M05DLA (TE1)
IC1404	8-759-586-98 s IC	NJM79M05DLA (TE1)
IS117	1-540-151-21 s	SOCKET, IC
IS317	1-540-151-21 s	SOCKET, IC
IS517	1-540-151-21 s	SOCKET, IC
IS717	1-540-151-21 s	SOCKET, IC
IS1312	1-526-652-21 o	SOCKET, IC 8P
L101	1-408-781-00 s	CHIP INDUCTOR 22UH (4532)
L102	1-408-781-00 s	CHIP INDUCTOR 22UH (4532)
L201	1-408-787-00 s	CHIP INDUCTOR 68UH (4532)
L202	1-408-781-00 s	CHIP INDUCTOR 22UH (4532)
L301	1-408-781-00 s	CHIP INDUCTOR 22UH (4532)
L302	1-408-781-00 s	CHIP INDUCTOR 22UH (4532)
L401	1-408-787-00 s	CHIP INDUCTOR 68UH (4532)
L402	1-408-781-00 s	CHIP INDUCTOR 22UH (4532)
L501	1-408-781-00 s	CHIP INDUCTOR 22UH (4532)
L502	1-408-781-00 s	CHIP INDUCTOR 22UH (4532)
L601	1-408-787-00 s	CHIP INDUCTOR 68UH (4532)
L602	1-408-781-00 s	CHIP INDUCTOR 22UH (4532)
L701	1-408-781-00 s	CHIP INDUCTOR 22UH (4532)
L702	1-408-781-00 s	CHIP INDUCTOR 22UH (4532)
L801	1-408-787-00 s	CHIP INDUCTOR 68UH (4532)
L802	1-408-781-00 s	CHIP INDUCTOR 22UH (4532)
L901	1-410-797-11 s	CHIP INDUCTOR 0.015UH (3225)
L902	1-410-797-11 s	CHIP INDUCTOR 0.015UH (3225)
L903	1-410-385-11 s	INDUCTOR, CHIP 22UH (3225)
L904	1-410-385-11 s	INDUCTOR, CHIP 22UH (3225)
L905	1-410-385-11 s	INDUCTOR, CHIP 22UH (3225)
L906	1-410-385-11 s	INDUCTOR, CHIP 22UH (3225)
L1001	1-410-797-11 s	CHIP INDUCTOR 0.015UH (3225)
L1002	1-410-797-11 s	CHIP INDUCTOR 0.015UH (3225)
L1003	1-410-385-11 s	INDUCTOR, CHIP 22UH (3225)
L1004	1-410-385-11 s	INDUCTOR, CHIP 22UH (3225)
L1005	1-410-385-11 s	INDUCTOR, CHIP 22UH (3225)
L1006	1-410-385-11 s	INDUCTOR, CHIP 22UH (3225)
L1401	1-421-459-21 s	COIL, CHOKE
L1402	1-421-459-21 s	COIL, CHOKE
L1403	1-469-529-11 s	INDUCTOR, (SMD) 10UH
L1404	1-469-529-11 s	INDUCTOR, (SMD) 10UH
PS1403	1-533-282-21 s	CIRCUIT PROTECTOR 2A (3225)
PS1404	1-533-282-21 s	CIRCUIT PROTECTOR 2A (3225)
Q101	8-729-120-28 s	TRANSISTOR 2SC1623-L5L6
Q102	8-729-120-28 s	TRANSISTOR 2SC1623-L5L6
Q103	8-729-120-28 s	TRANSISTOR 2SC1623-L5L6
Q104	8-729-216-22 s	TRANSISTOR 2SA1162-G
Q105	8-729-216-22 s	TRANSISTOR 2SA1162-G
Q106	8-729-216-22 s	TRANSISTOR 2SA1162-G

(IPM-96/96P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
Q107	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q108	8-729-216-22	s TRANSISTOR 2SA1162-G
Q118	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q119	8-729-216-22	s TRANSISTOR 2SA1162-G
Q120	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q121	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q201	8-729-216-22	s TRANSISTOR 2SA1162-G
Q301	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q302	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q303	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q304	8-729-216-22	s TRANSISTOR 2SA1162-G
Q305	8-729-216-22	s TRANSISTOR 2SA1162-G
Q306	8-729-216-22	s TRANSISTOR 2SA1162-G
Q307	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q308	8-729-216-22	s TRANSISTOR 2SA1162-G
Q318	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q319	8-729-216-22	s TRANSISTOR 2SA1162-G
Q320	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q321	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q401	8-729-216-22	s TRANSISTOR 2SA1162-G
Q501	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q502	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q503	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q504	8-729-216-22	s TRANSISTOR 2SA1162-G
Q505	8-729-216-22	s TRANSISTOR 2SA1162-G
Q506	8-729-216-22	s TRANSISTOR 2SA1162-G
Q507	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q508	8-729-216-22	s TRANSISTOR 2SA1162-G
Q518	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q519	8-729-216-22	s TRANSISTOR 2SA1162-G
Q520	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q521	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q601	8-729-216-22	s TRANSISTOR 2SA1162-G
Q701	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q702	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q703	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q704	8-729-216-22	s TRANSISTOR 2SA1162-G
Q705	8-729-216-22	s TRANSISTOR 2SA1162-G
Q706	8-729-216-22	s TRANSISTOR 2SA1162-G
Q707	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q708	8-729-216-22	s TRANSISTOR 2SA1162-G
Q718	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q719	8-729-216-22	s TRANSISTOR 2SA1162-G
Q720	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q721	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q722	8-729-216-22	s TRANSISTOR 2SA1162-G
Q723	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q724	8-729-216-22	s TRANSISTOR 2SA1162-G
Q725	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q726	8-729-216-22	s TRANSISTOR 2SA1162-G
Q727	8-729-216-22	s TRANSISTOR 2SA1162-G
Q728	*1 8-729-120-28	s TRANSISTOR 2SC1623-L5L6
	*2 8-729-107-31	s TRANSISTOR 2SC3545
Q729	*1 8-729-120-28	s TRANSISTOR 2SC1623-L5L6
	*2 8-729-107-31	s TRANSISTOR 2SC3545
Q730	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q731	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q732	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q733	8-729-216-22	s TRANSISTOR 2SA1162-G

(IPM-96/96P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
Q734	*1 8-729-120-28	s TRANSISTOR 2SC1623-L5L6
	*2 8-729-107-31	s TRANSISTOR 2SC3545
Q735	*1 8-729-120-28	s TRANSISTOR 2SC1623-L5L6
	*2 8-729-107-31	s TRANSISTOR 2SC3545
Q736	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q737	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q738	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q801	8-729-216-22	s TRANSISTOR 2SA1162-G
R101	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R102	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R103	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R104	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R105	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R106	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R107	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R108	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R109	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R110	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R111	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R112	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R113	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R114	1-218-764-11	s RESISTOR,CHIP 330K 1/10W(2012)
R115	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R116	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R117	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R118	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R119	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R120	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R121	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R122	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R123	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R124	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R125	*1 Not used	
	*2 1-216-699-11	s RESISTOR,CHIP 100K 1/10W(2012)
R126	*1 Not used	
	*2 1-216-699-11	s RESISTOR,CHIP 100K 1/10W(2012)
R127	*1 Not used	
	*2 1-218-768-11	s RESISTOR,CHIP 470K 1/10W(2012)
R128	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R129	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R130	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R131	1-216-655-11	s RESISTOR,CHIP 1.5K 1/10W(2012)
R132	1-216-655-11	s RESISTOR,CHIP 1.5K 1/10W(2012)
R133	1-216-637-11	s RESISTOR,CHIP 270 1/10W (2012)
R134	1-216-637-11	s RESISTOR,CHIP 270 1/10W (2012)
R135	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R136	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R137	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R138	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R139	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R140	1-216-655-11	s RESISTOR,CHIP 1.5K 1/10W(2012)
R141	1-216-636-11	s RESISTOR CHIP 240 1/10W (2012)
R142	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R143	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R144	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R145	*1 Not used	
	*2 1-216-699-11	s RESISTOR,CHIP 100K 1/10W(2012)
R146	*1 Not used	
	*2 1-216-699-11	s RESISTOR,CHIP 100K 1/10W(2012)

(IPM-96/96P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R147	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R150	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R151	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R153	*1 1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012) (for NTSC)
	*1 1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012) (for PAL)
	*2 1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012) (for NTSC)
	*2 1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012) (for PAL)
R154	*1 1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012) (for NTSC)
	*1 1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012) (for PAL)
	*2 1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012) (for NTSC)
	*2 1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012) (for PAL)
R155	1-216-625-11	s RESISTOR,CHIP 82 1/10W
R156	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R157	*1 1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012)
	*2 1-216-641-11	s RESISTOR,CHIP 390 1/10W (2012)
R158	*1 1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012) (for NTSC)
	*2 1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012) (for NTSC)
	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012) (for PAL)
R159	*1 1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012) (for NTSC)
	*2 1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012) (for NTSC)
	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012) (for PAL)
R162	*1 1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
	*2 1-216-656-11	s RESISTOR,CHIP 1K 1/10W(2012)
R181	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R182	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R183	1-216-669-11	s RESISTOR,CHIP 5.6K 1/10W(2012)
R184	1-216-658-11	s RESISTOR,CHIP 2.0K 1/10W(2012)
R185	1-216-655-11	s RESISTOR,CHIP 1.5K 1/10W(2012)
R186	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R187	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R189	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R190	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R191	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R192	1-216-603-11	s RESISTOR,CHIP 10 1/10W(2012)
R194	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R198	1-218-764-11	s RESISTOR,CHIP 330K 1/10W(2012)
R199	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R201	1-216-641-11	s RESISTOR,CHIP 390 1/10W(2012)
R203	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R205	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R206	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R207	1-218-772-11	s RESISTOR,CHIP 680K 1/10W(2012)
R208	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R209	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R210	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R211	1-218-760-11	s RESISTOR,CHIP 220K 1/10W(2012)
R212	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R213	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R214	1-216-687-11	s RESISTOR,CHIP 33K 1/10W (2012)
R215	1-216-689-11	s RESISTOR,CHIP 39K 1/10W(2012)

(IPM-96/96P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R216	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R217	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R223	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R224	1-216-694-11	s RESISTOR,CHIP 62K 1/10W(2012)
R225	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R226	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R227	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R228	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R229	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R230	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R231	1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012)
R232	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R233	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R250	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R301	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R302	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R303	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R304	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R305	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R306	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R307	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R308	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R309	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R310	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R311	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R312	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R313	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R314	1-218-764-11	s RESISTOR,CHIP 330K 1/10W(2012)
R315	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R316	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R317	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R318	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R319	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R320	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R321	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R322	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R323	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R324	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R325	*1 Not used	
	*2 1-216-699-11	s RESISTOR,CHIP 100K 1/10W(2012)
R326	*1 Not used	
	*2 1-216-699-11	s RESISTOR,CHIP 100K 1/10W(2012)
R327	*1 Not used	
	*2 1-218-768-11	s RESISTOR,CHIP 470K 1/10W(2012)
R328	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R329	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R330	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R331	1-216-655-11	s RESISTOR,CHIP 1.5K 1/10W(2012)
R332	1-216-655-11	s RESISTOR,CHIP 1.5K 1/10W(2012)
R333	1-216-637-11	s RESISTOR,CHIP 270 1/10W (2012)
R334	1-216-637-11	s RESISTOR,CHIP 270 1/10W (2012)
R335	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R336	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R337	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R338	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R339	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R340	1-216-655-11	s RESISTOR,CHIP 1.5K 1/10W(2012)
R341	1-216-636-11	s RESISTOR,CHIP 240 1/10W (2012)
R342	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)

(IPM-96/96P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R343	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R344	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R345	*1 Not used	
	*2 1-216-699-11	s RESISTOR,CHIP 100K 1/10W(2012)
R346	*1 Not used	
	*2 1-216-699-11	s RESISTOR,CHIP 100K 1/10W(2012)
R347	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R350	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R351	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R353	*1 1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012) (for NTSC)
	*1 1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012) (for PAL)
	*2 1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012) (for NTSC)
	*2 1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012) (for PAL)
R354	*1 1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012) (for NTSC)
	*1 1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012) (for PAL)
	*2 1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012) (for NTSC)
	*2 1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012) (for PAL)
R355	1-216-625-11	s RESISTOR,CHIP 82 1/10W
R356	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R357	*1 1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012)
	*2 1-216-641-11	s RESISTOR,CHIP 390 1/10W (2012)
R358	*1 1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012) (for NTSC)
	*2 1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012) (for NTSC)
	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012) (for PAL)
R359	*1 1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012) (for NTSC)
	*2 1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012) (for NTSC)
	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012) (for PAL)
R362	*1 1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
	*2 1-216-656-11	s RESISTOR,CHIP 1K 1/10W(2012)
R381	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R382	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R383	1-216-669-11	s RESISTOR,CHIP 5.6K 1/10W(2012)
R384	1-216-658-11	s RESISTOR,CHIP 2.0K 1/10W(2012)
R385	1-216-655-11	s RESISTOR,CHIP 1.5K 1/10W(2012)
R386	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R387	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R389	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R390	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R391	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R392	1-216-603-11	s RESISTOR,CHIP 10 1/10W(2012)
R394	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R398	1-218-764-11	s RESISTOR,CHIP 330K 1/10W(2012)
R399	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R401	1-216-641-11	s RESISTOR,CHIP 390 1/10W(2012)
R403	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R405	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R406	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R407	1-218-772-11	s RESISTOR,CHIP 680K 1/10W(2012)
R408	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R409	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)

(IPM-96/96P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R410	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R411	1-218-760-11	s RESISTOR,CHIP 220K 1/10W(2012)
R412	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R413	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R414	1-216-687-11	s RESISTOR CHIP 33K 1/10W (2012)
R415	1-216-689-11	s RESISTOR,CHIP 39K 1/10W(2012)
R416	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R417	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R423	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R424	1-216-694-11	s RESISTOR,CHIP 62K 1/10W(2012)
R425	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R426	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R427	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R428	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R429	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R430	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R431	1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012)
R432	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R433	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R450	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R501	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R502	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R503	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R504	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R505	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R506	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R507	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R508	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R509	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R510	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R511	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R512	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R513	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R514	1-218-764-11	s RESISTOR,CHIP 330K 1/10W(2012)
R515	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R516	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R517	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R518	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R519	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R520	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R521	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R522	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R523	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R524	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R525	*1 Not used	
	*2 1-216-699-11	s RESISTOR,CHIP 100K 1/10W(2012)
R526	*1 Not used	
	*2 1-216-699-11	s RESISTOR,CHIP 100K 1/10W(2012)
R527	*1 Not used	
	*2 1-218-768-11	s RESISTOR,CHIP 470K 1/10W(2012)
R528	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R529	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R530	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R531	1-216-655-11	s RESISTOR,CHIP 1.5K 1/10W(2012)
R532	1-216-655-11	s RESISTOR,CHIP 1.5K 1/10W(2012)
R533	1-216-637-11	s RESISTOR,CHIP 270 1/10W (2012)
R534	1-216-637-11	s RESISTOR,CHIP 270 1/10W (2012)
R535	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R536	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)

(IPM-96/96P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R537	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R538	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R539	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R540	1-216-655-11	s RESISTOR,CHIP 1.5K 1/10W(2012)
R541	1-216-636-11	s RESISTOR CHIP 240 1/10W (2012)
R542	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R543	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R544	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R545	*1 Not used	
	*2 1-216-699-11	s RESISTOR,CHIP 100K 1/10W(2012)
R546	*1 Not used	
	*2 1-216-699-11	s RESISTOR,CHIP 100K 1/10W(2012)
R547	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R550	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R551	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R553	*1 1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
		(for NTSC)
	*1 1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
		(for PAL)
	*2 1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
		(for NTSC)
	*2 1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
		(for PAL)
R554	*1 1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
		(for NTSC)
	*1 1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
		(for PAL)
	*2 1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
		(for NTSC)
	*2 1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
		(for PAL)
R555	1-216-625-11	s RESISTOR,CHIP 82 1/10W
R556	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R557	*1 1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012)
	*2 1-216-641-11	s RESISTOR,CHIP 390 1/10W (2012)
R558	*1 1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
		(for NTSC)
	*2 1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
		(for NTSC)
	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
		(for PAL)
R559	*1 1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
		(for NTSC)
	*2 1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
		(for NTSC)
	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
		(for PAL)
R562	*1 1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
	*2 1-216-656-11	s RESISTOR,CHIP 1K 1/10W(2012)
R581	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R582	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R583	1-216-669-11	s RESISTOR,CHIP 5.6K 1/10W(2012)
R584	1-216-658-11	s RESISTOR,CHIP 2.0K 1/10W(2012)
R585	1-216-655-11	s RESISTOR,CHIP 1.5K 1/10W(2012)
R586	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R587	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R589	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R590	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R591	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R592	1-216-603-11	s RESISTOR,CHIP 10 1/10W(2012)
R594	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R598	1-218-764-11	s RESISTOR,CHIP 330K 1/10W(2012)
R599	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R601	1-216-641-11	s RESISTOR,CHIP 390 1/10W(2012)

(IPM-96/96P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R603	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R605	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R606	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R607	1-218-772-11	s RESISTOR,CHIP 680K 1/10W(2012)
R608	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R609	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R610	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R611	1-218-760-11	s RESISTOR,CHIP 220K 1/10W(2012)
R612	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R613	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R614	1-216-687-11	s RESISTOR CHIP 33K 1/10W (2012)
R615	1-216-689-11	s RESISTOR,CHIP 39K 1/10W(2012)
R616	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R617	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R623	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R624	1-216-694-11	s RESISTOR,CHIP 62K 1/10W(2012)
R625	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R626	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R627	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R628	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R629	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R630	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R631	1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012)
R632	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R633	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R650	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R704	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R705	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R706	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R707	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R708	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R709	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R710	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R711	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R712	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R713	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R714	1-218-764-11	s RESISTOR,CHIP 330K 1/10W(2012)
R715	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R716	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R717	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R718	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R719	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R720	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R721	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R722	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R723	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R724	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R725	*1 1-216-655-11	s RESISTOR,CHIP 1.5K 1/10W(2012)
		(for NTSC)
	*2 1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
		(for NTSC)
	1-216-655-11	s RESISTOR,CHIP 1.5K 1/10W(2012)
		(for PAL)
R726	*1 1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
	*2 1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R727	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R728	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R729	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R730	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R731	1-216-655-11	s RESISTOR,CHIP 1.5K 1/10W(2012)

(IPM-96/96P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R732	1-216-655-11	s RESISTOR,CHIP 1.5K 1/10W(2012)
R733	1-216-637-11	s RESISTOR,CHIP 270 1/10W (2012)
R734	1-216-637-11	s RESISTOR,CHIP 270 1/10W (2012)
R735	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R736	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R737	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R738	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R739	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R740	1-216-655-11	s RESISTOR,CHIP 1.5K 1/10W(2012)
R741	1-216-636-11	s RESISTOR CHIP 240 1/10W (2012)
R742	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R743	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R744	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R745	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R746	*1 1-216-655-11	s RESISTOR,CHIP 1.5K 1/10W(2012) (for NTSC)
	*2 1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012) (for NTSC)
	1-216-655-11	s RESISTOR,CHIP 1.5K 1/10W(2012) (for PAL)
R747	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R748	*1 Not used	
	*2 1-216-699-11	s RESISTOR,CHIP 100K 1/10W(2012)
R749	*1 Not used	
	*2 1-216-699-11	s RESISTOR,CHIP 100K 1/10W(2012)
R750	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R751	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R752	*1 Not used	
	*2 1-218-768-11	s RESISTOR,CHIP 470K 1/10W(2012)
R753	*1 1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012) (for NTSC)
	*1 1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012) (for PAL)
	*2 1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012) (for NTSC)
	*2 1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012) (for PAL)
R754	*1 1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012) (for NTSC)
	*1 1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012) (for PAL)
	*2 1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012) (for NTSC)
	*2 1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012) (for PAL)
R755	1-216-625-11	s RESISTOR,CHIP 82 1/10W
R756	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R757	*1 1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012)
	*2 1-216-641-11	s RESISTOR,CHIP 390 1/10W (2012)
R758	*1 1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012) (for NTSC)
	*2 1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012) (for NTSC)
	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012) (for PAL)
R759	*1 1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012) (for NTSC)
	*2 1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012) (for NTSC)
	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012) (for PAL)
R760	*1 Not used	
	*2 1-216-699-11	s RESISTOR,CHIP 100K 1/10W(2012)
R761	*1 Not used	
	*2 1-216-699-11	s RESISTOR,CHIP 100K 1/10W(2012)

(IPM-96/96P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R762	*1 1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
	*2 1-216-656-11	s RESISTOR,CHIP 1K 1/10W(2012)
R765	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R766	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R767	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R768	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R769	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R770	1-216-637-11	s RESISTOR,CHIP 270 1/10W (2012)
R771	1-216-678-11	s RESISTOR,CHIP 13K 1/10W(2012)
R772	1-216-620-11	s RESISTOR,CHIP 51 1/10W (2012)
R773	1-216-649-11	s RESISTOR,CHIP 820 1/10W (2012)
R774	*1 1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
	*2 1-216-631-11	s RESISTOR,CHIP 150 1/10W (2012) (for NTSC)
	*2 1-216-625-11	s RESISTOR,CHIP 82 1/10W (for PAL)
R775	1-216-661-11	s RESISTOR,CHIP 2.7K 1/10W(2012)
R776	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R777	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R778	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R779	1-216-661-11	s RESISTOR,CHIP 2.7K 1/10W(2012)
R780	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R781	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R782	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R783	1-216-669-11	s RESISTOR,CHIP 5.6K 1/10W(2012)
R784	1-216-658-11	s RESISTOR,CHIP 2.0K 1/10W(2012)
R785	1-216-655-11	s RESISTOR,CHIP 1.5K 1/10W(2012)
R786	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R787	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R789	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R790	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R791	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R792	1-216-603-11	s RESISTOR,CHIP 10 1/10W(2012)
R794	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R798	1-218-764-11	s RESISTOR,CHIP 330K 1/10W(2012)
R799	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R801	1-216-641-11	s RESISTOR,CHIP 390 1/10W(2012)
R803	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R805	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R806	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R807	1-218-772-11	s RESISTOR,CHIP 680K 1/10W(2012)
R808	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R809	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R810	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R811	1-218-760-11	s RESISTOR,CHIP 220K 1/10W(2012)
R812	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R813	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R814	1-216-687-11	s RESISTOR CHIP 33K 1/10W (2012)
R815	1-216-689-11	s RESISTOR,CHIP 39K 1/10W(2012)
R816	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R817	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R823	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R824	1-216-694-11	s RESISTOR,CHIP 62K 1/10W(2012)
R825	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R826	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R827	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R828	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R829	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R830	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R831	1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012)
R832	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)

(IPM-96/96P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R1351	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R1352	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R1353	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R1354	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R1355	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R1356	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R1362	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R1363	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R1364	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R1365	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R1407	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R1408	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R1409	1-216-655-11	s RESISTOR,CHIP 1.5K 1/10W(2012)
R1410	1-216-655-11	s RESISTOR,CHIP 1.5K 1/10W(2012)
R7700	1-216-619-11	s RESISTOR CHIP 47 1/10W(2012)
R7701	*1 1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
	*2 1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R7702	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R7703	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R7704	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R7705	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R7706	1-216-665-11	s RESISTOR,CHIP 3.9K 1/10W(2012)
R7707	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R7708	1-216-682-11	s RESISTOR,CHIP 20K 1/10W (2012)
R7709	1-216-645-11	s RESISTOR,CHIP 560 1/10W(2012)
R7710	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R7711	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R7712	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R7713	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R7714	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R7715	*1 1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
	*2 1-216-650-11	s RESISTOR,CHIP 910 1/10W(2012) (for NTSC)
	*2 1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012) (for PAL)
R7716	1-216-661-11	s RESISTOR,CHIP 2.7K 1/10W(2012)
R7717	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R7718	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R7719	1-216-619-11	s RESISTOR CHIP 47 1/10W(2012)
R7720	*1 1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
	*2 1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R7721	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R7722	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R7723	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R7724	1-216-655-11	s RESISTOR,CHIP 1.5K 1/10W(2012)
R7725	1-216-664-11	s RESISTOR,CHIP 3.6K 1/10W(2125)
R7726	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R7727	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R7728	1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012)
R7729	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R7730	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R7731	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R7732	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R7733	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R7734	*1 1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
	*2 1-216-650-11	s RESISTOR,CHIP 910 1/10W(2012) (for NTSC)
	*2 1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012) (for PAL)
R7735	1-216-661-11	s RESISTOR,CHIP 2.7K 1/10W(2012)

(IPM-96/96P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R7736	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R7737	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R7738	1-216-619-11	s RESISTOR CHIP 47 1/10W(2012)
RB101	1-239-430-11	s NETWORK RESISTOR 4.7K (1608)
RB102	1-239-430-11	s NETWORK RESISTOR 4.7K (1608)
RB103	1-233-663-91	s NETWORK, RES (8 GANG) 4.7K
RB301	1-239-430-11	s NETWORK RESISTOR 4.7K (1608)
RB302	1-239-430-11	s NETWORK RESISTOR 4.7K (1608)
RB303	1-233-663-91	s NETWORK, RES (8 GANG) 4.7K
RB501	1-239-430-11	s NETWORK RESISTOR 4.7K (1608)
RB502	1-239-430-11	s NETWORK RESISTOR 4.7K (1608)
RB503	1-233-663-91	s NETWORK, RES (8 GANG) 4.7K
RB701	1-239-430-11	s NETWORK RESISTOR 4.7K (1608)
RB702	1-239-430-11	s NETWORK RESISTOR 4.7K (1608)
RB703	1-233-663-91	s NETWORK, RES (8 GANG) 4.7K
RB901	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB902	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB903	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB904	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB905	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB906	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB1001	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB1002	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB1003	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB1004	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB1005	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB1006	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB1101	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB1102	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB1103	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB1104	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB1105	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB1106	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB1107	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB1108	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB1109	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB1110	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB1111	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB1112	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB1113	1-234-397-11	s NETWORK, RES (8 GANG) 100K
RB1114	1-234-397-11	s NETWORK, RES (8 GANG) 100K
RB1115	1-234-397-11	s NETWORK, RES (8 GANG) 100K
RB1116	1-234-397-11	s NETWORK, RES (8 GANG) 100K
RB1117	1-234-397-11	s NETWORK, RES (8 GANG) 100K
RB1118	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB1119	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB1301	1-234-397-11	s NETWORK, RES (8 GANG) 100K
RB1302	1-234-397-11	s NETWORK, RES (8 GANG) 100K
RB1304	1-234-397-11	s NETWORK, RES (8 GANG) 100K
RB1305	1-233-664-11	s NETWORK, RES (8 GANG) 22K
RB1306	1-233-664-11	s NETWORK, RES (8 GANG) 22K
RV101	1-237-033-11	s RESISTOR,ADJ,CERMET 1K
RV102	1-237-033-11	s RESISTOR,ADJ,CERMET 1K
RV103	*1 1-237-032-11	s RESISTOR,ADJ,CERMET 500
	*2 1-237-030-11	s RESISTOR,ADJ,CERMET 100
RV104	*1 1-237-032-11	s RESISTOR,ADJ,CERMET 500
	*2 1-237-030-11	s RESISTOR,ADJ,CERMET 100

(IPM-96/96P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
RV105	*1 1-237-032-11	s RESISTOR, ADJ, CERMET 500
	*2 1-237-030-11	s RESISTOR, ADJ, CERMET 100
RV201	1-237-035-11	s RESISTOR, ADJ, CERMET 5K
RV301	1-237-033-11	s RESISTOR, ADJ, CERMET 1K
RV302	1-237-033-11	s RESISTOR, ADJ, CERMET 1K
RV303	*1 1-237-032-11	s RESISTOR, ADJ, CERMET 500
	*2 1-237-030-11	s RESISTOR, ADJ, CERMET 100
RV304	*1 1-237-032-11	s RESISTOR, ADJ, CERMET 500
	*2 1-237-030-11	s RESISTOR, ADJ, CERMET 100
RV305	*1 1-237-032-11	s RESISTOR, ADJ, CERMET 500
	*2 1-237-030-11	s RESISTOR, ADJ, CERMET 100
RV401	1-237-035-11	s RESISTOR, ADJ, CERMET 5K
RV501	1-237-033-11	s RESISTOR, ADJ, CERMET 1K
RV502	1-237-033-11	s RESISTOR, ADJ, CERMET 1K
RV503	*1 1-237-032-11	s RESISTOR, ADJ, CERMET 500
	*2 1-237-030-11	s RESISTOR, ADJ, CERMET 100
RV504	*1 1-237-032-11	s RESISTOR, ADJ, CERMET 500
	*2 1-237-030-11	s RESISTOR, ADJ, CERMET 100
RV505	*1 1-237-032-11	s RESISTOR, ADJ, CERMET 500
	*2 1-237-030-11	s RESISTOR, ADJ, CERMET 100
RV601	1-237-035-11	s RESISTOR, ADJ, CERMET 5K
RV701	1-237-033-11	s RESISTOR, ADJ, CERMET 1K
RV702	1-237-033-11	s RESISTOR, ADJ, CERMET 1K
RV703	*1 1-237-032-11	s RESISTOR, ADJ, CERMET 500
	*2 1-237-030-11	s RESISTOR, ADJ, CERMET 100
RV704	*1 1-237-032-11	s RESISTOR, ADJ, CERMET 500
	*2 1-237-030-11	s RESISTOR, ADJ, CERMET 100
RV705	*1 1-237-032-11	s RESISTOR, ADJ, CERMET 500
	*2 1-237-030-11	s RESISTOR, ADJ, CERMET 100
RV706	*1 1-237-032-11	s RESISTOR, ADJ, CERMET 500
	*2 1-237-030-11	s RESISTOR, ADJ, CERMET 100
RV707	*1 1-237-032-11	s RESISTOR, ADJ, CERMET 500
	*2 1-237-030-11	s RESISTOR, ADJ, CERMET 100
RV708	*1 1-237-032-11	s RESISTOR, ADJ, CERMET 500
	*2 1-237-030-11	s RESISTOR, ADJ, CERMET 100
RV801	1-237-035-11	s RESISTOR, ADJ, CERMET 5K
RV901	1-237-033-11	s RESISTOR, ADJ, CERMET 1K
RV902	1-237-033-11	s RESISTOR, ADJ, CERMET 1K
RV1001	1-237-033-11	s RESISTOR, ADJ, CERMET 1K
RV1002	1-237-033-11	s RESISTOR, ADJ, CERMET 1K
S901	1-570-711-11	s SWITCH, SLIDE
S904	1-570-711-11	s SWITCH, SLIDE
S1001	1-570-711-11	s SWITCH, SLIDE
S1002	1-570-711-11	s SWITCH, SLIDE
X201	1-767-695-21	s OSCILLATOR, CRYSTAL
X401	1-767-695-21	s OSCILLATOR, CRYSTAL
X601	1-767-695-21	s OSCILLATOR, CRYSTAL
X801	1-767-695-21	s OSCILLATOR, CRYSTAL

KY-466 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8324-714-A	o MOUNTED CIRCUIT BOARD, KY-466
2pcs	3-626-867-01	s KEY TOP
7pcs	3-626-867-11	s KEY TOP
54pcs	3-708-964-01	s COLOR BUTTON (LZ 6000)
C100	1-126-204-11	s CAPACITOR, ELECT 47MF/16V(CHIP
C101	1-126-204-11	s CAPACITOR, ELECT 47MF/16V(CHIP
C102	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C103	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C104	1-126-204-11	s CAPACITOR, ELECT 47MF/16V(CHIP
C105	1-126-204-11	s CAPACITOR, ELECT 47MF/16V(CHIP
C106	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C107	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C108	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C109	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C110	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C111	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C112	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C113	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C114	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C115	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C116	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C117	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C118	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C119	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C120	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C121	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C122	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C123	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C124	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C125	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C126	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C127	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C128	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C129	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C130	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C131	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C132	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C133	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C134	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C200	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C201	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C202	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C203	1-126-204-11	s CAPACITOR, ELECT 47MF/16V(CHIP
C204	1-126-204-11	s CAPACITOR, ELECT 47MF/16V(CHIP
C205	1-163-017-00	s CAPACITOR, CHIP CERAMIC 4700PF
C206	1-163-017-00	s CAPACITOR, CHIP CERAMIC 4700PF
C207	1-163-017-00	s CAPACITOR, CHIP CERAMIC 4700PF
C208	1-163-017-00	s CAPACITOR, CHIP CERAMIC 4700PF
C209	1-163-017-00	s CAPACITOR, CHIP CERAMIC 4700PF
C210	1-163-017-00	s CAPACITOR, CHIP CERAMIC 4700PF
C211	1-163-017-00	s CAPACITOR, CHIP CERAMIC 4700PF
C212	1-163-017-00	s CAPACITOR, CHIP CERAMIC 4700PF
C213	1-163-017-00	s CAPACITOR, CHIP CERAMIC 4700PF
C214	1-163-017-00	s CAPACITOR, CHIP CERAMIC 4700PF
C215	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V

(KY-466 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C216	1-163-017-00	s CAPACITOR, CHIP CERAMIC 4700PF
C217	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C218	1-163-017-00	s CAPACITOR, CHIP CERAMIC 4700PF
C219	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C220	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C221	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C222	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C223	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C224	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C225	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C226	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C227	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C228	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C229	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C230	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C231	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C232	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C233	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C234	1-126-204-11	s CAPACITOR, ELECT 47MF/16V(CHIP
C235	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C236	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C237	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C238	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C239	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C240	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C241	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C242	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C243	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
CN101	1-691-503-11	o CONNECTOR, FPC 14P
CN102	1-580-838-11	o PIN, CONNECTOR (PC BOARD) 4P
CN103	1-691-503-11	o CONNECTOR, FPC 14P
CN104	1-506-469-11	s PIN, CONNECTOR 4P
CN105	1-691-503-11	o CONNECTOR, FPC 14P
CN106	1-506-469-11	s PIN, CONNECTOR 4P
CN107	1-774-043-11	s CONNECTOR, FPC (DIP TYPE) 26P
CN108	1-506-469-11	s PIN, CONNECTOR 4P
CN111	1-691-503-11	o CONNECTOR, FPC 14P
D101	8-719-404-35	s DIODE MA141WK
D102	8-719-404-35	s DIODE MA141WK
D103	8-719-404-35	s DIODE MA141WK
D104	8-719-404-35	s DIODE MA141WK
D111	8-719-404-35	s DIODE MA141WK
D112	8-719-404-35	s DIODE MA141WK
D113	8-719-404-35	s DIODE MA141WK
D114	8-719-404-35	s DIODE MA141WK
D121	8-719-404-35	s DIODE MA141WK
D122	8-719-404-35	s DIODE MA141WK
D131	8-719-404-35	s DIODE MA141WK
D134	8-719-404-35	s DIODE MA141WK
D141	8-719-404-35	s DIODE MA141WK
D142	8-719-404-35	s DIODE MA141WK
D143	8-719-404-35	s DIODE MA141WK
D151	8-719-404-35	s DIODE MA141WK
D152	8-719-404-35	s DIODE MA141WK
D153	8-719-404-35	s DIODE MA141WK
D154	8-719-404-35	s DIODE MA141WK
D161	8-719-404-35	s DIODE MA141WK
D162	8-719-404-35	s DIODE MA141WK

(KY-466 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
D172	8-719-404-35	s DIODE MA141WK
D173	8-719-404-35	s DIODE MA141WK
D174	8-719-404-35	s DIODE MA141WK
D201	8-719-404-35	s DIODE MA141WK
D202	8-719-404-35	s DIODE MA141WK
D203	8-719-404-35	s DIODE MA141WK
D204	8-719-404-35	s DIODE MA141WK
D211	8-719-404-35	s DIODE MA141WK
D212	8-719-404-35	s DIODE MA141WK
D214	8-719-404-35	s DIODE MA141WK
D221	8-719-404-35	s DIODE MA141WK
D222	8-719-404-35	s DIODE MA141WK
D223	8-719-404-35	s DIODE MA141WK
D251	8-719-820-41	s DIODE 1SS302
D252	8-719-820-41	s DIODE 1SS302
D253	8-719-105-91	s DIODE RD5.6M-B2
D254	8-719-105-91	s DIODE RD5.6M-B2
D261	8-719-105-91	s DIODE RD5.6M-B2
D262	8-719-105-91	s DIODE RD5.6M-B2
D263	8-719-105-91	s DIODE RD5.6M-B2
D264	8-719-105-91	s DIODE RD5.6M-B2
D265	8-719-105-91	s DIODE RD5.6M-B2
D266	8-719-105-91	s DIODE RD5.6M-B2
IC100	8-759-491-46	s IC TC74VHCT04AFT (EL)
IC101	8-759-491-46	s IC TC74VHCT04AFT (EL)
IC102	8-759-491-46	s IC TC74VHCT04AFT (EL)
IC103	8-759-524-21	s IC TC74VHC174FT(EL)
IC104	8-759-524-19	s IC TC74VHC164FT(EL)
IC105	8-759-549-15	s IC SN74LV245APWR
IC106	8-759-549-15	s IC SN74LV245APWR
IC107	8-759-529-76	s IC TC74VHC595FT(EL)
IC108	8-759-529-76	s IC TC74VHC595FT(EL)
IC109	8-759-529-76	s IC TC74VHC595FT(EL)
IC110	8-759-529-76	s IC TC74VHC595FT(EL)
IC111	8-759-529-76	s IC TC74VHC595FT(EL)
IC200	8-759-524-52	s IC TC74VHC574FT(EL)
IC201	8-759-524-49	s IC TC74VHC540FT (EL)
IC202	8-759-524-49	s IC TC74VHC540FT (EL)
IC203	8-759-524-49	s IC TC74VHC540FT (EL)
IC204	8-759-524-18	s IC TC74VHC163FT(EL)
IC205	8-759-523-84	s IC TC74VHC14FT (EL)
IC206	8-759-523-84	s IC TC74VHC14FT (EL)
IC207	8-759-523-84	s IC TC74VHC14FT (EL)
IC208	8-759-597-82	s IC UPD4702G-E2
IC209	8-759-597-82	s IC UPD4702G-E2
IC210	8-759-597-82	s IC UPD4702G-E2
IC211	8-759-287-56	s IC UPD4701AGT
IC212	8-759-597-82	s IC UPD4702G-E2
IC213	8-759-597-82	s IC UPD4702G-E2
IC214	8-759-597-82	s IC UPD4702G-E2
IC215	8-759-106-58	s IC UPD7004C
IC216	8-759-051-38	s IC SN74HC166APW-E05
IC217	8-759-051-38	s IC SN74HC166APW-E05
IC218	8-759-051-38	s IC SN74HC166APW-E05
IC219	8-759-051-38	s IC SN74HC166APW-E05
IC220	8-759-523-92	s IC TC74VHC21FT(EL)
IC221	8-759-523-83	s IC TC74VHC11FT(EL)
IC222	8-759-523-94	s IC TC74VHC32FT(EL)

(KY-466 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
RB202	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB203	1-233-235-11	s RESISTOR, CHIP NETWORK 10K
RB204	1-233-235-11	s RESISTOR, CHIP NETWORK 10K
RB205	1-233-235-11	s RESISTOR, CHIP NETWORK 10K
RB206	1-239-303-11	s RESISTOR ARRAY,CHIP 1K
RB207	1-239-305-11	s RESISTOR ARRAY,CHIP 4.7K
RB208	1-239-305-11	s RESISTOR ARRAY,CHIP 4.7K
RB209	1-239-305-11	s RESISTOR ARRAY,CHIP 4.7K
RB210	1-233-448-11	s RESISTOR, CHIP NETWORK 22
RB211	1-233-448-11	s RESISTOR, CHIP NETWORK 22
RB212	1-233-448-11	s RESISTOR, CHIP NETWORK 22
RB213	1-233-448-11	s RESISTOR, CHIP NETWORK 22
RB214	1-233-448-11	s RESISTOR, CHIP NETWORK 22
S101	1-570-878-31	s SWITCH,PUSH (1 KEY)
S102	1-570-878-31	s SWITCH,PUSH (1 KEY)
S103	1-771-934-11	s SWITCH, PUSH
S104	1-771-934-11	s SWITCH, PUSH
S105	1-570-878-31	s SWITCH,PUSH (1 KEY)
S106	1-570-878-31	s SWITCH,PUSH (1 KEY)
S107	1-570-878-31	s SWITCH,PUSH (1 KEY)
S108	1-570-878-31	s SWITCH,PUSH (1 KEY)
S111	1-570-878-31	s SWITCH,PUSH (1 KEY)
S112	1-570-878-31	s SWITCH,PUSH (1 KEY)
S113	1-570-878-31	s SWITCH,PUSH (1 KEY)
S114	1-570-878-31	s SWITCH,PUSH (1 KEY)
S115	1-771-934-11	s SWITCH, PUSH
S116	1-570-878-31	s SWITCH,PUSH (1 KEY)
S117	1-570-878-31	s SWITCH,PUSH (1 KEY)
S118	1-771-934-11	s SWITCH, PUSH
S121	1-570-878-31	s SWITCH,PUSH (1 KEY)
S122	1-570-878-31	s SWITCH,PUSH (1 KEY)
S123	1-570-878-31	s SWITCH,PUSH (1 KEY)
S124	1-570-878-31	s SWITCH,PUSH (1 KEY)
S131	1-771-934-11	s SWITCH, PUSH
S133	1-771-934-11	s SWITCH, PUSH
S137	1-771-934-11	s SWITCH, PUSH
S141	1-771-934-11	s SWITCH, PUSH
S142	1-771-934-11	s SWITCH, PUSH
S143	1-771-934-11	s SWITCH, PUSH
S144	1-771-934-11	s SWITCH, PUSH
S145	1-771-934-11	s SWITCH, PUSH
S151	1-570-878-31	s SWITCH,PUSH (1 KEY)
S152	1-570-878-31	s SWITCH,PUSH (1 KEY)
S153	1-570-878-31	s SWITCH,PUSH (1 KEY)
S154	1-570-878-31	s SWITCH,PUSH (1 KEY)
S155	1-570-878-31	s SWITCH,PUSH (1 KEY)
S156	1-570-878-31	s SWITCH,PUSH (1 KEY)
S157	1-570-878-31	s SWITCH,PUSH (1 KEY)
S158	1-570-878-31	s SWITCH,PUSH (1 KEY)
S161	1-570-878-31	s SWITCH,PUSH (1 KEY)
S162	1-570-878-31	s SWITCH,PUSH (1 KEY)
S163	1-570-878-31	s SWITCH,PUSH (1 KEY)
S173	1-570-878-31	s SWITCH,PUSH (1 KEY)
S174	1-570-878-31	s SWITCH,PUSH (1 KEY)
S175	1-570-878-31	s SWITCH,PUSH (1 KEY)
S176	1-570-878-31	s SWITCH,PUSH (1 KEY)
S177	1-570-878-31	s SWITCH,PUSH (1 KEY)
S178	1-570-878-31	s SWITCH,PUSH (1 KEY)

(KY-466 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
S201	1-570-878-31	s SWITCH,PUSH (1 KEY)
S202	1-570-878-31	s SWITCH,PUSH (1 KEY)
S203	1-570-878-31	s SWITCH,PUSH (1 KEY)
S204	1-570-878-21	s SWITCH,PUSH (1 KEY)
S205	1-570-878-31	s SWITCH,PUSH (1 KEY)
S206	1-570-878-31	s SWITCH,PUSH (1 KEY)
S207	1-570-878-31	s SWITCH,PUSH (1 KEY)
S211	1-570-878-31	s SWITCH,PUSH (1 KEY)
S212	1-570-878-31	s SWITCH,PUSH (1 KEY)
S213	1-570-878-31	s SWITCH,PUSH (1 KEY)
S214	1-570-878-31	s SWITCH,PUSH (1 KEY)
S216	1-570-878-21	s SWITCH,PUSH (1 KEY)
S217	1-570-878-21	s SWITCH,PUSH (1 KEY)
S221	1-570-878-31	s SWITCH,PUSH (1 KEY)
S222	1-570-878-31	s SWITCH,PUSH (1 KEY)
S223	1-570-878-21	s SWITCH,PUSH (1 KEY)
S224	1-570-878-21	s SWITCH,PUSH (1 KEY)
S225	1-570-878-21	s SWITCH,PUSH (1 KEY)

KY-467 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8324-715-A	o MOUNTED CIRCUIT BOARD, KY-467
1pc	3-625-951-01	s CHIP(A),SW
CN307	1-774-043-11	s CONNECTOR, FPC (DIP TYPE)26P
D301	8-719-404-35	s DIODE MA141WK
D302	8-719-404-35	s DIODE MA141WK
D303	8-719-404-35	s DIODE MA141WK
D304	8-719-404-35	s DIODE MA141WK
D309	8-719-404-35	s DIODE MA141WK
D311	8-719-404-35	s DIODE MA141WK
D312	8-719-404-35	s DIODE MA141WK
D313	8-719-404-35	s DIODE MA141WK
D314	8-719-404-35	s DIODE MA141WK
S301	1-771-935-11	s SWITCH, PUSH
S302	1-771-935-11	s SWITCH, PUSH
S303	1-771-935-11	s SWITCH, PUSH
S304	1-771-935-11	s SWITCH, PUSH
S305	1-771-935-11	s SWITCH, PUSH
S306	1-771-935-11	s SWITCH, PUSH
S307	1-771-935-11	s SWITCH, PUSH
S308	1-771-935-11	s SWITCH, PUSH
S309	1-771-935-11	s SWITCH, PUSH
S310	1-771-935-11	s SWITCH, PUSH
S311	1-771-935-11	s SWITCH, PUSH
S312	1-771-935-11	s SWITCH, PUSH
S313	1-771-935-11	s SWITCH, PUSH
S314	1-771-935-11	s SWITCH, PUSH
S315	1-771-935-11	s SWITCH, PUSH
S316	1-771-935-11	s SWITCH, PUSH
S317	1-771-935-11	s SWITCH, PUSH
S318	1-771-935-11	s SWITCH, PUSH

KY-468 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8324-716-A	o MOUNTED CIRCUIT BOARD, KY-468
1pc	3-625-951-01	s CHIP(A),SW
C401	1-126-204-11	s CAPACITOR, ELECT 47MF/16V(CHIP
C402	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C403	1-126-204-11	s CAPACITOR, ELECT 47MF/16V(CHIP
C404	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C405	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C406	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C407	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C408	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C409	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C410	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C411	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C412	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C413	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C414	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
CN411	1-691-503-11	o CONNECTOR,FPC 14P
D401	8-719-404-35	s DIODE MA141WK
D402	8-719-404-35	s DIODE MA141WK
D403	8-719-404-35	s DIODE MA141WK
D404	8-719-404-35	s DIODE MA141WK
D411	8-719-404-35	s DIODE MA141WK
D412	8-719-404-35	s DIODE MA141WK
D421	8-719-404-35	s DIODE MA141WK
D422	8-719-404-35	s DIODE MA141WK
D423	8-719-404-35	s DIODE MA141WK
D424	8-719-404-35	s DIODE MA141WK
D431	8-719-404-35	s DIODE MA141WK
D432	8-719-404-35	s DIODE MA141WK
D433	8-719-404-35	s DIODE MA141WK
D441	8-719-105-91	s DIODE RD5.6M-B2
D442	8-719-105-91	s DIODE RD5.6M-B2
D443	8-719-105-91	s DIODE RD5.6M-B2
D444	8-719-105-91	s DIODE RD5.6M-B2
D445	8-719-105-91	s DIODE RD5.6M-B2
IC401	8-759-524-49	s IC TC74VHC540FT (EL)
IC402	8-759-524-21	s IC TC74VHC174FT(EL)
IC403	8-759-524-19	s IC TC74VHC164FT(EL)
IC404	8-759-491-46	s IC TC74VHCT04AFT (EL)
IC405	8-759-529-76	s IC TC74VHC595FT(EL)
IC406	8-759-051-38	s IC SN74HC166APW-E05
Q401	8-729-027-50	s TRANSISTOR DTC123JKA-T146
Q402	8-729-027-50	s TRANSISTOR DTC123JKA-T146
Q403	8-729-027-50	s TRANSISTOR DTC123JKA-T146
Q404	8-729-027-50	s TRANSISTOR DTC123JKA-T146
Q405	8-729-027-50	s TRANSISTOR DTC123JKA-T146
Q406	8-729-027-50	s TRANSISTOR DTC123JKA-T146
Q407	8-729-027-50	s TRANSISTOR DTC123JKA-T146
Q408	8-729-904-60	s TRANSISTOR DTB113ZK
Q409	8-729-904-60	s TRANSISTOR DTB113ZK
Q410	8-729-904-60	s TRANSISTOR DTB113ZK
Q411	8-729-904-60	s TRANSISTOR DTB113ZK
Q412	8-729-904-60	s TRANSISTOR DTB113ZK
Q413	8-729-904-60	s TRANSISTOR DTB113ZK
Q414	8-729-904-60	s TRANSISTOR DTB113ZK
Q415	8-729-027-50	s TRANSISTOR DTC123JKA-T146

(KY-468 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
Q416	8-729-027-50	s TRANSISTOR DTC123JKA-T146
Q417	8-729-027-50	s TRANSISTOR DTC123JKA-T146
Q418	8-729-027-50	s TRANSISTOR DTC123JKA-T146
Q419	8-729-027-50	s TRANSISTOR DTC123JKA-T146
Q420	8-729-027-50	s TRANSISTOR DTC123JKA-T146
Q421	8-729-027-50	s TRANSISTOR DTC123JKA-T146
Q422	8-729-027-50	s TRANSISTOR DTC123JKA-T146
Q423	8-729-904-60	s TRANSISTOR DTB113ZK
Q424	8-729-904-60	s TRANSISTOR DTB113ZK
Q425	8-729-904-60	s TRANSISTOR DTB113ZK
Q426	8-729-904-60	s TRANSISTOR DTB113ZK
Q427	8-729-904-60	s TRANSISTOR DTB113ZK
Q428	8-729-904-60	s TRANSISTOR DTB113ZK
Q429	8-729-904-60	s TRANSISTOR DTB113ZK
R401	1-216-049-91	s RESISTOR,CHIP 1K 1/10W(2125)
R402	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R403	1-220-233-11	s RESISTOR,CHIP 3.9 1/4W(3225)
R404	1-220-233-11	s RESISTOR,CHIP 3.9 1/4W(3225)
R409	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R410	1-220-243-11	s RESISTOR CHIP 27 1/4W (3225)
R411	1-220-243-11	s RESISTOR CHIP 27 1/4W (3225)
R412	1-220-233-11	s RESISTOR,CHIP 3.9 1/4W(3225)
R413	1-220-233-11	s RESISTOR,CHIP 3.9 1/4W(3225)
R414	1-220-243-11	s RESISTOR CHIP 27 1/4W (3225)
R415	1-220-243-11	s RESISTOR CHIP 27 1/4W (3225)
R416	1-220-233-11	s RESISTOR,CHIP 3.9 1/4W(3225)
R417	1-220-233-11	s RESISTOR,CHIP 3.9 1/4W(3225)
R418	1-220-243-11	s RESISTOR CHIP 27 1/4W (3225)
R419	1-220-243-11	s RESISTOR CHIP 27 1/4W (3225)
R420	1-220-233-11	s RESISTOR,CHIP 3.9 1/4W(3225)
R421	1-220-233-11	s RESISTOR,CHIP 3.9 1/4W(3225)
R422	1-220-243-11	s RESISTOR CHIP 27 1/4W (3225)
R423	1-220-243-11	s RESISTOR CHIP 27 1/4W (3225)
R428	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R429	1-220-233-11	s RESISTOR,CHIP 3.9 1/4W(3225)
R430	1-220-233-11	s RESISTOR,CHIP 3.9 1/4W(3225)
R431	1-220-233-11	s RESISTOR,CHIP 3.9 1/4W(3225)
R432	1-220-233-11	s RESISTOR,CHIP 3.9 1/4W(3225)
R433	1-220-233-11	s RESISTOR,CHIP 3.9 1/4W(3225)
R434	1-220-233-11	s RESISTOR,CHIP 3.9 1/4W(3225)
R435	1-220-233-11	s RESISTOR,CHIP 3.9 1/4W(3225)
R436	1-220-233-11	s RESISTOR,CHIP 3.9 1/4W(3225)
R437	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
RB401	1-239-305-11	s RESISTOR ARRAY,CHIP 4.7K
RB402	1-233-235-11	s RESISTOR, CHIP NETWORK 10K
RB403	1-233-448-11	s RESISTOR, CHIP NETWORK 22
S401	1-771-886-11	s SWITCH, TACTILE
S402	1-771-886-11	s SWITCH, TACTILE
S403	1-771-886-11	s SWITCH, TACTILE
S404	1-771-886-11	s SWITCH, TACTILE
S405	1-771-886-11	s SWITCH, TACTILE
S406	1-771-886-11	s SWITCH, TACTILE
S407	1-771-886-11	s SWITCH, TACTILE
S408	1-771-886-11	s SWITCH, TACTILE
S411	1-771-886-11	s SWITCH, TACTILE
S412	1-771-886-11	s SWITCH, TACTILE
S413	1-771-886-11	s SWITCH, TACTILE
S421	1-771-886-11	s SWITCH, TACTILE

(KY-468 BOARD)

Ref. No. or Q'ty	Part No.	SP Description
S422	1-771-886-11	s SWITCH, TACTILE
S423	1-771-886-11	s SWITCH, TACTILE
S424	1-771-886-11	s SWITCH, TACTILE
S425	1-771-886-11	s SWITCH, TACTILE
S426	1-771-886-11	s SWITCH, TACTILE
S427	1-771-886-11	s SWITCH, TACTILE
S428	1-771-886-11	s SWITCH, TACTILE
S431	1-771-886-11	s SWITCH, TACTILE
S432	1-771-886-11	s SWITCH, TACTILE
S433	1-771-886-11	s SWITCH, TACTILE
S435	1-771-935-11	s SWITCH, PUSH
S436	1-771-935-11	s SWITCH, PUSH

LC-40 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	1-675-965-11	o PRINTED WIRING BOARD, LC-40
4pcs	7-685-546-14	s SCREW +BTP 3X8
C801	1-164-346-11	s CAPACITOR CHIP CERAMIC 1MF/16V
C802	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C803	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
CN806	1-506-469-11	s PIN, CONNECTOR 4P
RV801	1-238-724-11	s RESISTOR, VAR, CARBON 10K

LE-227 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8323-732-A	o MOUNTED CIRCUIT BOARD, LE-227
CN505	1-691-503-11	o CONNECTOR, FPC 14P
D501	8-719-078-25	s DIODE HDSP-7801
D502	8-719-078-25	s DIODE HDSP-7801
D503	8-719-078-25	s DIODE HDSP-7801
D504	8-719-078-25	s DIODE HDSP-7801

LE-233 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8325-191-A	o MOUNTED CIRCUIT BOARD, LE-233
CN21	1-750-145-11	o PIN, SIL 8P
CN22	1-750-145-11	o PIN, SIL 8P
D1	8-719-979-87	s LED LD-701MG
D2	8-719-979-87	s LED LD-701MG
D3	8-719-979-87	s LED LD-701MG
D31	8-719-078-25	s DIODE HDSP-7801
D32	8-719-078-25	s DIODE HDSP-7801
D33	8-719-078-25	s DIODE HDSP-7801

LE-234 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8324-718-A	o MOUNTED CIRCUIT BOARD, LE-234
CN23	1-794-295-11	o PIN, SIL 6P
CN24	1-794-295-11	o PIN, SIL 6P
D21	8-719-078-25	s DIODE HDSP-7801
D22	8-719-078-25	s DIODE HDSP-7801
D23	8-719-078-25	s DIODE HDSP-7801
D24	8-719-078-25	s DIODE HDSP-7801

LE-235 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8324-719-A	o MOUNTED CIRCUIT BOARD, LE-235
CN25	1-794-294-11	o PLUG, SIL 6P
CN26	1-794-294-11	o PLUG, SIL 6P
D41	8-719-984-41	s LED ARRAY HDSP-4850-S22
D42	8-719-984-41	s LED ARRAY HDSP-4850-S22

MB-874 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8324-726-A	o MOUNTED CIRCUIT BOARD, MB-874
C1	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C2	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
CN26	1-778-022-11	o CONNECTOR, BOARD TO BOARD 24P
CN27	1-778-022-11	o CONNECTOR, BOARD TO BOARD 24P
CN28	1-778-022-11	o CONNECTOR, BOARD TO BOARD 24P
CN29	1-778-022-11	o CONNECTOR, BOARD TO BOARD 24P
CN30	1-778-022-11	o CONNECTOR, BOARD TO BOARD 24P
CN31	1-691-960-11	o PIN, CONNECTOR (PC BOARD) 3P
R1	1-216-635-11	s RESISTOR, CHIP 220 1/10W (2012)
R2	1-216-635-11	s RESISTOR, CHIP 220 1/10W (2012)

OPM-39/39P BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8324-722-A	o MOUNTED CIRCUIT BOARD, OPM-39 (for NTSC)
1pc	A-8324-731-A	o MOUNTED CIRCUIT BOARD, OPM-39P (for PAL)
2pcs	3-624-100-02	o LEVER, PWB
7pcs	4-886-821-11	s SCREW, M3X6 CASE (SILVER)
2pcs	7-626-300-54	o SPRING PIN 3X6
C101	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C102	1-163-231-11	s CAPACITOR, CHIP CERAMIC 15PF/50V (for NTSC)
	1-163-227-11	s CAPACITOR, CHIP CERAMIC 10PF/50V (for PAL)
C103	1-126-392-11	s CAPACITOR, CHIP ELECT 100MF/6.3V
C104	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C105	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C106	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C107	1-163-251-11	s CAPACITOR, CERAMIC 100PF/50V
C108	1-163-251-11	s CAPACITOR, CERAMIC 100PF/50V
C109	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C110	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C111	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C112	1-126-392-11	s CAPACITOR, CHIP ELECT 100MF/6.3V
C113	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C114	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C115	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C116	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C117	1-126-392-11	s CAPACITOR, CHIP ELECT 100MF/6.3V
C118	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C119	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C120	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C121	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C122	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C123	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C124	1-126-392-11	s CAPACITOR, CHIP ELECT 100MF/6.3V
C125	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C126	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C127	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C128	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C129	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C130	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C131	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C132	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C133	1-163-259-91	s CAPACITOR, CHIP CERAMIC 220PF
C134	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C135	1-126-392-11	s CAPACITOR, CHIP ELECT 100MF/6.3V
C136	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C137	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C138	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C139	1-163-231-11	s CAPACITOR, CHIP CERAMIC 15PF/50V
C140	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C141	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C142	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C143	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C144	1-163-251-11	s CAPACITOR, CERAMIC 100PF/50V
C145	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C146	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C147	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C148	1-163-233-11	s CAPACITOR, CHIP CERAMIC 18PF/50
C149	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C150	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C151	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V

(OPM-39/39P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C153	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C155	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C156	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C157	1-163-251-11	s CAPACITOR, CERAMIC 100PF/50V
C158	1-163-235-11	s CAPACITOR, CHIP CERAMIC 22PF/50V
C159	1-163-251-11	s CAPACITOR, CERAMIC 100PF/50V
C160	1-107-823-11	s CAPACITOR, CERAMIC 0.47MF/16V
C161	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C162	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C163	1-126-392-11	s CAPACITOR, CHIP ELECT 100MF/6.3V
C164	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C165	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C166	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C167	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C168	1-126-392-11	s CAPACITOR, CHIP ELECT 100MF/6.3V
C169	1-126-392-11	s CAPACITOR, CHIP ELECT 100MF/6.3V
C170	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C171	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C172	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C173	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C174	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C175	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C176	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C177	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C178	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C179	1-126-392-11	s CAPACITOR, CHIP ELECT 100MF/6.3V
C180	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C181	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C182	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C183	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C184	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C185	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C186	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C187	1-163-243-11	s CAPACITOR, CHIP CERAMIC 47PF/50
C188	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C189	1-163-239-11	s CAPACITOR, CHIP CERAMIC 33PF/50V
C190	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C191	1-163-235-11	s CAPACITOR, CHIP CERAMIC 22PF/50V (for PAL only)
C192	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C193	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C194	1-163-243-11	s CAPACITOR, CHIP CERAMIC 47PF/50
C195	1-163-235-11	s CAPACITOR, CHIP CERAMIC 22PF/50V (for PAL only)
C196	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C197	1-102-973-00	s CAPACITOR, CERAMIC 10PF/50V (SL)
C201	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C202	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C203	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C204	1-126-392-11	s CAPACITOR, CHIP ELECT 100MF/6.3V
C205	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C206	1-126-392-11	s CAPACITOR, CHIP ELECT 100MF/6.3V
C207	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C208	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C209	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C210	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C211	1-163-251-11	s CAPACITOR, CERAMIC 100PF/50V
C212	1-163-227-11	s CAPACITOR, CERAMIC 10PF/50V (CH)
C213	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V

(OPM-39/39P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C606	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C607	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C608	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C609	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C610	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C611	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C612	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C614	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C615	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C616	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C617	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C618	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C619	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C620	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C621	1-163-259-91	s CAPACITOR,CHIP CERAMIC 220PF
C622	1-163-259-91	s CAPACITOR,CHIP CERAMIC 220PF
C623	1-163-239-11	s CAPACITOR,CHIP CERAMIC33PF/50V
C624	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C625	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C626	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C627	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C628	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C629	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C630	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C631	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C632	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C633	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C634	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C635	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C636	1-163-087-00	s CAPACITOR,CHIP CERAMIC 4.0PF
C637	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C638	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C639	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C640	1-163-239-11	s CAPACITOR,CHIP CERAMIC33PF/50V
C641	1-163-239-11	s CAPACITOR,CHIP CERAMIC33PF/50V
C642	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C643	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C644	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C645	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C646	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C647	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C648	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C649	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C650	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C651	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C652	1-163-085-00	s CAPACITOR,CHIP CERAMIC 2.0PF
C653	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C654	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C655	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C656	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C657	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C658	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C659	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C660	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C661	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C662	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C663	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C664	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C665	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V

(OPM-39/39P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C666	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C667	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C668	1-115-566-11	s CAPACITOR,CERAMIC 4.7MF B/6.3V
C669	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C670	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C671	1-115-566-11	s CAPACITOR,CERAMIC 4.7MF B/6.3V
C672	1-115-566-11	s CAPACITOR,CERAMIC 4.7MF B/6.3V
C673	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C674	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C675	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C676	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C677	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C678	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C679	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C680	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C681	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C682	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C683	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C684	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C685	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C686	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C687	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C688	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C689	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C690	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C691	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C692	1-163-259-91	s CAPACITOR,CHIP CERAMIC 220PF
C693	1-163-259-91	s CAPACITOR,CHIP CERAMIC 220PF
C694	1-163-227-11	s CAPACITOR CERAMIC 10PF/50V(CH)
C695	1-163-227-11	s CAPACITOR CERAMIC 10PF/50V(CH)
C696	1-163-227-11	s CAPACITOR CERAMIC 10PF/50V(CH)
C697	1-163-227-11	s CAPACITOR CERAMIC 10PF/50V(CH)
C698	1-163-239-11	s CAPACITOR,CHIP CERAMIC33PF/50V
C699	1-163-239-11	s CAPACITOR,CHIP CERAMIC33PF/50V
C701	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C702	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C703	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C704	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C705	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C706	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C707	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C708	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C709	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C710	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C711	1-163-085-00	s CAPACITOR,CHIP CERAMIC 2.0PF
C712	1-163-091-00	s CAPACITOR,CHIP CERAMIC 8PF/50V (for NTSC)
	1-163-222-11	s CAPACITOR. CHIP CERAMIC 5.0PF (for PAL)
C713	1-104-608-11	s CAPACITOR, ELECT 33MF/6.3V
C714	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C715	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C716	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C717	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C718	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C719	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C720	1-163-259-91	s CAPACITOR,CHIP CERAMIC 220PF
C721	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C722	1-104-608-11	s CAPACITOR, ELECT 33MF/6.3V

(OPM-39/39P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C723	1-163-227-11	s CAPACITOR CERAMIC 10PF/50V(CH)
C724	1-163-255-91	s CAPACITOR,CHIP CERAMIC 150PF
C725	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V (for PAL only)
C726	1-163-231-11	s CAPACITOR,CHIP CERAMIC15PF/50V
C727	1-163-224-11	s CAPACITOR,CHIP CERAMIC 7PF(M-) (for NTSC)
	1-163-227-11	s CAPACITOR CERAMIC 10PF/50V(CH) (for PAL)
C728	1-104-608-11	s CAPACITOR, ELECT 33MF/6.3V
C729	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C730	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C731	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C732	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C733	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C734	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C735	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C736	1-163-227-11	s CAPACITOR CERAMIC 10PF/50V(CH)
C737	1-104-608-11	s CAPACITOR, ELECT 33MF/6.3V
C738	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C739	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C740	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C741	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C742	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C743	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C744	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C745	1-163-227-11	s CAPACITOR CERAMIC 10PF/50V(CH)
C746	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C747	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C748	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C749	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V (for PAL only)
C750	1-163-237-11	s CAPACITOR CERAMIC 27PF/50V (for NTSC)
	1-163-231-11	s CAPACITOR,CHIP CERAMIC15PF/50V (for PAL)
C751	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C752	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C753	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C754	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C755	1-163-237-11	s CAPACITOR CERAMIC 27PF/50V (for NTSC)
	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V (for PAL)
C756	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C757	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C758	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C759	1-126-396-11	s CAPACITOR,ELECT 47MF/16V(CHIP)
C760	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C761	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C762	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C763	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C764	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C765	1-163-227-11	s CAPACITOR CERAMIC 10PF/50V(CH)
C766	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C767	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C768	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C769	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C770	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C771	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C772	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V

(OPM-39/39P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C773	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C774	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C775	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C776	1-163-231-11	s CAPACITOR,CHIP CERAMIC15PF/50V
C777	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C778	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C779	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C780	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C781	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C801	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C802	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C803	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C804	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C806	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C812	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C813	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C814	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C815	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C816	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C817	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C818	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C819	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C820	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C821	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C822	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C823	1-164-346-11	s CAPACITOR CHIP CERAMIC 1MF/16V
C824	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C825	1-164-346-11	s CAPACITOR CHIP CERAMIC 1MF/16V
C826	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C827	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C828	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C830	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C831	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C835	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C836	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C837	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C838	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C839	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C840	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C841	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C842	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C843	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C844	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C845	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C901	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C902	1-117-372-11	s CAP,ELECT (SMD) 100MF/10V
C903	1-117-372-11	s CAP,ELECT (SMD) 100MF/10V
C904	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C905	1-117-372-11	s CAP,ELECT (SMD) 100MF/10V
C906	1-117-372-11	s CAP,ELECT (SMD) 100MF/10V
C907	1-126-396-11	s CAPACITOR,ELECT 47MF/16V(CHIP)
C908	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C911	1-126-396-11	s CAPACITOR,ELECT 47MF/16V(CHIP)
C912	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C913	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C914	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C915	1-126-396-11	s CAPACITOR,ELECT 47MF/16V(CHIP)
C916	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C917	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V

(OPM-39/39P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C918	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C919	1-126-396-11	s CAPACITOR, ELECT 47MF/16V(CHIP)
C920	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C923	1-126-396-11	s CAPACITOR, ELECT 47MF/16V(CHIP)
C924	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C925	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C926	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C927	1-126-396-11	s CAPACITOR, ELECT 47MF/16V(CHIP)
C928	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C931	1-126-396-11	s CAPACITOR, ELECT 47MF/16V(CHIP)
C932	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C933	1-126-396-11	s CAPACITOR, ELECT 47MF/16V(CHIP)
C934	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C937	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C938	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C939	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C940	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C1701	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C1702	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C1703	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1704	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1705	1-163-091-00	s CAPACITOR, CHIP CERAMIC 8PF/50V (for NTSC)
	1-163-222-11	s CAPACITOR, CHIP CERAMIC 5.0PF (for PAL)
C1706	1-104-608-11	s CAPACITOR, ELECT 33MF/6.3V
C1707	1-163-255-91	s CAPACITOR, CHIP CERAMIC 150PF
C1708	1-104-608-11	s CAPACITOR, ELECT 33MF/6.3V
C1709	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1710	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1711	1-163-227-11	s CAPACITOR CERAMIC 10PF/50V(CH)
C1712	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C1713	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C1714	1-104-608-11	s CAPACITOR, ELECT 33MF/6.3V
C1716	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1717	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1718	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V (for PAL only)
C1720	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1721	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1722	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C1725	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C1726	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1727	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C1728	1-163-227-11	s CAPACITOR CERAMIC 10PF/50V(CH)
C1729	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1734	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C1735	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1737	1-163-227-11	s CAPACITOR CERAMIC 10PF/50V(CH)
C1738	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1739	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V (for PAL only)
C1740	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C1741	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C1742	1-126-396-11	s CAPACITOR, ELECT 47MF/16V(CHIP)
C1743	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1744	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C1745	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C1746	1-163-239-11	s CAPACITOR, CHIP CERAMIC 33PF/50V

(OPM-39/39P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C1747	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C1748	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
D101	8-719-987-41	s LED CL-150Y-CD
D104	8-719-800-76	s DIODE 1SS226
D601	8-719-105-51	s DIODE RD3.6M-B1
D602	8-719-105-51	s DIODE RD3.6M-B1
D603	8-719-105-51	s DIODE RD3.6M-B1
D901	8-719-987-43	s LED CL-150PG-CD
D902	8-719-987-43	s LED CL-150PG-CD
D903	8-719-987-43	s LED CL-150PG-CD
D904	8-719-987-43	s LED CL-150PG-CD
D905	8-719-987-43	s LED CL-150PG-CD
D906	8-719-987-43	s LED CL-150PG-CD
DL601	1-415-502-11	s DELAY LINE
DL602	1-415-502-11	s DELAY LINE
F901	△ 1-576-329-11	s FUSE CHIP 10A/125V (6125)
F902	△ 1-576-329-11	s FUSE CHIP 10A/125V (6125)
F906	△ 1-533-627-21	s FUSE CHIP 5A/125V (6125)
FL101	1-233-737-11	s FILTER, BAND PASS (for NTSC)
	1-233-738-11	s FILTER, BAND PASS (for PAL)
FL201	1-239-085-11	s FILTER, LOW PASS
FL601	1-239-913-41	s FILTER, LOW PASS
FL602	1-233-599-11	s FILTER, LOW PASS
FL603	1-233-599-11	s FILTER, LOW PASS
FL701	1-239-383-12	s FILTER, LOW PASS(NTSC SYNC) (for NTSC)
	1-239-381-21	s FILTER(PAL SYNC), LOW PASS (for PAL)
FL702	1-239-381-21	s FILTER(PAL SYNC), LOW PASS
FL703	1-233-737-11	s FILTER, BAND PASS (for NTSC)
	1-233-738-11	s FILTER, BAND PASS (for PAL)
FL704	1-239-383-12	s FILTER, LOW PASS(NTSC SYNC) (for NTSC)
	1-239-381-21	s FILTER(PAL SYNC), LOW PASS (for PAL)
FL705	1-239-381-21	s FILTER(PAL SYNC), LOW PASS
FL706	1-233-737-11	s FILTER, BAND PASS (for NTSC)
	1-233-738-11	s FILTER, BAND PASS (for PAL)
FL801	1-239-085-11	s FILTER, LOW PASS
IC101	8-759-987-27	s IC LM1881M
IC102	8-752-335-47	s IC CXD1216M
IC103	8-752-332-67	s IC CXD1217M
IC104	8-759-243-19	s IC TC7SU04F
IC105	8-759-524-09	s IC TC74VHC153FT (EL)
IC106	8-759-524-18	s IC TC74VHC163FT(EL)
IC107	8-759-524-18	s IC TC74VHC163FT(EL)
IC108	8-759-186-54	s IC TC74VHC164F
IC109	8-759-186-54	s IC TC74VHC164F
IC110	8-759-186-54	s IC TC74VHC164F
IC111	8-759-186-54	s IC TC74VHC164F
IC114	8-759-009-07	s IC MC14053BF
IC115	8-759-983-69	s IC LM358PS
IC116	8-759-009-07	s IC MC14053BF
IC117	8-759-902-88	s IC SN74LS123NS
IC118	8-759-925-80	s IC SN74HC14ANS
IC120	8-759-669-75	s IC TLC2932IPWR
IC121	8-759-524-18	s IC TC74VHC163FT(EL)
IC122	8-759-524-18	s IC TC74VHC163FT(EL)

(OPM-39/39P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC123	8-759-524-18 s	IC TC74VHC163FT (EL)
IC124	8-759-925-74 s	IC SN74HC04ANS
IC125	8-759-700-78 s	IC NJM082M
IC126	8-759-523-95 s	IC TC74VHC74FT (EL)
IC127	8-759-549-22 s	IC SN74LV574APWR
IC132	8-759-907-81 s	IC SN74LS221N(S)
IC133	8-759-983-69 s	IC LM358PS
IC135	8-759-925-85 s	IC SN74HC32ANS
IC136	8-759-549-13 s	IC SN74LV240APWR
IC137	8-759-549-13 s	IC SN74LV240APWR
IC138	8-759-549-20 s	IC SN74LV541APWR
IC139	8-759-549-22 s	IC SN74LV574APWR
IC140	8-759-549-22 s	IC SN74LV574APWR
IC141	8-759-549-20 s	IC SN74LV541APWR
IC142	8-759-549-20 s	IC SN74LV541APWR
IC143	8-759-549-20 s	IC SN74LV541APWR
IC144	8-759-186-54 s	IC TC74VHC164F
IC145	8-752-332-67 s	IC CXD1217M
IC146	8-759-186-54 s	IC TC74VHC164F
IC147	8-759-186-51 s	IC TC74VHC157F
IC148	8-759-186-54 s	IC TC74VHC164F
IC149	8-759-186-54 s	IC TC74VHC164F
IC150	8-759-925-80 s	IC SN74HC14ANS
IC151	8-759-082-61 s	IC TC4W53FU
IC152	8-759-082-61 s	IC TC4W53FU
IC201	8-759-987-27 s	IC LM1881M
IC202	8-759-239-58 s	IC TC74HC221AF
IC203	8-759-984-88 s	IC LC361M
IC205	8-759-009-07 s	IC MC14053BF
IC206	8-759-362-55 s	IC NJM13700M (TE2)
IC207	8-752-334-55 s	IC CXD1175AM
IC208	8-759-549-22 s	IC SN74LV574APWR
IC301	8-759-575-40 s	IC M66258FP-E2
IC302	8-759-549-22 s	IC SN74LV574APWR
IC303	8-759-292-78 s	IC CXD8890Q
IC304	8-752-360-44 s	IC CXK1203AR
IC305	8-752-360-44 s	IC CXK1203AR
IC306	8-752-360-44 s	IC CXK1203AR
IC307	8-752-360-44 s	IC CXK1203AR
IC309	8-759-667-26 o	IC AT27C010-DSK-V1.00
IC310	8-759-292-79 s	IC CXD8891Q
IC311	8-759-549-22 s	IC SN74LV574APWR
IC401	8-759-549-22 s	IC SN74LV574APWR
IC402	8-759-549-22 s	IC SN74LV574APWR
IC403	8-759-549-22 s	IC SN74LV574APWR
IC404	8-759-575-40 s	IC M66258FP-E2
IC405	8-759-445-73 s	IC M66256FP (E2)
IC406	8-759-442-46 s	IC CXD9030R
IC407	8-759-549-22 s	IC SN74LV574APWR
IC408	8-759-454-76 s	IC CXD9041R
IC409	8-752-078-32 s	IC CXB1341R
IC501	8-759-549-22 s	IC SN74LV574APWR
IC502	8-759-442-46 s	IC CXD9030R
IC503	8-759-445-73 s	IC M66256FP (E2)
IC504	8-759-454-76 s	IC CXD9041R
IC505	8-752-078-32 s	IC CXB1341R
IC601	8-759-524-52 s	IC TC74VHC574FT (EL)
IC602	8-759-524-52 s	IC TC74VHC574FT (EL)
IC603	8-759-524-52 s	IC TC74VHC574FT (EL)

(OPM-39/39P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC604	8-759-524-52 s	IC TC74VHC574FT (EL)
IC605	8-759-524-52 s	IC TC74VHC574FT (EL)
IC606	8-759-524-52 s	IC TC74VHC574FT (EL)
IC607	8-759-524-52 s	IC TC74VHC574FT (EL)
IC608	8-759-524-52 s	IC TC74VHC574FT (EL)
IC609	8-759-524-52 s	IC TC74VHC574FT (EL)
IC610	8-759-524-52 s	IC TC74VHC574FT (EL)
IC611	8-759-524-52 s	IC TC74VHC574FT (EL)
IC612	8-752-032-93 s	IC CXA1260Q-Z
IC613	8-759-573-91 s	IC AD8055ART-REEL7
IC614	8-759-573-91 s	IC AD8055ART-REEL7
IC615	8-759-573-91 s	IC AD8055ART-REEL7
IC616	8-759-573-91 s	IC AD8055ART-REEL7
IC617	8-752-052-82 s	IC CXA1432M
IC618	8-752-052-82 s	IC CXA1432M
IC619	8-752-052-82 s	IC CXA1432M
IC620	8-759-573-91 s	IC AD8055ART-REEL7
IC621	8-759-573-91 s	IC AD8055ART-REEL7
IC622	8-759-573-91 s	IC AD8055ART-REEL7
IC623	8-759-573-91 s	IC AD8055ART-REEL7
IC624	8-759-573-91 s	IC AD8055ART-REEL7
IC625	8-759-433-92 s	IC TC7W14F-TE12L
IC626	8-759-573-91 s	IC AD8055ART-REEL7
IC701	8-759-573-91 s	IC AD8055ART-REEL7
IC702	8-759-573-91 s	IC AD8055ART-REEL7
IC703	8-759-573-91 s	IC AD8055ART-REEL7
IC704	8-752-090-56 s	IC CXA3178M-T4
IC705	8-759-573-91 s	IC AD8055ART-REEL7
IC706	8-759-573-91 s	IC AD8055ART-REEL7
IC707	8-759-573-91 s	IC AD8055ART-REEL7
IC709	8-759-362-55 s	IC NJM13700M (TE2)
IC710	8-759-573-91 s	IC AD8055ART-REEL7
IC712	8-752-090-56 s	IC CXA3178M-T4
IC801	8-759-549-20 s	IC SN74LV541APWR
IC802	8-759-549-15 s	IC SN74LV245APWR
IC803	8-759-549-15 s	IC SN74LV245APWR
IC804	8-759-549-20 s	IC SN74LV541APWR
IC805	8-759-664-22 o	IC EPF6016TC144-3
IC807	8-759-549-20 s	IC SN74LV541APWR
IC808	8-759-522-74 s	IC ADV7176AKS
IC809	8-759-098-12 s	IC TD62083F
IC810	8-759-447-19 s	IC AD8041AR
IC812	8-759-578-68 s	IC SN74LVCC4245APWR
IC813	8-759-578-68 s	IC SN74LVCC4245APWR
IC815	8-759-573-91 s	IC AD8055ART-REEL7
IC816	8-759-680-65 o	IC EPC2LC20-OPMC-V2.00
IC901	8-759-358-38 s	IC NJM78M05DLA (TE1)
IC902	8-759-358-38 s	IC NJM78M05DLA (TE1)
IC903	8-759-586-98 s	IC NJM79M05DLA (TE1)
IC904	8-759-168-20 s	IC TA78L09S
IC905	8-759-983-69 s	IC LM358PS
IS309	1-540-151-21 s	SOCKET, IC
IS816	1-251-093-11 s	SOCKET, IC
L101	1-408-793-21 s	CHIP INDUCTOR 220UH (4532)
L102	1-408-781-00 s	CHIP INDUCTOR 22UH (4532)
L103	1-408-789-21 s	CHIP INDUCTOR 100UH (4532)
L104	1-408-781-00 s	CHIP INDUCTOR 22UH (4532)
L105	1-408-781-00 s	CHIP INDUCTOR 22UH (4532)

(OPM-39/39P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
L201	1-408-777-00	s CHIP INDUCTOR 10UH (4532)
L202	1-408-777-00	s CHIP INDUCTOR 10UH (4532)
L203	1-408-793-21	s CHIP INDUCTOR 220UH (4532)
L204	1-408-777-00	s CHIP INDUCTOR 10UH (4532)
L205	1-408-777-00	s CHIP INDUCTOR 10UH (4532)
L402	1-410-797-11	s CHIP INDUCTOR 0.015UH (3225)
L403	1-410-797-11	s CHIP INDUCTOR 0.015UH (3225)
L502	1-410-797-11	s CHIP INDUCTOR 0.015UH (3225)
L601	1-408-781-00	s CHIP INDUCTOR 22UH (4532)
L602	1-408-781-00	s CHIP INDUCTOR 22UH (4532)
L603	1-410-655-31	s INDUCTOR,CHIP 120UH (3225)
L701	1-408-793-21	s CHIP INDUCTOR 220UH (4532) (for NTSC)
	1-408-790-00	s INDUCTOR CHIP 120UH (4532) (for PAL)
L702	1-408-786-21	s CHIP INDUCTOR 56UH (4532) (for NTSC)
	1-408-785-21	s CHIP INDUCTOR 47UH (4532) (for PAL)
L801	1-424-643-11	s COIL, CHOKE 10UH
L901	1-412-522-31	s MICRO INDUCTOR 5.6UH
L902	1-412-522-31	s MICRO INDUCTOR 5.6UH
L903	1-469-529-11	s INDUCTOR, (SMD) 10UH
L904	1-469-529-11	s INDUCTOR, (SMD) 10UH
L905	1-409-647-11	s COIL, CHOKE 22UH
PS903	Δ 1-533-282-21	s CIRCUIT PROTECTOR 2A (3225)
PS904	Δ 1-533-282-21	s CIRCUIT PROTECTOR 2A (3225)
PS905	Δ 1-533-282-21	s CIRCUIT PROTECTOR 2A (3225)
Q101	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q102	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q103	8-729-216-22	s TRANSISTOR 2SA1162-G
Q104	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q105	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q106	8-729-109-44	s TRANSISTOR 2SK94
Q107	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q108	8-729-216-22	s TRANSISTOR 2SA1162-G
Q109	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q110	8-729-216-22	s TRANSISTOR 2SA1162-G
Q201	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q202	8-729-216-22	s TRANSISTOR 2SA1162-G
Q203	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q204	8-729-116-64	s TRANSISTOR 2SK508-K51
Q205	8-729-216-22	s TRANSISTOR 2SA1162-G
Q206	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q207	8-729-216-22	s TRANSISTOR 2SA1162-G
Q401	8-729-105-68	s TRANSISTOR 2SC3356-K
Q402	8-729-105-68	s TRANSISTOR 2SC3356-K
Q501	8-729-105-68	s TRANSISTOR 2SC3356-K
Q502	8-729-105-68	s TRANSISTOR 2SC3356-K
Q601	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q602	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q603	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q604	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q605	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q606	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q607	8-729-216-22	s TRANSISTOR 2SA1162-G
Q608	8-729-216-22	s TRANSISTOR 2SA1162-G
Q609	8-729-216-22	s TRANSISTOR 2SA1162-G
Q610	8-729-120-28	s TRANSISTOR 2SC1623-L5L6

(OPM-39/39P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
Q611	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q612	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q613	8-729-216-22	s TRANSISTOR 2SA1162-G
Q614	8-729-216-22	s TRANSISTOR 2SA1162-G
Q615	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q616	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q617	8-729-216-22	s TRANSISTOR 2SA1162-G
Q618	8-729-216-22	s TRANSISTOR 2SA1162-G
Q619	8-729-216-22	s TRANSISTOR 2SA1162-G
Q701	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q702	8-729-216-22	s TRANSISTOR 2SA1162-G
Q703	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q704	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q705	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q706	8-729-216-22	s TRANSISTOR 2SA1162-G
Q707	8-729-216-22	s TRANSISTOR 2SA1162-G
Q708	8-729-116-64	s TRANSISTOR 2SK508-K51
Q709	8-729-216-22	s TRANSISTOR 2SA1162-G
Q710	8-729-216-22	s TRANSISTOR 2SA1162-G
Q711	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q712	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q713	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q714	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q715	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q716	8-729-216-22	s TRANSISTOR 2SA1162-G
Q717	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q718	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q719	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q720	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q721	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q722	8-729-216-22	s TRANSISTOR 2SA1162-G
Q723	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q724	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q725	8-729-216-22	s TRANSISTOR 2SA1162-G
Q726	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q727	8-729-216-22	s TRANSISTOR 2SA1162-G
Q729	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q731	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q732	8-729-216-22	s TRANSISTOR 2SA1162-G
Q733	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q734	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q735	8-729-216-22	s TRANSISTOR 2SA1162-G
Q736	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q737	8-729-216-22	s TRANSISTOR 2SA1162-G
R101	1-216-699-11	s RESISTOR,CHIP 100K 1/10W(2012)
R102	1-216-631-11	s RESISTOR,CHIP 150 1/10W (2012)
R103	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R104	1-218-756-11	s RESISTOR,CHIP 150K 1/10W(2012)
R105	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R106	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R107	1-216-669-11	s RESISTOR,CHIP 5.6K 1/10W(2012)
R108	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R109	1-218-772-11	s RESISTOR,CHIP 680K 1/10W(2012)
R110	1-216-681-11	s RESISTOR,CHIP 18K 1/10W (2012)
R111	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R112	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R113	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R114	1-216-655-11	s RESISTOR,CHIP 1.5K 1/10W(2012)
R115	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)

(OPM-39/39P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R116	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R117	1-216-295-91	s RESISTOR, CHIP 0 (1/10W) (for PAL only)
R118	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R119	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R120	1-218-776-11	s RESISTOR CHIP 1M 1/10W (2012)
R121	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R122	1-216-687-11	s RESISTOR CHIP 33K 1/10W (2012)
R123	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R124	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R125	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R126	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R127	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R128	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R129	1-216-687-11	s RESISTOR CHIP 33K 1/10W (2012)
R130	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R131	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R132	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R133	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R134	1-216-695-11	s RESISTOR,CHIP 68K 1/10W(2012)
R135	1-216-699-11	s RESISTOR,CHIP 100K 1/10W(2012)
R136	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R137	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R138	1-216-295-91	s RESISTOR, CHIP 0 (1/10W) (for NTSC only)
R139	1-216-631-11	s RESISTOR,CHIP 150 1/10W (2012)
R140	1-216-631-11	s RESISTOR,CHIP 150 1/10W (2012)
R141	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R142	1-216-689-11	s RESISTOR,CHIP 39K 1/10W(2012)
R143	1-216-683-11	s RESISTOR,CHIP 22K 1/10W (2012)
R144	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R145	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R146	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R147	1-216-681-11	s RESISTOR,CHIP 18K 1/10W (2012)
R148	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R149	1-216-295-91	s RESISTOR, CHIP 0 (1/10W) (for NTSC only)
R150	1-216-295-91	s RESISTOR, CHIP 0 (1/10W) (for PAL only)
R151	1-216-685-11	s RESISTOR,CHIP 27K 1/10W(2012)
R152	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R153	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R154	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R155	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R156	1-216-685-11	s RESISTOR,CHIP 27K 1/10W(2012)
R157	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R158	1-216-295-91	s RESISTOR, CHIP 0 (1/10W) (for PAL only)
R159	1-216-295-91	s RESISTOR, CHIP 0 (1/10W) (for NTSC only)
R160	1-216-295-91	s RESISTOR, CHIP 0 (1/10W) (for NTSC only)
R161	1-216-295-91	s RESISTOR, CHIP 0 (1/10W) (for PAL only)
R162	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R163	1-216-658-11	s RESISTOR,CHIP 2.0K 1/10W(2012)
R164	1-216-660-11	s RESISTOR,CHIP 2.4K 1/10W(2012)
R165	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R166	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R167	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)

(OPM-39/39P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R168	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R169	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R170	1-216-683-11	s RESISTOR,CHIP 22K 1/10W (2012)
R171	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R172	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R173	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R174	1-216-649-11	s RESISTOR,CHIP 820 1/10W (2012)
R175	1-216-649-11	s RESISTOR,CHIP 820 1/10W (2012)
R176	1-216-642-11	s RESISTOR,CHIP 430 1/10W (2012)
R177	1-216-631-11	s RESISTOR,CHIP 150 1/10W (2012)
R178	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R180	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012) (for NTSC only)
R181	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R182	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R183	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R185	1-218-760-11	s RESISTOR,CHIP 220K 1/10W(2012)
R186	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R187	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R188	1-216-295-91	s RESISTOR, CHIP 0 (1/10W) (for PAL only)
R189	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R190	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R191	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R192	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R193	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R194	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R195	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R196	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R198	1-216-295-91	s RESISTOR, CHIP 0 (1/10W)
R199	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R201	1-216-699-11	s RESISTOR,CHIP 100K 1/10W(2012)
R202	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R203	1-216-631-11	s RESISTOR,CHIP 150 1/10W (2012)
R204	1-216-661-11	s RESISTOR,CHIP 2.7K 1/10W(2012)
R205	1-216-684-91	s RESISTOR,CHIP 24K 1/10W
R206	1-216-631-11	s RESISTOR,CHIP 150 1/10W (2012)
R207	1-218-772-11	s RESISTOR,CHIP 680K 1/10W(2012)
R208	1-216-661-11	s RESISTOR,CHIP 2.7K 1/10W(2012)
R209	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R210	1-216-669-11	s RESISTOR,CHIP 5.6K 1/10W(2012)
R211	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R212	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R213	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R214	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R215	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R216	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R217	1-216-631-11	s RESISTOR,CHIP 150 1/10W (2012)
R218	1-216-661-11	s RESISTOR,CHIP 2.7K 1/10W(2012)
R219	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R220	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R221	1-216-699-11	s RESISTOR,CHIP 100K 1/10W(2012)
R222	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R223	1-216-669-11	s RESISTOR,CHIP 5.6K 1/10W(2012)
R224	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R225	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R226	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R227	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R228	1-216-687-11	s RESISTOR CHIP 33K 1/10W (2012)

(OPM-39/39P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R229	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R230	1-216-699-11	s RESISTOR,CHIP 100K 1/10W(2012)
R231	1-216-631-11	s RESISTOR,CHIP 150 1/10W (2012)
R232	1-216-631-11	s RESISTOR,CHIP 150 1/10W (2012)
R233	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R234	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R235	1-216-669-11	s RESISTOR,CHIP 5.6K 1/10W(2012)
R236	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R237	1-216-699-11	s RESISTOR,CHIP 100K 1/10W(2012)
R403	1-216-677-11	s RESISTOR,CHIP 12K 1/10W(2012)
R404	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R405	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R406	1-216-658-11	s RESISTOR,CHIP 2.0K 1/10W(2012)
R407	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R408	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R409	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R410	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R411	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R412	1-216-607-11	s RESISTOR,CHIP 15 1/10W(2012)
R413	1-216-607-11	s RESISTOR,CHIP 15 1/10W(2012)
R414	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R415	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R416	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R417	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R418	1-216-615-11	s RESISTOR,CHIP 33 1/10W(2012)
R419	1-216-615-11	s RESISTOR,CHIP 33 1/10W(2012)
R420	1-216-616-11	s RESISTOR,CHIP 36 1/10W (2012)
R421	1-216-628-11	s RESISTOR,CHIP 110 1/10W(2012)
R422	1-216-628-11	s RESISTOR,CHIP 110 1/10W(2012)
R423	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R424	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R425	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R426	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R427	1-216-645-11	s RESISTOR,CHIP 560 1/10W(2012)
R428	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R429	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R430	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R503	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R504	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R505	1-216-677-11	s RESISTOR,CHIP 12K 1/10W(2012)
R506	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R507	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R508	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R509	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R510	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R511	1-216-658-11	s RESISTOR,CHIP 2.0K 1/10W(2012)
R512	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R513	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R514	1-216-607-11	s RESISTOR,CHIP 15 1/10W(2012)
R515	1-216-607-11	s RESISTOR,CHIP 15 1/10W(2012)
R516	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R517	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R518	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R519	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R520	1-216-615-11	s RESISTOR,CHIP 33 1/10W(2012)
R521	1-216-615-11	s RESISTOR,CHIP 33 1/10W(2012)
R522	1-216-616-11	s RESISTOR,CHIP 36 1/10W (2012)
R523	1-216-628-11	s RESISTOR,CHIP 110 1/10W(2012)
R524	1-216-628-11	s RESISTOR,CHIP 110 1/10W(2012)

(OPM-39/39P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R525	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R526	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R527	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R528	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R529	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R530	1-216-645-11	s RESISTOR,CHIP 560 1/10W(2012)
R601	1-216-683-11	s RESISTOR,CHIP 22K 1/10W (2012)
R602	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R603	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R604	1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012)
R605	1-216-655-11	s RESISTOR,CHIP 1.5K 1/10W(2012)
R606	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R607	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R608	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R609	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R610	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R611	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R612	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R613	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R614	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R615	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R616	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R617	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R618	1-216-636-11	s RESISTOR,CHIP 240 1/10W (2012)
R619	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R620	1-216-637-11	s RESISTOR,CHIP 270 1/10W (2012)
R621	1-216-633-11	s RESISTOR,CHIP 180 1/10W (2012)
R622	1-216-637-11	s RESISTOR,CHIP 270 1/10W (2012)
R623	1-216-633-11	s RESISTOR,CHIP 180 1/10W (2012)
R624	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R625	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R626	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R627	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R628	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R629	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R630	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R631	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R632	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R633	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R634	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R635	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R636	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R637	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R638	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R639	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R640	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R641	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R642	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R643	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R644	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R645	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R646	1-216-661-11	s RESISTOR,CHIP 2.7K 1/10W(2012)
R647	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R648	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R649	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R650	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R651	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R652	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R653	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)

(OPM-39/39P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R654	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R655	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R656	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R657	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R658	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R659	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R660	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R661	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R662	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R663	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R664	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R665	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R666	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R667	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R668	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R669	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R670	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R671	1-216-665-11	s RESISTOR,CHIP 3.9K 1/10W(2012)
R672	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R673	1-216-665-11	s RESISTOR,CHIP 3.9K 1/10W(2012)
R674	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R675	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R676	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R677	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R678	1-216-655-11	s RESISTOR,CHIP 1.5K 1/10W(2012)
R679	1-216-655-11	s RESISTOR,CHIP 1.5K 1/10W(2012)
R680	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R681	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R682	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R683	1-216-640-11	s RESISTOR,CHIP 360 1/10W
R684	1-216-640-11	s RESISTOR,CHIP 360 1/10W
R685	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R686	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R687	1-216-640-11	s RESISTOR,CHIP 360 1/10W
R688	1-216-640-11	s RESISTOR,CHIP 360 1/10W
R689	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R690	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R691	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R692	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R693	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R694	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R695	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R696	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R697	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R698	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R699	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R701	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R702	1-216-655-11	s RESISTOR,CHIP 1.5K 1/10W(2012)
R703	1-216-633-11	s RESISTOR,CHIP 180 1/10W (2012)
		(for NTSC)
	1-216-634-11	s RESISTOR,CHIP 200 1/10W(2012)
		(for PAL)
R704	1-216-633-11	s RESISTOR,CHIP 180 1/10W (2012)
		(for NTSC)
	1-216-626-11	s RESISTOR,CHIP 91 1/10W(2012)
		(for PAL)
R705	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R706	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R707	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R708	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)

(OPM-39/39P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R709	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
		(for PAL only)
R710	1-216-653-11	s RESISTOR,CHIP 1.2K 1/10W(2012)
R711	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R712	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R713	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R714	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R715	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R716	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R717	1-216-666-11	s RESISTOR,CHIP 4.3K 1/10W(2012)
R718	1-216-641-11	s RESISTOR,CHIP 390 1/10W(2012)
R719	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R720	1-216-665-11	s RESISTOR,CHIP 3.9K 1/10W(2012)
R721	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R722	1-216-677-11	s RESISTOR,CHIP 12K 1/10W(2012)
R723	1-216-661-11	s RESISTOR,CHIP 2.7K 1/10W(2012)
R724	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R725	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R726	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R727	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R728	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R729	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R730	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R731	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R732	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R733	1-216-699-11	s RESISTOR,CHIP 100K 1/10W(2012)
R734	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R735	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R736	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R737	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R738	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R739	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R740	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R741	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R742	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R743	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R744	1-216-687-11	s RESISTOR,CHIP 33K 1/10W (2012)
R745	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R746	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R747	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R748	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R749	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R750	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R751	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R752	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R753	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R754	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R755	1-216-655-11	s RESISTOR,CHIP 1.5K 1/10W(2012)
R756	1-216-655-11	s RESISTOR,CHIP 1.5K 1/10W(2012)
R757	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
		(for NTSC)
	1-216-633-11	s RESISTOR,CHIP 180 1/10W (2012)
		(for PAL)
R758	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R759	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R760	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R761	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R762	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R763	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
		(for NTSC)

(OPM-39/39P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R763	1-216-641-11 s	RESISTOR,CHIP 390 1/10W (2012) (for PAL)
R764	1-216-655-11 s	RESISTOR,CHIP 1.5K 1/10W(2012)
R765	1-216-619-11 s	RESISTOR CHIP 47 1/10W(2012)
R766	1-216-619-11 s	RESISTOR CHIP 47 1/10W(2012)
R767	1-216-661-11 s	RESISTOR,CHIP 2.7K 1/10W(2012)
R768	1-216-673-11 s	RESISTOR,CHIP 8.2K 1/10W(2012)
R769	1-216-624-11 s	RESISTOR,CHIP 75 1/10W(2012)
R770	1-216-653-11 s	RESISTOR,CHIP 1.2K 1/10W(2012)
R771	1-216-663-11 s	RESISTOR,CHIP 3.3K 1/10W(2012)
R772	1-216-635-11 s	RESISTOR,CHIP 220 1/10W (2012)
R773	1-216-624-11 s	RESISTOR,CHIP 75 1/10W(2012)
R774	1-216-635-11 s	RESISTOR,CHIP 220 1/10W (2012)
R775	1-216-663-11 s	RESISTOR,CHIP 3.3K 1/10W(2012)
R776	1-216-635-11 s	RESISTOR,CHIP 220 1/10W (2012)
R777	1-216-639-11 s	RESISTOR,CHIP 330 1/10W (2012)
R778	1-216-649-11 s	RESISTOR,CHIP 820 1/10W (2012)
R779	1-216-675-11 s	RESISTOR,CHIP 10K 1/10W(2012)
R780	1-216-677-11 s	RESISTOR,CHIP 12K 1/10W(2012)
R781	1-216-627-11 s	RESISTOR,CHIP 100 1/10W (2012)
R782	1-216-663-11 s	RESISTOR,CHIP 3.3K 1/10W(2012)
R783	1-216-635-11 s	RESISTOR,CHIP 220 1/10W (2012)
R784	1-216-643-11 s	RESISTOR,CHIP 470 1/10W (2012)
R785	1-216-675-11 s	RESISTOR,CHIP 10K 1/10W(2012)
R786	1-216-627-11 s	RESISTOR,CHIP 100 1/10W (2012)
R787	1-216-635-11 s	RESISTOR,CHIP 220 1/10W (2012)
R788	1-216-619-11 s	RESISTOR CHIP 47 1/10W(2012)
R789	1-216-667-11 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R790	1-216-699-11 s	RESISTOR,CHIP 100K 1/10W(2012)
R791	1-216-663-11 s	RESISTOR,CHIP 3.3K 1/10W(2012)
R792	1-216-619-11 s	RESISTOR CHIP 47 1/10W(2012)
R793	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R794	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R795	1-216-624-11 s	RESISTOR,CHIP 75 1/10W(2012)
R796	1-216-624-11 s	RESISTOR,CHIP 75 1/10W(2012)
R797	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R798	1-216-624-11 s	RESISTOR,CHIP 75 1/10W(2012)
R799	1-216-663-11 s	RESISTOR,CHIP 3.3K 1/10W(2012)
R803	1-216-699-11 s	RESISTOR,CHIP 100K 1/10W(2012)
R804	1-216-699-11 s	RESISTOR,CHIP 100K 1/10W(2012)
R805	1-216-699-11 s	RESISTOR,CHIP 100K 1/10W(2012)
R806	1-216-683-11 s	RESISTOR,CHIP 22K 1/10W (2012)
R811	1-216-629-11 s	RESISTOR,CHIP 120 1/10W (2012)
R812	1-216-647-11 s	RESISTOR,CHIP 680 1/10W (2012)
R813	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R814	1-216-643-11 s	RESISTOR,CHIP 470 1/10W (2012)
R815	1-216-670-11 s	RESISTOR,CHIP 6.2K 1/10W(2012)
R816	1-216-653-11 s	RESISTOR,CHIP 1.2K 1/10W(2012)
R817	1-216-619-11 s	RESISTOR CHIP 47 1/10W(2012)
R818	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R819	1-216-619-11 s	RESISTOR CHIP 47 1/10W(2012)
R820	1-216-611-11 s	RESISTOR,CHIP 22 1/10W (2012)
R821	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R822	1-216-669-11 s	RESISTOR,CHIP 5.6K 1/10W(2012)
R823	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R824	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R825	1-216-643-11 s	RESISTOR,CHIP 470 1/10W (2012)
R826	1-216-619-11 s	RESISTOR CHIP 47 1/10W(2012)
R827	1-216-619-11 s	RESISTOR CHIP 47 1/10W(2012)

(OPM-39/39P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R830	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R839	1-216-624-11 s	RESISTOR,CHIP 75 1/10W(2012)
R847	1-217-671-11 s	RESISTOR CHIP 1 1/10W(2125)
R848	1-217-671-11 s	RESISTOR CHIP 1 1/10W(2125)
R849	1-217-671-11 s	RESISTOR CHIP 1 1/10W(2125)
R850	1-217-671-11 s	RESISTOR CHIP 1 1/10W(2125)
R851	1-217-671-11 s	RESISTOR CHIP 1 1/10W(2125)
R852	1-217-671-11 s	RESISTOR CHIP 1 1/10W(2125)
R853	1-217-671-11 s	RESISTOR CHIP 1 1/10W(2125)
R854	1-217-671-11 s	RESISTOR CHIP 1 1/10W(2125)
R855	1-216-611-11 s	RESISTOR,CHIP 22 1/10W (2012)
R857	1-216-619-11 s	RESISTOR CHIP 47 1/10W(2012)
R860	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R861	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R862	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R863	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R864	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R865	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R866	1-216-295-91 s	RESISTOR, CHIP 0 (1/10W) (for NTSC only)
R870	1-216-675-11 s	RESISTOR,CHIP 10K 1/10W(2012)
R901	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R902	1-216-646-11 s	RESISTOR,CHIP 620 1/10W (2012)
R903	1-216-655-11 s	RESISTOR,CHIP 1.5K 1/10W(2012)
R904	1-216-655-11 s	RESISTOR,CHIP 1.5K 1/10W(2012)
R905	1-216-660-11 s	RESISTOR,CHIP 2.4K 1/10W(2012)
R906	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R907	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R908	1-216-643-11 s	RESISTOR,CHIP 470 1/10W (2012)
R909	1-216-678-11 s	RESISTOR,CHIP 13K 1/10W(2012)
R910	1-216-619-11 s	RESISTOR CHIP 47 1/10W(2012)
R911	1-216-643-11 s	RESISTOR,CHIP 470 1/10W (2012)
R912	1-216-678-11 s	RESISTOR,CHIP 13K 1/10W(2012)
R913	1-216-619-11 s	RESISTOR CHIP 47 1/10W(2012)
R917	1-216-660-11 s	RESISTOR,CHIP 2.4K 1/10W(2012)
R1100	1-216-667-11 s	RESISTOR,CHIP 4.7K 1/10W(2012) (for PAL only)
R1103	1-216-295-91 s	RESISTOR, CHIP 0 (1/10W)
R1105	1-216-295-91 s	RESISTOR, CHIP 0 (1/10W) (for NTSC only)
R1106	1-216-295-91 s	RESISTOR, CHIP 0 (1/10W) (for NTSC only)
R1107	1-216-667-11 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R1108	1-215-445-00 s	RESISTOR,METAL FILM 10K 1/4W
R1600	1-216-643-11 s	RESISTOR,CHIP 470 1/10W (2012)
R1601	1-216-619-11 s	RESISTOR CHIP 47 1/10W(2012)
R1602	1-216-619-11 s	RESISTOR CHIP 47 1/10W(2012)
R1603	1-216-647-11 s	RESISTOR,CHIP 680 1/10W (2012)
R1604	1-216-647-11 s	RESISTOR,CHIP 680 1/10W (2012)
R1605	1-216-675-11 s	RESISTOR,CHIP 10K 1/10W(2012)
R1606	1-216-647-11 s	RESISTOR,CHIP 680 1/10W (2012)
R1607	1-216-619-11 s	RESISTOR CHIP 47 1/10W(2012)
R1608	1-216-619-11 s	RESISTOR CHIP 47 1/10W(2012)
R1609	1-216-619-11 s	RESISTOR CHIP 47 1/10W(2012)
R1610	1-216-619-11 s	RESISTOR CHIP 47 1/10W(2012)
R1611	1-216-675-11 s	RESISTOR,CHIP 10K 1/10W(2012)
R1612	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R1613	1-216-675-11 s	RESISTOR,CHIP 10K 1/10W(2012)
R1614	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)

(OPM-39/39P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R1615	1-216-645-11	s RESISTOR,CHIP 560 1/10W(2012)
R1616	1-216-645-11	s RESISTOR,CHIP 560 1/10W(2012) (for NTSC)
	1-216-653-11	s RESISTOR,CHIP 1.2K 1/10W(2012) (for PAL)
R1617	1-216-645-11	s RESISTOR,CHIP 560 1/10W(2012) (for NTSC)
	1-216-653-11	s RESISTOR,CHIP 1.2K 1/10W(2012) (for PAL)
R1618	1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012)
R1619	1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012)
R1620	1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012)
R1621	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R1622	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R1623	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R1624	1-216-619-11	s RESISTOR CHIP 47 1/10W(2012)
R1625	1-216-619-11	s RESISTOR CHIP 47 1/10W(2012)
R1626	1-216-619-11	s RESISTOR CHIP 47 1/10W(2012)
R1627	1-216-619-11	s RESISTOR CHIP 47 1/10W(2012)
R1628	1-216-619-11	s RESISTOR CHIP 47 1/10W(2012)
R1629	1-216-619-11	s RESISTOR CHIP 47 1/10W(2012)
R1630	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R1631	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R1632	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R1633	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R1634	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R1635	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R1636	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R1637	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R1638	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R1639	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R1640	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R1641	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R1642	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R1643	1-216-673-11	s RESISTOR,CHIP 8.2K 1/10W(2012)
R1644	1-216-673-11	s RESISTOR,CHIP 8.2K 1/10W(2012)
R1645	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R1646	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R1647	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R1648	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R1649	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R1650	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R1651	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R1652	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R1653	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R1654	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R1700	1-216-645-11	s RESISTOR,CHIP 560 1/10W(2012)
R1701	1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012)
R1702	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012) (for NTSC only)
R1703	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R1704	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R1705	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R1706	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R1707	1-216-619-11	s RESISTOR CHIP 47 1/10W(2012)
R1708	1-216-619-11	s RESISTOR CHIP 47 1/10W(2012)
R1709	1-216-603-11	s RESISTOR,CHIP 10 1/10W(2012)
R1710	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R1711	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R1712	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)

(OPM-39/39P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R1713	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R1715	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R1716	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R1717	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R1718	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R1719	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R1720	1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012)
R1721	1-216-645-11	s RESISTOR,CHIP 560 1/10W(2012)
R1722	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R1723	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R1724	1-216-648-11	s RESISTOR,CHIP 750 1/10W (2012) (for NTSC)
	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012) (for PAL)
R1725	1-216-661-11	s RESISTOR,CHIP 2.7K 1/10W(2012)
R1726	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R1727	1-216-619-11	s RESISTOR CHIP 47 1/10W(2012)
R1728	1-216-619-11	s RESISTOR CHIP 47 1/10W(2012)
R1729	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R1730	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R1731	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R1732	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R1733	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R1734	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R1735	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R1736	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R1737	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R1738	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R1739	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R1740	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R1741	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R1742	1-216-619-11	s RESISTOR CHIP 47 1/10W(2012)
R1743	1-216-619-11	s RESISTOR CHIP 47 1/10W(2012)
R1744	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R1745	1-216-611-11	s RESISTOR,CHIP 22 1/10W (2012)
R1746	1-216-655-11	s RESISTOR,CHIP 1.5K 1/10W(2012)
R1747	1-216-633-11	s RESISTOR,CHIP 180 1/10W (2012) (for NTSC)
	1-216-634-11	s RESISTOR,CHIP 200 1/10W(2012) (for PAL)
R1748	1-216-633-11	s RESISTOR,CHIP 180 1/10W (2012) (for NTSC)
	1-216-626-11	s RESISTOR,CHIP 91 1/10W(2012) (for PAL)
R1749	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R1750	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R1751	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R1752	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R1753	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R1754	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R1755	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R1756	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R1757	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R1758	1-216-655-11	s RESISTOR,CHIP 1.5K 1/10W(2012)
R1759	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012) (for NTSC)
	1-216-633-11	s RESISTOR,CHIP 180 1/10W (2012) (for PAL)
R1760	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012) (for NTSC)
	1-216-641-11	s RESISTOR,CHIP 390 1/10W(2012) (for PAL)

(OPM-39/39P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R1761	1-216-655-11	s RESISTOR,CHIP 1.5K 1/10W(2012)
R1762	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R1763	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R1764	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R1765	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R1766	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R1767	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R1769	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R1770	1-216-665-11	s RESISTOR,CHIP 3.9K 1/10W(2012)
R1771	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R1772	1-216-661-11	s RESISTOR,CHIP 2.7K 1/10W(2012)
R1773	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R1774	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R1775	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R1776	1-216-619-11	s RESISTOR CHIP 47 1/10W(2012)
R1777	1-216-619-11	s RESISTOR CHIP 47 1/10W(2012)
R1778	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012) (for PAL only)
R1782	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R1783	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R1784	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R1785	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R1787	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R1789	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R1790	1-216-677-11	s RESISTOR,CHIP 12K 1/10W(2012)
R1793	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R1794	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R1795	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R1796	1-216-699-11	s RESISTOR,CHIP 100K 1/10W(2012)
R1797	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R1798	1-216-673-11	s RESISTOR,CHIP 8.2K 1/10W(2012)
R1801	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R1802	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R1805	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R1806	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R1807	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R1808	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R1809	1-216-677-11	s RESISTOR,CHIP 12K 1/10W(2012)
R1812	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R1813	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R1814	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R1815	1-216-699-11	s RESISTOR,CHIP 100K 1/10W(2012)
R1816	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R1817	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R1818	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012) (for NTSC only)
R1819	1-216-603-11	s RESISTOR,CHIP 10 1/10W(2012)
R1820	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R1821	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R1822	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R1823	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R1824	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R1825	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R1826	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R1827	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R1828	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R1829	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R1830	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)

(OPM-39/39P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
R1831	1-216-661-11	s RESISTOR,CHIP 2.7K 1/10W(2012)
RB101	1-236-907-11	s RESISTOR BLOCK 100K (1608)
RB102	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB103	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB104	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB105	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB106	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB108	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB109	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB301	1-239-306-11	s RESISTOR ARRAY,CHIP 10K
RB401	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB402	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB403	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB404	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB405	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB406	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB501	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB502	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB503	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB504	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB601	1-236-904-11	s RESISTOR NETWORK 1K (1608)
RB602	1-236-904-11	s RESISTOR NETWORK 1K (1608)
RB603	1-236-904-11	s RESISTOR NETWORK 1K (1608)
RB604	1-236-904-11	s RESISTOR NETWORK 1K (1608)
RB801	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB802	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB803	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB804	1-239-307-11	s RESISTOR ARRAY,CHIP 22K
RB805	1-239-307-11	s RESISTOR ARRAY,CHIP 22K
RB806	1-239-307-11	s RESISTOR ARRAY,CHIP 22K
RB807	1-239-307-11	s RESISTOR ARRAY,CHIP 22K
RB808	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB809	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB810	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB811	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RV101	1-237-035-11	s RESISTOR,ADJ,CERMET 5K
RV102	1-237-036-11	s RESISTOR, ADJ,CERMET 10K
RV103	1-238-786-11	s RESISTOR, ADJ, CERMET 5K
RV104	1-238-785-21	s RESISTOR, ADJ, CERMET 2K
RV105	1-237-033-11	s RESISTOR,ADJ,CERMET 1K
RV106	1-237-033-11	s RESISTOR,ADJ,CERMET 1K (for PAL only)
RV107	1-237-033-11	s RESISTOR,ADJ,CERMET 1K (for PAL only)
RV201	1-237-033-11	s RESISTOR,ADJ,CERMET 1K
RV202	1-237-034-11	s RESISTOR,ADJ,CERMET 2K
RV401	1-237-033-11	s RESISTOR,ADJ,CERMET 1K
RV501	1-237-033-11	s RESISTOR,ADJ,CERMET 1K
RV601	1-237-033-11	s RESISTOR,ADJ,CERMET 1K
RV602	1-237-033-11	s RESISTOR,ADJ,CERMET 1K
RV603	1-238-783-11	s RESISTOR, ADJ, CERMET 500
RV604	1-238-783-11	s RESISTOR, ADJ, CERMET 500
RV605	1-238-783-11	s RESISTOR, ADJ, CERMET 500
RV701	1-237-029-11	s RESISTOR,ADJ,CERMET 50
RV702	1-237-032-11	s RESISTOR,ADJ,CERMET 500
RV703	1-237-036-11	s RESISTOR, ADJ,CERMET 10K
RV704	1-237-035-11	s RESISTOR,ADJ,CERMET 5K (for PAL only)
RV705	1-238-783-11	s RESISTOR, ADJ, CERMET 500
RV706	1-237-031-11	s RESISTOR,ADJ,CERMET 200
RV707	1-237-033-11	s RESISTOR,ADJ,CERMET 1K

(OPM-39/39P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
RV709	1-237-036-11	s RESISTOR, ADJ, CERMET 10K
RV710	1-238-783-11	s RESISTOR, ADJ, CERMET 500
RV711	1-237-032-11	s RESISTOR, ADJ, CERMET 500
RV712	1-238-783-11	s RESISTOR, ADJ, CERMET 500
RV713	1-237-032-11	s RESISTOR, ADJ, CERMET 500
RV714	1-237-029-11	s RESISTOR, ADJ, CERMET 50
RV715	1-237-031-11	s RESISTOR, ADJ, CERMET 200
RV717	1-237-035-11	s RESISTOR, ADJ, CERMET 5K (for PAL only)
RV718	1-237-036-11	s RESISTOR, ADJ, CERMET 10K
RV720	1-237-036-11	s RESISTOR, ADJ, CERMET 10K
RV721	1-237-032-11	s RESISTOR, ADJ, CERMET 500
RV801	1-237-032-11	s RESISTOR, ADJ, CERMET 500
RV901	1-241-262-11	s RESISTOR ADJ 2K (CERMET)
RV902	1-241-262-11	s RESISTOR ADJ 2K (CERMET)
RY801	1-755-379-11	s 853641000
RY802	1-755-379-11	s 853641000
RY803	1-755-379-11	s 853641000
RY804	1-755-379-11	s 853641000
RY805	1-755-379-11	s 853641000
RY806	1-755-379-11	s 853641000
RY807	1-755-379-11	s 853641000
RY808	1-755-379-11	s 853641000
S101	1-762-994-11	s SWITCH, ROTARY
S102	1-554-399-00	s SWITCH, TOGGLE
S201	1-570-711-11	s SWITCH, SLIDE
S401	1-570-711-11	s SWITCH, SLIDE
S501	1-570-711-11	s SWITCH, SLIDE
S801	1-570-602-11	s SWITCH, DIP (2P)
TH101	1-807-971-11	s THERMISTOR
X101	1-767-617-11	s OSCILLATOR, CRYSTAL (for NTSC)
	1-767-619-11	s OSCILLATOR, CRYSTAL (for PAL)
X102	1-760-267-11	s OSCILLATOR, CRYSTAL (VCO TYPE)
		(for NTSC)
	1-760-266-11	s OSCILLATOR, CRYSTAL (VCO TYPE)
		(for PAL)
X103	1-767-695-21	s OSCILLATOR, CRYSTAL

VIP-19/19P BOARD (Suffix -12 and Higher)

Ref. No. or Q'ty	Part No.	SP Description
2pcs	3-624-100-02	o LEVER, PWB
7pcs	4-886-821-11	s SCREW, M3X6 CASE (SILVER)
2pcs	7-626-300-54	o SPRING PIN 3X6
C101	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C102	1-162-926-11	s CAPACITOR, CERAMIC 82PF/50V CH
C104	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C105	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C106	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C107	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C108	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C109	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C110	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C111	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C112	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C113	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C114	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C115	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C116	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C117	1-162-919-11	s CAPACITOR, CERAMIC 22PF/50V CH (for NTSC only)
C118	1-162-925-11	s CAPACITOR, CERAMIC 68PF/50V CH
C120	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)
C121	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C122	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C123	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C124	1-162-959-11	s CAPACITOR, CERAMIC 330PF/50V SL (for NTSC)
	1-164-230-11	s CAPACITOR, CERAMIC 220PF/50V (for PAL)
C125	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C126	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C127	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C128	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C129	1-162-921-11	s CAPACITOR, CERAMIC 33PF/50V CH
C130	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C131	1-164-217-11	s CAPACITOR, CERAMIC 150PF/50V CH
C132	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C133	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C134	1-162-925-11	s CAPACITOR, CERAMIC 68PF/50V CH
C135	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C136	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C137	1-162-968-11	s CAPACITOR, CERAMIC 4700PF/50V B
C138	1-162-968-11	s CAPACITOR, CERAMIC 4700PF/50V B
C139	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C140	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C143	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C147	1-115-467-11	s CAPACITOR CERAMIC 0.22MF/10V B (for NTSC)
	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF (for PAL)
C149	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C150	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C151	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C152	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C153	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C154	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C155	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C156	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C157	1-104-601-11	s CAP, ELECT 10MF/10V (BP) (CHIP)
C158	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
C159	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C160	1-115-566-11	s CAPACITOR,CERAMIC 4.7MF B/6.3V
C161	1-162-919-11	s CAPACITOR,CERAMIC 22PF/50V CH
C162	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C163	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C164	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C165	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C166	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C167	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C168	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C169	1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C201	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C202	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C203	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C204	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH
C205	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C206	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C207	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C208	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C209	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C210	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C211	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C212	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C213	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C214	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C215	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C216	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C217	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C218	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C219	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C220	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C221	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C222	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C223	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C224	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C225	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C226	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C227	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C228	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C229	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C230	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C231	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C232	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C233	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C234	1-104-608-11	s CAPACITOR, ELECT 33MF/6.3V
C235	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C236	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C237	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C238	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C239	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C240	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C241	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C242	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C243	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C244	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C245	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C246	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C247	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C248	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
C249	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C250	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH (for NTSC)
	1-162-919-11	s CAPACITOR,CERAMIC 22PF/50V CH (for PAL)
C251	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C252	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH (for NTSC)
	1-162-919-11	s CAPACITOR,CERAMIC 22PF/50V CH (for PAL)
C253	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C254	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C255	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C256	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C257	1-162-919-11	s CAPACITOR,CERAMIC 22PF/50V CH
C258	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH
C259	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH
C260	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C261	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C262	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C263	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C264	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C265	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C266	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C267	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C268	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C269	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C270	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C271	1-162-966-11	s CAPACITOR,CERAMIC 2200PF/50V B
C272	1-162-966-11	s CAPACITOR,CERAMIC 2200PF/50V B
C273	1-162-966-11	s CAPACITOR,CERAMIC 2200PF/50V B
C274	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C275	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C276	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C277	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C278	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C279	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C280	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C281	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C282	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C283	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C284	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C285	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C286	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C287	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C288	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C289	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C290	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C291	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C292	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C293	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C294	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C295	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C296	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C297	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C298	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C299	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C301	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C302	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C303	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
C304	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C305	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C306	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C307	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C308	1-115-416-11	s CAPACITOR,CERAMIC 1000PF/25V
C309	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C310	1-104-608-11	s CAPACITOR, ELECT 33MF/6.3V
C311	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C312	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C313	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C314	1-126-395-11	s CAPACITOR,ELECT 22MF/16V(CHIP)
C315	1-115-467-11	s CAPACITOR CERAMIC 0.22MF/10V B
C316	1-115-412-11	s CAPACITOR,CERAMIC 680PF/25V CH
C317	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C318	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C319	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C320	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C321	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C322	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C323	1-126-395-11	s CAPACITOR,ELECT 22MF/16V(CHIP)
C324	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C325	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C326	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C327	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C328	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C329	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C330	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C331	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C332	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C333	1-126-394-11	s CAPACITOR,ELECT 10MF/16V(CHIP)
C334	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C335	1-126-395-11	s CAPACITOR,ELECT 22MF/16V(CHIP)
C336	1-125-891-11	s CAPACITOR CERAMIC 0.47MF/10V
C337	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C338	1-164-315-11	s CAPACITOR,CERAMIC 470PF/50V CH
C339	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C340	1-162-917-11	s CAPACITOR,CERAMIC 15PF/50V CH
C341	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C342	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C343	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C344	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C345	1-115-416-11	s CAPACITOR,CERAMIC 1000PF/25V
C346	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C347	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C348	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C349	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C350	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C351	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C352	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C353	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C354	1-115-416-11	s CAPACITOR,CERAMIC 1000PF/25V
C401	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C402	1-162-926-11	s CAPACITOR,CERAMIC 82PF/50V CH
C403	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C404	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C413	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C417	1-162-919-11	s CAPACITOR,CERAMIC 22PF/50V CH (for NTSC only)
C418	1-162-925-11	s CAPACITOR,CERAMIC 68PF/50V CH

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
C420	1-126-394-11	s CAPACITOR,ELECT 10MF/16V(CHIP)
C421	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C424	1-162-959-11	s CAPACITOR,CERAMIC 330PF/50V SL (for NTSC)
	1-164-230-11	s CAPACITOR,CERAMIC 220PF/50V (for PAL)
C425	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C426	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C427	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C428	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C432	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C434	1-162-925-11	s CAPACITOR,CERAMIC 68PF/50V CH
C436	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C437	1-162-968-11	s CAPACITOR,CERAMIC 4700PF/50V B
C438	1-162-968-11	s CAPACITOR,CERAMIC 4700PF/50V B
C443	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C447	1-115-467-11	s CAPACITOR CERAMIC 0.22MF/10V B (for NTSC)
	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF (for PAL)
C449	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C450	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C452	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C454	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C455	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C456	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C457	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C458	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C459	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C460	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C461	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C462	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C463	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C464	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C465	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C466	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C467	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C468	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C469	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C470	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH
C471	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C472	1-164-217-11	s CAPACITOR,CERAMIC 150PF/50V CH
C473	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C474	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C475	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C476	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C477	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C478	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C479	1-104-601-11	s CAP,ELECT 10MF/10V (BP) (CHIP)
C480	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C481	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C482	1-115-566-11	s CAPACITOR,CERAMIC 4.7MF B/6.3V
C483	1-162-919-11	s CAPACITOR,CERAMIC 22PF/50V CH
C484	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C485	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C486	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C487	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C488	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C489	1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C490	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
C501	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C502	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C503	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C504	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH
C505	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C506	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C507	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C508	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C509	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C510	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C511	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C512	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C513	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C514	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C515	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C516	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C517	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C518	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C519	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C520	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C521	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C522	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C523	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C524	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C525	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C526	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C527	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C528	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C529	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C530	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C531	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C532	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C533	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C534	1-104-608-11	s CAPACITOR, ELECT 33MF/6.3V
C535	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C536	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C537	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C538	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C539	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C540	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C541	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C542	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C543	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C544	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C545	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C546	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C547	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C548	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C549	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C550	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH (for NTSC)
	1-162-919-11	s CAPACITOR,CERAMIC 22PF/50V CH (for PAL)
C551	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C552	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH (for NTSC)
	1-162-919-11	s CAPACITOR,CERAMIC 22PF/50V CH (for PAL)
C553	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C554	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
C555	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C556	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C557	1-162-919-11	s CAPACITOR,CERAMIC 22PF/50V CH
C558	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH
C559	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH
C560	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C561	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C562	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C563	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C564	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C565	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C566	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C567	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C568	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C569	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C570	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C571	1-162-966-11	s CAPACITOR,CERAMIC 2200PF/50V B
C572	1-162-966-11	s CAPACITOR,CERAMIC 2200PF/50V B
C573	1-162-966-11	s CAPACITOR,CERAMIC 2200PF/50V B
C574	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C575	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C576	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C577	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C578	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C579	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C580	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C581	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C582	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C583	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C584	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C585	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C586	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C587	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C588	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C589	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C590	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C591	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C592	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C593	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C594	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C595	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C596	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C597	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C598	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C599	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C601	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C602	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C603	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C604	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C605	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C606	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C607	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C608	1-115-416-11	s CAPACITOR,CERAMIC 1000PF/25V
C609	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C610	1-104-608-11	s CAPACITOR, ELECT 33MF/6.3V
C611	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C612	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C613	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C614	1-126-395-11	s CAPACITOR,ELECT 22MF/16V(CHIP)

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
C615	1-115-467-11	s CAPACITOR CERAMIC 0.22MF/10V B
C616	1-115-412-11	s CAPACITOR, CERAMIC 680PF/25V CH
C617	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C618	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C619	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C620	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C621	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C622	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C623	1-126-395-11	s CAPACITOR, ELECT 22MF/16V (CHIP)
C624	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C625	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C626	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C627	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C628	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C629	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C630	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C631	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C632	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C633	1-126-394-11	s CAPACITOR, ELECT 10MF/16V (CHIP)
C634	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C635	1-126-395-11	s CAPACITOR, ELECT 22MF/16V (CHIP)
C636	1-125-891-11	s CAPACITOR CERAMIC 0.47MF/10V
C637	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C638	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C639	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C640	1-162-917-11	s CAPACITOR, CERAMIC 15PF/50V CH
C641	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C642	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C643	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C644	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V (105)
C645	1-115-416-11	s CAPACITOR, CERAMIC 1000PF/25V
C646	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C647	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C648	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C649	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C650	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C651	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C652	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C653	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C654	1-115-416-11	s CAPACITOR, CERAMIC 1000PF/25V
C701	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V (105)
C702	1-162-926-11	s CAPACITOR, CERAMIC 82PF/50V CH
C703	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C704	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V (105)
C713	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C717	1-162-919-11	s CAPACITOR, CERAMIC 22PF/50V CH (for NTSC only)
C718	1-162-925-11	s CAPACITOR, CERAMIC 68PF/50V CH
C720	1-126-394-11	s CAPACITOR, ELECT 10MF/16V (CHIP)
C721	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C724	1-162-959-11	s CAPACITOR, CERAMIC 330PF/50V SL (for NTSC)
	1-164-230-11	s CAPACITOR, CERAMIC 220PF/50V (for PAL)
C725	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C726	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C727	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C728	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C732	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
C734	1-162-925-11	s CAPACITOR, CERAMIC 68PF/50V CH
C736	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C737	1-162-968-11	s CAPACITOR, CERAMIC 4700PF/50V B
C738	1-162-968-11	s CAPACITOR, CERAMIC 4700PF/50V B
C743	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C747	1-115-467-11	s CAPACITOR CERAMIC 0.22MF/10V B (for NTSC)
	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF (for PAL)
C749	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C750	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V (105)
C752	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C754	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V (105)
C755	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C756	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C757	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V (105)
C758	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V (105)
C759	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C760	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C761	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C762	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C763	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C764	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C765	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C766	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C767	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C768	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C769	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C770	1-162-921-11	s CAPACITOR, CERAMIC 33PF/50V CH
C771	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V (105)
C772	1-164-217-11	s CAPACITOR, CERAMIC 150PF/50V CH
C773	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C774	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C775	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C776	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C777	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C778	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C779	1-104-601-11	s CAP, ELECT 10MF/10V (BP) (CHIP)
C780	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C781	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C782	1-115-566-11	s CAPACITOR, CERAMIC 4.7MF B/6.3V
C783	1-162-919-11	s CAPACITOR, CERAMIC 22PF/50V CH
C784	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V (105)
C785	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C786	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C787	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C788	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C789	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C790	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C801	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C802	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C803	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C804	1-162-921-11	s CAPACITOR, CERAMIC 33PF/50V CH
C805	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C806	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C807	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V (105)
C808	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C809	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C810	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
C811	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C812	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C813	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C814	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C815	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C816	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C817	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C818	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C819	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C820	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C821	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C822	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C823	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C824	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C825	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C826	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C827	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C828	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C829	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C830	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C831	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C832	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C833	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C834	1-104-608-11	s CAPACITOR, ELECT 33MF/6.3V
C835	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C836	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C837	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C838	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C839	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C840	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C841	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C842	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C843	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C844	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C845	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C846	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C847	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C848	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C849	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C850	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH (for NTSC)
	1-162-919-11	s CAPACITOR,CERAMIC 22PF/50V CH (for PAL)
C851	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C852	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH (for NTSC)
	1-162-919-11	s CAPACITOR,CERAMIC 22PF/50V CH (for PAL)
C853	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C854	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C855	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C856	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C857	1-162-919-11	s CAPACITOR,CERAMIC 22PF/50V CH
C858	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH
C859	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH
C860	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C861	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C862	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C863	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C864	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
C865	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C866	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C867	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C868	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C869	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C870	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C871	1-162-966-11	s CAPACITOR,CERAMIC 2200PF/50V B
C872	1-162-966-11	s CAPACITOR,CERAMIC 2200PF/50V B
C873	1-162-966-11	s CAPACITOR,CERAMIC 2200PF/50V B
C874	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C875	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C876	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C877	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C878	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C879	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C880	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C881	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C882	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C883	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C884	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C885	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C886	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C887	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C888	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C889	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C890	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C891	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C892	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C893	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C894	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C895	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C896	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C897	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C898	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C899	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C901	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C902	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C903	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C904	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C905	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C906	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C907	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C908	1-115-416-11	s CAPACITOR,CERAMIC 1000PF/25V
C909	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C910	1-104-608-11	s CAPACITOR, ELECT 33MF/6.3V
C911	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C912	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C913	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C914	1-126-395-11	s CAPACITOR,ELECT 22MF/16V(CHIP)
C915	1-115-467-11	s CAPACITOR CERAMIC 0.22MF/10V B
C916	1-115-412-11	s CAPACITOR,CERAMIC 680PF/25V CH
C917	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C918	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C919	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C920	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C921	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C922	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C923	1-126-395-11	s CAPACITOR,ELECT 22MF/16V(CHIP)
C924	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
C925	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C926	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C927	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C928	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C929	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C930	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C931	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C932	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C933	1-126-394-11	s CAPACITOR, ELECT 10MF/16V (CHIP)
C934	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C935	1-126-395-11	s CAPACITOR, ELECT 22MF/16V (CHIP)
C936	1-125-891-11	s CAPACITOR CERAMIC 0.47MF/10V
C937	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C938	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C939	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C940	1-162-917-11	s CAPACITOR, CERAMIC 15PF/50V CH
C941	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C942	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C943	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C944	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V (105)
C945	1-115-416-11	s CAPACITOR, CERAMIC 1000PF/25V
C946	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C947	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C948	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C949	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C950	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C951	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C952	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C953	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C954	1-115-416-11	s CAPACITOR, CERAMIC 1000PF/25V
C1001	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V (105)
C1002	1-162-926-11	s CAPACITOR, CERAMIC 82PF/50V CH
C1003	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1004	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V (105)
C1013	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1017	1-162-919-11	s CAPACITOR, CERAMIC 22PF/50V CH (for NTSC only)
C1018	1-162-925-11	s CAPACITOR, CERAMIC 68PF/50V CH
C1020	1-126-394-11	s CAPACITOR, ELECT 10MF/16V (CHIP)
C1021	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1024	1-162-959-11	s CAPACITOR, CERAMIC 330PF/50V SL (for NTSC)
	1-164-230-11	s CAPACITOR, CERAMIC .220PF/50V (for PAL)
C1025	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C1026	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1027	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1028	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1032	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C1034	1-162-925-11	s CAPACITOR, CERAMIC 68PF/50V CH
C1036	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1037	1-162-968-11	s CAPACITOR, CERAMIC 4700PF/50V B
C1038	1-162-968-11	s CAPACITOR, CERAMIC 4700PF/50V B
C1043	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1047	1-115-467-11	s CAPACITOR CERAMIC 0.22MF/10V B (for NTSC)
	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF (for PAL)
C1049	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1050	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V (105)

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
C1052	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C1054	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V (105)
C1055	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C1056	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C1057	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V (105)
C1058	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V (105)
C1059	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1060	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1061	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1062	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1063	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1064	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1065	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1066	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1067	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1068	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1069	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1070	1-162-921-11	s CAPACITOR, CERAMIC 33PF/50V CH
C1071	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V (105)
C1072	1-164-217-11	s CAPACITOR, CERAMIC 150PF/50V CH
C1073	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1074	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1075	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C1076	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C1077	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C1078	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C1079	1-104-601-11	s CAP, ELECT 10MF/10V (BP) (CHIP)
C1080	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C1081	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C1082	1-115-566-11	s CAPACITOR, CERAMIC 4.7MF B/6.3V
C1083	1-162-919-11	s CAPACITOR, CERAMIC 22PF/50V CH
C1084	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V (105)
C1085	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1086	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1087	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1088	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1089	1-162-915-11	s CAPACITOR, CERAMIC 10PF/50V CH
C1090	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1101	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C1102	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C1103	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C1104	1-162-921-11	s CAPACITOR, CERAMIC 33PF/50V CH
C1105	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1106	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C1107	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V (105)
C1108	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C1109	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1110	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1111	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C1112	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C1113	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V (105)
C1114	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C1115	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C1116	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C1117	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C1118	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C1119	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C1120	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C1121	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V (105)

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
C1122	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1123	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1124	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1125	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1126	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1127	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1128	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1129	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1130	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1131	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1132	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1133	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C1134	1-104-608-11	s CAPACITOR, ELECT 33MF/6.3V
C1135	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1136	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C1137	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1138	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C1139	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C1140	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1141	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1142	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1143	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1144	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1145	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1146	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C1147	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C1148	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C1149	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C1150	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH (for NTSC)
	1-162-919-11	s CAPACITOR,CERAMIC 22PF/50V CH (for PAL)
C1151	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C1152	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH (for NTSC)
	1-162-919-11	s CAPACITOR,CERAMIC 22PF/50V CH (for PAL)
C1153	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C1154	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1155	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1156	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1157	1-162-919-11	s CAPACITOR,CERAMIC 22PF/50V CH
C1158	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH
C1159	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH
C1160	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1161	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1162	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1163	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1164	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1165	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1166	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1167	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1168	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1169	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1170	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1171	1-162-966-11	s CAPACITOR,CERAMIC 2200PF/50V B
C1172	1-162-966-11	s CAPACITOR,CERAMIC 2200PF/50V B
C1173	1-162-966-11	s CAPACITOR,CERAMIC 2200PF/50V B
C1174	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1175	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
C1176	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C1177	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1178	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1179	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1180	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1181	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1182	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1183	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1184	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C1185	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1186	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1187	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1188	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1189	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1190	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1191	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1192	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1193	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1194	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1195	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1196	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1197	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1198	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1199	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1201	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1202	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1203	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1204	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1205	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1206	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1207	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1208	1-115-416-11	s CAPACITOR,CERAMIC 1000PF/25V
C1209	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1210	1-104-608-11	s CAPACITOR, ELECT 33MF/6.3V
C1211	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1212	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C1213	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1214	1-126-395-11	s CAPACITOR,ELECT 22MF/16V(CHIP)
C1215	1-115-467-11	s CAPACITOR CERAMIC 0.22MF/10V B
C1216	1-115-412-11	s CAPACITOR,CERAMIC 680PF/25V CH
C1217	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1218	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C1219	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1220	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1221	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1222	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1223	1-126-395-11	s CAPACITOR,ELECT 22MF/16V(CHIP)
C1224	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1225	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C1226	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C1227	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1228	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1229	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1230	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1231	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1232	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1233	1-126-394-11	s CAPACITOR,ELECT 10MF/16V(CHIP)
C1234	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C1235	1-126-395-11	s CAPACITOR,ELECT 22MF/16V(CHIP)

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
C1801	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C1802	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1803	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1804	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1805	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1806	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1807	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C1808	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C1809	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C1810	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1812	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1813	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1814	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1815	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C1816	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1817	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1818	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1819	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1820	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1821	1-162-925-11	s CAPACITOR,CERAMIC 68PF/50V CH
C1822	1-162-925-11	s CAPACITOR,CERAMIC 68PF/50V CH
C1823	1-162-925-11	s CAPACITOR,CERAMIC 68PF/50V CH
C1824	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1825	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1826	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C2001	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C2002	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C2003	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C2004	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C2005	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C2006	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C2007	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C2008	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C2009	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C2010	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C2012	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C2013	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C2014	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C2015	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C2016	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C2017	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C2018	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C2019	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C2020	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C2021	1-162-925-11	s CAPACITOR,CERAMIC 68PF/50V CH
C2022	1-162-925-11	s CAPACITOR,CERAMIC 68PF/50V CH
C2023	1-162-925-11	s CAPACITOR,CERAMIC 68PF/50V CH
C2024	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C2025	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C2026	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C5001	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C5002	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C5003	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C5004	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C5005	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C5006	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C5007	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C5008	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C5009	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
C5010	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C5012	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C5013	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C5014	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C5015	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C5016	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C5017	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C5018	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C5019	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C5020	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C5021	1-162-925-11	s CAPACITOR,CERAMIC 68PF/50V CH
C5022	1-162-925-11	s CAPACITOR,CERAMIC 68PF/50V CH
C5023	1-162-925-11	s CAPACITOR,CERAMIC 68PF/50V CH
C5024	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C5025	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C5026	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C8001	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C8002	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C8003	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C8004	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C8005	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C8006	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C8007	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C8008	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C8009	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C8010	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C8012	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C8013	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C8014	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C8015	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C8016	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C8017	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C8018	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C8019	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C8020	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C8021	1-162-925-11	s CAPACITOR,CERAMIC 68PF/50V CH
C8022	1-162-925-11	s CAPACITOR,CERAMIC 68PF/50V CH
C8023	1-162-925-11	s CAPACITOR,CERAMIC 68PF/50V CH
C8024	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C8025	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C8026	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
CN301	1-564-033-11	o PIN, CONNECTOR 8P
D103	8-719-820-41	s DIODE 1SS302
D104	8-719-041-39	s DIODE KV1470 (5MA)
D105	8-719-941-23	s DIODE DA204U (for PAL only)
D106	8-719-941-23	s DIODE DA204U (for PAL only)
D108	8-719-801-78	s DIODE 1SS184
D109	8-719-801-78	s DIODE 1SS184
D110	8-719-801-78	s DIODE 1SS184
D111	8-719-801-78	s DIODE 1SS184
D112	8-719-801-78	s DIODE 1SS184
D301	8-719-801-78	s DIODE 1SS184
D302	8-719-104-34	s DIODE 1S2836
D303	8-719-104-34	s DIODE 1S2836
D305	8-719-105-57	s DIODE RD3.9M-B1
D306	8-719-157-23	s DIODE RD4.7M-B
D307	8-719-061-62	s DIODE KV1851 (ARI-CAP)

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
D308	8-719-061-62 s	DIODE KV1851 (ARI-CAP)
D309	8-719-024-81 s	DIODE 1SS300-TE85L
D403	8-719-820-41 s	DIODE 1SS302
D404	8-719-041-39 s	DIODE KV1470 (5MA)
D405	8-719-941-23 s	DIODE DA204U (for PAL only)
D406	8-719-941-23 s	DIODE DA204U (for PAL only)
D407	8-719-801-78 s	DIODE 1SS184
D408	8-719-801-78 s	DIODE 1SS184
D409	8-719-801-78 s	DIODE 1SS184
D410	8-719-801-78 s	DIODE 1SS184
D411	8-719-801-78 s	DIODE 1SS184
D601	8-719-801-78 s	DIODE 1SS184
D602	8-719-104-34 s	DIODE 1S2836
D603	8-719-104-34 s	DIODE 1S2836
D605	8-719-105-57 s	DIODE RD3.9M-B1
D606	8-719-157-23 s	DIODE RD4.7M-B
D607	8-719-061-62 s	DIODE KV1851 (ARI-CAP)
D608	8-719-061-62 s	DIODE KV1851 (ARI-CAP)
D609	8-719-024-81 s	DIODE 1SS300-TE85L
D703	8-719-820-41 s	DIODE 1SS302
D704	8-719-041-39 s	DIODE KV1470 (5MA)
D705	8-719-941-23 s	DIODE DA204U (for PAL only)
D706	8-719-941-23 s	DIODE DA204U (for PAL only)
D707	8-719-801-78 s	DIODE 1SS184
D708	8-719-801-78 s	DIODE 1SS184
D709	8-719-801-78 s	DIODE 1SS184
D710	8-719-801-78 s	DIODE 1SS184
D711	8-719-801-78 s	DIODE 1SS184
D901	8-719-801-78 s	DIODE 1SS184
D902	8-719-104-34 s	DIODE 1S2836
D903	8-719-104-34 s	DIODE 1S2836
D905	8-719-105-57 s	DIODE RD3.9M-B1
D906	8-719-157-23 s	DIODE RD4.7M-B
D907	8-719-061-62 s	DIODE KV1851 (ARI-CAP)
D908	8-719-061-62 s	DIODE KV1851 (ARI-CAP)
D909	8-719-024-81 s	DIODE 1SS300-TE85L
D1003	8-719-820-41 s	DIODE 1SS302
D1004	8-719-041-39 s	DIODE KV1470 (5MA)
D1005	8-719-941-23 s	DIODE DA204U (for PAL only)
D1006	8-719-941-23 s	DIODE DA204U (for PAL only)
D1007	8-719-801-78 s	DIODE 1SS184
D1008	8-719-801-78 s	DIODE 1SS184
D1009	8-719-801-78 s	DIODE 1SS184
D1010	8-719-801-78 s	DIODE 1SS184
D1011	8-719-801-78 s	DIODE 1SS184
D1201	8-719-801-78 s	DIODE 1SS184
D1202	8-719-104-34 s	DIODE 1S2836
D1203	8-719-104-34 s	DIODE 1S2836
D1205	8-719-105-57 s	DIODE RD3.9M-B1
D1206	8-719-157-23 s	DIODE RD4.7M-B
D1207	8-719-061-62 s	DIODE KV1851 (ARI-CAP)
D1208	8-719-061-62 s	DIODE KV1851 (ARI-CAP)
D1209	8-719-024-81 s	DIODE 1SS300-TE85L
F1701	Δ 1-576-329-11 s	FUSE CHIP 10A/125V (6125)
FL101	1-233-614-11 s	FILTER, LOW PASS
FL201	1-233-614-11 s	FILTER, LOW PASS
FL202	1-233-598-11 s	FILTER, LOW PASS (for NTSC)
	1-233-599-11 s	FILTER, LOW PASS (for PAL)

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
FL203	1-233-598-11 s	FILTER, LOW PASS (for NTSC)
	1-233-599-11 s	FILTER, LOW PASS (for PAL)
FL401	1-233-614-11 s	FILTER, LOW PASS
FL501	1-233-614-11 s	FILTER, LOW PASS
FL502	1-233-598-11 s	FILTER, LOW PASS (for NTSC)
	1-233-599-11 s	FILTER, LOW PASS (for PAL)
FL503	1-233-598-11 s	FILTER, LOW PASS (for NTSC)
	1-233-599-11 s	FILTER, LOW PASS (for PAL)
FL701	1-233-614-11 s	FILTER, LOW PASS
FL801	1-233-614-11 s	FILTER, LOW PASS
FL802	1-233-598-11 s	FILTER, LOW PASS (for NTSC)
	1-233-599-11 s	FILTER, LOW PASS (for PAL)
FL803	1-233-598-11 s	FILTER, LOW PASS (for NTSC)
	1-233-599-11 s	FILTER, LOW PASS (for PAL)
FL1001	1-233-614-11 s	FILTER, LOW PASS
FL1101	1-233-614-11 s	FILTER, LOW PASS
FL1102	1-233-598-11 s	FILTER, LOW PASS (for NTSC)
	1-233-599-11 s	FILTER, LOW PASS (for PAL)
FL1103	1-233-598-11 s	FILTER, LOW PASS (for NTSC)
	1-233-599-11 s	FILTER, LOW PASS (for PAL)
IC101	8-759-082-61 s	IC TC4W53FU
IC102	8-759-058-58 s	IC TC7S04FU-TE85R
IC103	8-759-082-61 s	IC TC4W53FU
IC105	8-759-533-83 s	IC AD8011AR-REEL
IC106	8-759-058-58 s	IC TC7S04FU-TE85R
IC107	8-759-520-55 s	IC CXD8243AM
IC108	8-759-184-64 s	IC TC4W66FU
IC109	8-759-669-74 s	IC TL084CPWR-12
IC110	8-752-052-82 s	IC CXA1432M
IC111	8-759-573-91 s	IC AD8055ART-REEL7
IC201	8-759-466-27 s	IC LMC60321MX
IC202	8-759-664-23 s	IC ADC10321CIVT
IC203	8-759-456-03 s	IC M66256GP (E2)
IC204	8-759-456-03 s	IC M66256GP (E2)
IC205	8-759-456-03 s	IC M66256GP (E2)
IC206	8-759-513-76 s	IC CXD8161AQ
IC207	8-752-338-46 s	IC CXD1178Q
IC208	8-759-324-03 s	IC HA17431UA(TL)
IC209	8-759-082-61 s	IC TC4W53FU
IC210	8-759-573-91 s	IC AD8055ART-REEL7
IC211	8-759-082-61 s	IC TC4W53FU
IC212	8-759-082-61 s	IC TC4W53FU
IC213	8-759-573-91 s	IC AD8055ART-REEL7
IC214	8-759-573-91 s	IC AD8055ART-REEL7
IC215	8-759-447-90 s	IC TLC5733AIPM
IC216	8-759-324-03 s	IC HA17431UA(TL)
IC217	8-759-524-52 s	IC TC74VHC574FT(EL)
IC218	8-759-524-52 s	IC TC74VHC574FT(EL)
IC219	8-759-524-52 s	IC TC74VHC574FT(EL)
IC220	8-759-050-39 s	IC SN74HC574APW-EL
IC221	8-759-700-78 s	IC NJM082M
IC222	8-759-082-60 s	IC TC7S66FU
IC223	8-759-082-60 s	IC TC7S66FU
IC224	8-759-524-52 s	IC TC74VHC574FT(EL)
IC225	8-759-524-52 s	IC TC74VHC574FT(EL)
IC226	8-759-676-03 o	IC AT27C010-LEVT-V1.00
IC301	8-759-245-45 s	IC TA78L09F
IC302	8-759-533-85 s	IC L88M05T-FA-TL
IC303	8-759-586-98 s	IC NJM79M05DLA(Te1)
IC304	8-759-346-81 s	IC NJM2257M (TE2)

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
IC305	8-759-902-88 s	IC SN74LS123NS
IC306	8-759-907-81 s	IC SN74LS221N(S)
IC307	8-759-700-78 s	IC NJM082M
IC308	8-759-687-54 o	IC ISPLSI2032E-HPLL-V2.00
IC309	8-759-700-78 s	IC NJM082M
IC310	8-759-907-81 s	IC SN74LS221N(S)
IC311	8-759-907-81 s	IC SN74LS221N(S)
IC312	8-759-524-27 s	IC TC74VHC244FT(EL)
IC318	8-759-548-99 s	IC SN74LV08APWR
IC319	8-759-523-95 s	IC TC74VHC74FT(EL)
IC320	8-759-594-71 s	IC TC7SH14FU-TE85R
IC402	8-759-058-58 s	IC TC7S04FU-TE85R
IC406	8-759-058-58 s	IC TC7S04FU-TE85R
IC407	8-759-520-55 s	IC CXD8243AM
IC408	8-759-184-64 s	IC TC4W66FU
IC409	8-759-669-74 s	IC TL084CPWR-12
IC410	8-759-082-61 s	IC TC4W53FU
IC411	8-759-082-61 s	IC TC4W53FU
IC412	8-759-533-83 s	IC AD8011AR-REEL
IC413	8-752-052-82 s	IC CXA1432M
IC414	8-759-573-91 s	IC AD8055ART-REEL7
IC501	8-759-466-27 s	IC LMC60321MX
IC502	8-759-664-23 s	IC ADC10321CIVT
IC503	8-759-456-03 s	IC M66256GP (E2)
IC504	8-759-456-03 s	IC M66256GP (E2)
IC505	8-759-456-03 s	IC M66256GP (E2)
IC506	8-759-513-76 s	IC CXD8161AQ
IC507	8-752-338-46 s	IC CXD1178Q
IC508	8-759-324-03 s	IC HA17431UA(TL)
IC509	8-759-082-61 s	IC TC4W53FU
IC510	8-759-573-91 s	IC AD8055ART-REEL7
IC511	8-759-082-61 s	IC TC4W53FU
IC512	8-759-082-61 s	IC TC4W53FU
IC513	8-759-573-91 s	IC AD8055ART-REEL7
IC514	8-759-573-91 s	IC AD8055ART-REEL7
IC515	8-759-447-90 s	IC TLC5733AIPM
IC516	8-759-324-03 s	IC HA17431UA(TL)
IC517	8-759-524-52 s	IC TC74VHC574FT(EL)
IC518	8-759-524-52 s	IC TC74VHC574FT(EL)
IC519	8-759-524-52 s	IC TC74VHC574FT(EL)
IC520	8-759-050-39 s	IC SN74HC574APW-EL
IC521	8-759-700-78 s	IC NJM082M
IC522	8-759-082-60 s	IC TC7S66FU
IC523	8-759-082-60 s	IC TC7S66FU
IC524	8-759-524-52 s	IC TC74VHC574FT(EL)
IC525	8-759-524-52 s	IC TC74VHC574FT(EL)
IC526	8-759-676-03 o	IC AT27C010-LEVT-V1.00
IC601	8-759-245-45 s	IC TA78L09F
IC602	8-759-533-85 s	IC L88M05T-FA-TL
IC603	8-759-586-98 s	IC NJM79M05DLA(TE1)
IC604	8-759-346-81 s	IC NJM2257M (TE2)
IC605	8-759-902-88 s	IC SN74LS123NS
IC606	8-759-907-81 s	IC SN74LS221N(S)
IC607	8-759-700-78 s	IC NJM082M
IC608	8-759-687-54 o	IC ISPLSI2032E-HPLL-V2.00
IC609	8-759-700-78 s	IC NJM082M
IC610	8-759-907-81 s	IC SN74LS221N(S)
IC611	8-759-907-81 s	IC SN74LS221N(S)
IC612	8-759-524-27 s	IC TC74VHC244FT(EL)

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
IC618	8-759-548-99 s	IC SN74LV08APWR
IC619	8-759-523-95 s	IC TC74VHC74FT(EL)
IC620	8-759-594-71 s	IC TC7SH14FU-TE85R
IC702	8-759-058-58 s	IC TC7S04FU-TE85R
IC706	8-759-058-58 s	IC TC7S04FU-TE85R
IC707	8-759-520-55 s	IC CXD8243AM
IC708	8-759-184-64 s	IC TC4W66FU
IC709	8-759-669-74 s	IC TL084CPWR-12
IC710	8-759-082-61 s	IC TC4W53FU
IC711	8-759-082-61 s	IC TC4W53FU
IC712	8-759-533-83 s	IC AD8011AR-REEL
IC713	8-752-052-82 s	IC CXA1432M
IC714	8-759-573-91 s	IC AD8055ART-REEL7
IC801	8-759-466-27 s	IC LMC60321MX
IC802	8-759-664-23 s	IC ADC10321CIVT
IC803	8-759-456-03 s	IC M66256GP (E2)
IC804	8-759-456-03 s	IC M66256GP (E2)
IC805	8-759-456-03 s	IC M66256GP (E2)
IC806	8-759-513-76 s	IC CXD8161AQ
IC807	8-752-338-46 s	IC CXD1178Q
IC808	8-759-324-03 s	IC HA17431UA(TL)
IC809	8-759-082-61 s	IC TC4W53FU
IC810	8-759-573-91 s	IC AD8055ART-REEL7
IC811	8-759-082-61 s	IC TC4W53FU
IC812	8-759-082-61 s	IC TC4W53FU
IC813	8-759-573-91 s	IC AD8055ART-REEL7
IC814	8-759-573-91 s	IC AD8055ART-REEL7
IC815	8-759-447-90 s	IC TLC5733AIPM
IC816	8-759-324-03 s	IC HA17431UA(TL)
IC817	8-759-524-52 s	IC TC74VHC574FT(EL)
IC818	8-759-524-52 s	IC TC74VHC574FT(EL)
IC819	8-759-524-52 s	IC TC74VHC574FT(EL)
IC820	8-759-050-39 s	IC SN74HC574APW-EL
IC821	8-759-700-78 s	IC NJM082M
IC822	8-759-082-60 s	IC TC7S66FU
IC823	8-759-082-60 s	IC TC7S66FU
IC824	8-759-524-52 s	IC TC74VHC574FT(EL)
IC825	8-759-524-52 s	IC TC74VHC574FT(EL)
IC826	8-759-676-03 o	IC AT27C010-LEVT-V1.00
IC901	8-759-245-45 s	IC TA78L09F
IC902	8-759-533-85 s	IC L88M05T-FA-TL
IC903	8-759-586-98 s	IC NJM79M05DLA(TE1)
IC904	8-759-346-81 s	IC NJM2257M (TE2)
IC905	8-759-902-88 s	IC SN74LS123NS
IC906	8-759-907-81 s	IC SN74LS221N(S)
IC907	8-759-700-78 s	IC NJM082M
IC908	8-759-687-54 o	IC ISPLSI2032E-HPLL-V2.00
IC909	8-759-700-78 s	IC NJM082M
IC910	8-759-907-81 s	IC SN74LS221N(S)
IC911	8-759-907-81 s	IC SN74LS221N(S)
IC912	8-759-524-27 s	IC TC74VHC244FT(EL)
IC918	8-759-548-99 s	IC SN74LV08APWR
IC919	8-759-523-95 s	IC TC74VHC74FT(EL)
IC920	8-759-594-71 s	IC TC7SH14FU-TE85R
IC1002	8-759-058-58 s	IC TC7S04FU-TE85R
IC1006	8-759-058-58 s	IC TC7S04FU-TE85R
IC1007	8-759-520-55 s	IC CXD8243AM
IC1008	8-759-184-64 s	IC TC4W66FU
IC1009	8-759-669-74 s	IC TL084CPWR-12

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
IC1010	8-759-082-61	s IC TC4W53FU
IC1011	8-759-082-61	s IC TC4W53FU
IC1012	8-759-533-83	s IC AD8011AR-REEL
IC1013	8-752-052-82	s IC CXA1432M
IC1014	8-759-573-91	s IC AD8055ART-REEL7
IC1101	8-759-466-27	s IC LMC60321MX
IC1102	8-759-664-23	s IC ADC10321CIVT
IC1103	8-759-456-03	s IC M66256GP (E2)
IC1104	8-759-456-03	s IC M66256GP (E2)
IC1105	8-759-456-03	s IC M66256GP (E2)
IC1106	8-759-513-76	s IC CXD8161AQ
IC1107	8-752-338-46	s IC CXD1178Q
IC1108	8-759-324-03	s IC HA17431UA (TL)
IC1109	8-759-082-61	s IC TC4W53FU
IC1110	8-759-573-91	s IC AD8055ART-REEL7
IC1111	8-759-082-61	s IC TC4W53FU
IC1112	8-759-082-61	s IC TC4W53FU
IC1113	8-759-573-91	s IC AD8055ART-REEL7
IC1114	8-759-573-91	s IC AD8055ART-REEL7
IC1115	8-759-447-90	s IC TLC5733AIPM
IC1116	8-759-324-03	s IC HA17431UA (TL)
IC1117	8-759-524-52	s IC TC74VHC574AFT (EL)
IC1118	8-759-524-52	s IC TC74VHC574AFT (EL)
IC1119	8-759-524-52	s IC TC74VHC574AFT (EL)
IC1120	8-759-050-39	s IC SN74HC574APW-EL
IC1121	8-759-700-78	s IC NJM082M
IC1122	8-759-082-60	s IC TC7S66FU
IC1123	8-759-082-60	s IC TC7S66FU
IC1124	8-759-524-52	s IC TC74VHC574AFT (EL)
IC1125	8-759-524-52	s IC TC74VHC574AFT (EL)
IC1126	8-759-676-03	o IC AT27C010-LEVT-V1.00
IC1201	8-759-245-45	s IC TA78L09F
IC1202	8-759-533-85	s IC L88M05T-FA-TL
IC1203	8-759-586-98	s IC NJM79M05DLA (TE1)
IC1204	8-759-346-81	s IC NJM2257M (TE2)
IC1205	8-759-902-88	s IC SN74LS123NS
IC1206	8-759-907-81	s IC SN74LS221N(S)
IC1207	8-759-700-78	s IC NJM082M
IC1208	8-759-687-54	o IC ISPLSI2032E-HPLL-V2.00
IC1209	8-759-700-78	s IC NJM082M
IC1210	8-759-907-81	s IC SN74LS221N(S)
IC1211	8-759-907-81	s IC SN74LS221N(S)
IC1212	8-759-524-27	s IC TC74VHC244FT (EL)
IC1218	8-759-548-99	s IC SN74LV08APWR
IC1219	8-759-523-95	s IC TC74VHC74FT (EL)
IC1220	8-759-594-71	s IC TC7SH14FU-TE85R
IC1300	8-759-456-03	s IC M66256GP (E2)
IC1301	8-752-360-44	s IC CXK1203AR
IC1302	8-752-360-44	s IC CXK1203AR
IC1303	8-759-549-22	s IC SN74LV574APWR
IC1304	8-759-549-22	s IC SN74LV574APWR
IC1305	8-759-647-49	s IC AL422B-TEL
IC1306	8-759-647-49	s IC AL422B-TEL
IC1307	8-759-647-49	s IC AL422B-TEL
IC1308	8-759-647-49	s IC AL422B-TEL
IC1309	8-759-490-42	s IC TC74VHCT574AFT (EL)
IC1310	8-759-490-42	s IC TC74VHCT574AFT (EL)
IC1311	8-759-549-22	s IC SN74LV574APWR
IC1312	8-759-491-49	s IC TC74VHCT240AFT (EL)

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
IC1400	8-759-456-03	s IC M66256GP (E2)
IC1401	8-752-360-44	s IC CXK1203AR
IC1402	8-752-360-44	s IC CXK1203AR
IC1403	8-759-549-22	s IC SN74LV574APWR
IC1404	8-759-549-22	s IC SN74LV574APWR
IC1405	8-759-647-49	s IC AL422B-TEL
IC1406	8-759-647-49	s IC AL422B-TEL
IC1407	8-759-647-49	s IC AL422B-TEL
IC1408	8-759-647-49	s IC AL422B-TEL
IC1409	8-759-490-42	s IC TC74VHCT574AFT (EL)
IC1410	8-759-490-42	s IC TC74VHCT574AFT (EL)
IC1411	8-759-549-22	s IC SN74LV574APWR
IC1500	8-759-456-03	s IC M66256GP (E2)
IC1501	8-752-360-44	s IC CXK1203AR
IC1502	8-752-360-44	s IC CXK1203AR
IC1503	8-759-549-22	s IC SN74LV574APWR
IC1504	8-759-549-22	s IC SN74LV574APWR
IC1505	8-759-647-49	s IC AL422B-TEL
IC1506	8-759-647-49	s IC AL422B-TEL
IC1507	8-759-647-49	s IC AL422B-TEL
IC1508	8-759-647-49	s IC AL422B-TEL
IC1509	8-759-490-42	s IC TC74VHCT574AFT (EL)
IC1510	8-759-490-42	s IC TC74VHCT574AFT (EL)
IC1511	8-759-549-22	s IC SN74LV574APWR
IC1600	8-759-456-03	s IC M66256GP (E2)
IC1601	8-752-360-44	s IC CXK1203AR
IC1602	8-752-360-44	s IC CXK1203AR
IC1603	8-759-549-22	s IC SN74LV574APWR
IC1604	8-759-549-22	s IC SN74LV574APWR
IC1605	8-759-647-49	s IC AL422B-TEL
IC1606	8-759-647-49	s IC AL422B-TEL
IC1607	8-759-647-49	s IC AL422B-TEL
IC1608	8-759-647-49	s IC AL422B-TEL
IC1609	8-759-490-42	s IC TC74VHCT574AFT (EL)
IC1610	8-759-490-42	s IC TC74VHCT574AFT (EL)
IC1611	8-759-549-22	s IC SN74LV574APWR
IC1701	8-759-549-20	s IC SN74LV541APWR
IC1702	8-759-549-20	s IC SN74LV541APWR
IC1703	8-759-549-20	s IC SN74LV541APWR
IC1704	8-759-549-15	s IC SN74LV245APWR
IC1706	8-759-549-22	s IC SN74LV574APWR
IC1707	8-759-549-20	s IC SN74LV541APWR
IC1708	8-759-549-15	s IC SN74LV245APWR
IC1709	8-759-549-20	s IC SN74LV541APWR
IC1711	8-759-549-13	s IC SN74LV240APWR
IC1712	8-759-549-22	s IC SN74LV574APWR
IC1713	8-759-549-22	s IC SN74LV574APWR
IC1714	8-759-549-13	s IC SN74LV240APWR
IC1715	8-759-490-41	s IC TC74VHCT541AFT (EL)
IC1716	8-759-490-41	s IC TC74VHCT541AFT (EL)
IC1717	8-759-681-76	o IC EPC2LC20-FSC-V3.00
IC1718	8-759-660-47	s IC EPF10K20TC144-3 (04)
IC1719	8-759-490-41	s IC TC74VHCT541AFT (EL)
IS226	1-540-151-21	s SOCKET, IC
IS526	1-540-151-21	s SOCKET, IC
IS826	1-540-151-21	s SOCKET, IC
IS1126	1-540-151-21	s SOCKET, IC
IS1717	1-251-093-11	s SOCKET, IC

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
L101	1-414-398-11 s	INDUCTOR (SMD) 10UH
L102	1-414-398-11 s	INDUCTOR (SMD) 10UH
L103	1-414-398-11 s	INDUCTOR (SMD) 10UH
L104	1-410-387-11 s	INDUCTOR,CHIP 33UH (3225)
L105	1-414-398-11 s	INDUCTOR (SMD) 10UH
L106	1-410-375-11 s	CHIP INDUCTOR 3.3UH (3225)
L107	1-410-389-31 s	INDUCTOR,CHIP 47UH (3225) (for NTSC)
	1-410-387-11 s	INDUCTOR,CHIP 33UH (3225) (for PAL)
L108	1-410-378-11 s	INDUCTOR,CHIP 5.6UH (3225)
L109	1-410-393-11 s	INDUCTOR,CHIP 100UH (3225)
L110	1-414-398-11 s	INDUCTOR (SMD) 10UH
L112	1-414-404-11 s	INDUCTOR (SMD) 100UH
L113	1-414-404-11 s	INDUCTOR (SMD) 100UH
L114	1-414-398-11 s	INDUCTOR (SMD) 10UH
L115	1-414-398-11 s	INDUCTOR (SMD) 10UH
L201	1-414-398-11 s	INDUCTOR (SMD) 10UH
L202	1-414-398-11 s	INDUCTOR (SMD) 10UH
L203	1-414-398-11 s	INDUCTOR (SMD) 10UH
L204	1-412-010-41 s	CHIP INDUCTOR 22UH (2012)
L205	1-412-010-41 s	CHIP INDUCTOR 22UH (2012)
L206	1-410-373-31 s	CHIP INDUCTOR 2.2UH (3225)
L207	1-414-398-11 s	INDUCTOR (SMD) 10UH
L208	1-414-398-11 s	INDUCTOR (SMD) 10UH
L301	1-414-398-11 s	INDUCTOR (SMD) 10UH
L302	1-414-398-11 s	INDUCTOR (SMD) 10UH
L303	1-410-369-11 s	INDUCTOR,CHIP 1UH (3225)
L401	1-414-398-11 s	INDUCTOR (SMD) 10UH
L402	1-414-398-11 s	INDUCTOR (SMD) 10UH
L403	1-414-398-11 s	INDUCTOR (SMD) 10UH
L404	1-410-387-11 s	INDUCTOR,CHIP 33UH (3225)
L406	1-410-375-11 s	CHIP INDUCTOR 3.3UH (3225)
L407	1-410-389-31 s	INDUCTOR,CHIP 47UH (3225) (for NTSC)
	1-410-387-11 s	INDUCTOR,CHIP 33UH (3225) (for PAL)
L408	1-410-378-11 s	INDUCTOR,CHIP 5.6UH (3225)
L412	1-414-404-11 s	INDUCTOR (SMD) 100UH
L413	1-414-404-11 s	INDUCTOR (SMD) 100UH
L414	1-414-398-11 s	INDUCTOR (SMD) 10UH
L415	1-414-398-11 s	INDUCTOR (SMD) 10UH
L416	1-410-393-11 s	INDUCTOR,CHIP 100UH (3225)
L417	1-414-398-11 s	INDUCTOR (SMD) 10UH
L418	1-414-398-11 s	INDUCTOR (SMD) 10UH
L501	1-414-398-11 s	INDUCTOR (SMD) 10UH
L502	1-414-398-11 s	INDUCTOR (SMD) 10UH
L503	1-414-398-11 s	INDUCTOR (SMD) 10UH
L504	1-412-010-41 s	CHIP INDUCTOR 22UH (2012)
L505	1-412-010-41 s	CHIP INDUCTOR 22UH (2012)
L506	1-410-373-31 s	CHIP INDUCTOR 2.2UH (3225)
L507	1-414-398-11 s	INDUCTOR (SMD) 10UH
L508	1-414-398-11 s	INDUCTOR (SMD) 10UH
L601	1-414-398-11 s	INDUCTOR (SMD) 10UH
L602	1-414-398-11 s	INDUCTOR (SMD) 10UH
L603	1-410-369-11 s	INDUCTOR,CHIP 1UH (3225)
L701	1-414-398-11 s	INDUCTOR (SMD) 10UH
L702	1-414-398-11 s	INDUCTOR (SMD) 10UH
L704	1-410-387-11 s	INDUCTOR,CHIP 33UH (3225)
L706	1-410-375-11 s	CHIP INDUCTOR 3.3UH (3225)

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
L707	1-410-389-31 s	INDUCTOR,CHIP 47UH (3225) (for NTSC)
	1-410-387-11 s	INDUCTOR,CHIP 33UH (3225) (for PAL)
L708	1-410-378-11 s	INDUCTOR,CHIP 5.6UH (3225)
L712	1-414-404-11 s	INDUCTOR (SMD) 100UH
L713	1-414-404-11 s	INDUCTOR (SMD) 100UH
L714	1-414-398-11 s	INDUCTOR (SMD) 10UH
L715	1-414-398-11 s	INDUCTOR (SMD) 10UH
L716	1-414-398-11 s	INDUCTOR (SMD) 10UH
L717	1-410-393-11 s	INDUCTOR,CHIP 100UH (3225)
L718	1-414-398-11 s	INDUCTOR (SMD) 10UH
L719	1-414-398-11 s	INDUCTOR (SMD) 10UH
L801	1-414-398-11 s	INDUCTOR (SMD) 10UH
L802	1-414-398-11 s	INDUCTOR (SMD) 10UH
L803	1-414-398-11 s	INDUCTOR (SMD) 10UH
L804	1-412-010-41 s	CHIP INDUCTOR 22UH (2012)
L805	1-412-010-41 s	CHIP INDUCTOR 22UH (2012)
L806	1-410-373-31 s	CHIP INDUCTOR 2.2UH (3225)
L807	1-414-398-11 s	INDUCTOR (SMD) 10UH
L808	1-414-398-11 s	INDUCTOR (SMD) 10UH
L901	1-414-398-11 s	INDUCTOR (SMD) 10UH
L902	1-414-398-11 s	INDUCTOR (SMD) 10UH
L903	1-410-369-11 s	INDUCTOR,CHIP 1UH (3225)
L1025	1-414-398-11 s	INDUCTOR (SMD) 10UH
L1026	1-414-398-11 s	INDUCTOR (SMD) 10UH
L1027	1-414-398-11 s	INDUCTOR (SMD) 10UH
L1028	1-414-398-11 s	INDUCTOR (SMD) 10UH
L1029	1-410-375-11 s	CHIP INDUCTOR 3.3UH (3225)
L1030	1-410-389-31 s	INDUCTOR,CHIP 47UH (3225) (for NTSC)
	1-410-387-11 s	INDUCTOR,CHIP 33UH (3225) (for PAL)
L1031	1-410-378-11 s	INDUCTOR,CHIP 5.6UH (3225)
L1032	1-414-404-11 s	INDUCTOR (SMD) 100UH
L1033	1-414-404-11 s	INDUCTOR (SMD) 100UH
L1034	1-414-398-11 s	INDUCTOR (SMD) 10UH
L1035	1-410-387-11 s	INDUCTOR,CHIP 33UH (3225)
L1036	1-414-398-11 s	INDUCTOR (SMD) 10UH
L1037	1-410-393-11 s	INDUCTOR,CHIP 100UH (3225)
L1038	1-414-398-11 s	INDUCTOR (SMD) 10UH
L1101	1-414-398-11 s	INDUCTOR (SMD) 10UH
L1102	1-414-398-11 s	INDUCTOR (SMD) 10UH
L1103	1-414-398-11 s	INDUCTOR (SMD) 10UH
L1104	1-412-010-41 s	CHIP INDUCTOR 22UH (2012)
L1105	1-412-010-41 s	CHIP INDUCTOR 22UH (2012)
L1106	1-410-373-31 s	CHIP INDUCTOR 2.2UH (3225)
L1107	1-414-398-11 s	INDUCTOR (SMD) 10UH
L1108	1-414-398-11 s	INDUCTOR (SMD) 10UH
L1201	1-414-398-11 s	INDUCTOR (SMD) 10UH
L1202	1-414-398-11 s	INDUCTOR (SMD) 10UH
L1203	1-410-369-11 s	INDUCTOR,CHIP 1UH (3225)
L1701	1-412-522-31 s	MICRO INDUCTOR 5.6UH
L1703	1-414-398-11 s	INDUCTOR (SMD) 10UH
L1704	1-412-056-11 s	INDUCTOR 4.7UH (3225)
L1705	1-412-056-11 s	INDUCTOR 4.7UH (3225)
LV301	1-410-286-11 s	VARIABLE INDUCTOR 1.0UH
LV601	1-410-286-11 s	VARIABLE INDUCTOR 1.0UH
LV901	1-410-286-11 s	VARIABLE INDUCTOR 1.0UH
LV1201	1-410-286-11 s	VARIABLE INDUCTOR 1.0UH

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
PS1703	Δ 1-533-282-21	s CIRCUIT PROTECTOR 2A (3225)
PS1704	Δ 1-533-282-21	s CIRCUIT PROTECTOR 2A (3225)
PS1705	Δ 1-533-282-21	s CIRCUIT PROTECTOR 2A (3225)
Q101	8-729-117-32	s TRANSISTOR 2SC4177
Q103	8-729-117-32	s TRANSISTOR 2SC4177
Q104	8-729-117-32	s TRANSISTOR 2SC4177
Q105	8-729-013-28	s TRANSISTOR HN1B01FU-TE85R
Q106	8-729-013-28	s TRANSISTOR HN1B01FU-TE85R
Q107	8-729-013-28	s TRANSISTOR HN1B01FU-TE85R
Q108	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q110	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q112	8-729-117-32	s TRANSISTOR 2SC4177
Q113	8-729-013-28	s TRANSISTOR HN1B01FU-TE85R
Q114	8-729-117-32	s TRANSISTOR 2SC4177
Q115	8-729-117-32	s TRANSISTOR 2SC4177
Q118	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q119	8-729-117-32	s TRANSISTOR 2SC4177
Q120	8-729-028-85	s TRANSISTOR DTA124XUA-T106
Q201	8-729-117-32	s TRANSISTOR 2SC4177
Q202	8-729-117-32	s TRANSISTOR 2SC4177
Q203	8-729-117-32	s TRANSISTOR 2SC4177
Q204	8-729-117-32	s TRANSISTOR 2SC4177
Q205	8-729-117-32	s TRANSISTOR 2SC4177
Q206	8-729-117-32	s TRANSISTOR 2SC4177
Q207	8-729-117-32	s TRANSISTOR 2SC4177
Q208	8-729-117-32	s TRANSISTOR 2SC4177
Q209	8-729-117-32	s TRANSISTOR 2SC4177
Q210	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q301	8-729-427-70	s TRANSISTOR XP4401
Q302	8-729-117-32	s TRANSISTOR 2SC4177
Q303	8-729-117-32	s TRANSISTOR 2SC4177
Q304	8-729-116-66	s TRANSISTOR 2SK508-K53
Q305	8-729-117-32	s TRANSISTOR 2SC4177
Q401	8-729-117-32	s TRANSISTOR 2SC4177
Q403	8-729-117-32	s TRANSISTOR 2SC4177
Q404	8-729-117-32	s TRANSISTOR 2SC4177
Q408	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q410	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q412	8-729-117-32	s TRANSISTOR 2SC4177
Q414	8-729-117-32	s TRANSISTOR 2SC4177
Q415	8-729-117-32	s TRANSISTOR 2SC4177
Q416	8-729-013-28	s TRANSISTOR HN1B01FU-TE85R
Q417	8-729-013-28	s TRANSISTOR HN1B01FU-TE85R
Q418	8-729-013-28	s TRANSISTOR HN1B01FU-TE85R
Q419	8-729-013-28	s TRANSISTOR HN1B01FU-TE85R
Q420	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q421	8-729-117-32	s TRANSISTOR 2SC4177
Q422	8-729-028-85	s TRANSISTOR DTA124XUA-T106
Q501	8-729-117-32	s TRANSISTOR 2SC4177
Q502	8-729-117-32	s TRANSISTOR 2SC4177
Q503	8-729-117-32	s TRANSISTOR 2SC4177
Q504	8-729-117-32	s TRANSISTOR 2SC4177
Q505	8-729-117-32	s TRANSISTOR 2SC4177
Q506	8-729-117-32	s TRANSISTOR 2SC4177
Q507	8-729-117-32	s TRANSISTOR 2SC4177
Q508	8-729-117-32	s TRANSISTOR 2SC4177
Q509	8-729-117-32	s TRANSISTOR 2SC4177
Q510	8-729-140-63	s TRANSISTOR 2SA1611-M5M6

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
Q601	8-729-427-70	s TRANSISTOR XP4401
Q602	8-729-117-32	s TRANSISTOR 2SC4177
Q603	8-729-117-32	s TRANSISTOR 2SC4177
Q604	8-729-116-66	s TRANSISTOR 2SK508-K53
Q605	8-729-117-32	s TRANSISTOR 2SC4177
Q701	8-729-117-32	s TRANSISTOR 2SC4177
Q703	8-729-117-32	s TRANSISTOR 2SC4177
Q704	8-729-117-32	s TRANSISTOR 2SC4177
Q708	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q710	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q712	8-729-117-32	s TRANSISTOR 2SC4177
Q714	8-729-117-32	s TRANSISTOR 2SC4177
Q715	8-729-117-32	s TRANSISTOR 2SC4177
Q716	8-729-013-28	s TRANSISTOR HN1B01FU-TE85R
Q717	8-729-013-28	s TRANSISTOR HN1B01FU-TE85R
Q718	8-729-013-28	s TRANSISTOR HN1B01FU-TE85R
Q719	8-729-013-28	s TRANSISTOR HN1B01FU-TE85R
Q720	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q721	8-729-117-32	s TRANSISTOR 2SC4177
Q722	8-729-028-85	s TRANSISTOR DTA124XUA-T106
Q801	8-729-117-32	s TRANSISTOR 2SC4177
Q802	8-729-117-32	s TRANSISTOR 2SC4177
Q803	8-729-117-32	s TRANSISTOR 2SC4177
Q804	8-729-117-32	s TRANSISTOR 2SC4177
Q805	8-729-117-32	s TRANSISTOR 2SC4177
Q806	8-729-117-32	s TRANSISTOR 2SC4177
Q807	8-729-117-32	s TRANSISTOR 2SC4177
Q808	8-729-117-32	s TRANSISTOR 2SC4177
Q809	8-729-117-32	s TRANSISTOR 2SC4177
Q810	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q901	8-729-427-70	s TRANSISTOR XP4401
Q902	8-729-117-32	s TRANSISTOR 2SC4177
Q903	8-729-117-32	s TRANSISTOR 2SC4177
Q904	8-729-116-66	s TRANSISTOR 2SK508-K53
Q905	8-729-117-32	s TRANSISTOR 2SC4177
Q1001	8-729-117-32	s TRANSISTOR 2SC4177
Q1003	8-729-117-32	s TRANSISTOR 2SC4177
Q1004	8-729-117-32	s TRANSISTOR 2SC4177
Q1008	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q1010	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q1012	8-729-117-32	s TRANSISTOR 2SC4177
Q1014	8-729-117-32	s TRANSISTOR 2SC4177
Q1015	8-729-117-32	s TRANSISTOR 2SC4177
Q1016	8-729-013-28	s TRANSISTOR HN1B01FU-TE85R
Q1017	8-729-013-28	s TRANSISTOR HN1B01FU-TE85R
Q1018	8-729-013-28	s TRANSISTOR HN1B01FU-TE85R
Q1019	8-729-013-28	s TRANSISTOR HN1B01FU-TE85R
Q1020	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q1021	8-729-117-32	s TRANSISTOR 2SC4177
Q1022	8-729-028-85	s TRANSISTOR DTA124XUA-T106
Q1101	8-729-117-32	s TRANSISTOR 2SC4177
Q1102	8-729-117-32	s TRANSISTOR 2SC4177
Q1103	8-729-117-32	s TRANSISTOR 2SC4177
Q1104	8-729-117-32	s TRANSISTOR 2SC4177
Q1105	8-729-117-32	s TRANSISTOR 2SC4177
Q1106	8-729-117-32	s TRANSISTOR 2SC4177
Q1107	8-729-117-32	s TRANSISTOR 2SC4177
Q1108	8-729-117-32	s TRANSISTOR 2SC4177
Q1109	8-729-117-32	s TRANSISTOR 2SC4177

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
Q1110	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q1201	8-729-427-70	s TRANSISTOR XP4401
Q1202	8-729-117-32	s TRANSISTOR 2SC4177
Q1203	8-729-117-32	s TRANSISTOR 2SC4177
Q1204	8-729-116-66	s TRANSISTOR 2SK508-K53
Q1205	8-729-117-32	s TRANSISTOR 2SC4177
R101	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R102	1-211-990-11	s RESISTOR,CHIP 75 1/16W (1608)
R103	1-211-969-11	s RESISTOR,CHIP 10 1/16W (1608)
R104	1-211-990-11	s RESISTOR,CHIP 75 1/16W (1608)
R105	1-211-990-11	s RESISTOR,CHIP 75 1/16W (1608)
R106	1-218-841-11	s RESISTOR,CHIP 560 1/16W (1608)
R107	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R108	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R109	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R110	1-218-849-11	s RESISTOR,CHIP 1.2K 1/16W(1608) (for NTSC)
	1-218-853-11	s RESISTOR,CHIP 1.8K 1/16W(1608) (for PAL)
R111	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R112	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R113	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R114	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R115	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R116	1-218-869-11	s RESISTOR,CHIP 8.2K 1/16W(1608)
R117	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R118	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R119	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R120	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R121	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R122	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R123	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R124	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R125	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R126	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R127	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R128	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R129	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R130	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R131	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
R132	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R133	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R134	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R135	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R136	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R137	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R138	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R139	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R140	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R141	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R142	1-218-843-11	s RESISTOR,CHIP 680 1/16W (1608)
R143	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R144	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R145	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R146	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R147	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R148	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R149	1-218-835-11	s RESISTOR,CHIP 330 1/16W (1608)
R150	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
R151	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R152	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R153	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R154	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R155	1-218-915-11	s RESISTOR,CHIP 680K 1/16W(1608) (for PAL only)
R156	1-218-907-11	s RESISTOR,CHIP 330K 1/16W(1608) (for NTSC)
	1-218-915-11	s RESISTOR,CHIP 680K 1/16W(1608) (for PAL)
R157	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R158	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R159	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R160	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R161	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R162	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608) (for NTSC)
	1-218-903-11	s RESISTOR,CHIP 220K 1/16W(1608) (for PAL)
R163	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
R164	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R165	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R166	1-218-907-11	s RESISTOR,CHIP 330K 1/16W(1608)
R167	1-218-903-11	s RESISTOR,CHIP 220K 1/16W(1608)
R169	1-218-883-11	s RESISTOR,CHIP 33K 1/16W (1608)
R170	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608) (for PAL only)
R171	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R172	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R173	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R174	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R175	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R176	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R177	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R178	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R179	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R180	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R181	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R182	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R183	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R184	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R185	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R186	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R187	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R188	1-218-851-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R189	1-218-834-11	s RESISTOR,CHIP 300 1/16W (1608)
R190	1-218-837-11	s RESISTOR,CHIP 390 1/16W (1608)
R191	1-218-843-11	s RESISTOR,CHIP 680 1/16W (1608)
R192	1-218-867-11	s RESISTOR,CHIP 6.8K 1/16W(1608)
R193	1-218-878-11	s RESISTOR,CHIP 20K 1/16W (1608)
R194	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
R196	1-218-885-11	s RESISTOR,CHIP 39K 1/16W (1608)
R197	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R198	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R199	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R201	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R202	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R203	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R204	1-218-873-11	s RESISTOR,CHIP 12K 1/16W (1608)
R205	1-218-875-11	s RESISTOR,CHIP 15K 1/16W (1608)

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
R206	1-218-857-11	s RESISTOR,CHIP 2.7K 1/16W(1608)
R207	1-218-861-11	s RESISTOR,CHIP 3.9K 1/16W(1608)
R208	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R210	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R211	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R212	1-218-860-11	s RESISTOR,CHIP 3.6K 1/16W(1608)
R213	1-218-849-11	s RESISTOR,CHIP 1.2K 1/16W(1608)
R214	1-218-841-11	s RESISTOR,CHIP 560 1/16W (1608)
R215	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R216	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R217	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R218	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R219	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R220	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R221	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R222	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R223	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R224	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R225	1-218-854-11	s RESISTOR,CHIP 2K 1/16W (1608)
R226	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R227	1-218-851-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R228	1-218-879-11	s RESISTOR,CHIP 22K 1/16W (1608)
R229	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R230	1-218-834-11	s RESISTOR,CHIP 300 1/16W (1608)
R231	1-218-835-11	s RESISTOR,CHIP 330 1/16W (1608)
R232	1-218-835-11	s RESISTOR,CHIP 330 1/16W (1608)
R233	1-218-835-11	s RESISTOR,CHIP 330 1/16W (1608)
R234	1-218-840-11	s RESISTOR,CHIP 510 1/16W (1608)
R235	1-218-840-11	s RESISTOR,CHIP 510 1/16W (1608)
R236	1-218-864-11	s RESISTOR,CHIP 5.1K 1/16W(1608)
R237	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R238	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R239	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R240	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R241	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608) (for NTSC only)
R242	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R243	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R244	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R245	1-218-853-11	s RESISTOR,CHIP 1.8K 1/16W(1608)
R246	1-218-853-11	s RESISTOR,CHIP 1.8K 1/16W(1608)
R247	1-218-834-11	s RESISTOR,CHIP 300 1/16W (1608)
R248	1-218-845-11	s RESISTOR,CHIP 820 1/16W (1608)
R249	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R251	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R252	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R253	1-218-841-11	s RESISTOR,CHIP 560 1/16W (1608)
R254	1-218-841-11	s RESISTOR,CHIP 560 1/16W (1608)
R255	1-218-845-11	s RESISTOR,CHIP 820 1/16W (1608)
R256	1-218-845-11	s RESISTOR,CHIP 820 1/16W (1608)
R257	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R258	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R259	1-218-875-11	s RESISTOR,CHIP 15K 1/16W (1608)
R260	1-218-875-11	s RESISTOR,CHIP 15K 1/16W (1608)
R261	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R262	1-218-875-11	s RESISTOR,CHIP 15K 1/16W (1608)
R263	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R264	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R265	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
R266	1-218-864-11	s RESISTOR,CHIP 5.1K 1/16W(1608)
R267	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R268	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R269	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R270	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R271	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R272	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R273	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R274	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R275	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R276	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R277	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R278	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R279	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R280	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R281	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R282	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R283	1-218-827-11	s RESISTOR,CHIP 150 1/16W (1608)
R284	1-218-827-11	s RESISTOR,CHIP 150 1/16W (1608)
R285	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R286	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R287	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R288	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R289	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R290	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R291	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R292	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R293	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R294	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R295	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R296	1-218-865-11	s RESISTOR,CHIP 5.6K 1/16W(1608)
R297	1-218-879-11	s RESISTOR,CHIP 22K 1/16W (1608)
R298	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R299	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R301	1-218-914-11	s RESISTOR CHIP 620K 1/16W(1608)
R302	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R303	1-218-890-11	s RESISTOR, CHIP 62K 1/16W(1608)
R304	1-218-853-11	s RESISTOR,CHIP 1.8K 1/16W(1608)
R305	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
R306	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R307	1-218-893-11	s RESISTOR, CHIP 82K 1/16W(1608)
R308	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R309	1-218-849-11	s RESISTOR,CHIP 1.2K 1/16W(1608)
R310	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R311	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R312	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R313	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R314	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R315	1-218-875-11	s RESISTOR,CHIP 15K 1/16W (1608)
R316	1-218-861-11	s RESISTOR,CHIP 3.9K 1/16W(1608)
R317	1-218-903-11	s RESISTOR,CHIP 220K 1/16W(1608)
R318	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R319	1-218-897-11	s RESISTOR,CHIP 120K 1/16W(1608) (for NTSC) (for PAL)
R320	1-218-903-11	s RESISTOR,CHIP 220K 1/16W(1608)
R321	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R322	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)

(VIP-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
R323	1-218-877-11	s RESISTOR,CHIP 18K 1/16W (1608)
R324	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R327	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R328	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
R329	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R330	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R331	1-218-879-11	s RESISTOR,CHIP 22K 1/16W (1608)
R332	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R333	1-218-883-11	s RESISTOR,CHIP 33K 1/16W (1608)
R334	1-218-883-11	s RESISTOR,CHIP 33K 1/16W (1608)
R335	1-218-875-11	s RESISTOR,CHIP 15K 1/16W (1608)
R336	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R337	1-218-903-11	s RESISTOR,CHIP 220K 1/16W(1608)
R338	1-218-907-11	s RESISTOR,CHIP 330K 1/16W(1608)
R339	1-218-875-11	s RESISTOR,CHIP 15K 1/16W (1608)
R340	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R341	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R342	1-218-903-11	s RESISTOR,CHIP 220K 1/16W(1608)
R343	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
R347	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R348	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R349	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R350	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R353	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R354	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R356	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R401	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R402	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R403	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R404	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R405	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R406	1-218-841-11	s RESISTOR,CHIP 560 1/16W (1608)
R407	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R408	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R409	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R410	1-218-849-11	s RESISTOR,CHIP 1.2K 1/16W(1608)
		(for NTSC)
	1-218-853-11	s RESISTOR,CHIP 1.8K 1/16W(1608)
		(for PAL)
R411	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R412	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R413	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R414	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R415	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R416	1-218-869-11	s RESISTOR,CHIP 8.2K 1/16W(1608)
R417	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R418	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R419	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R420	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R421	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R422	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R423	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R424	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R425	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R426	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R427	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R428	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
R429	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R430	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)

(VIP-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
R431	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
R433	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R434	1-218-885-11	s RESISTOR,CHIP 39K 1/16W (1608)
R435	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R436	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R437	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R438	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R439	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R440	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R441	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R442	1-218-843-11	s RESISTOR,CHIP 680 1/16W (1608)
R443	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R444	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R445	1-218-834-11	s RESISTOR,CHIP 300 1/16W (1608)
R446	1-218-851-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R447	1-218-835-11	s RESISTOR,CHIP 330 1/16W (1608)
R448	1-218-867-11	s RESISTOR,CHIP 6.8K 1/16W(1608)
R449	1-218-837-11	s RESISTOR,CHIP 390 1/16W (1608)
R450	1-218-843-11	s RESISTOR,CHIP 680 1/16W (1608)
R451	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R452	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R453	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R454	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R455	1-218-915-11	s RESISTOR,CHIP 680K 1/16W(1608)
		(for PAL only)
R456	1-218-907-11	s RESISTOR,CHIP 330K 1/16W(1608)
		(for NTSC)
	1-218-915-11	s RESISTOR,CHIP 680K 1/16W(1608)
		(for PAL)
R457	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R458	1-218-878-11	s RESISTOR,CHIP 20K 1/16W (1608)
R459	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R460	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R461	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R462	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
		(for NTSC)
	1-218-903-11	s RESISTOR,CHIP 220K 1/16W(1608)
		(for PAL)
R463	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
R464	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R465	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R466	1-218-907-11	s RESISTOR,CHIP 330K 1/16W(1608)
R467	1-218-903-11	s RESISTOR,CHIP 220K 1/16W(1608)
R468	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R469	1-218-883-11	s RESISTOR,CHIP 33K 1/16W (1608)
R470	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
		(for PAL only)
R471	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R472	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R473	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R474	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R475	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R476	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R477	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R478	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R479	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R480	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R481	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R482	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R483	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
R484	1-211-990-11	s RESISTOR,CHIP 75 1/16W (1608)
R485	1-211-969-11	s RESISTOR,CHIP 10 1/16W (1608)
R486	1-211-990-11	s RESISTOR,CHIP 75 1/16W (1608)
R487	1-211-990-11	s RESISTOR,CHIP 75 1/16W (1608)
R488	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R489	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R490	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R491	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R492	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R493	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R494	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R495	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R496	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R497	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R498	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R499	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R501	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R502	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R503	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R504	1-218-873-11	s RESISTOR,CHIP 12K 1/16W (1608)
R505	1-218-875-11	s RESISTOR,CHIP 15K 1/16W (1608)
R506	1-218-857-11	s RESISTOR,CHIP 2.7K 1/16W(1608)
R507	1-218-861-11	s RESISTOR,CHIP 3.9K 1/16W(1608)
R508	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R510	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R511	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R512	1-218-860-11	s RESISTOR,CHIP 3.6K 1/16W(1608)
R513	1-218-849-11	s RESISTOR,CHIP 1.2K 1/16W(1608)
R514	1-218-841-11	s RESISTOR,CHIP 560 1/16W (1608)
R515	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R516	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R517	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R518	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R519	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R520	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R521	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R522	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R523	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R524	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R525	1-218-854-11	s RESISTOR,CHIP 2K 1/16W (1608)
R526	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R527	1-218-851-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R528	1-218-879-11	s RESISTOR,CHIP 22K 1/16W (1608)
R529	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R530	1-218-834-11	s RESISTOR,CHIP 300 1/16W (1608)
R531	1-218-835-11	s RESISTOR,CHIP 330 1/16W (1608)
R532	1-218-835-11	s RESISTOR,CHIP 330 1/16W (1608)
R533	1-218-835-11	s RESISTOR,CHIP 330 1/16W (1608)
R534	1-218-840-11	s RESISTOR,CHIP 510 1/16W (1608)
R535	1-218-840-11	s RESISTOR,CHIP 510 1/16W (1608)
R536	1-218-864-11	s RESISTOR,CHIP 5.1K 1/16W(1608)
R537	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R538	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R539	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R540	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R541	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608) (for NTSC only)
R542	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R543	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
R544	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R545	1-218-853-11	s RESISTOR,CHIP 1.8K 1/16W(1608)
R546	1-218-853-11	s RESISTOR,CHIP 1.8K 1/16W(1608)
R547	1-218-834-11	s RESISTOR,CHIP 300 1/16W (1608)
R548	1-218-845-11	s RESISTOR,CHIP 820 1/16W (1608)
R549	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R551	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R552	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R553	1-218-841-11	s RESISTOR,CHIP 560 1/16W (1608)
R554	1-218-841-11	s RESISTOR,CHIP 560 1/16W (1608)
R555	1-218-845-11	s RESISTOR,CHIP 820 1/16W (1608)
R556	1-218-845-11	s RESISTOR,CHIP 820 1/16W (1608)
R557	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R558	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R559	1-218-875-11	s RESISTOR,CHIP 15K 1/16W (1608)
R560	1-218-875-11	s RESISTOR,CHIP 15K 1/16W (1608)
R561	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R562	1-218-875-11	s RESISTOR,CHIP 15K 1/16W (1608)
R563	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R564	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R565	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R566	1-218-864-11	s RESISTOR,CHIP 5.1K 1/16W(1608)
R567	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R568	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R569	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R570	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R571	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R572	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R573	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R574	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R575	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R576	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R577	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R578	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R579	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R580	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R581	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R582	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R583	1-218-827-11	s RESISTOR,CHIP 150 1/16W (1608)
R584	1-218-827-11	s RESISTOR,CHIP 150 1/16W (1608)
R585	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R586	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R587	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R588	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R589	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R590	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R591	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R592	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R593	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R594	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R595	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R596	1-218-865-11	s RESISTOR,CHIP 5.6K 1/16W(1608)
R597	1-218-879-11	s RESISTOR,CHIP 22K 1/16W (1608)
R598	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R599	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R601	1-218-914-11	s RESISTOR CHIP 620K 1/16W(1608)
R602	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R603	1-218-890-11	s RESISTOR, CHIP 62K 1/16W(1608)
R604	1-218-853-11	s RESISTOR,CHIP 1.8K 1/16W(1608)

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
R605	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
R606	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R607	1-218-893-11	s RESISTOR,CHIP 82K 1/16W(1608)
R608	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R609	1-218-849-11	s RESISTOR,CHIP 1.2K 1/16W(1608)
R610	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R611	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R612	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R613	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R614	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R615	1-218-875-11	s RESISTOR,CHIP 15K 1/16W (1608)
R616	1-218-861-11	s RESISTOR,CHIP 3.9K 1/16W(1608)
R617	1-218-903-11	s RESISTOR,CHIP 220K 1/16W(1608)
R618	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R619	1-218-897-11	s RESISTOR,CHIP 120K 1/16W(1608)
		(for NTSC)
	1-218-901-11	s RESISTOR,CHIP 180K 1/16W(1608)
		(for PAL)
R620	1-218-903-11	s RESISTOR,CHIP 220K 1/16W(1608)
R621	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R622	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R623	1-218-877-11	s RESISTOR,CHIP 18K 1/16W (1608)
R624	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R627	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R628	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
R629	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R630	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R631	1-218-879-11	s RESISTOR,CHIP 22K 1/16W (1608)
R632	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R633	1-218-883-11	s RESISTOR,CHIP 33K 1/16W (1608)
R634	1-218-883-11	s RESISTOR,CHIP 33K 1/16W (1608)
R635	1-218-875-11	s RESISTOR,CHIP 15K 1/16W (1608)
R636	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R637	1-218-903-11	s RESISTOR,CHIP 220K 1/16W(1608)
R638	1-218-907-11	s RESISTOR,CHIP 330K 1/16W(1608)
R639	1-218-875-11	s RESISTOR,CHIP 15K 1/16W (1608)
R640	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R641	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R642	1-218-903-11	s RESISTOR,CHIP 220K 1/16W(1608)
R643	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
R647	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R648	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R649	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R650	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R653	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R654	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R656	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R701	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R702	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R703	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R704	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R705	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R706	1-218-841-11	s RESISTOR,CHIP 560 1/16W (1608)
R707	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R708	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R709	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R710	1-218-849-11	s RESISTOR,CHIP 1.2K 1/16W(1608)
		(for NTSC)
	1-218-853-11	s RESISTOR,CHIP 1.8K 1/16W(1608)
		(for PAL)

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
R711	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R712	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R713	1-218-834-11	s RESISTOR,CHIP 300 1/16W (1608)
R714	1-218-851-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R715	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R716	1-218-869-11	s RESISTOR,CHIP 8.2K 1/16W(1608)
R717	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R718	1-218-867-11	s RESISTOR,CHIP 6.8K 1/16W(1608)
R719	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
R721	1-218-885-11	s RESISTOR,CHIP 39K 1/16W (1608)
R722	1-218-878-11	s RESISTOR,CHIP 20K 1/16W (1608)
R723	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R724	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R725	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R726	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R727	1-218-837-11	s RESISTOR,CHIP 390 1/16W (1608)
R728	1-218-843-11	s RESISTOR,CHIP 680 1/16W (1608)
R729	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R730	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R731	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
R732	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R733	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R734	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R735	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R736	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R737	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R738	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R739	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R740	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R741	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R742	1-218-843-11	s RESISTOR,CHIP 680 1/16W (1608)
R743	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R744	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R745	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R746	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R747	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R748	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R749	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R750	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R751	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R752	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R753	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R754	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R755	1-218-915-11	s RESISTOR,CHIP 680K 1/16W(1608)
		(for PAL only)
R756	1-218-907-11	s RESISTOR,CHIP 330K 1/16W(1608)
		(for NTSC)
	1-218-915-11	s RESISTOR,CHIP 680K 1/16W(1608)
		(for PAL)
R757	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R758	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R759	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R760	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R761	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R762	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
		(for NTSC)
	1-218-903-11	s RESISTOR,CHIP 220K 1/16W(1608)
		(for PAL)
R763	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
R764	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
R765	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R766	1-218-907-11	s RESISTOR,CHIP 330K 1/16W(1608)
R767	1-218-903-11	s RESISTOR,CHIP 220K 1/16W(1608)
R768	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R769	1-218-883-11	s RESISTOR,CHIP 33K 1/16W (1608)
R770	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608) (for PAL only)
R771	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R772	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R773	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R774	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R775	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R776	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R777	1-211-990-11	s RESISTOR,CHIP 75 1/16W (1608)
R778	1-211-969-11	s RESISTOR,CHIP 10 1/16W (1608)
R779	1-211-990-11	s RESISTOR,CHIP 75 1/16W (1608)
R780	1-211-990-11	s RESISTOR,CHIP 75 1/16W (1608)
R781	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R782	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R783	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R784	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R785	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R786	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R787	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R788	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R789	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R790	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R791	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R792	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R793	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R794	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R795	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R796	1-218-835-11	s RESISTOR,CHIP 330 1/16W (1608)
R797	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R798	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R799	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R801	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R802	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R803	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R804	1-218-873-11	s RESISTOR,CHIP 12K 1/16W (1608)
R805	1-218-875-11	s RESISTOR,CHIP 15K 1/16W (1608)
R806	1-218-857-11	s RESISTOR,CHIP 2.7K 1/16W(1608)
R807	1-218-861-11	s RESISTOR,CHIP 3.9K 1/16W(1608)
R808	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R810	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R811	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R812	1-218-860-11	s RESISTOR,CHIP 3.6K 1/16W(1608)
R813	1-218-849-11	s RESISTOR,CHIP 1.2K 1/16W(1608)
R814	1-218-841-11	s RESISTOR,CHIP 560 1/16W (1608)
R815	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R816	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R817	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R818	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R819	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R820	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R821	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R822	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R823	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R824	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
R825	1-218-854-11	s RESISTOR,CHIP 2K 1/16W (1608)
R826	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R827	1-218-851-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R828	1-218-879-11	s RESISTOR,CHIP 22K 1/16W (1608)
R829	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R830	1-218-834-11	s RESISTOR,CHIP 300 1/16W (1608)
R831	1-218-835-11	s RESISTOR,CHIP 330 1/16W (1608)
R832	1-218-835-11	s RESISTOR,CHIP 330 1/16W (1608)
R833	1-218-835-11	s RESISTOR,CHIP 330 1/16W (1608)
R834	1-218-840-11	s RESISTOR,CHIP 510 1/16W (1608)
R835	1-218-840-11	s RESISTOR,CHIP 510 1/16W (1608)
R836	1-218-864-11	s RESISTOR,CHIP 5.1K 1/16W(1608)
R837	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R838	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R839	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R840	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R841	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608) (for NTSC only)
R842	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R843	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R844	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R845	1-218-853-11	s RESISTOR,CHIP 1.8K 1/16W(1608)
R846	1-218-853-11	s RESISTOR,CHIP 1.8K 1/16W(1608)
R847	1-218-834-11	s RESISTOR,CHIP 300 1/16W (1608)
R848	1-218-845-11	s RESISTOR,CHIP 820 1/16W (1608)
R849	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R851	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R852	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R853	1-218-841-11	s RESISTOR,CHIP 560 1/16W (1608)
R854	1-218-841-11	s RESISTOR,CHIP 560 1/16W (1608)
R855	1-218-845-11	s RESISTOR,CHIP 820 1/16W (1608)
R856	1-218-845-11	s RESISTOR,CHIP 820 1/16W (1608)
R857	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R858	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R859	1-218-875-11	s RESISTOR,CHIP 15K 1/16W (1608)
R860	1-218-875-11	s RESISTOR,CHIP 15K 1/16W (1608)
R861	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R862	1-218-875-11	s RESISTOR,CHIP 15K 1/16W (1608)
R863	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R864	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R865	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R866	1-218-864-11	s RESISTOR,CHIP 5.1K 1/16W(1608)
R867	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R868	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R869	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R870	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R871	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R872	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R873	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R874	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R875	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R876	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R877	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R878	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R879	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R880	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R881	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R882	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R883	1-218-827-11	s RESISTOR,CHIP 150 1/16W (1608)

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
R884	1-218-827-11	s RESISTOR,CHIP 150 1/16W (1608)
R885	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R886	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R887	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R888	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R889	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R890	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R891	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R892	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R893	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R894	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R895	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R896	1-218-865-11	s RESISTOR,CHIP 5.6K 1/16W(1608)
R897	1-218-879-11	s RESISTOR,CHIP 22K 1/16W (1608)
R898	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R899	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R901	1-218-914-11	s RESISTOR CHIP 620K 1/16W(1608)
R902	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R903	1-218-890-11	s RESISTOR, CHIP 62K 1/16W(1608)
R904	1-218-853-11	s RESISTOR,CHIP 1.8K 1/16W(1608)
R905	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
R906	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R907	1-218-893-11	s RESISTOR, CHIP 82K 1/16W(1608)
R908	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R909	1-218-849-11	s RESISTOR,CHIP 1.2K 1/16W(1608)
R910	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R911	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R912	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R913	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R914	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R915	1-218-875-11	s RESISTOR,CHIP 15K 1/16W (1608)
R916	1-218-861-11	s RESISTOR,CHIP 3.9K 1/16W(1608)
R917	1-218-903-11	s RESISTOR,CHIP 220K 1/16W(1608)
R918	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R919	1-218-897-11	s RESISTOR,CHIP 120K 1/16W(1608)
		(for NTSC)
	1-218-901-11	s RESISTOR,CHIP 180K 1/16W(1608)
		(for PAL)
R920	1-218-903-11	s RESISTOR,CHIP 220K 1/16W(1608)
R921	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R922	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R923	1-218-877-11	s RESISTOR,CHIP 18K 1/16W (1608)
R924	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R927	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R928	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
R929	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R930	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R931	1-218-879-11	s RESISTOR,CHIP 22K 1/16W (1608)
R932	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R933	1-218-883-11	s RESISTOR,CHIP 33K 1/16W (1608)
R934	1-218-883-11	s RESISTOR,CHIP 33K 1/16W (1608)
R935	1-218-875-11	s RESISTOR,CHIP 15K 1/16W (1608)
R936	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R937	1-218-903-11	s RESISTOR,CHIP 220K 1/16W(1608)
R938	1-218-907-11	s RESISTOR,CHIP 330K 1/16W(1608)
R939	1-218-875-11	s RESISTOR,CHIP 15K 1/16W (1608)
R940	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R941	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R942	1-218-903-11	s RESISTOR,CHIP 220K 1/16W(1608)

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
R943	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
R947	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R948	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R949	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R950	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R953	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R954	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R956	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R1001	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R1002	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R1003	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R1004	1-218-835-11	s RESISTOR,CHIP 330 1/16W (1608)
R1005	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1006	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R1007	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R1008	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R1009	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R1010	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R1011	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R1012	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R1013	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R1014	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R1015	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R1016	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R1017	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R1018	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R1019	1-218-851-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R1020	1-218-834-11	s RESISTOR,CHIP 300 1/16W (1608)
R1021	1-218-837-11	s RESISTOR,CHIP 390 1/16W (1608)
R1022	1-218-843-11	s RESISTOR,CHIP 680 1/16W (1608)
R1023	1-218-867-11	s RESISTOR,CHIP 6.8K 1/16W(1608)
R1024	1-218-878-11	s RESISTOR,CHIP 20K 1/16W (1608)
R1025	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
R1027	1-218-885-11	s RESISTOR,CHIP 39K 1/16W (1608)
R1028	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R1029	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R1030	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R1031	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1032	1-218-841-11	s RESISTOR,CHIP 560 1/16W (1608)
R1033	1-218-849-11	s RESISTOR,CHIP 1.2K 1/16W(1608)
		(for NTSC)
	1-218-853-11	s RESISTOR,CHIP 1.8K 1/16W(1608)
		(for PAL)
R1034	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1035	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1036	1-218-869-11	s RESISTOR,CHIP 8.2K 1/16W(1608)
R1037	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R1038	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R1039	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R1040	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R1041	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R1042	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
R1043	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1044	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R1045	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R1046	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R1047	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R1048	1-218-843-11	s RESISTOR,CHIP 680 1/16W (1608)
R1049	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
R1050	1-218-915-11 s	RESISTOR,CHIP 680K 1/16W(1608) (for PAL only)
R1051	1-218-907-11 s	RESISTOR,CHIP 330K 1/16W(1608) (for NTSC)
	1-218-915-11 s	RESISTOR,CHIP 680K 1/16W(1608) (for PAL)
R1052	1-218-887-11 s	RESISTOR,CHIP 47K 1/16W (1608)
R1053	1-218-887-11 s	RESISTOR,CHIP 47K 1/16W (1608)
R1054	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608) (for NTSC)
	1-218-903-11 s	RESISTOR,CHIP 220K 1/16W(1608) (for PAL)
R1055	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R1056	1-218-823-11 s	RESISTOR,CHIP 100 1/16W (1608)
R1057	1-218-883-11 s	RESISTOR,CHIP 33K 1/16W (1608)
R1058	1-211-977-11 s	RESISTOR,CHIP 22 1/16W (1608)
R1059	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R1060	1-211-977-11 s	RESISTOR,CHIP 22 1/16W (1608)
R1061	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R1062	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R1063	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R1064	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R1065	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R1066	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R1067	1-211-977-11 s	RESISTOR,CHIP 22 1/16W (1608)
R1068	1-211-977-11 s	RESISTOR,CHIP 22 1/16W (1608)
R1069	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R1070	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1071	1-211-990-11 s	RESISTOR,CHIP 75 1/16W (1608)
R1072	1-211-969-11 s	RESISTOR,CHIP 10 1/16W (1608)
R1073	1-211-990-11 s	RESISTOR,CHIP 75 1/16W (1608)
R1074	1-211-990-11 s	RESISTOR,CHIP 75 1/16W (1608)
R1075	1-218-887-11 s	RESISTOR,CHIP 47K 1/16W (1608)
R1076	1-218-887-11 s	RESISTOR,CHIP 47K 1/16W (1608)
R1077	1-218-887-11 s	RESISTOR,CHIP 47K 1/16W (1608)
R1078	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R1079	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R1080	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R1081	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R1082	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R1083	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R1084	1-218-859-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R1085	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R1086	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R1087	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R1088	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R1089	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R1090	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R1091	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R1092	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R1093	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R1094	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R1095	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R1096	1-218-887-11 s	RESISTOR,CHIP 47K 1/16W (1608)
R1097	1-218-907-11 s	RESISTOR,CHIP 330K 1/16W(1608)
R1098	1-218-903-11 s	RESISTOR,CHIP 220K 1/16W(1608)
R1099	1-211-977-11 s	RESISTOR,CHIP 22 1/16W (1608) (for PAL only)
R1101	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R1102	1-218-859-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
R1103	1-218-863-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R1104	1-218-873-11 s	RESISTOR,CHIP 12K 1/16W (1608)
R1105	1-218-875-11 s	RESISTOR,CHIP 15K 1/16W (1608)
R1106	1-218-857-11 s	RESISTOR,CHIP 2.7K 1/16W(1608)
R1107	1-218-861-11 s	RESISTOR,CHIP 3.9K 1/16W(1608)
R1108	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R1110	1-218-887-11 s	RESISTOR,CHIP 47K 1/16W (1608)
R1111	1-218-863-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R1112	1-218-860-11 s	RESISTOR,CHIP 3.6K 1/16W(1608)
R1113	1-218-849-11 s	RESISTOR,CHIP 1.2K 1/16W(1608)
R1114	1-218-841-11 s	RESISTOR,CHIP 560 1/16W (1608)
R1115	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R1116	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R1117	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R1118	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R1119	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R1120	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R1121	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R1122	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R1123	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R1124	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R1125	1-218-854-11 s	RESISTOR,CHIP 2K 1/16W (1608)
R1126	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R1127	1-218-851-11 s	RESISTOR,CHIP 1.5K 1/16W(1608)
R1128	1-218-879-11 s	RESISTOR,CHIP 22K 1/16W (1608)
R1129	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R1130	1-218-834-11 s	RESISTOR,CHIP 300 1/16W (1608)
R1131	1-218-835-11 s	RESISTOR,CHIP 330 1/16W (1608)
R1132	1-218-835-11 s	RESISTOR,CHIP 330 1/16W (1608)
R1133	1-218-835-11 s	RESISTOR,CHIP 330 1/16W (1608)
R1134	1-218-840-11 s	RESISTOR,CHIP 510 1/16W (1608)
R1135	1-218-840-11 s	RESISTOR,CHIP 510 1/16W (1608)
R1136	1-218-864-11 s	RESISTOR,CHIP 5.1K 1/16W(1608)
R1137	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1138	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1139	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R1140	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R1141	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608) (for NTSC only)
R1142	1-218-839-11 s	RESISTOR,CHIP 470 1/16W (1608)
R1143	1-218-863-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R1144	1-218-863-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R1145	1-218-853-11 s	RESISTOR,CHIP 1.8K 1/16W(1608)
R1146	1-218-853-11 s	RESISTOR,CHIP 1.8K 1/16W(1608)
R1147	1-218-834-11 s	RESISTOR,CHIP 300 1/16W (1608)
R1148	1-218-845-11 s	RESISTOR,CHIP 820 1/16W (1608)
R1149	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R1151	1-218-839-11 s	RESISTOR,CHIP 470 1/16W (1608)
R1152	1-218-839-11 s	RESISTOR,CHIP 470 1/16W (1608)
R1153	1-218-841-11 s	RESISTOR,CHIP 560 1/16W (1608)
R1154	1-218-841-11 s	RESISTOR,CHIP 560 1/16W (1608)
R1155	1-218-845-11 s	RESISTOR,CHIP 820 1/16W (1608)
R1156	1-218-845-11 s	RESISTOR,CHIP 820 1/16W (1608)
R1157	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R1158	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R1159	1-218-875-11 s	RESISTOR,CHIP 15K 1/16W (1608)
R1160	1-218-875-11 s	RESISTOR,CHIP 15K 1/16W (1608)
R1161	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R1162	1-218-875-11 s	RESISTOR,CHIP 15K 1/16W (1608)

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
R1163	1-218-831-11 s	RESISTOR, CHIP 220 1/16W(1608)
R1164	1-218-831-11 s	RESISTOR, CHIP 220 1/16W(1608)
R1165	1-218-831-11 s	RESISTOR, CHIP 220 1/16W(1608)
R1166	1-218-864-11 s	RESISTOR,CHIP 5.1K 1/16W(1608)
R1167	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R1168	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R1169	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R1170	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R1171	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R1172	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R1173	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R1174	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R1175	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R1176	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R1177	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R1178	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R1179	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R1180	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R1181	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R1182	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R1183	1-218-827-11 s	RESISTOR,CHIP 150 1/16W (1608)
R1184	1-218-827-11 s	RESISTOR,CHIP 150 1/16W (1608)
R1185	1-218-831-11 s	RESISTOR, CHIP 220 1/16W(1608)
R1186	1-211-977-11 s	RESISTOR,CHIP 22 1/16W (1608)
R1187	1-211-977-11 s	RESISTOR,CHIP 22 1/16W (1608)
R1188	1-211-977-11 s	RESISTOR,CHIP 22 1/16W (1608)
R1189	1-211-977-11 s	RESISTOR,CHIP 22 1/16W (1608)
R1190	1-211-977-11 s	RESISTOR,CHIP 22 1/16W (1608)
R1191	1-211-977-11 s	RESISTOR,CHIP 22 1/16W (1608)
R1192	1-218-831-11 s	RESISTOR, CHIP 220 1/16W(1608)
R1193	1-218-831-11 s	RESISTOR, CHIP 220 1/16W(1608)
R1194	1-218-831-11 s	RESISTOR, CHIP 220 1/16W(1608)
R1195	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1196	1-218-865-11 s	RESISTOR,CHIP 5.6K 1/16W(1608)
R1197	1-218-879-11 s	RESISTOR,CHIP 22K 1/16W (1608)
R1198	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608)
R1199	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608)
R1201	1-218-914-11 s	RESISTOR CHIP 620K 1/16W(1608)
R1202	1-218-823-11 s	RESISTOR,CHIP 100 1/16W (1608)
R1203	1-218-890-11 s	RESISTOR, CHIP 62K 1/16W(1608)
R1204	1-218-853-11 s	RESISTOR,CHIP 1.8K 1/16W(1608)
R1205	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R1206	1-218-859-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R1207	1-218-893-11 s	RESISTOR, CHIP 82K 1/16W(1608)
R1208	1-218-859-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R1209	1-218-849-11 s	RESISTOR,CHIP 1.2K 1/16W(1608)
R1210	1-218-859-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R1211	1-218-863-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R1212	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1213	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1214	1-218-859-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R1215	1-218-875-11 s	RESISTOR,CHIP 15K 1/16W (1608)
R1216	1-218-861-11 s	RESISTOR,CHIP 3.9K 1/16W(1608)
R1217	1-218-903-11 s	RESISTOR,CHIP 220K 1/16W(1608)
R1218	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1219	1-218-897-11 s	RESISTOR,CHIP 120K 1/16W(1608) (for NTSC)
	1-218-901-11 s	RESISTOR,CHIP 180K 1/16W(1608) (for PAL)

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
R1220	1-218-903-11 s	RESISTOR,CHIP 220K 1/16W(1608)
R1221	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R1222	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R1223	1-218-877-11 s	RESISTOR,CHIP 18K 1/16W (1608)
R1224	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R1227	1-218-863-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R1228	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R1229	1-218-823-11 s	RESISTOR,CHIP 100 1/16W (1608)
R1230	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R1231	1-218-879-11 s	RESISTOR,CHIP 22K 1/16W (1608)
R1232	1-218-831-11 s	RESISTOR, CHIP 220 1/16W(1608)
R1233	1-218-883-11 s	RESISTOR,CHIP 33K 1/16W (1608)
R1234	1-218-883-11 s	RESISTOR,CHIP 33K 1/16W (1608)
R1235	1-218-875-11 s	RESISTOR,CHIP 15K 1/16W (1608)
R1236	1-218-831-11 s	RESISTOR, CHIP 220 1/16W(1608)
R1237	1-218-903-11 s	RESISTOR,CHIP 220K 1/16W(1608)
R1238	1-218-907-11 s	RESISTOR,CHIP 330K 1/16W(1608)
R1239	1-218-875-11 s	RESISTOR,CHIP 15K 1/16W (1608)
R1240	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R1241	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R1242	1-218-903-11 s	RESISTOR,CHIP 220K 1/16W(1608)
R1243	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R1247	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R1248	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R1249	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R1250	1-218-887-11 s	RESISTOR,CHIP 47K 1/16W (1608)
R1253	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R1254	1-218-887-11 s	RESISTOR,CHIP 47K 1/16W (1608)
R1256	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R1300	1-216-699-11 s	RESISTOR,CHIP 100K 1/10W(2012)
R1305	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608) (for PAL only)
R1306	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608) (for NTSC only)
R1307	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608) (for PAL only)
R1308	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608) (for NTSC only)
R1400	1-216-699-11 s	RESISTOR,CHIP 100K 1/10W(2012)
R1401	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608) (for PAL only)
R1402	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608) (for NTSC only)
R1403	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608) (for PAL only)
R1404	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608) (for NTSC only)
R1500	1-216-699-11 s	RESISTOR,CHIP 100K 1/10W(2012)
R1501	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608) (for PAL only)
R1502	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608) (for NTSC only)
R1503	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608) (for PAL only)
R1504	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608) (for NTSC only)
R1600	1-216-699-11 s	RESISTOR,CHIP 100K 1/10W(2012)
R1601	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608) (for PAL only)
R1602	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608) (for NTSC only)

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
R8015	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
R8016	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
RB201	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB202	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB203	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB204	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB205	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB301	1-233-270-11	o RESISTOR, NETWORK (8 GANG) 10K
RB302	1-239-389-11	s RESISTOR,NETWORK 47K (1608)
RB501	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB502	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB503	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB504	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB505	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB601	1-233-270-11	o RESISTOR, NETWORK (8 GANG) 10K
RB602	1-239-389-11	s RESISTOR,NETWORK 47K (1608)
RB801	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB802	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB803	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB804	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB805	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB901	1-233-270-11	o RESISTOR, NETWORK (8 GANG) 10K
RB902	1-239-389-11	s RESISTOR,NETWORK 47K (1608)
RB1101	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB1102	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB1103	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB1104	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB1105	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB1201	1-233-270-11	o RESISTOR, NETWORK (8 GANG) 10K
RB1202	1-239-389-11	s RESISTOR,NETWORK 47K (1608)
RB1301	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB1302	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB1303	1-234-397-11	s NETWORK, RES (8 GANG) 100K
RB1401	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB1402	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB1403	1-234-397-11	s NETWORK, RES (8 GANG) 100K
RB1501	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB1502	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB1503	1-234-397-11	s NETWORK, RES (8 GANG) 100K
RB1601	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB1602	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB1603	1-234-397-11	s NETWORK, RES (8 GANG) 100K
RB1701	1-234-397-11	s NETWORK, RES (8 GANG) 100K
RB1702	1-234-397-11	s NETWORK, RES (8 GANG) 100K
RB1703	1-234-397-11	s NETWORK, RES (8 GANG) 100K
RB1704	1-233-663-91	s NETWORK, RES (8 GANG) 4.7K
RB1705	1-233-663-91	s NETWORK, RES (8 GANG) 4.7K
RB1706	1-233-663-91	s NETWORK, RES (8 GANG) 4.7K
RB1707	1-233-663-91	s NETWORK, RES (8 GANG) 4.7K
RB1708	1-233-477-11	s NETWORK, RES (8 GANG) 1K
RV101	1-225-789-21	s RES, ADJ, CERMET 2K
RV102	1-225-787-21	s RES, ADJ, CERMET 500
RV103	1-225-787-21	s RES, ADJ, CERMET 500
RV201	1-225-785-21	s RES, ADJ, CERMET 100
RV202	1-225-789-21	s RES, ADJ, CERMET 2K
RV203	1-225-789-21	s RES, ADJ, CERMET 2K
RV204	1-225-789-21	s RES, ADJ, CERMET 2K
RV205	1-225-789-21	s RES, ADJ, CERMET 2K

(VIF-19/19P BOARD (Suffix -12 and Higher))

Ref. No. or Q'ty	Part No.	SP Description
RV206	1-225-786-11	s RES, ADJ, CERMET 200
RV207	1-225-786-11	s RES, ADJ, CERMET 200
RV301	1-237-037-11	s RESISTOR,ADJ,CERMET 20K
RV302	1-237-035-11	s RESISTOR,ADJ,CERMET 5K
RV303	1-237-035-11	s RESISTOR,ADJ,CERMET 5K
RV401	1-225-789-21	s RES, ADJ, CERMET 2K
RV402	1-225-787-21	s RES, ADJ, CERMET 500
RV403	1-225-787-21	s RES, ADJ, CERMET 500
RV501	1-225-785-21	s RES, ADJ, CERMET 100
RV502	1-225-789-21	s RES, ADJ, CERMET 2K
RV503	1-225-789-21	s RES, ADJ, CERMET 2K
RV504	1-225-789-21	s RES, ADJ, CERMET 2K
RV505	1-225-789-21	s RES, ADJ, CERMET 2K
RV506	1-225-786-11	s RES, ADJ, CERMET 200
RV507	1-225-786-11	s RES, ADJ, CERMET 200
RV601	1-237-037-11	s RESISTOR,ADJ,CERMET 20K
RV602	1-237-035-11	s RESISTOR,ADJ,CERMET 5K
RV603	1-237-035-11	s RESISTOR,ADJ,CERMET 5K
RV701	1-225-789-21	s RES, ADJ, CERMET 2K
RV702	1-225-787-21	s RES, ADJ, CERMET 500
RV703	1-225-787-21	s RES, ADJ, CERMET 500
RV801	1-225-785-21	s RES, ADJ, CERMET 100
RV802	1-225-789-21	s RES, ADJ, CERMET 2K
RV803	1-225-789-21	s RES, ADJ, CERMET 2K
RV804	1-225-789-21	s RES, ADJ, CERMET 2K
RV805	1-225-789-21	s RES, ADJ, CERMET 2K
RV806	1-225-786-11	s RES, ADJ, CERMET 200
RV807	1-225-786-11	s RES, ADJ, CERMET 200
RV901	1-237-037-11	s RESISTOR,ADJ,CERMET 20K
RV902	1-237-035-11	s RESISTOR,ADJ,CERMET 5K
RV903	1-237-035-11	s RESISTOR,ADJ,CERMET 5K
RV1001	1-225-789-21	s RES, ADJ, CERMET 2K
RV1002	1-225-787-21	s RES, ADJ, CERMET 500
RV1003	1-225-787-21	s RES, ADJ, CERMET 500
RV1101	1-225-785-21	s RES, ADJ, CERMET 100
RV1102	1-225-789-21	s RES, ADJ, CERMET 2K
RV1103	1-225-789-21	s RES, ADJ, CERMET 2K
RV1104	1-225-789-21	s RES, ADJ, CERMET 2K
RV1105	1-225-789-21	s RES, ADJ, CERMET 2K
RV1106	1-225-786-11	s RES, ADJ, CERMET 200
RV1107	1-225-786-11	s RES, ADJ, CERMET 200
RV1201	1-237-037-11	s RESISTOR,ADJ,CERMET 20K
RV1202	1-237-035-11	s RESISTOR,ADJ,CERMET 5K
RV1203	1-237-035-11	s RESISTOR,ADJ,CERMET 5K
X101	1-767-617-11	s OSCILLATOR, CRYSTAL (for NTSC)
	1-767-619-11	s OSCILLATOR, CRYSTAL (for PAL)
X401	1-767-617-11	s OSCILLATOR, CRYSTAL (for NTSC)
	1-767-619-11	s OSCILLATOR, CRYSTAL (for PAL)
X701	1-767-617-11	s OSCILLATOR, CRYSTAL (for NTSC)
	1-767-619-11	s OSCILLATOR, CRYSTAL (for PAL)
X1001	1-767-617-11	s OSCILLATOR, CRYSTAL (for NTSC)
	1-767-619-11	s OSCILLATOR, CRYSTAL (for PAL)

VIF-19/19P BOARD (Suffix -11)

Ref. No. or Q'ty	Part No.	SP Description
2pc	3-624-100-02	o LEVER,PWB
7pc	4-886-821-11	s SCREW,M3X6 CASE (SILVER)
2pc	7-626-300-54	o SPRING PIN 3X6
C101	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C102	1-162-926-11	s CAPACITOR,CERAMIC 82PF/50V CH
C104	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C105	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C106	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C107	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C108	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C109	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C110	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C111	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C112	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C113	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C114	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C115	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C116	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C117	1-162-919-11	s CAPACITOR,CERAMIC 22PF/50V CH (for NTSC only)
C118	1-162-925-11	s CAPACITOR,CERAMIC 68PF/50V CH
C120	1-126-394-11	s CAPACITOR,ELECT 10MF/16V(CHIP)
C121	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C122	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C123	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C124	1-162-959-11	s CAPACITOR,CERAMIC 330PF/50V SL (for NTSC)
	1-164-230-11	s CAPACITOR,CERAMIC 220PF/50V (for PAL)
C125	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C126	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C127	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C128	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C129	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH
C130	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C131	1-164-217-11	s CAPACITOR,CERAMIC 150PF/50V CH
C132	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C133	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C135	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C137	1-162-968-11	s CAPACITOR,CERAMIC 4700PF/50V B
C138	1-162-968-11	s CAPACITOR,CERAMIC 4700PF/50V B
C139	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C140	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C143	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C147	1-115-467-11	s CAPACITOR CERAMIC 0.22MF/10V B (for NTSC)
	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF (for PAL)
C149	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C150	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C151	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C152	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C153	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C154	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C155	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C156	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C157	1-104-601-11	s CAP,ELECT 10MF/10V (BP)(CHIP)
C158	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C159	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C160	1-115-566-11	s CAPACITOR,CERAMIC 4.7MF B/6.3V

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
C161	1-162-919-11	s CAPACITOR,CERAMIC 22PF/50V CH
C162	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C163	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C164	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C165	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C166	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C167	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C168	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C169	1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C201	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C202	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C203	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C204	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH
C205	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C206	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C207	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C208	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C209	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C210	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C211	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C212	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C213	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C214	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C215	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C216	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C217	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C218	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C219	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C220	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C221	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C222	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C223	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C224	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C225	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C226	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C227	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C228	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C229	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C230	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C231	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C232	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C233	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C234	1-104-608-11	s CAPACITOR, ELECT 33MF/6.3V
C235	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C236	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C237	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C238	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C239	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C240	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C241	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C242	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C243	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C244	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C245	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C246	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C247	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C248	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C249	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
C250	1-162-921-11 s	CAPACITOR, CERAMIC 33PF/50V CH (for NTSC)
	1-162-919-11 s	CAPACITOR, CERAMIC 22PF/50V CH (for PAL)
C251	1-126-391-11 s	CAPACITOR ELECT 47MF/6.3V(105)
C252	1-162-921-11 s	CAPACITOR, CERAMIC 33PF/50V CH (for NTSC)
	1-162-919-11 s	CAPACITOR, CERAMIC 22PF/50V CH (for PAL)
C253	1-126-391-11 s	CAPACITOR ELECT 47MF/6.3V(105)
C254	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C255	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C256	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C257	1-162-919-11 s	CAPACITOR, CERAMIC 22PF/50V CH
C258	1-162-921-11 s	CAPACITOR, CERAMIC 33PF/50V CH
C259	1-162-921-11 s	CAPACITOR, CERAMIC 33PF/50V CH
C260	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C261	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C262	1-125-817-11 s	CAPACITOR, CERAMIC 10MF/6.3V
C263	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C264	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C265	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C266	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C267	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C268	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C269	1-125-817-11 s	CAPACITOR, CERAMIC 10MF/6.3V
C270	1-125-817-11 s	CAPACITOR, CERAMIC 10MF/6.3V
C271	1-162-966-11 s	CAPACITOR, CERAMIC 2200PF/50V B
C273	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C274	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C275	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C276	1-126-391-11 s	CAPACITOR ELECT 47MF/6.3V(105)
C277	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C278	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C279	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C280	1-125-817-11 s	CAPACITOR, CERAMIC 10MF/6.3V
C281	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C282	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C283	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C284	1-126-391-11 s	CAPACITOR ELECT 47MF/6.3V(105)
C285	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C286	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C287	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C288	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C289	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C290	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C291	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C292	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C293	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C294	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C295	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C296	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C297	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C298	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C299	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C301	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C302	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C303	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C304	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C305	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
C306	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C307	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C308	1-115-416-11 s	CAPACITOR, CERAMIC 1000PF/25V
C309	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C310	1-104-608-11 s	CAPACITOR, ELECT 33MF/6.3V
C311	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C312	1-162-970-11 s	CAPACITOR, CERAMIC 0.01MF/25V B
C313	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C314	1-126-395-11 s	CAPACITOR, ELECT 22MF/16V(CHIP)
C315	1-115-467-11 s	CAPACITOR CERAMIC 0.22MF/10V B
C316	1-115-412-11 s	CAPACITOR, CERAMIC 680PF/25V CH
C317	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C318	1-162-927-11 s	CAPACITOR, CERAMIC 100PF/50V CH
C319	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C320	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C321	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C322	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C323	1-126-395-11 s	CAPACITOR, ELECT 22MF/16V(CHIP)
C324	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C325	1-162-927-11 s	CAPACITOR, CERAMIC 100PF/50V CH
C326	1-162-970-11 s	CAPACITOR CERAMIC 0.01MF/25V B
C327	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C328	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C329	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C330	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C331	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C332	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C333	1-126-394-11 s	CAPACITOR, ELECT 10MF/16V(CHIP)
C334	1-162-970-11 s	CAPACITOR, CERAMIC 0.01MF/25V B
C335	1-126-395-11 s	CAPACITOR, ELECT 22MF/16V(CHIP)
C336	1-125-891-11 s	CAPACITOR CERAMIC 0.47MF/10V
C337	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C338	1-164-315-11 s	CAPACITOR, CERAMIC 470PF/50V CH
C339	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C340	1-162-917-11 s	CAPACITOR, CERAMIC 15PF/50V CH
C341	1-162-970-11 s	CAPACITOR CERAMIC 0.01MF/25V B
C342	1-162-927-11 s	CAPACITOR, CERAMIC 100PF/50V CH
C343	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C344	1-126-391-11 s	CAPACITOR ELECT 47MF/6.3V(105)
C345	1-115-416-11 s	CAPACITOR, CERAMIC 1000PF/25V
C346	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C347	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C348	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C349	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C350	1-162-970-11 s	CAPACITOR CERAMIC 0.01MF/25V B
C351	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C352	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C353	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C354	1-162-294-31 s	CAPACITOR, CERAMIC 1000PF/50V
C401	1-126-391-11 s	CAPACITOR ELECT 47MF/6.3V(105)
C402	1-162-926-11 s	CAPACITOR, CERAMIC 82PF/50V CH
C403	1-125-817-11 s	CAPACITOR, CERAMIC 10MF/6.3V
C404	1-126-391-11 s	CAPACITOR ELECT 47MF/6.3V(105)
C413	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C417	1-162-919-11 s	CAPACITOR, CERAMIC 22PF/50V CH (for NTSC only)
C418	1-162-925-11 s	CAPACITOR, CERAMIC 68PF/50V CH
C420	1-126-394-11 s	CAPACITOR, ELECT 10MF/16V(CHIP)
C421	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
C424	1-162-959-11 s	CAPACITOR, CERAMIC 330PF/50V SL (for NTSC)
	1-164-230-11 s	CAPACITOR, CERAMIC 220PF/50V (for PAL)
C425	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C426	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C427	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C428	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C432	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C437	1-162-968-11 s	CAPACITOR, CERAMIC 4700PF/50V B
C438	1-162-968-11 s	CAPACITOR, CERAMIC 4700PF/50V B
C443	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C447	1-115-467-11 s	CAPACITOR CERAMIC 0.22MF/10V B (for NTSC)
	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF (for PAL)
C449	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C450	1-126-391-11 s	CAPACITOR ELECT 47MF/6.3V(105)
C452	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C454	1-126-391-11 s	CAPACITOR ELECT 47MF/6.3V(105)
C455	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C456	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C457	1-126-391-11 s	CAPACITOR ELECT 47MF/6.3V(105)
C458	1-126-391-11 s	CAPACITOR ELECT 47MF/6.3V(105)
C459	1-125-817-11 s	CAPACITOR, CERAMIC 10MF/6.3V
C460	1-125-817-11 s	CAPACITOR, CERAMIC 10MF/6.3V
C461	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C462	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C463	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C464	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C465	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C466	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C467	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C468	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C469	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C470	1-162-921-11 s	CAPACITOR, CERAMIC 33PF/50V CH
C471	1-126-391-11 s	CAPACITOR ELECT 47MF/6.3V(105)
C472	1-164-217-11 s	CAPACITOR, CERAMIC 150PF/50V CH
C473	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C474	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C475	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C476	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C477	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C478	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C479	1-104-601-11 s	CAP, ELECT 10MF/10V (BP) (CHIP)
C480	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C481	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C482	1-115-566-11 s	CAPACITOR, CERAMIC 4.7MF B/6.3V
C483	1-162-919-11 s	CAPACITOR, CERAMIC 22PF/50V CH
C484	1-126-391-11 s	CAPACITOR ELECT 47MF/6.3V(105)
C485	1-125-817-11 s	CAPACITOR, CERAMIC 10MF/6.3V
C486	1-125-817-11 s	CAPACITOR, CERAMIC 10MF/6.3V
C487	1-125-817-11 s	CAPACITOR, CERAMIC 10MF/6.3V
C488	1-125-817-11 s	CAPACITOR, CERAMIC 10MF/6.3V
C489	1-162-915-11 s	CAPACITOR, CERAMIC 10PF/50V CH
C490	1-125-817-11 s	CAPACITOR, CERAMIC 10MF/6.3V
C501	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C502	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C503	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C504	1-162-921-11 s	CAPACITOR, CERAMIC 33PF/50V CH
C505	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
C506	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C507	1-126-391-11 s	CAPACITOR ELECT 47MF/6.3V(105)
C508	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C509	1-125-817-11 s	CAPACITOR, CERAMIC 10MF/6.3V
C510	1-125-817-11 s	CAPACITOR, CERAMIC 10MF/6.3V
C511	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C512	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C513	1-126-391-11 s	CAPACITOR ELECT 47MF/6.3V(105)
C514	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C515	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C516	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C517	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C518	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C519	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C520	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C521	1-126-391-11 s	CAPACITOR ELECT 47MF/6.3V(105)
C522	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C523	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C524	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C525	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C526	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C527	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C528	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C529	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C530	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C531	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C532	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C533	1-126-391-11 s	CAPACITOR ELECT 47MF/6.3V(105)
C534	1-104-608-11 s	CAPACITOR, ELECT 33MF/6.3V
C535	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C536	1-126-391-11 s	CAPACITOR ELECT 47MF/6.3V(105)
C537	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C538	1-126-391-11 s	CAPACITOR ELECT 47MF/6.3V(105)
C539	1-126-391-11 s	CAPACITOR ELECT 47MF/6.3V(105)
C540	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C541	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C542	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C543	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C544	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C545	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C546	1-126-391-11 s	CAPACITOR ELECT 47MF/6.3V(105)
C547	1-126-391-11 s	CAPACITOR ELECT 47MF/6.3V(105)
C548	1-126-391-11 s	CAPACITOR ELECT 47MF/6.3V(105)
C549	1-126-391-11 s	CAPACITOR ELECT 47MF/6.3V(105)
C550	1-162-921-11 s	CAPACITOR, CERAMIC 33PF/50V CH (for NTSC)
	1-162-919-11 s	CAPACITOR, CERAMIC 22PF/50V CH (for PAL)
C551	1-126-391-11 s	CAPACITOR ELECT 47MF/6.3V(105)
C552	1-162-921-11 s	CAPACITOR, CERAMIC 33PF/50V CH (for NTSC)
	1-162-919-11 s	CAPACITOR, CERAMIC 22PF/50V CH (for PAL)
C553	1-126-391-11 s	CAPACITOR ELECT 47MF/6.3V(105)
C554	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C555	1-107-826-11 s	CAPACITOR, CHIP CERAMIC 0.1MF
C556	1-125-837-11 s	CAPACITOR, CHIP CERAMIC1MF/6.3V
C557	1-162-919-11 s	CAPACITOR, CERAMIC 22PF/50V CH
C558	1-162-921-11 s	CAPACITOR, CERAMIC 33PF/50V CH

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
C559	1-162-921-11	s CAPACITOR, CERAMIC 33PF/50V CH
C560	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C561	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C562	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C563	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C564	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C565	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C566	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C567	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C568	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C569	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C570	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C571	1-162-966-11	s CAPACITOR, CERAMIC 2200PF/50V B
C573	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C574	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C575	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C576	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C577	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C578	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C579	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C580	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C581	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C582	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C583	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C584	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C585	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C586	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C587	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C588	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C589	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C590	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C591	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C592	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C593	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C594	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C595	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C596	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C597	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C598	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C599	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C601	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C602	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C603	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C604	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C605	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C606	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C607	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C608	1-115-416-11	s CAPACITOR, CERAMIC 1000PF/25V
C609	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C610	1-104-608-11	s CAPACITOR, ELECT 33MF/6.3V
C611	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C612	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C613	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C614	1-126-395-11	s CAPACITOR, ELECT 22MF/16V(CHIP)
C615	1-115-467-11	s CAPACITOR CERAMIC 0.22MF/10V B
C616	1-115-412-11	s CAPACITOR, CERAMIC 680PF/25V CH
C617	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C618	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C619	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
C620	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C621	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C622	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C623	1-126-395-11	s CAPACITOR, ELECT 22MF/16V(CHIP)
C624	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C625	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C626	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C627	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C628	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C629	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C630	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C631	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C632	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C633	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)
C634	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C635	1-126-395-11	s CAPACITOR, ELECT 22MF/16V(CHIP)
C636	1-125-891-11	s CAPACITOR CERAMIC 0.47MF/10V
C637	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C638	1-164-315-11	s CAPACITOR, CERAMIC 470PF/50V CH
C639	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C640	1-162-917-11	s CAPACITOR, CERAMIC 15PF/50V CH
C641	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C642	1-162-927-11	s CAPACITOR, CERAMIC 100PF/50V CH
C643	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C644	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C645	1-115-416-11	s CAPACITOR, CERAMIC 1000PF/25V
C646	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C647	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C648	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C649	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C650	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C651	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C652	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C653	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C654	1-162-294-31	s CAPACITOR, CERAMIC 1000PF/50V
C701	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C702	1-162-926-11	s CAPACITOR, CERAMIC 82PF/50V CH
C703	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C704	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C713	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C717	1-162-919-11	s CAPACITOR, CERAMIC 22PF/50V CH (for NTSC only)
C718	1-162-925-11	s CAPACITOR, CERAMIC 68PF/50V CH
C720	1-126-394-11	s CAPACITOR, ELECT 10MF/16V(CHIP)
C721	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C724	1-162-959-11	s CAPACITOR, CERAMIC 330PF/50V SL (for NTSC)
	1-164-230-11	s CAPACITOR, CERAMIC 220PF/50V (for PAL)
C725	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C726	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C727	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C728	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C732	1-125-837-11	s CAPACITOR, CHIP CERAMIC 1MF/6.3V
C737	1-162-968-11	s CAPACITOR, CERAMIC 4700PF/50V B
C738	1-162-968-11	s CAPACITOR, CERAMIC 4700PF/50V B
C743	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF
C747	1-115-467-11	s CAPACITOR CERAMIC 0.22MF/10V B (for NTSC)
	1-107-826-11	s CAPACITOR, CHIP CERAMIC 0.1MF (for PAL)

(VIP-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
C749	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C750	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C752	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C754	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C755	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C756	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C757	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C758	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C759	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C760	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C761	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C762	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C763	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C764	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C765	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C766	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C767	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C768	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C769	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C770	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH
C771	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C772	1-164-217-11	s CAPACITOR,CERAMIC 150PF/50V CH
C773	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C774	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C775	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C776	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C777	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C778	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C779	1-104-601-11	s CAP,ELECT 10MF/10V (BP) (CHIP)
C780	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C781	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C782	1-115-566-11	s CAPACITOR,CERAMIC 4.7MF B/6.3V
C783	1-162-919-11	s CAPACITOR,CERAMIC 22PF/50V CH
C784	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C785	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C786	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C787	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C788	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C789	1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C790	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C801	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C802	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C803	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C804	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH
C805	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C806	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C807	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C808	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C809	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C810	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C811	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C812	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C813	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C814	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C815	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C816	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C817	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C818	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C819	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V

(VIP-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
C820	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C821	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C822	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C823	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C824	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C825	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C826	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C827	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C828	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C829	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C830	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C831	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C832	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C833	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C834	1-104-608-11	s CAPACITOR, ELECT 33MF/6.3V
C835	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C836	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C837	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C838	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C839	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C840	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C841	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C842	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C843	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C844	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C845	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C846	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C847	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C848	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C849	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C850	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH (for NTSC)
	1-162-919-11	s CAPACITOR,CERAMIC 22PF/50V CH (for PAL)
C851	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C852	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH (for NTSC)
	1-162-919-11	s CAPACITOR,CERAMIC 22PF/50V CH (for PAL)
C853	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C854	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C855	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C856	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C857	1-162-919-11	s CAPACITOR,CERAMIC 22PF/50V CH
C858	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH
C859	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH
C860	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C861	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C862	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C863	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C864	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C865	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C866	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C867	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C868	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C869	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C870	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C871	1-162-966-11	s CAPACITOR,CERAMIC 2200PF/50V B
C873	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C874	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
C875	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C876	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C877	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C878	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C879	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C880	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C881	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C882	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C883	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C884	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C885	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C886	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C887	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C888	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C889	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C890	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C891	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C892	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C893	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C894	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C895	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C896	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C897	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C898	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C899	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C901	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C902	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C903	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C904	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C905	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C906	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C907	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C908	1-115-416-11	s CAPACITOR,CERAMIC 1000PF/25V
C909	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C910	1-104-608-11	s CAPACITOR, ELECT 33MF/6.3V
C911	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C912	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C913	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C914	1-126-395-11	s CAPACITOR,ELECT 22MF/16V(CHIP)
C915	1-115-467-11	s CAPACITOR CERAMIC 0.22MF/10V B
C916	1-115-412-11	s CAPACITOR,CERAMIC 680PF/25V CH
C917	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C918	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C919	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C920	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C921	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C922	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C923	1-126-395-11	s CAPACITOR,ELECT 22MF/16V(CHIP)
C924	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C925	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C926	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C927	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C928	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C929	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C930	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C931	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C932	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C933	1-126-394-11	s CAPACITOR,ELECT 10MF/16V(CHIP)
C934	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
C935	1-126-395-11	s CAPACITOR,ELECT 22MF/16V(CHIP)
C936	1-125-891-11	s CAPACITOR CERAMIC 0.47MF/10V
C937	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C938	1-164-315-11	s CAPACITOR,CERAMIC 470PF/50V CH
C939	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C940	1-162-917-11	s CAPACITOR,CERAMIC 15PF/50V CH
C941	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C942	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C943	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C944	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C945	1-115-416-11	s CAPACITOR,CERAMIC 1000PF/25V
C946	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C947	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C948	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C949	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C950	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C951	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C952	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C953	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C954	1-162-294-31	s CAPACITOR,CERAMIC 1000PF/50V
C1001	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C1002	1-162-926-11	s CAPACITOR,CERAMIC 82PF/50V CH
C1003	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1004	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C1013	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1017	1-162-919-11	s CAPACITOR,CERAMIC 22PF/50V CH (for NTSC only)
C1018	1-162-925-11	s CAPACITOR,CERAMIC 68PF/50V CH
C1020	1-126-394-11	s CAPACITOR,ELECT 10MF/16V(CHIP)
C1021	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1024	1-162-959-11	s CAPACITOR,CERAMIC 330PF/50V SL (for NTSC)
	1-164-230-11	s CAPACITOR,CERAMIC 220PF/50V (for PAL)
C1025	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1026	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1027	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1028	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1032	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1037	1-162-968-11	s CAPACITOR,CERAMIC 4700PF/50V B
C1038	1-162-968-11	s CAPACITOR,CERAMIC 4700PF/50V B
C1043	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1047	1-115-467-11	s CAPACITOR CERAMIC 0.22MF/10V B (for NTSC)
	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF (for PAL)
C1049	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1050	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C1052	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1054	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C1055	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1056	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1057	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C1058	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C1059	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1060	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1061	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1062	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1063	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1064	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
C1065	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1066	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1067	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1068	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1069	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1070	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH
C1071	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C1072	1-164-217-11	s CAPACITOR,CERAMIC 150PF/50V CH
C1073	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1074	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1075	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1076	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1077	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1078	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1079	1-104-601-11	s CAP,ELECT 10MF/10V (BP) (CHIP)
C1080	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1081	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1082	1-115-566-11	s CAPACITOR,CERAMIC 4.7MF B/6.3V
C1083	1-162-919-11	s CAPACITOR,CERAMIC 22PF/50V CH
C1084	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C1085	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1086	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1087	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1088	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1089	1-162-915-11	s CAPACITOR,CERAMIC 10PF/50V CH
C1090	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1101	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1102	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1103	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1104	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH
C1105	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1106	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1107	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C1108	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1109	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1110	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1111	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1112	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1113	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C1114	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1115	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1116	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1117	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1118	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1119	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1120	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1121	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C1122	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1123	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1124	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1125	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1126	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1127	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1128	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1129	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1130	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1131	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1132	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1133	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
C1134	1-104-608-11	s CAPACITOR, ELECT 33MF/6.3V
C1135	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1136	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C1137	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1138	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C1139	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C1140	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1141	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1142	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1143	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1144	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1145	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1146	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C1147	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C1148	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C1149	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C1150	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH (for NTSC)
	1-162-919-11	s CAPACITOR,CERAMIC 22PF/50V CH (for PAL)
C1151	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C1152	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH (for NTSC)
	1-162-919-11	s CAPACITOR,CERAMIC 22PF/50V CH (for PAL)
C1153	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C1154	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1155	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1156	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1157	1-162-919-11	s CAPACITOR,CERAMIC 22PF/50V CH
C1158	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH
C1159	1-162-921-11	s CAPACITOR,CERAMIC 33PF/50V CH
C1160	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1161	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1162	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1163	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1164	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1165	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1166	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1167	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1168	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1169	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1170	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1171	1-162-966-11	s CAPACITOR,CERAMIC 2200PF/50V B
C1173	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1174	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1175	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1176	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C1177	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1178	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1179	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1180	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C1181	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1182	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1183	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1184	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C1185	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1186	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1187	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1188	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
C1189	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1190	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1191	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1192	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1193	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1194	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1195	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1196	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1197	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1198	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1199	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1201	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1202	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1203	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1204	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1205	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1206	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1207	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1208	1-115-416-11	s CAPACITOR,CERAMIC 1000PF/25V
C1209	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1210	1-104-608-11	s CAPACITOR, ELECT 33MF/6.3V
C1211	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1212	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C1213	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1214	1-126-395-11	s CAPACITOR,ELECT 22MF/16V(CHIP)
C1215	1-115-467-11	s CAPACITOR CERAMIC 0.22MF/10V B
C1216	1-115-412-11	s CAPACITOR,CERAMIC 680PF/25V CH
C1217	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1218	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C1219	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1220	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1221	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1222	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1223	1-126-395-11	s CAPACITOR,ELECT 22MF/16V(CHIP)
C1224	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1225	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C1226	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C1227	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1228	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1229	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1230	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1231	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1232	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1233	1-126-394-11	s CAPACITOR,ELECT 10MF/16V(CHIP)
C1234	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C1235	1-126-395-11	s CAPACITOR,ELECT 22MF/16V(CHIP)
C1236	1-125-891-11	s CAPACITOR CERAMIC 0.47MF/10V
C1237	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1238	1-164-315-11	s CAPACITOR,CERAMIC 470PF/50V CH
C1239	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1240	1-162-917-11	s CAPACITOR,CERAMIC 15PF/50V CH
C1241	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C1242	1-162-927-11	s CAPACITOR,CERAMIC 100PF/50V CH
C1243	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1244	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C1245	1-115-416-11	s CAPACITOR,CERAMIC 1000PF/25V
C1246	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1247	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1248	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
C1249	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1250	1-162-970-11	s CAPACITOR CERAMIC 0.01MF/25V B
C1251	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1252	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1253	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1254	1-162-294-31	s CAPACITOR,CERAMIC 1000PF/50V
C1300	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1301	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1302	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1303	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1304	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1305	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1306	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1307	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1308	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1309	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1310	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1311	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1312	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1313	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1314	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1315	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1316	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1400	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1401	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1402	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1403	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1404	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1405	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1406	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1407	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1408	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1409	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1410	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1411	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1412	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1413	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1414	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1415	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1500	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1501	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1502	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1503	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1504	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1505	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1506	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1507	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1508	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1509	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1510	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1511	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1512	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1513	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1514	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1515	1-125-837-11	s CAPACITOR,CHIP CERAMIC1MF/6.3V
C1600	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1601	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1602	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF
C1603	1-107-826-11	s CAPACITOR,CHIP CERAMIC 0.1MF

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP	Description
C1815	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C1816	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1818	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C1819	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C2001	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C2002	1-125-837-11	s	CAPACITOR,CHIP CERAMIC1MF/6.3V
C2003	1-125-837-11	s	CAPACITOR,CHIP CERAMIC1MF/6.3V
C2004	1-125-837-11	s	CAPACITOR,CHIP CERAMIC1MF/6.3V
C2005	1-125-837-11	s	CAPACITOR,CHIP CERAMIC1MF/6.3V
C2006	1-125-837-11	s	CAPACITOR,CHIP CERAMIC1MF/6.3V
C2007	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C2008	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C2009	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C2010	1-125-837-11	s	CAPACITOR,CHIP CERAMIC1MF/6.3V
C2012	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C2013	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C2014	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C2015	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C2016	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C2017	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C2018	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C5001	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C5002	1-125-837-11	s	CAPACITOR,CHIP CERAMIC1MF/6.3V
C5003	1-125-837-11	s	CAPACITOR,CHIP CERAMIC1MF/6.3V
C5004	1-125-837-11	s	CAPACITOR,CHIP CERAMIC1MF/6.3V
C5005	1-125-837-11	s	CAPACITOR,CHIP CERAMIC1MF/6.3V
C5006	1-125-837-11	s	CAPACITOR,CHIP CERAMIC1MF/6.3V
C5007	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C5008	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C5009	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C5010	1-125-837-11	s	CAPACITOR,CHIP CERAMIC1MF/6.3V
C5012	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C5013	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C5014	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C5015	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C5016	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C5017	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C5018	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C8001	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C8002	1-125-837-11	s	CAPACITOR,CHIP CERAMIC1MF/6.3V
C8003	1-125-837-11	s	CAPACITOR,CHIP CERAMIC1MF/6.3V
C8004	1-125-837-11	s	CAPACITOR,CHIP CERAMIC1MF/6.3V
C8005	1-125-837-11	s	CAPACITOR,CHIP CERAMIC1MF/6.3V
C8006	1-125-837-11	s	CAPACITOR,CHIP CERAMIC1MF/6.3V
C8007	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C8008	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C8009	1-126-391-11	s	CAPACITOR ELECT 47MF/6.3V(105)
C8010	1-125-837-11	s	CAPACITOR,CHIP CERAMIC1MF/6.3V
C8012	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C8013	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C8014	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C8015	1-162-927-11	s	CAPACITOR,CERAMIC 100PF/50V CH
C8016	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C8017	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
C8018	1-107-826-11	s	CAPACITOR,CHIP CERAMIC 0.1MF
CN5	1-573-714-11	o	HEADER, CONNECTOR 20P
CN301	1-564-033-11	o	PIN, CONNECTOR 8P
D103	8-719-820-41	s	DIODE 1SS302

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
D104	8-719-041-39	s DIODE KV1470 (5MA)
D105	8-719-941-23	s DIODE DA204U (for PAL only)
D106	8-719-941-23	s DIODE DA204U (for PAL only)
D108	8-719-801-78	s DIODE 1SS184
D109	8-719-801-78	s DIODE 1SS184
D110	8-719-801-78	s DIODE 1SS184
D111	8-719-801-78	s DIODE 1SS184
D112	8-719-801-78	s DIODE 1SS184
D301	8-719-801-78	s DIODE 1SS184
D302	8-719-104-34	s DIODE 1S2836
D303	8-719-104-34	s DIODE 1S2836
D305	8-719-105-57	s DIODE RD3.9M-B1
D306	8-719-157-23	s DIODE RD4.7M-B
D307	8-719-061-62	s DIODE KV1851 (ARI-CAP)
D308	8-719-061-62	s DIODE KV1851 (ARI-CAP)
D309	8-719-024-81	s DIODE 1SS300-TE85L
D403	8-719-820-41	s DIODE 1SS302
D404	8-719-041-39	s DIODE KV1470 (5MA)
D405	8-719-941-23	s DIODE DA204U (for PAL only)
D406	8-719-941-23	s DIODE DA204U (for PAL only)
D407	8-719-801-78	s DIODE 1SS184
D408	8-719-801-78	s DIODE 1SS184
D409	8-719-801-78	s DIODE 1SS184
D410	8-719-801-78	s DIODE 1SS184
D411	8-719-801-78	s DIODE 1SS184
D601	8-719-801-78	s DIODE 1SS184
D602	8-719-104-34	s DIODE 1S2836
D603	8-719-104-34	s DIODE 1S2836
D605	8-719-105-57	s DIODE RD3.9M-B1
D606	8-719-157-23	s DIODE RD4.7M-B
D607	8-719-061-62	s DIODE KV1851 (ARI-CAP)
D608	8-719-061-62	s DIODE KV1851 (ARI-CAP)
D609	8-719-024-81	s DIODE 1SS300-TE85L
D703	8-719-820-41	s DIODE 1SS302
D704	8-719-041-39	s DIODE KV1470 (5MA)
D705	8-719-941-23	s DIODE DA204U (for PAL only)
D706	8-719-941-23	s DIODE DA204U (for PAL only)
D707	8-719-801-78	s DIODE 1SS184
D708	8-719-801-78	s DIODE 1SS184
D709	8-719-801-78	s DIODE 1SS184
D710	8-719-801-78	s DIODE 1SS184
D711	8-719-801-78	s DIODE 1SS184
D901	8-719-801-78	s DIODE 1SS184
D902	8-719-104-34	s DIODE 1S2836
D903	8-719-104-34	s DIODE 1S2836
D905	8-719-105-57	s DIODE RD3.9M-B1
D906	8-719-157-23	s DIODE RD4.7M-B
D907	8-719-061-62	s DIODE KV1851 (ARI-CAP)
D908	8-719-061-62	s DIODE KV1851 (ARI-CAP)
D909	8-719-024-81	s DIODE 1SS300-TE85L
D1003	8-719-820-41	s DIODE 1SS302
D1004	8-719-041-39	s DIODE KV1470 (5MA)
D1005	8-719-941-23	s DIODE DA204U (for PAL only)
D1006	8-719-941-23	s DIODE DA204U (for PAL only)
D1007	8-719-801-78	s DIODE 1SS184
D1008	8-719-801-78	s DIODE 1SS184
D1009	8-719-801-78	s DIODE 1SS184
D1010	8-719-801-78	s DIODE 1SS184
D1011	8-719-801-78	s DIODE 1SS184

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
D1201	8-719-801-78	s DIODE 1SS184
D1202	8-719-104-34	s DIODE 1S2836
D1203	8-719-104-34	s DIODE 1S2836
D1205	8-719-105-57	s DIODE RD3.9M-B1
D1206	8-719-157-23	s DIODE RD4.7M-B
D1207	8-719-061-62	s DIODE KV1851 (ARI-CAP)
D1208	8-719-061-62	s DIODE KV1851 (ARI-CAP)
D1209	8-719-024-81	s DIODE 1SS300-TE85L
D1701	8-719-987-43	s LED CL-150PG-CD
D1703	8-719-987-43	s LED CL-150PG-CD
D1704	8-719-987-43	s LED CL-150PG-CD
F1701	Δ 1-576-329-11	s FUSE CHIP 10A/125V (6125)
FL101	1-233-614-11	s FILTER, LOW PASS
FL201	1-233-614-11	s FILTER, LOW PASS
FL202	1-233-598-11	s FILTER, LOW PASS (for NTSC)
	1-233-599-11	s FILTER, LOW PASS (for PAL)
FL203	1-233-598-11	s FILTER, LOW PASS (for NTSC)
	1-233-599-11	s FILTER, LOW PASS (for PAL)
FL401	1-233-614-11	s FILTER, LOW PASS
FL501	1-233-614-11	s FILTER, LOW PASS
FL502	1-233-598-11	s FILTER, LOW PASS (for NTSC)
	1-233-599-11	s FILTER, LOW PASS (for PAL)
FL503	1-233-598-11	s FILTER, LOW PASS (for NTSC)
	1-233-599-11	s FILTER, LOW PASS (for PAL)
FL701	1-233-614-11	s FILTER, LOW PASS
FL801	1-233-614-11	s FILTER, LOW PASS
FL802	1-233-598-11	s FILTER, LOW PASS (for NTSC)
	1-233-599-11	s FILTER, LOW PASS (for PAL)
FL803	1-233-598-11	s FILTER, LOW PASS (for NTSC)
	1-233-599-11	s FILTER, LOW PASS (for PAL)
FL1001	1-233-614-11	s FILTER, LOW PASS
FL1101	1-233-614-11	s FILTER, LOW PASS
FL1102	1-233-598-11	s FILTER, LOW PASS (for NTSC)
	1-233-599-11	s FILTER, LOW PASS (for PAL)
FL1103	1-233-598-11	s FILTER, LOW PASS (for NTSC)
	1-233-599-11	s FILTER, LOW PASS (for PAL)
IC101	8-759-082-61	s IC TC4W53FU
IC102	8-759-058-58	s IC TC7S04FU-TE85R
IC103	8-759-082-61	s IC TC4W53FU
IC105	8-759-533-83	s IC AD8011AR-REEL
IC106	8-759-058-58	s IC TC7S04FU-TE85R
IC107	8-759-520-55	s IC CXD8243AM
IC108	8-759-184-64	s IC TC4W66FU
IC109	8-759-669-74	s IC TL084CPWR-12
IC110	8-752-052-82	s IC CXA1432M
IC111	8-759-573-91	s IC AD8055ART-REEL7
IC201	8-759-466-27	s IC LMC60321MX
IC202	8-759-664-23	s IC ADC10321CIVT
IC203	8-759-456-03	s IC M66256GP (E2)
IC204	8-759-456-03	s IC M66256GP (E2)
IC205	8-759-456-03	s IC M66256GP (E2)
IC206	8-759-513-76	s IC CXD8161AQ
IC207	8-752-338-46	s IC CXD1178Q
IC208	8-759-324-03	s IC HA17431UA(TL)
IC209	8-759-082-61	s IC TC4W53FU
IC210	8-759-573-91	s IC AD8055ART-REEL7
IC211	8-759-082-61	s IC TC4W53FU
IC212	8-759-082-61	s IC TC4W53FU

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
IC213	8-759-573-91	s IC AD8055ART-REEL7
IC214	8-759-573-91	s IC AD8055ART-REEL7
IC215	8-759-447-90	s IC TLC5733AIPM
IC216	8-759-324-03	s IC HA17431UA(TL)
IC217	8-759-524-52	s IC TC74VHC574FT(EL)
IC218	8-759-524-52	s IC TC74VHC574FT(EL)
IC219	8-759-524-52	s IC TC74VHC574FT(EL)
IC220	8-759-050-39	s IC SN74HC574APW-EL
IC221	8-759-700-78	s IC NJM082M
IC222	8-759-082-60	s IC TC7S66FU
IC223	8-759-082-60	s IC TC7S66FU
IC224	8-759-524-52	s IC TC74VHC574FT(EL)
IC225	8-759-524-52	s IC TC74VHC574FT(EL)
IC226	8-759-676-03	o IC AT27C010-LEVT-V1.00
IC301	8-759-245-45	s IC TA78L09F
IC302	8-759-460-74	s IC BA05FP
IC303	8-759-586-98	s IC NJM79M05DLA(TE1)
IC304	8-759-346-81	s IC NJM2257M (TE2)
IC305	8-759-902-88	s IC SN74LS123NS
IC306	8-759-907-81	s IC SN74LS221N(S)
IC307	8-759-700-78	s IC NJM082M
IC308	8-759-677-14	o IC ISPLSI2032E-HPLL-V1.00
IC309	8-759-700-78	s IC NJM082M
IC310	8-759-907-81	s IC SN74LS221N(S)
IC311	8-759-907-81	s IC SN74LS221N(S)
IC312	8-759-524-27	s IC TC74VHC244FT(EL)
IC318	8-759-548-99	s IC SN74LV08APWR
IC319	8-759-523-95	s IC TC74VHC74FT(EL)
IC320	8-759-594-71	s IC TC7SH14FU-TE85R
IC402	8-759-058-58	s IC TC7S04FU-TE85R
IC406	8-759-058-58	s IC TC7S04FU-TE85R
IC407	8-759-520-55	s IC CXD8243AM
IC408	8-759-184-64	s IC TC4W66FU
IC409	8-759-669-74	s IC TL084CPWR-12
IC410	8-759-082-61	s IC TC4W53FU
IC411	8-759-082-61	s IC TC4W53FU
IC412	8-759-533-83	s IC AD8011AR-REEL
IC413	8-752-052-82	s IC CXA1432M
IC414	8-759-573-91	s IC AD8055ART-REEL7
IC501	8-759-466-27	s IC LMC60321MX
IC502	8-759-664-23	s IC ADC10321CIVT
IC503	8-759-456-03	s IC M66256GP (E2)
IC504	8-759-456-03	s IC M66256GP (E2)
IC505	8-759-456-03	s IC M66256GP (E2)
IC506	8-759-513-76	s IC CXD8161AQ
IC507	8-752-338-46	s IC CXD1178Q
IC508	8-759-324-03	s IC HA17431UA(TL)
IC509	8-759-082-61	s IC TC4W53FU
IC510	8-759-573-91	s IC AD8055ART-REEL7
IC511	8-759-082-61	s IC TC4W53FU
IC512	8-759-082-61	s IC TC4W53FU
IC513	8-759-573-91	s IC AD8055ART-REEL7
IC514	8-759-573-91	s IC AD8055ART-REEL7
IC515	8-759-447-90	s IC TLC5733AIPM
IC516	8-759-324-03	s IC HA17431UA(TL)
IC517	8-759-524-52	s IC TC74VHC574FT(EL)
IC518	8-759-524-52	s IC TC74VHC574FT(EL)
IC519	8-759-524-52	s IC TC74VHC574FT(EL)
IC520	8-759-050-39	s IC SN74HC574APW-EL

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
IC521	8-759-700-78	s IC NJM082M
IC522	8-759-082-60	s IC TC7S66FU
IC523	8-759-082-60	s IC TC7S66FU
IC524	8-759-524-52	s IC TC74VHC574FT(EL)
IC525	8-759-524-52	s IC TC74VHC574FT(EL)
IC526	8-759-676-03	o IC AT27C010-LEVT-V1.00
IC601	8-759-245-45	s IC TA78L09F
IC602	8-759-460-74	s IC BA05FP
IC603	8-759-586-98	s IC NJM79M05DLA(TE1)
IC604	8-759-346-81	s IC NJM2257M (TE2)
IC605	8-759-902-88	s IC SN74LS123NS
IC606	8-759-907-81	s IC SN74LS221N(S)
IC607	8-759-700-78	s IC NJM082M
IC608	8-759-677-14	o IC ISPLSI2032E-HPLL-V1.00
IC609	8-759-700-78	s IC NJM082M
IC610	8-759-907-81	s IC SN74LS221N(S)
IC611	8-759-907-81	s IC SN74LS221N(S)
IC612	8-759-524-27	s IC TC74VHC244FT(EL)
IC618	8-759-548-99	s IC SN74LV08APWR
IC619	8-759-523-95	s IC TC74VHC74FT(EL)
IC620	8-759-594-71	s IC TC7SH14FU-TE85R
IC702	8-759-058-58	s IC TC7S04FU-TE85R
IC706	8-759-058-58	s IC TC7S04FU-TE85R
IC707	8-759-520-55	s IC CXD8243AM
IC708	8-759-184-64	s IC TC4W66FU
IC709	8-759-669-74	s IC TL084CPWR-12
IC710	8-759-082-61	s IC TC4W53FU
IC711	8-759-082-61	s IC TC4W53FU
IC712	8-759-533-83	s IC AD8011AR-REEL
IC713	8-752-052-82	s IC CXA1432M
IC714	8-759-573-91	s IC AD8055ART-REEL7
IC801	8-759-466-27	s IC LMC60321MX
IC802	8-759-664-23	s IC ADC10321CIVT
IC803	8-759-456-03	s IC M66256GP (E2)
IC804	8-759-456-03	s IC M66256GP (E2)
IC805	8-759-456-03	s IC M66256GP (E2)
IC806	8-759-513-76	s IC CXD8161AQ
IC807	8-752-338-46	s IC CXD1178Q
IC808	8-759-324-03	s IC HA17431UA(TL)
IC809	8-759-082-61	s IC TC4W53FU
IC810	8-759-573-91	s IC AD8055ART-REEL7
IC811	8-759-082-61	s IC TC4W53FU
IC812	8-759-082-61	s IC TC4W53FU
IC813	8-759-573-91	s IC AD8055ART-REEL7
IC814	8-759-573-91	s IC AD8055ART-REEL7
IC815	8-759-447-90	s IC TLC5733AIPM
IC816	8-759-324-03	s IC HA17431UA(TL)
IC817	8-759-524-52	s IC TC74VHC574FT(EL)
IC818	8-759-524-52	s IC TC74VHC574FT(EL)
IC819	8-759-524-52	s IC TC74VHC574FT(EL)
IC820	8-759-050-39	s IC SN74HC574APW-EL
IC821	8-759-700-78	s IC NJM082M
IC822	8-759-082-60	s IC TC7S66FU
IC823	8-759-082-60	s IC TC7S66FU
IC824	8-759-524-52	s IC TC74VHC574FT(EL)
IC825	8-759-524-52	s IC TC74VHC574FT(EL)
IC826	8-759-676-03	o IC AT27C010-LEVT-V1.00
IC901	8-759-245-45	s IC TA78L09F
IC902	8-759-460-74	s IC BA05FP

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
IC903	8-759-586-98	s IC NJM79M05DLA (TE1)
IC904	8-759-346-81	s IC NJM2257M (TE2)
IC905	8-759-902-88	s IC SN74LS123NS
IC906	8-759-907-81	s IC SN74LS221N(S)
IC907	8-759-700-78	s IC NJM082M
IC908	8-759-677-14	o IC ISPLSI2032E-HPLL-V1.00
IC909	8-759-700-78	s IC NJM082M
IC910	8-759-907-81	s IC SN74LS221N(S)
IC911	8-759-907-81	s IC SN74LS221N(S)
IC912	8-759-524-27	s IC TC74VHC244FT(EL)
IC918	8-759-548-99	s IC SN74LV08APWR
IC919	8-759-523-95	s IC TC74VHC74FT(EL)
IC920	8-759-594-71	s IC TC7SH14FU-TE85R
IC1002	8-759-058-58	s IC TC7S04FU-TE85R
IC1006	8-759-058-58	s IC TC7S04FU-TE85R
IC1007	8-759-520-55	s IC CXD8243AM
IC1008	8-759-184-64	s IC TC4W66FU
IC1009	8-759-669-74	s IC TL084CPWR-12
IC1010	8-759-082-61	s IC TC4W53FU
IC1011	8-759-082-61	s IC TC4W53FU
IC1012	8-759-533-83	s IC AD8011AR-REEL
IC1013	8-752-052-82	s IC CXA1432M
IC1014	8-759-573-91	s IC AD8055ART-REEL7
IC1101	8-759-466-27	s IC LMC60321MX
IC1102	8-759-664-23	s IC ADC10321CIVT
IC1103	8-759-456-03	s IC M66256GP (E2)
IC1104	8-759-456-03	s IC M66256GP (E2)
IC1105	8-759-456-03	s IC M66256GP (E2)
IC1106	8-759-513-76	s IC CXD8161AQ
IC1107	8-752-338-46	s IC CXD1178Q
IC1108	8-759-324-03	s IC HA17431UA(TL)
IC1109	8-759-082-61	s IC TC4W53FU
IC1110	8-759-573-91	s IC AD8055ART-REEL7
IC1111	8-759-082-61	s IC TC4W53FU
IC1112	8-759-082-61	s IC TC4W53FU
IC1113	8-759-573-91	s IC AD8055ART-REEL7
IC1114	8-759-573-91	s IC AD8055ART-REEL7
IC1115	8-759-447-90	s IC TLC5733AIPM
IC1116	8-759-324-03	s IC HA17431UA(TL)
IC1117	8-759-524-52	s IC TC74VHC574FT(EL)
IC1118	8-759-524-52	s IC TC74VHC574FT(EL)
IC1119	8-759-524-52	s IC TC74VHC574FT(EL)
IC1120	8-759-050-39	s IC SN74HC574APW-EL
IC1121	8-759-700-78	s IC NJM082M
IC1122	8-759-082-60	s IC TC7S66FU
IC1123	8-759-082-60	s IC TC7S66FU
IC1124	8-759-524-52	s IC TC74VHC574FT(EL)
IC1125	8-759-524-52	s IC TC74VHC574FT(EL)
IC1126	8-759-676-03	o IC AT27C010-LEVT-V1.00
IC1201	8-759-245-45	s IC TA78L09F
IC1202	8-759-460-74	s IC BA05FP
IC1203	8-759-586-98	s IC NJM79M05DLA (TE1)
IC1204	8-759-346-81	s IC NJM2257M (TE2)
IC1205	8-759-902-88	s IC SN74LS123NS
IC1206	8-759-907-81	s IC SN74LS221N(S)
IC1207	8-759-700-78	s IC NJM082M
IC1208	8-759-677-14	o IC ISPLSI2032E-HPLL-V1.00
IC1209	8-759-700-78	s IC NJM082M
IC1210	8-759-907-81	s IC SN74LS221N(S)

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
IC1211	8-759-907-81	s IC SN74LS221N(S)
IC1212	8-759-524-27	s IC TC74VHC244FT(EL)
IC1218	8-759-548-99	s IC SN74LV08APWR
IC1219	8-759-523-95	s IC TC74VHC74FT(EL)
IC1220	8-759-594-71	s IC TC7SH14FU-TE85R
IC1300	8-759-456-03	s IC M66256GP (E2)
IC1301	8-752-360-44	s IC CXK1203AR
IC1302	8-752-360-44	s IC CXK1203AR
IC1303	8-759-549-22	s IC SN74LV574APWR
IC1304	8-759-549-22	s IC SN74LV574APWR
IC1305	8-759-647-49	s IC AL422B-TEL
IC1306	8-759-647-49	s IC AL422B-TEL
IC1307	8-759-647-49	s IC AL422B-TEL
IC1308	8-759-647-49	s IC AL422B-TEL
IC1309	8-759-490-42	s IC TC74VHCT574AFT(EL)
IC1310	8-759-490-42	s IC TC74VHCT574AFT(EL)
IC1311	8-759-549-22	s IC SN74LV574APWR
IC1312	8-759-491-49	s IC TC74VHCT240AFT(EL)
IC1400	8-759-456-03	s IC M66256GP (E2)
IC1401	8-752-360-44	s IC CXK1203AR
IC1402	8-752-360-44	s IC CXK1203AR
IC1403	8-759-549-22	s IC SN74LV574APWR
IC1404	8-759-549-22	s IC SN74LV574APWR
IC1405	8-759-647-49	s IC AL422B-TEL
IC1406	8-759-647-49	s IC AL422B-TEL
IC1407	8-759-647-49	s IC AL422B-TEL
IC1408	8-759-647-49	s IC AL422B-TEL
IC1409	8-759-490-42	s IC TC74VHCT574AFT(EL)
IC1410	8-759-490-42	s IC TC74VHCT574AFT(EL)
IC1411	8-759-549-22	s IC SN74LV574APWR
IC1500	8-759-456-03	s IC M66256GP (E2)
IC1501	8-752-360-44	s IC CXK1203AR
IC1502	8-752-360-44	s IC CXK1203AR
IC1503	8-759-549-22	s IC SN74LV574APWR
IC1504	8-759-549-22	s IC SN74LV574APWR
IC1505	8-759-647-49	s IC AL422B-TEL
IC1506	8-759-647-49	s IC AL422B-TEL
IC1507	8-759-647-49	s IC AL422B-TEL
IC1508	8-759-647-49	s IC AL422B-TEL
IC1509	8-759-490-42	s IC TC74VHCT574AFT(EL)
IC1510	8-759-490-42	s IC TC74VHCT574AFT(EL)
IC1511	8-759-549-22	s IC SN74LV574APWR
IC1600	8-759-456-03	s IC M66256GP (E2)
IC1601	8-752-360-44	s IC CXK1203AR
IC1602	8-752-360-44	s IC CXK1203AR
IC1603	8-759-549-22	s IC SN74LV574APWR
IC1604	8-759-549-22	s IC SN74LV574APWR
IC1605	8-759-647-49	s IC AL422B-TEL
IC1606	8-759-647-49	s IC AL422B-TEL
IC1607	8-759-647-49	s IC AL422B-TEL
IC1608	8-759-647-49	s IC AL422B-TEL
IC1609	8-759-490-42	s IC TC74VHCT574AFT(EL)
IC1610	8-759-490-42	s IC TC74VHCT574AFT(EL)
IC1611	8-759-549-22	s IC SN74LV574APWR
IC1701	8-759-549-20	s IC SN74LV541APWR
IC1702	8-759-549-20	s IC SN74LV541APWR
IC1703	8-759-549-20	s IC SN74LV541APWR
IC1704	8-759-549-15	s IC SN74LV245APWR
IC1706	8-759-549-22	s IC SN74LV574APWR

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
IC1707	8-759-549-20	s IC SN74LV541APWR
IC1708	8-759-549-15	s IC SN74LV245APWR
IC1709	8-759-549-20	s IC SN74LV541APWR
IC1711	8-759-549-13	s IC SN74LV240APWR
IC1712	8-759-549-22	s IC SN74LV574APWR
IC1713	8-759-549-22	s IC SN74LV574APWR
IC1714	8-759-549-13	s IC SN74LV240APWR
IC1715	8-759-490-41	s IC TC74VHCT541AFT(EL)
IC1716	8-759-490-41	s IC TC74VHCT541AFT(EL)
IC1717	8-759-681-76	o IC EPC2LC20-FSC-V3.00
IC1718	8-759-660-47	s IC EPF10K20TC144-3(04)
IC1719	8-759-490-41	s IC TC74VHCT541AFT(EL)
IS226	1-540-151-21	s SOCKET, IC
IS526	1-540-151-21	s SOCKET, IC
IS826	1-540-151-21	s SOCKET, IC
IS1126	1-540-151-21	s SOCKET, IC
IS1717	1-251-093-11	s SOCKET, IC
L101	1-414-398-11	s INDUCTOR (SMD) 10UH
L102	1-414-398-11	s INDUCTOR (SMD) 10UH
L103	1-414-398-11	s INDUCTOR (SMD) 10UH
L104	1-410-387-11	s CHIP INDUCTOR 33UH (3225)
L105	1-414-398-11	s INDUCTOR (SMD) 10UH
L106	1-410-375-11	s CHIP INDUCTOR 3.3UH (3225)
L107	1-410-389-31	s INDUCTOR,CHIP 47UH (3225) (for NTSC)
	1-410-387-11	s CHIP INDUCTOR 33UH (3225) (for PAL)
L108	1-410-378-11	s INDUCTOR,CHIP 5.6UH (3225)
L109	1-410-393-11	s INDUCTOR,CHIP 100UH (3225)
L110	1-414-398-11	s INDUCTOR (SMD) 10UH
L112	1-414-404-11	s INDUCTOR (SMD) 100UH
L113	1-414-404-11	s INDUCTOR (SMD) 100UH
L114	1-414-398-11	s INDUCTOR (SMD) 10UH
L115	1-414-398-11	s INDUCTOR (SMD) 10UH
L201	1-414-398-11	s INDUCTOR (SMD) 10UH
L202	1-414-398-11	s INDUCTOR (SMD) 10UH
L203	1-414-398-11	s INDUCTOR (SMD) 10UH
L204	1-412-010-41	s CHIP INDUCTOR 22UH (2012)
L205	1-412-010-41	s CHIP INDUCTOR 22UH (2012)
L206	1-410-373-31	s CHIP INDUCTOR 2.2UH (3225)
L207	1-414-398-11	s INDUCTOR (SMD) 10UH
L208	1-414-398-11	s INDUCTOR (SMD) 10UH
L301	1-414-398-11	s INDUCTOR (SMD) 10UH
L302	1-414-398-11	s INDUCTOR (SMD) 10UH
L303	1-410-369-11	s INDUCTOR,CHIP 1UH (3225)
L401	1-414-398-11	s INDUCTOR (SMD) 10UH
L402	1-414-398-11	s INDUCTOR (SMD) 10UH
L403	1-414-398-11	s INDUCTOR (SMD) 10UH
L404	1-410-387-11	s CHIP INDUCTOR 33UH (3225)
L406	1-410-375-11	s CHIP INDUCTOR 3.3UH (3225)
L407	1-410-389-31	s INDUCTOR,CHIP 47UH (3225) (for NTSC)
	1-410-387-11	s CHIP INDUCTOR 33UH (3225) (for PAL)
L408	1-410-378-11	s INDUCTOR,CHIP 5.6UH (3225)
L412	1-414-404-11	s INDUCTOR (SMD) 100UH
L413	1-414-404-11	s INDUCTOR (SMD) 100UH
L414	1-414-398-11	s INDUCTOR (SMD) 10UH

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
L415	1-414-398-11	s INDUCTOR (SMD) 10UH
L416	1-410-393-11	s INDUCTOR,CHIP 100UH (3225)
L417	1-414-398-11	s INDUCTOR (SMD) 10UH
L418	1-414-398-11	s INDUCTOR (SMD) 10UH
L501	1-414-398-11	s INDUCTOR (SMD) 10UH
L502	1-414-398-11	s INDUCTOR (SMD) 10UH
L503	1-414-398-11	s INDUCTOR (SMD) 10UH
L504	1-412-010-41	s CHIP INDUCTOR 22UH (2012)
L505	1-412-010-41	s CHIP INDUCTOR 22UH (2012)
L506	1-410-373-31	s CHIP INDUCTOR 2.2UH (3225)
L507	1-414-398-11	s INDUCTOR (SMD) 10UH
L508	1-414-398-11	s INDUCTOR (SMD) 10UH
L601	1-414-398-11	s INDUCTOR (SMD) 10UH
L602	1-414-398-11	s INDUCTOR (SMD) 10UH
L603	1-410-369-11	s INDUCTOR,CHIP 1UH (3225)
L701	1-414-398-11	s INDUCTOR (SMD) 10UH
L702	1-414-398-11	s INDUCTOR (SMD) 10UH
L704	1-410-387-11	s CHIP INDUCTOR 33UH (3225)
L706	1-410-375-11	s CHIP INDUCTOR 3.3UH (3225)
L707	1-410-389-31	s INDUCTOR,CHIP 47UH (3225) (for NTSC)
	1-410-387-11	s CHIP INDUCTOR 33UH (3225) (for PAL)
L708	1-410-378-11	s INDUCTOR,CHIP 5.6UH (3225)
L712	1-414-404-11	s INDUCTOR (SMD) 100UH
L713	1-414-404-11	s INDUCTOR (SMD) 100UH
L714	1-414-398-11	s INDUCTOR (SMD) 10UH
L715	1-414-398-11	s INDUCTOR (SMD) 10UH
L716	1-414-398-11	s INDUCTOR (SMD) 10UH
L717	1-410-393-11	s INDUCTOR,CHIP 100UH (3225)
L718	1-414-398-11	s INDUCTOR (SMD) 10UH
L719	1-414-398-11	s INDUCTOR (SMD) 10UH
L801	1-414-398-11	s INDUCTOR (SMD) 10UH
L802	1-414-398-11	s INDUCTOR (SMD) 10UH
L803	1-414-398-11	s INDUCTOR (SMD) 10UH
L804	1-412-010-41	s CHIP INDUCTOR 22UH (2012)
L805	1-412-010-41	s CHIP INDUCTOR 22UH (2012)
L806	1-410-373-31	s CHIP INDUCTOR 2.2UH (3225)
L807	1-414-398-11	s INDUCTOR (SMD) 10UH
L808	1-414-398-11	s INDUCTOR (SMD) 10UH
L901	1-414-398-11	s INDUCTOR (SMD) 10UH
L902	1-414-398-11	s INDUCTOR (SMD) 10UH
L903	1-410-369-11	s INDUCTOR,CHIP 1UH (3225)
L1025	1-414-398-11	s INDUCTOR (SMD) 10UH
L1026	1-414-398-11	s INDUCTOR (SMD) 10UH
L1027	1-414-398-11	s INDUCTOR (SMD) 10UH
L1028	1-414-398-11	s INDUCTOR (SMD) 10UH
L1029	1-410-375-11	s CHIP INDUCTOR 3.3UH (3225)
L1030	1-410-389-31	s INDUCTOR,CHIP 47UH (3225) (for NTSC)
	1-410-387-11	s CHIP INDUCTOR 33UH (3225) (for PAL)
L1031	1-410-378-11	s INDUCTOR,CHIP 5.6UH (3225)
L1032	1-414-404-11	s INDUCTOR (SMD) 100UH
L1033	1-414-404-11	s INDUCTOR (SMD) 100UH
L1034	1-414-398-11	s INDUCTOR (SMD) 10UH
L1035	1-410-387-11	s CHIP INDUCTOR 33UH (3225)
L1036	1-414-398-11	s INDUCTOR (SMD) 10UH
L1037	1-410-393-11	s INDUCTOR,CHIP 100UH (3225)
L1038	1-414-398-11	s INDUCTOR (SMD) 10UH

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
L1101	1-414-398-11	s INDUCTOR (SMD) 10UH
L1102	1-414-398-11	s INDUCTOR (SMD) 10UH
L1103	1-414-398-11	s INDUCTOR (SMD) 10UH
L1104	1-412-010-41	s CHIP INDUCTOR 22UH (2012)
L1105	1-412-010-41	s CHIP INDUCTOR 22UH (2012)
L1106	1-410-373-31	s CHIP INDUCTOR 2.2UH (3225)
L1107	1-414-398-11	s INDUCTOR (SMD) 10UH
L1108	1-414-398-11	s INDUCTOR (SMD) 10UH
L1201	1-414-398-11	s INDUCTOR (SMD) 10UH
L1202	1-414-398-11	s INDUCTOR (SMD) 10UH
L1203	1-410-369-11	s INDUCTOR,CHIP 1UH (3225)
L1701	1-412-522-31	s MICRO INDUCTOR 5.6UH
L1703	1-414-398-11	s INDUCTOR (SMD) 10UH
L1704	1-412-056-11	s INDUCTOR 4.7UH (3225)
L1705	1-412-056-11	s INDUCTOR 4.7UH (3225)
LV301	1-410-286-11	s VARIABLE INDUCTOR 1.0UH
LV601	1-410-286-11	s VARIABLE INDUCTOR 1.0UH
LV901	1-410-286-11	s VARIABLE INDUCTOR 1.0UH
LV1201	1-410-286-11	s VARIABLE INDUCTOR 1.0UH
PS1703	△ 1-533-282-21	s CIRCUIT PROTECTOR 2A (3225)
PS1704	△ 1-533-282-21	s CIRCUIT PROTECTOR 2A (3225)
PS1705	△ 1-533-282-21	s CIRCUIT PROTECTOR 2A (3225)
Q101	8-729-117-32	s TRANSISTOR 2SC4177
Q103	8-729-117-32	s TRANSISTOR 2SC4177
Q104	8-729-117-32	s TRANSISTOR 2SC4177
Q105	8-729-013-28	s TRANSISTOR HN1B01FU-TE85R
Q106	8-729-013-28	s TRANSISTOR HN1B01FU-TE85R
Q107	8-729-013-28	s TRANSISTOR HN1B01FU-TE85R
Q108	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q110	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q112	8-729-117-32	s TRANSISTOR 2SC4177
Q113	8-729-013-28	s TRANSISTOR HN1B01FU-TE85R
Q114	8-729-117-32	s TRANSISTOR 2SC4177
Q115	8-729-117-32	s TRANSISTOR 2SC4177
Q118	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q119	8-729-117-32	s TRANSISTOR 2SC4177
Q120	8-729-028-85	s TRANSISTOR DTA124XUA-T106
Q201	8-729-117-32	s TRANSISTOR 2SC4177
Q202	8-729-117-32	s TRANSISTOR 2SC4177
Q203	8-729-117-32	s TRANSISTOR 2SC4177
Q204	8-729-117-32	s TRANSISTOR 2SC4177
Q205	8-729-117-32	s TRANSISTOR 2SC4177
Q206	8-729-117-32	s TRANSISTOR 2SC4177
Q207	8-729-117-32	s TRANSISTOR 2SC4177
Q208	8-729-117-32	s TRANSISTOR 2SC4177
Q209	8-729-117-32	s TRANSISTOR 2SC4177
Q210	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q301	8-729-427-70	s TRANSISTOR XP4401
Q302	8-729-117-32	s TRANSISTOR 2SC4177
Q303	8-729-117-32	s TRANSISTOR 2SC4177
Q304	8-729-116-66	s TRANSISTOR 2SK508-K53
Q305	8-729-117-32	s TRANSISTOR 2SC4177
Q401	8-729-117-32	s TRANSISTOR 2SC4177
Q403	8-729-117-32	s TRANSISTOR 2SC4177
Q404	8-729-117-32	s TRANSISTOR 2SC4177
Q408	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q410	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q412	8-729-117-32	s TRANSISTOR 2SC4177

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
Q414	8-729-117-32	s TRANSISTOR 2SC4177
Q415	8-729-117-32	s TRANSISTOR 2SC4177
Q416	8-729-013-28	s TRANSISTOR HN1B01FU-TE85R
Q417	8-729-013-28	s TRANSISTOR HN1B01FU-TE85R
Q418	8-729-013-28	s TRANSISTOR HN1B01FU-TE85R
Q419	8-729-013-28	s TRANSISTOR HN1B01FU-TE85R
Q420	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q421	8-729-117-32	s TRANSISTOR 2SC4177
Q422	8-729-028-85	s TRANSISTOR DTA124XUA-T106
Q501	8-729-117-32	s TRANSISTOR 2SC4177
Q502	8-729-117-32	s TRANSISTOR 2SC4177
Q503	8-729-117-32	s TRANSISTOR 2SC4177
Q504	8-729-117-32	s TRANSISTOR 2SC4177
Q505	8-729-117-32	s TRANSISTOR 2SC4177
Q506	8-729-117-32	s TRANSISTOR 2SC4177
Q507	8-729-117-32	s TRANSISTOR 2SC4177
Q508	8-729-117-32	s TRANSISTOR 2SC4177
Q509	8-729-117-32	s TRANSISTOR 2SC4177
Q510	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q601	8-729-427-70	s TRANSISTOR XP4401
Q602	8-729-117-32	s TRANSISTOR 2SC4177
Q603	8-729-117-32	s TRANSISTOR 2SC4177
Q604	8-729-116-66	s TRANSISTOR 2SK508-K53
Q605	8-729-117-32	s TRANSISTOR 2SC4177
Q701	8-729-117-32	s TRANSISTOR 2SC4177
Q703	8-729-117-32	s TRANSISTOR 2SC4177
Q704	8-729-117-32	s TRANSISTOR 2SC4177
Q708	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q710	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q712	8-729-117-32	s TRANSISTOR 2SC4177
Q714	8-729-117-32	s TRANSISTOR 2SC4177
Q715	8-729-117-32	s TRANSISTOR 2SC4177
Q716	8-729-013-28	s TRANSISTOR HN1B01FU-TE85R
Q717	8-729-013-28	s TRANSISTOR HN1B01FU-TE85R
Q718	8-729-013-28	s TRANSISTOR HN1B01FU-TE85R
Q719	8-729-013-28	s TRANSISTOR HN1B01FU-TE85R
Q720	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q721	8-729-117-32	s TRANSISTOR 2SC4177
Q722	8-729-028-85	s TRANSISTOR DTA124XUA-T106
Q801	8-729-117-32	s TRANSISTOR 2SC4177
Q802	8-729-117-32	s TRANSISTOR 2SC4177
Q803	8-729-117-32	s TRANSISTOR 2SC4177
Q804	8-729-117-32	s TRANSISTOR 2SC4177
Q805	8-729-117-32	s TRANSISTOR 2SC4177
Q806	8-729-117-32	s TRANSISTOR 2SC4177
Q807	8-729-117-32	s TRANSISTOR 2SC4177
Q808	8-729-117-32	s TRANSISTOR 2SC4177
Q809	8-729-117-32	s TRANSISTOR 2SC4177
Q810	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q901	8-729-427-70	s TRANSISTOR XP4401
Q902	8-729-117-32	s TRANSISTOR 2SC4177
Q903	8-729-117-32	s TRANSISTOR 2SC4177
Q904	8-729-116-66	s TRANSISTOR 2SK508-K53
Q905	8-729-117-32	s TRANSISTOR 2SC4177
Q1001	8-729-117-32	s TRANSISTOR 2SC4177
Q1003	8-729-117-32	s TRANSISTOR 2SC4177
Q1004	8-729-117-32	s TRANSISTOR 2SC4177
Q1008	8-729-140-63	s TRANSISTOR 2SA1611-M5M6
Q1010	8-729-140-63	s TRANSISTOR 2SA1611-M5M6

(VIP-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
Q1012	8-729-117-32 s	TRANSISTOR 2SC4177
Q1014	8-729-117-32 s	TRANSISTOR 2SC4177
Q1015	8-729-117-32 s	TRANSISTOR 2SC4177
Q1016	8-729-013-28 s	TRANSISTOR HN1B01FU-TE85R
Q1017	8-729-013-28 s	TRANSISTOR HN1B01FU-TE85R
Q1018	8-729-013-28 s	TRANSISTOR HN1B01FU-TE85R
Q1019	8-729-013-28 s	TRANSISTOR HN1B01FU-TE85R
Q1020	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q1021	8-729-117-32 s	TRANSISTOR 2SC4177
Q1022	8-729-028-85 s	TRANSISTOR DTA124XUA-T106
Q1101	8-729-117-32 s	TRANSISTOR 2SC4177
Q1102	8-729-117-32 s	TRANSISTOR 2SC4177
Q1103	8-729-117-32 s	TRANSISTOR 2SC4177
Q1104	8-729-117-32 s	TRANSISTOR 2SC4177
Q1105	8-729-117-32 s	TRANSISTOR 2SC4177
Q1106	8-729-117-32 s	TRANSISTOR 2SC4177
Q1107	8-729-117-32 s	TRANSISTOR 2SC4177
Q1108	8-729-117-32 s	TRANSISTOR 2SC4177
Q1109	8-729-117-32 s	TRANSISTOR 2SC4177
Q1110	8-729-140-63 s	TRANSISTOR 2SA1611-M5M6
Q1201	8-729-427-70 s	TRANSISTOR XP4401
Q1202	8-729-117-32 s	TRANSISTOR 2SC4177
Q1203	8-729-117-32 s	TRANSISTOR 2SC4177
Q1204	8-729-116-66 s	TRANSISTOR 2SK508-K53
Q1205	8-729-117-32 s	TRANSISTOR 2SC4177
R101	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R102	1-211-990-11 s	RESISTOR,CHIP 75 1/16W (1608)
R103	1-211-969-11 s	RESISTOR,CHIP 10 1/16W (1608)
R104	1-211-990-11 s	RESISTOR,CHIP 75 1/16W (1608)
R105	1-211-990-11 s	RESISTOR,CHIP 75 1/16W (1608)
R106	1-218-841-11 s	RESISTOR,CHIP 560 1/16W (1608)
R107	1-218-887-11 s	RESISTOR,CHIP 47K 1/16W (1608)
R108	1-218-887-11 s	RESISTOR,CHIP 47K 1/16W (1608)
R109	1-218-887-11 s	RESISTOR,CHIP 47K 1/16W (1608)
R110	1-218-849-11 s	RESISTOR,CHIP 1.2K 1/16W(1608) (for NTSC)
	1-218-853-11 s	RESISTOR,CHIP 1.8K 1/16W(1608) (for PAL)
R111	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R112	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R113	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R114	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R115	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R116	1-218-869-11 s	RESISTOR,CHIP 8.2K 1/16W(1608)
R117	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R118	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R119	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R120	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R121	1-218-859-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R122	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R123	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R124	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R125	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R126	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R127	1-211-977-11 s	RESISTOR,CHIP 22 1/16W (1608)
R128	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R129	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R130	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R131	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)

(VIP-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
R132	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R133	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R134	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R135	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R136	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R137	1-218-839-11 s	RESISTOR,CHIP 470 1/16W (1608)
R138	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R139	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R140	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R141	1-218-859-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R142	1-218-843-11 s	RESISTOR,CHIP 680 1/16W (1608)
R143	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R144	1-216-857-11 s	RESISTOR,CHIP 1M 1/16W(1608)
R145	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R146	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R147	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R148	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R149	1-218-835-11 s	RESISTOR,CHIP 330 1/16W (1608)
R150	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R151	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R152	1-211-977-11 s	RESISTOR,CHIP 22 1/16W (1608)
R153	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R154	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R155	1-218-915-11 s	RESISTOR,CHIP 680K 1/16W(1608) (for PAL only)
R156	1-218-907-11 s	RESISTOR,CHIP 330K 1/16W(1608) (for NTSC)
	1-218-915-11 s	RESISTOR,CHIP 680K 1/16W(1608) (for PAL)
R157	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R158	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R159	1-218-887-11 s	RESISTOR,CHIP 47K 1/16W (1608)
R160	1-218-887-11 s	RESISTOR,CHIP 47K 1/16W (1608)
R161	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R162	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608) (for NTSC)
	1-218-903-11 s	RESISTOR,CHIP 220K 1/16W(1608) (for PAL)
R163	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R169	1-218-883-11 s	RESISTOR,CHIP 33K 1/16W (1608)
R171	1-211-977-11 s	RESISTOR,CHIP 22 1/16W (1608)
R172	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R173	1-211-977-11 s	RESISTOR,CHIP 22 1/16W (1608)
R174	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R175	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R176	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R177	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R178	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R179	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R180	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R181	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R182	1-218-859-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R183	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R184	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R185	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R186	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R187	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R188	1-218-851-11 s	RESISTOR,CHIP 1.5K 1/16W(1608)
R189	1-218-834-11 s	RESISTOR,CHIP 300 1/16W (1608)
R190	1-218-837-11 s	RESISTOR,CHIP 390 1/16W (1608)

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
R191	1-218-843-11	s RESISTOR,CHIP 680 1/16W (1608)
R192	1-218-867-11	s RESISTOR,CHIP 6.8K 1/16W(1608)
R193	1-218-878-11	s RESISTOR,CHIP 20K 1/16W (1608)
R194	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
R196	1-218-885-11	s RESISTOR,CHIP 39K 1/16W (1608)
R197	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R198	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R199	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R201	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R202	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R203	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R204	1-218-873-11	s RESISTOR,CHIP 12K 1/16W (1608)
R205	1-218-875-11	s RESISTOR,CHIP 15K 1/16W (1608)
R206	1-218-857-11	s RESISTOR,CHIP 2.7K 1/16W(1608)
R207	1-218-861-11	s RESISTOR,CHIP 3.9K 1/16W(1608)
R208	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R210	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R211	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R212	1-218-860-11	s RESISTOR,CHIP 3.6K 1/16W(1608)
R213	1-218-849-11	s RESISTOR,CHIP 1.2K 1/16W(1608)
R214	1-218-841-11	s RESISTOR,CHIP 560 1/16W (1608)
R215	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R216	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R217	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R218	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R219	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R220	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R221	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R222	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R223	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R224	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R225	1-218-854-11	s RESISTOR,CHIP 2K 1/16W (1608)
R226	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R227	1-218-851-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R228	1-218-879-11	s RESISTOR,CHIP 22K 1/16W (1608)
R229	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R230	1-218-834-11	s RESISTOR,CHIP 300 1/16W (1608)
R231	1-218-835-11	s RESISTOR,CHIP 330 1/16W (1608)
R232	1-218-835-11	s RESISTOR,CHIP 330 1/16W (1608)
R233	1-218-835-11	s RESISTOR,CHIP 330 1/16W (1608)
R234	1-218-840-11	s RESISTOR,CHIP 510 1/16W (1608)
R235	1-218-840-11	s RESISTOR,CHIP 510 1/16W (1608)
R236	1-218-864-11	s RESISTOR,CHIP 5.1K 1/16W(1608)
R237	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R238	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R239	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R240	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R241	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608) (for NTSC only)
R242	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R243	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R244	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R245	1-218-853-11	s RESISTOR,CHIP 1.8K 1/16W(1608)
R246	1-218-853-11	s RESISTOR,CHIP 1.8K 1/16W(1608)
R247	1-218-832-11	s RESISTOR,CHIP 240 1/16W (1608)
R248	1-218-845-11	s RESISTOR,CHIP 820 1/16W (1608)
R249	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R251	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R252	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
R253	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R254	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R255	1-218-845-11	s RESISTOR,CHIP 820 1/16W (1608)
R256	1-218-845-11	s RESISTOR,CHIP 820 1/16W (1608)
R257	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R258	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R259	1-218-875-11	s RESISTOR,CHIP 15K 1/16W (1608)
R260	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R261	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R262	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R263	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R264	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R265	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R266	1-218-864-11	s RESISTOR,CHIP 5.1K 1/16W(1608)
R267	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R268	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R269	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R270	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R271	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R272	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R273	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R274	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R275	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R276	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R277	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R278	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R279	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R280	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R281	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R282	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R283	1-218-827-11	s RESISTOR,CHIP 150 1/16W (1608)
R284	1-218-827-11	s RESISTOR,CHIP 150 1/16W (1608)
R285	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R286	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R287	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R288	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R289	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R290	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R291	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R292	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R293	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R294	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R295	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R296	1-218-865-11	s RESISTOR,CHIP 5.6K 1/16W(1608)
R297	1-218-879-11	s RESISTOR,CHIP 22K 1/16W (1608)
R298	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R299	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R301	1-218-914-11	s RESISTOR CHIP 620K 1/16W(1608)
R302	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R303	1-218-890-11	s RESISTOR, CHIP 62K 1/16W(1608)
R304	1-218-853-11	s RESISTOR,CHIP 1.8K 1/16W(1608)
R305	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
R306	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R307	1-218-893-11	s RESISTOR, CHIP 82K 1/16W(1608)
R308	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R309	1-218-849-11	s RESISTOR,CHIP 1.2K 1/16W(1608)
R310	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R311	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R312	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
R313	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R314	1-218-859-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R315	1-218-875-11 s	RESISTOR,CHIP 15K 1/16W (1608)
R316	1-218-861-11 s	RESISTOR,CHIP 3.9K 1/16W(1608)
R317	1-218-903-11 s	RESISTOR,CHIP 220K 1/16W(1608)
R318	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R319	1-218-897-11 s	RESISTOR,CHIP 120K 1/16W(1608) (for NTSC)
	1-218-901-11 s	RESISTOR,CHIP 180K 1/16W(1608) (for PAL)
R320	1-218-903-11 s	RESISTOR,CHIP 220K 1/16W(1608)
R321	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R322	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R323	1-215-451-00 s	RESISTOR,METAL FILM 18K 1/4W
R324	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R325	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R327	1-218-863-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R328	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R329	1-218-823-11 s	RESISTOR,CHIP 100 1/16W (1608)
R330	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R331	1-218-879-11 s	RESISTOR,CHIP 22K 1/16W (1608)
R332	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R333	1-218-883-11 s	RESISTOR,CHIP 33K 1/16W (1608)
R334	1-218-883-11 s	RESISTOR,CHIP 33K 1/16W (1608)
R335	1-218-875-11 s	RESISTOR,CHIP 15K 1/16W (1608)
R336	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R337	1-218-903-11 s	RESISTOR,CHIP 220K 1/16W(1608)
R338	1-218-907-11 s	RESISTOR,CHIP 330K 1/16W(1608)
R339	1-218-875-11 s	RESISTOR,CHIP 15K 1/16W (1608)
R340	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R341	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R342	1-218-903-11 s	RESISTOR,CHIP 220K 1/16W(1608)
R343	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R347	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R348	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R349	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R350	1-218-887-11 s	RESISTOR,CHIP 47K 1/16W (1608)
R401	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R402	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R403	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R404	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R405	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R406	1-218-841-11 s	RESISTOR,CHIP 560 1/16W (1608)
R407	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R408	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R409	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R410	1-218-849-11 s	RESISTOR,CHIP 1.2K 1/16W(1608) (for NTSC)
	1-218-853-11 s	RESISTOR,CHIP 1.8K 1/16W(1608) (for PAL)
R411	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R412	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R413	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R414	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R415	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R416	1-218-869-11 s	RESISTOR,CHIP 8.2K 1/16W(1608)
R417	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R418	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R419	1-218-859-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R420	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
R421	1-218-859-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R422	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R423	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R424	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R425	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R426	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R427	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R428	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R429	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R430	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R431	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R433	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R434	1-218-885-11 s	RESISTOR,CHIP 39K 1/16W (1608)
R435	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R436	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R437	1-218-839-11 s	RESISTOR,CHIP 470 1/16W (1608)
R438	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R439	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R440	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R441	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R442	1-218-843-11 s	RESISTOR,CHIP 680 1/16W (1608)
R443	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R444	1-216-857-11 s	RESISTOR,CHIP 1M 1/16W(1608)
R445	1-218-834-11 s	RESISTOR,CHIP 300 1/16W (1608)
R446	1-218-851-11 s	RESISTOR,CHIP 1.5K 1/16W(1608)
R447	1-218-835-11 s	RESISTOR,CHIP 330 1/16W (1608)
R448	1-218-867-11 s	RESISTOR,CHIP 6.8K 1/16W(1608)
R449	1-218-837-11 s	RESISTOR,CHIP 390 1/16W (1608)
R450	1-218-843-11 s	RESISTOR,CHIP 680 1/16W (1608)
R451	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R452	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R453	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R454	1-218-839-11 s	RESISTOR,CHIP 470 1/16W (1608)
R455	1-218-915-11 s	RESISTOR,CHIP 680K 1/16W(1608) (for PAL only)
R456	1-218-907-11 s	RESISTOR,CHIP 330K 1/16W(1608) (for NTSC)
	1-218-915-11 s	RESISTOR,CHIP 680K 1/16W(1608) (for PAL)
R457	1-218-839-11 s	RESISTOR,CHIP 470 1/16W (1608)
R458	1-218-878-11 s	RESISTOR,CHIP 20K 1/16W (1608)
R459	1-218-887-11 s	RESISTOR,CHIP 47K 1/16W (1608)
R460	1-218-887-11 s	RESISTOR,CHIP 47K 1/16W (1608)
R461	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R462	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608) (for NTSC)
	1-218-903-11 s	RESISTOR,CHIP 220K 1/16W(1608) (for PAL)
R463	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R468	1-218-823-11 s	RESISTOR,CHIP 100 1/16W (1608)
R469	1-218-883-11 s	RESISTOR,CHIP 33K 1/16W (1608)
R471	1-211-977-11 s	RESISTOR,CHIP 22 1/16W (1608)
R472	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R473	1-211-977-11 s	RESISTOR,CHIP 22 1/16W (1608)
R474	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R475	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R476	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R477	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R478	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R479	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
R480	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R481	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R482	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R483	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R484	1-211-990-11	s RESISTOR,CHIP 75 1/16W (1608)
R485	1-211-969-11	s RESISTOR,CHIP 10 1/16W (1608)
R486	1-211-990-11	s RESISTOR,CHIP 75 1/16W (1608)
R487	1-211-990-11	s RESISTOR,CHIP 75 1/16W (1608)
R488	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R489	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R490	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R491	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R492	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R493	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R494	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R495	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R496	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R497	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R498	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R499	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R501	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R502	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R503	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R504	1-218-873-11	s RESISTOR,CHIP 12K 1/16W (1608)
R505	1-218-875-11	s RESISTOR,CHIP 15K 1/16W (1608)
R506	1-218-857-11	s RESISTOR,CHIP 2.7K 1/16W(1608)
R507	1-218-861-11	s RESISTOR,CHIP 3.9K 1/16W(1608)
R508	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R510	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R511	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R512	1-218-860-11	s RESISTOR,CHIP 3.6K 1/16W(1608)
R513	1-218-849-11	s RESISTOR,CHIP 1.2K 1/16W(1608)
R514	1-218-841-11	s RESISTOR,CHIP 560 1/16W (1608)
R515	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R516	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R517	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R518	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R519	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R520	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R521	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R522	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R523	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R524	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R525	1-218-854-11	s RESISTOR,CHIP 2K 1/16W (1608)
R526	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R527	1-218-851-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R528	1-218-879-11	s RESISTOR,CHIP 22K 1/16W (1608)
R529	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R530	1-218-834-11	s RESISTOR,CHIP 300 1/16W (1608)
R531	1-218-835-11	s RESISTOR,CHIP 330 1/16W (1608)
R532	1-218-835-11	s RESISTOR,CHIP 330 1/16W (1608)
R533	1-218-835-11	s RESISTOR,CHIP 330 1/16W (1608)
R534	1-218-840-11	s RESISTOR,CHIP 510 1/16W (1608)
R535	1-218-840-11	s RESISTOR,CHIP 510 1/16W (1608)
R536	1-218-864-11	s RESISTOR,CHIP 5.1K 1/16W(1608)
R537	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R538	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R539	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R540	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
R541	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608) (for NTSC only)
R542	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R543	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R544	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R545	1-218-853-11	s RESISTOR,CHIP 1.8K 1/16W(1608)
R546	1-218-853-11	s RESISTOR,CHIP 1.8K 1/16W(1608)
R547	1-218-832-11	s RESISTOR,CHIP 240 1/16W (1608)
R548	1-218-845-11	s RESISTOR,CHIP 820 1/16W (1608)
R549	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R551	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R552	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R553	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R554	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R555	1-218-845-11	s RESISTOR,CHIP 820 1/16W (1608)
R556	1-218-845-11	s RESISTOR,CHIP 820 1/16W (1608)
R557	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R558	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R559	1-218-875-11	s RESISTOR,CHIP 15K 1/16W (1608)
R560	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R561	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R562	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R563	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R564	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R565	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R566	1-218-864-11	s RESISTOR,CHIP 5.1K 1/16W(1608)
R567	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R568	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R569	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R570	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R571	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R572	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R573	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R574	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R575	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R576	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R577	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R578	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R579	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R580	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R581	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R582	1-211-981-11	s RESISTOR,CHIP 33 1/16W (1608)
R583	1-218-827-11	s RESISTOR,CHIP 150 1/16W (1608)
R584	1-218-827-11	s RESISTOR,CHIP 150 1/16W (1608)
R585	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R586	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R587	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R588	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R589	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R590	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R591	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R592	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R593	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R594	1-218-831-11	s RESISTOR,CHIP 220 1/16W(1608)
R595	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R596	1-218-865-11	s RESISTOR,CHIP 5.6K 1/16W(1608)
R597	1-218-879-11	s RESISTOR,CHIP 22K 1/16W (1608)
R598	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)
R599	1-218-847-11	s RESISTOR,CHIP 1K 1/16W (1608)

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
R601	1-218-914-11	s RESISTOR,CHIP 620K 1/16W(1608)
R602	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R603	1-218-890-11	s RESISTOR, CHIP 62K 1/16W(1608)
R604	1-218-853-11	s RESISTOR,CHIP 1.8K 1/16W(1608)
R605	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
R606	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R607	1-218-893-11	s RESISTOR, CHIP 82K 1/16W(1608)
R608	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R609	1-218-849-11	s RESISTOR,CHIP 1.2K 1/16W(1608)
R610	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R611	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R612	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R613	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R614	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R615	1-218-875-11	s RESISTOR,CHIP 15K 1/16W (1608)
R616	1-218-861-11	s RESISTOR,CHIP 3.9K 1/16W(1608)
R617	1-218-903-11	s RESISTOR,CHIP 220K 1/16W(1608)
R618	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R619	1-218-897-11	s RESISTOR,CHIP 120K 1/16W(1608)
		(for NTSC)
	1-218-901-11	s RESISTOR,CHIP 180K 1/16W(1608)
		(for PAL)
R620	1-218-903-11	s RESISTOR,CHIP 220K 1/16W(1608)
R621	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R622	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R623	1-215-451-00	s RESISTOR,METAL FILM 18K 1/4W
R624	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R625	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R627	1-218-863-11	s RESISTOR,CHIP 4.7K 1/16W(1608)
R628	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
R629	1-218-823-11	s RESISTOR,CHIP 100 1/16W (1608)
R630	1-216-864-11	s RESISTOR,CHIP 0 1/16W (1608)
R631	1-218-879-11	s RESISTOR,CHIP 22K 1/16W (1608)
R632	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R633	1-218-883-11	s RESISTOR,CHIP 33K 1/16W (1608)
R634	1-218-883-11	s RESISTOR,CHIP 33K 1/16W (1608)
R635	1-218-875-11	s RESISTOR,CHIP 15K 1/16W (1608)
R636	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R637	1-218-903-11	s RESISTOR,CHIP 220K 1/16W(1608)
R638	1-218-907-11	s RESISTOR,CHIP 330K 1/16W(1608)
R639	1-218-875-11	s RESISTOR,CHIP 15K 1/16W (1608)
R640	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R641	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R642	1-218-903-11	s RESISTOR,CHIP 220K 1/16W(1608)
R643	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
R647	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R648	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R649	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R650	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R701	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R702	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R703	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R704	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R705	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R706	1-218-841-11	s RESISTOR,CHIP 560 1/16W (1608)
R707	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R708	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R709	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
R710	1-218-849-11	s RESISTOR,CHIP 1.2K 1/16W(1608)
		(for NTSC)
	1-218-853-11	s RESISTOR,CHIP 1.8K 1/16W(1608)
		(for PAL)
R711	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R712	1-218-859-11	s RESISTOR,CHIP 3.3K 1/16W(1608)
R713	1-218-834-11	s RESISTOR,CHIP 300 1/16W (1608)
R714	1-218-851-11	s RESISTOR,CHIP 1.5K 1/16W(1608)
R715	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R716	1-218-869-11	s RESISTOR,CHIP 8.2K 1/16W(1608)
R717	1-218-871-11	s RESISTOR,CHIP 10K 1/16W (1608)
R718	1-218-867-11	s RESISTOR,CHIP 6.8K 1/16W(1608)
R719	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
R721	1-218-885-11	s RESISTOR,CHIP 39K 1/16W (1608)
R722	1-218-878-11	s RESISTOR,CHIP 20K 1/16W (1608)
R723	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R724	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R725	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R726	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R727	1-218-837-11	s RESISTOR,CHIP 390 1/16W (1608)
R728	1-218-843-11	s RESISTOR,CHIP 680 1/16W (1608)
R729	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R730	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R731	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
R732	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R733	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R734	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R735	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R736	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R737	1-218-839-11	s RESISTOR,CHIP 470 1/16W (1608)
R738	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R739	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R740	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R741	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R742	1-218-843-11	s RESISTOR,CHIP 680 1/16W (1608)
R743	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R744	1-216-857-11	s RESISTOR,CHIP 1M 1/16W(1608)
R745	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R746	1-211-985-11	s RESISTOR,CHIP 47 1/16W (1608)
R747	1-218-847-11	s RESISTOR, CHIP 1K 1/16W (1608)
R748	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R749	1-211-977-11	s RESISTOR,CHIP 22 1/16W (1608)
R750	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R751	1-218-855-11	s RESISTOR,CHIP 2.2K 1/16W(1608)
R752	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R753	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R754	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R755	1-218-915-11	s RESISTOR,CHIP 680K 1/16W(1608)
		(for PAL only)
R756	1-218-907-11	s RESISTOR,CHIP 330K 1/16W(1608)
		(for NTSC)
	1-218-915-11	s RESISTOR,CHIP 680K 1/16W(1608)
		(for PAL)
R757	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R758	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R759	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R760	1-218-887-11	s RESISTOR,CHIP 47K 1/16W (1608)
R761	1-218-831-11	s RESISTOR, CHIP 220 1/16W(1608)
R762	1-218-895-11	s RESISTOR,CHIP 100K 1/16W(1608)
		(for NTSC)

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
R762	1-218-903-11 s	RESISTOR,CHIP 220K 1/16W(1608) (for PAL)
R763	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R768	1-218-823-11 s	RESISTOR,CHIP 100 1/16W (1608)
R769	1-218-883-11 s	RESISTOR,CHIP 33K 1/16W (1608)
R771	1-211-977-11 s	RESISTOR,CHIP 22 1/16W (1608)
R772	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R773	1-211-977-11 s	RESISTOR,CHIP 22 1/16W (1608)
R774	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R775	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R776	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R777	1-211-990-11 s	RESISTOR,CHIP 75 1/16W (1608)
R778	1-211-969-11 s	RESISTOR,CHIP 10 1/16W (1608)
R779	1-211-990-11 s	RESISTOR,CHIP 75 1/16W (1608)
R780	1-211-990-11 s	RESISTOR,CHIP 75 1/16W (1608)
R781	1-218-887-11 s	RESISTOR,CHIP 47K 1/16W (1608)
R782	1-218-887-11 s	RESISTOR,CHIP 47K 1/16W (1608)
R783	1-218-887-11 s	RESISTOR,CHIP 47K 1/16W (1608)
R784	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R785	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R786	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R787	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R788	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R789	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R790	1-218-859-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R791	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R792	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R793	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R794	1-218-859-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R795	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R796	1-218-835-11 s	RESISTOR,CHIP 330 1/16W (1608)
R797	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R798	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R799	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R801	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R802	1-218-859-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R803	1-218-863-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R804	1-218-873-11 s	RESISTOR,CHIP 12K 1/16W (1608)
R805	1-218-875-11 s	RESISTOR,CHIP 15K 1/16W (1608)
R806	1-218-857-11 s	RESISTOR,CHIP 2.7K 1/16W(1608)
R807	1-218-861-11 s	RESISTOR,CHIP 3.9K 1/16W(1608)
R808	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R810	1-218-887-11 s	RESISTOR,CHIP 47K 1/16W (1608)
R811	1-218-863-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R812	1-218-860-11 s	RESISTOR,CHIP 3.6K 1/16W(1608)
R813	1-218-849-11 s	RESISTOR,CHIP 1.2K 1/16W(1608)
R814	1-218-841-11 s	RESISTOR,CHIP 560 1/16W (1608)
R815	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R816	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R817	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R818	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R819	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R820	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R821	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R822	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R823	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R824	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R825	1-218-854-11 s	RESISTOR,CHIP 2K 1/16W (1608)
R826	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R827	1-218-851-11 s	RESISTOR,CHIP 1.5K 1/16W(1608)

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
R828	1-218-879-11 s	RESISTOR,CHIP 22K 1/16W (1608)
R829	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R830	1-218-834-11 s	RESISTOR,CHIP 300 1/16W (1608)
R831	1-218-835-11 s	RESISTOR,CHIP 330 1/16W (1608)
R832	1-218-835-11 s	RESISTOR,CHIP 330 1/16W (1608)
R833	1-218-835-11 s	RESISTOR,CHIP 330 1/16W (1608)
R834	1-218-840-11 s	RESISTOR,CHIP 510 1/16W (1608)
R835	1-218-840-11 s	RESISTOR,CHIP 510 1/16W (1608)
R836	1-218-864-11 s	RESISTOR,CHIP 5.1K 1/16W(1608)
R837	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R838	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R839	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R840	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R841	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608) (for NTSC only)
R842	1-218-839-11 s	RESISTOR,CHIP 470 1/16W (1608)
R843	1-218-863-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R844	1-218-863-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R845	1-218-853-11 s	RESISTOR,CHIP 1.8K 1/16W(1608)
R846	1-218-853-11 s	RESISTOR,CHIP 1.8K 1/16W(1608)
R847	1-218-832-11 s	RESISTOR,CHIP 240 1/16W (1608)
R848	1-218-845-11 s	RESISTOR,CHIP 820 1/16W (1608)
R849	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R851	1-218-839-11 s	RESISTOR,CHIP 470 1/16W (1608)
R852	1-218-839-11 s	RESISTOR,CHIP 470 1/16W (1608)
R853	1-218-839-11 s	RESISTOR,CHIP 470 1/16W (1608)
R854	1-218-839-11 s	RESISTOR,CHIP 470 1/16W (1608)
R855	1-218-845-11 s	RESISTOR,CHIP 820 1/16W (1608)
R856	1-218-845-11 s	RESISTOR,CHIP 820 1/16W (1608)
R857	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R858	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R859	1-218-875-11 s	RESISTOR,CHIP 15K 1/16W (1608)
R860	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R861	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R862	1-218-863-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R863	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R864	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R865	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R866	1-218-864-11 s	RESISTOR,CHIP 5.1K 1/16W(1608)
R867	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R868	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R869	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R870	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R871	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R872	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R873	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R874	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R875	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R876	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R877	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R878	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R879	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R880	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R881	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R882	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R883	1-218-827-11 s	RESISTOR,CHIP 150 1/16W (1608)
R884	1-218-827-11 s	RESISTOR,CHIP 150 1/16W (1608)
R885	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R886	1-211-977-11 s	RESISTOR,CHIP 22 1/16W (1608)
R887	1-211-977-11 s	RESISTOR,CHIP 22 1/16W (1608)

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
R888	1-211-977-11 s	RESISTOR,CHIP 22 1/16W (1608)
R889	1-211-977-11 s	RESISTOR,CHIP 22 1/16W (1608)
R890	1-211-977-11 s	RESISTOR,CHIP 22 1/16W (1608)
R891	1-211-977-11 s	RESISTOR,CHIP 22 1/16W (1608)
R892	1-218-831-11 s	RESISTOR, CHIP 220 1/16W(1608)
R893	1-218-831-11 s	RESISTOR, CHIP 220 1/16W(1608)
R894	1-218-831-11 s	RESISTOR, CHIP 220 1/16W(1608)
R895	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R896	1-218-865-11 s	RESISTOR,CHIP 5.6K 1/16W(1608)
R897	1-218-879-11 s	RESISTOR,CHIP 22K 1/16W (1608)
R898	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608)
R899	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608)
R901	1-218-914-11 s	RESISTOR CHIP 620K 1/16W(1608)
R902	1-218-823-11 s	RESISTOR,CHIP 100 1/16W (1608)
R903	1-218-890-11 s	RESISTOR, CHIP 62K 1/16W(1608)
R904	1-218-853-11 s	RESISTOR,CHIP 1.8K 1/16W(1608)
R905	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R906	1-218-859-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R907	1-218-893-11 s	RESISTOR, CHIP 82K 1/16W(1608)
R908	1-218-859-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R909	1-218-849-11 s	RESISTOR,CHIP 1.2K 1/16W(1608)
R910	1-218-859-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R911	1-218-863-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R912	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R913	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R914	1-218-859-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R915	1-218-875-11 s	RESISTOR,CHIP 15K 1/16W (1608)
R916	1-218-861-11 s	RESISTOR,CHIP 3.9K 1/16W(1608)
R917	1-218-903-11 s	RESISTOR,CHIP 220K 1/16W(1608)
R918	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R919	1-218-897-11 s	RESISTOR,CHIP 120K 1/16W(1608) (for NTSC)
	1-218-901-11 s	RESISTOR,CHIP 180K 1/16W(1608) (for PAL)
R920	1-218-903-11 s	RESISTOR,CHIP 220K 1/16W(1608)
R921	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R922	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R923	1-215-451-00 s	RESISTOR,METAL FILM 18K 1/4W
R924	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R925	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R927	1-218-863-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R928	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R929	1-218-823-11 s	RESISTOR,CHIP 100 1/16W (1608)
R930	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R931	1-218-879-11 s	RESISTOR,CHIP 22K 1/16W (1608)
R932	1-218-831-11 s	RESISTOR, CHIP 220 1/16W(1608)
R933	1-218-883-11 s	RESISTOR,CHIP 33K 1/16W (1608)
R934	1-218-883-11 s	RESISTOR,CHIP 33K 1/16W (1608)
R935	1-218-875-11 s	RESISTOR,CHIP 15K 1/16W (1608)
R936	1-218-831-11 s	RESISTOR, CHIP 220 1/16W(1608)
R937	1-218-903-11 s	RESISTOR,CHIP 220K 1/16W(1608)
R938	1-218-907-11 s	RESISTOR,CHIP 330K 1/16W(1608)
R939	1-218-875-11 s	RESISTOR,CHIP 15K 1/16W (1608)
R940	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R941	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R942	1-218-903-11 s	RESISTOR,CHIP 220K 1/16W(1608)
R943	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R947	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R948	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
R949	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R950	1-218-887-11 s	RESISTOR,CHIP 47K 1/16W (1608)
R1001	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R1002	1-218-859-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R1003	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608)
R1004	1-218-835-11 s	RESISTOR,CHIP 330 1/16W (1608)
R1005	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1006	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R1007	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R1008	1-218-831-11 s	RESISTOR, CHIP 220 1/16W(1608)
R1009	1-218-831-11 s	RESISTOR, CHIP 220 1/16W(1608)
R1010	1-218-831-11 s	RESISTOR, CHIP 220 1/16W(1608)
R1011	1-218-831-11 s	RESISTOR, CHIP 220 1/16W(1608)
R1012	1-218-831-11 s	RESISTOR, CHIP 220 1/16W(1608)
R1013	1-218-859-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R1014	1-218-831-11 s	RESISTOR, CHIP 220 1/16W(1608)
R1015	1-218-831-11 s	RESISTOR, CHIP 220 1/16W(1608)
R1016	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R1017	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R1018	1-218-831-11 s	RESISTOR, CHIP 220 1/16W(1608)
R1019	1-218-851-11 s	RESISTOR,CHIP 1.5K 1/16W(1608)
R1020	1-218-834-11 s	RESISTOR,CHIP 300 1/16W (1608)
R1021	1-218-837-11 s	RESISTOR,CHIP 390 1/16W (1608)
R1022	1-218-843-11 s	RESISTOR,CHIP 680 1/16W (1608)
R1023	1-218-867-11 s	RESISTOR,CHIP 6.8K 1/16W(1608)
R1024	1-218-878-11 s	RESISTOR,CHIP 20K 1/16W (1608)
R1025	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R1027	1-218-885-11 s	RESISTOR,CHIP 39K 1/16W (1608)
R1028	1-218-831-11 s	RESISTOR, CHIP 220 1/16W(1608)
R1029	1-218-839-11 s	RESISTOR,CHIP 470 1/16W (1608)
R1030	1-218-839-11 s	RESISTOR,CHIP 470 1/16W (1608)
R1031	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1032	1-218-841-11 s	RESISTOR,CHIP 560 1/16W (1608)
R1033	1-218-849-11 s	RESISTOR,CHIP 1.2K 1/16W(1608) (for NTSC)
	1-218-853-11 s	RESISTOR,CHIP 1.8K 1/16W(1608) (for PAL)
R1034	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1035	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1036	1-218-869-11 s	RESISTOR,CHIP 8.2K 1/16W(1608)
R1037	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R1038	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608)
R1039	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608)
R1040	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608)
R1041	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R1042	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R1043	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1044	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608)
R1045	1-218-839-11 s	RESISTOR,CHIP 470 1/16W (1608)
R1046	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608)
R1047	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1048	1-218-843-11 s	RESISTOR,CHIP 680 1/16W (1608)
R1049	1-216-857-11 s	RESISTOR,CHIP 1M 1/16W(1608)
R1050	1-218-915-11 s	RESISTOR,CHIP 680K 1/16W(1608) (for PAL only)
R1051	1-218-907-11 s	RESISTOR,CHIP 330K 1/16W(1608) (for NTSC)
	1-218-915-11 s	RESISTOR,CHIP 680K 1/16W(1608) (for PAL)

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
R1052	1-218-887-11 s	RESISTOR, CHIP 47K 1/16W (1608)
R1053	1-218-887-11 s	RESISTOR, CHIP 47K 1/16W (1608)
R1054	1-218-895-11 s	RESISTOR, CHIP 100K 1/16W (1608) (for NTSC)
	1-218-903-11 s	RESISTOR, CHIP 220K 1/16W (1608) (for PAL)
R1055	1-218-895-11 s	RESISTOR, CHIP 100K 1/16W (1608)
R1056	1-218-823-11 s	RESISTOR, CHIP 100 1/16W (1608)
R1057	1-218-883-11 s	RESISTOR, CHIP 33K 1/16W (1608)
R1058	1-211-977-11 s	RESISTOR, CHIP 22 1/16W (1608)
R1059	1-218-871-11 s	RESISTOR, CHIP 10K 1/16W (1608)
R1060	1-211-977-11 s	RESISTOR, CHIP 22 1/16W (1608)
R1061	1-211-985-11 s	RESISTOR, CHIP 47 1/16W (1608)
R1062	1-211-985-11 s	RESISTOR, CHIP 47 1/16W (1608)
R1063	1-218-871-11 s	RESISTOR, CHIP 10K 1/16W (1608)
R1064	1-211-985-11 s	RESISTOR, CHIP 47 1/16W (1608)
R1065	1-211-985-11 s	RESISTOR, CHIP 47 1/16W (1608)
R1066	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608)
R1067	1-211-977-11 s	RESISTOR, CHIP 22 1/16W (1608)
R1068	1-211-977-11 s	RESISTOR, CHIP 22 1/16W (1608)
R1069	1-218-831-11 s	RESISTOR, CHIP 220 1/16W (1608)
R1070	1-218-855-11 s	RESISTOR, CHIP 2.2K 1/16W (1608)
R1071	1-211-990-11 s	RESISTOR, CHIP 75 1/16W (1608)
R1072	1-211-969-11 s	RESISTOR, CHIP 10 1/16W (1608)
R1073	1-211-990-11 s	RESISTOR, CHIP 75 1/16W (1608)
R1074	1-211-990-11 s	RESISTOR, CHIP 75 1/16W (1608)
R1075	1-218-887-11 s	RESISTOR, CHIP 47K 1/16W (1608)
R1076	1-218-887-11 s	RESISTOR, CHIP 47K 1/16W (1608)
R1077	1-218-887-11 s	RESISTOR, CHIP 47K 1/16W (1608)
R1078	1-218-831-11 s	RESISTOR, CHIP 220 1/16W (1608)
R1079	1-218-831-11 s	RESISTOR, CHIP 220 1/16W (1608)
R1080	1-218-831-11 s	RESISTOR, CHIP 220 1/16W (1608)
R1081	1-218-871-11 s	RESISTOR, CHIP 10K 1/16W (1608)
R1082	1-218-871-11 s	RESISTOR, CHIP 10K 1/16W (1608)
R1083	1-218-871-11 s	RESISTOR, CHIP 10K 1/16W (1608)
R1084	1-218-859-11 s	RESISTOR, CHIP 3.3K 1/16W (1608)
R1085	1-218-871-11 s	RESISTOR, CHIP 10K 1/16W (1608)
R1086	1-218-871-11 s	RESISTOR, CHIP 10K 1/16W (1608)
R1087	1-218-831-11 s	RESISTOR, CHIP 220 1/16W (1608)
R1088	1-218-831-11 s	RESISTOR, CHIP 220 1/16W (1608)
R1089	1-218-831-11 s	RESISTOR, CHIP 220 1/16W (1608)
R1090	1-218-831-11 s	RESISTOR, CHIP 220 1/16W (1608)
R1091	1-218-831-11 s	RESISTOR, CHIP 220 1/16W (1608)
R1092	1-218-831-11 s	RESISTOR, CHIP 220 1/16W (1608)
R1093	1-218-831-11 s	RESISTOR, CHIP 220 1/16W (1608)
R1094	1-218-831-11 s	RESISTOR, CHIP 220 1/16W (1608)
R1101	1-211-985-11 s	RESISTOR, CHIP 47 1/16W (1608)
R1102	1-218-859-11 s	RESISTOR, CHIP 3.3K 1/16W (1608)
R1103	1-218-863-11 s	RESISTOR, CHIP 4.7K 1/16W (1608)
R1104	1-218-873-11 s	RESISTOR, CHIP 12K 1/16W (1608)
R1105	1-218-875-11 s	RESISTOR, CHIP 15K 1/16W (1608)
R1106	1-218-857-11 s	RESISTOR, CHIP 2.7K 1/16W (1608)
R1107	1-218-861-11 s	RESISTOR, CHIP 3.9K 1/16W (1608)
R1108	1-218-831-11 s	RESISTOR, CHIP 220 1/16W (1608)
R1110	1-218-887-11 s	RESISTOR, CHIP 47K 1/16W (1608)
R1111	1-218-863-11 s	RESISTOR, CHIP 4.7K 1/16W (1608)
R1112	1-218-860-11 s	RESISTOR, CHIP 3.6K 1/16W (1608)
R1113	1-218-849-11 s	RESISTOR, CHIP 1.2K 1/16W (1608)
R1114	1-218-841-11 s	RESISTOR, CHIP 560 1/16W (1608)

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
R1115	1-218-831-11 s	RESISTOR, CHIP 220 1/16W (1608)
R1116	1-218-831-11 s	RESISTOR, CHIP 220 1/16W (1608)
R1117	1-218-831-11 s	RESISTOR, CHIP 220 1/16W (1608)
R1118	1-218-831-11 s	RESISTOR, CHIP 220 1/16W (1608)
R1119	1-218-831-11 s	RESISTOR, CHIP 220 1/16W (1608)
R1120	1-218-831-11 s	RESISTOR, CHIP 220 1/16W (1608)
R1121	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608)
R1122	1-218-831-11 s	RESISTOR, CHIP 220 1/16W (1608)
R1123	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608)
R1124	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608)
R1125	1-218-854-11 s	RESISTOR, CHIP 2K 1/16W (1608)
R1126	1-218-831-11 s	RESISTOR, CHIP 220 1/16W (1608)
R1127	1-218-851-11 s	RESISTOR, CHIP 1.5K 1/16W (1608)
R1128	1-218-879-11 s	RESISTOR, CHIP 22K 1/16W (1608)
R1129	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608)
R1130	1-218-834-11 s	RESISTOR, CHIP 300 1/16W (1608)
R1131	1-218-835-11 s	RESISTOR, CHIP 330 1/16W (1608)
R1132	1-218-835-11 s	RESISTOR, CHIP 330 1/16W (1608)
R1133	1-218-835-11 s	RESISTOR, CHIP 330 1/16W (1608)
R1134	1-218-840-11 s	RESISTOR, CHIP 510 1/16W (1608)
R1135	1-218-840-11 s	RESISTOR, CHIP 510 1/16W (1608)
R1136	1-218-864-11 s	RESISTOR, CHIP 5.1K 1/16W (1608)
R1137	1-218-855-11 s	RESISTOR, CHIP 2.2K 1/16W (1608)
R1138	1-218-855-11 s	RESISTOR, CHIP 2.2K 1/16W (1608)
R1139	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608)
R1140	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608)
R1141	1-218-831-11 s	RESISTOR, CHIP 220 1/16W (1608) (for NTSC only)
R1142	1-218-839-11 s	RESISTOR, CHIP 470 1/16W (1608)
R1143	1-218-863-11 s	RESISTOR, CHIP 4.7K 1/16W (1608)
R1144	1-218-863-11 s	RESISTOR, CHIP 4.7K 1/16W (1608)
R1145	1-218-853-11 s	RESISTOR, CHIP 1.8K 1/16W (1608)
R1146	1-218-853-11 s	RESISTOR, CHIP 1.8K 1/16W (1608)
R1147	1-218-832-11 s	RESISTOR, CHIP 240 1/16W (1608)
R1148	1-218-845-11 s	RESISTOR, CHIP 820 1/16W (1608)
R1149	1-211-985-11 s	RESISTOR, CHIP 47 1/16W (1608)
R1151	1-218-839-11 s	RESISTOR, CHIP 470 1/16W (1608)
R1152	1-218-839-11 s	RESISTOR, CHIP 470 1/16W (1608)
R1153	1-218-839-11 s	RESISTOR, CHIP 470 1/16W (1608)
R1154	1-218-839-11 s	RESISTOR, CHIP 470 1/16W (1608)
R1155	1-218-845-11 s	RESISTOR, CHIP 820 1/16W (1608)
R1156	1-218-845-11 s	RESISTOR, CHIP 820 1/16W (1608)
R1157	1-211-985-11 s	RESISTOR, CHIP 47 1/16W (1608)
R1158	1-211-985-11 s	RESISTOR, CHIP 47 1/16W (1608)
R1159	1-218-875-11 s	RESISTOR, CHIP 15K 1/16W (1608)
R1160	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608)
R1161	1-218-831-11 s	RESISTOR, CHIP 220 1/16W (1608)
R1162	1-218-863-11 s	RESISTOR, CHIP 4.7K 1/16W (1608)
R1163	1-218-831-11 s	RESISTOR, CHIP 220 1/16W (1608)
R1164	1-218-831-11 s	RESISTOR, CHIP 220 1/16W (1608)
R1165	1-218-831-11 s	RESISTOR, CHIP 220 1/16W (1608)
R1166	1-218-864-11 s	RESISTOR, CHIP 5.1K 1/16W (1608)
R1167	1-211-981-11 s	RESISTOR, CHIP 33 1/16W (1608)
R1168	1-211-981-11 s	RESISTOR, CHIP 33 1/16W (1608)
R1169	1-211-981-11 s	RESISTOR, CHIP 33 1/16W (1608)
R1170	1-211-981-11 s	RESISTOR, CHIP 33 1/16W (1608)
R1171	1-211-981-11 s	RESISTOR, CHIP 33 1/16W (1608)
R1172	1-211-981-11 s	RESISTOR, CHIP 33 1/16W (1608)
R1173	1-211-981-11 s	RESISTOR, CHIP 33 1/16W (1608)

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
R1174	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R1175	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R1176	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R1177	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R1178	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R1179	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R1180	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R1181	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R1182	1-211-981-11 s	RESISTOR,CHIP 33 1/16W (1608)
R1183	1-218-827-11 s	RESISTOR,CHIP 150 1/16W (1608)
R1184	1-218-827-11 s	RESISTOR,CHIP 150 1/16W (1608)
R1185	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R1186	1-211-977-11 s	RESISTOR,CHIP 22 1/16W (1608)
R1187	1-211-977-11 s	RESISTOR,CHIP 22 1/16W (1608)
R1188	1-211-977-11 s	RESISTOR,CHIP 22 1/16W (1608)
R1189	1-211-977-11 s	RESISTOR,CHIP 22 1/16W (1608)
R1190	1-211-977-11 s	RESISTOR,CHIP 22 1/16W (1608)
R1191	1-211-977-11 s	RESISTOR,CHIP 22 1/16W (1608)
R1192	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R1193	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R1194	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R1195	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1196	1-218-865-11 s	RESISTOR,CHIP 5.6K 1/16W(1608)
R1197	1-218-879-11 s	RESISTOR,CHIP 22K 1/16W (1608)
R1198	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R1199	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
R1201	1-218-914-11 s	RESISTOR,CHIP 620K 1/16W(1608)
R1202	1-218-823-11 s	RESISTOR,CHIP 100 1/16W (1608)
R1203	1-218-890-11 s	RESISTOR,CHIP 62K 1/16W(1608)
R1204	1-218-853-11 s	RESISTOR,CHIP 1.8K 1/16W(1608)
R1205	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R1206	1-218-859-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R1207	1-218-893-11 s	RESISTOR,CHIP 82K 1/16W(1608)
R1208	1-218-859-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R1209	1-218-849-11 s	RESISTOR,CHIP 1.2K 1/16W(1608)
R1210	1-218-859-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R1211	1-218-863-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R1212	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1213	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1214	1-218-859-11 s	RESISTOR,CHIP 3.3K 1/16W(1608)
R1215	1-218-875-11 s	RESISTOR,CHIP 15K 1/16W (1608)
R1216	1-218-861-11 s	RESISTOR,CHIP 3.9K 1/16W(1608)
R1217	1-218-903-11 s	RESISTOR,CHIP 220K 1/16W(1608)
R1218	1-218-855-11 s	RESISTOR,CHIP 2.2K 1/16W(1608)
R1219	1-218-897-11 s	RESISTOR,CHIP 120K 1/16W(1608)
		(for NTSC)
		1-218-901-11 s RESISTOR,CHIP 180K 1/16W(1608)
		(for PAL)
R1220	1-218-903-11 s	RESISTOR,CHIP 220K 1/16W(1608)
R1221	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R1222	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R1223	1-215-451-00 s	RESISTOR,METAL FILM 18K 1/4W
R1224	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R1225	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R1227	1-218-863-11 s	RESISTOR,CHIP 4.7K 1/16W(1608)
R1228	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R1229	1-218-823-11 s	RESISTOR,CHIP 100 1/16W (1608)
R1230	1-216-864-11 s	RESISTOR,CHIP 0 1/16W (1608)
R1231	1-218-879-11 s	RESISTOR,CHIP 22K 1/16W (1608)

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
R1232	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R1233	1-218-883-11 s	RESISTOR,CHIP 33K 1/16W (1608)
R1234	1-218-883-11 s	RESISTOR,CHIP 33K 1/16W (1608)
R1235	1-218-875-11 s	RESISTOR,CHIP 15K 1/16W (1608)
R1236	1-218-831-11 s	RESISTOR,CHIP 220 1/16W(1608)
R1237	1-218-903-11 s	RESISTOR,CHIP 220K 1/16W(1608)
R1238	1-218-907-11 s	RESISTOR,CHIP 330K 1/16W(1608)
R1239	1-218-875-11 s	RESISTOR,CHIP 15K 1/16W (1608)
R1240	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R1241	1-218-871-11 s	RESISTOR,CHIP 10K 1/16W (1608)
R1242	1-218-903-11 s	RESISTOR,CHIP 220K 1/16W(1608)
R1243	1-218-895-11 s	RESISTOR,CHIP 100K 1/16W(1608)
R1247	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R1248	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R1249	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R1250	1-218-887-11 s	RESISTOR,CHIP 47K 1/16W (1608)
R1300	1-216-699-11 s	RESISTOR,CHIP 100K 1/10W(2012)
R1305	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
		(for PAL only)
R1306	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
		(for NTSC only)
R1307	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
		(for PAL only)
R1308	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
		(for NTSC only)
R1400	1-216-699-11 s	RESISTOR,CHIP 100K 1/10W(2012)
R1401	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
		(for PAL only)
R1402	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
		(for NTSC only)
R1403	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
		(for PAL only)
R1404	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
		(for NTSC only)
R1500	1-216-699-11 s	RESISTOR,CHIP 100K 1/10W(2012)
R1501	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
		(for PAL only)
R1502	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
		(for NTSC only)
R1503	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
		(for PAL only)
R1504	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
		(for NTSC only)
R1600	1-216-699-11 s	RESISTOR,CHIP 100K 1/10W(2012)
R1601	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
		(for PAL only)
R1602	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
		(for NTSC only)
R1603	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
		(for PAL only)
R1604	1-218-847-11 s	RESISTOR,CHIP 1K 1/16W (1608)
		(for NTSC only)
R1701	1-216-699-11 s	RESISTOR,CHIP 100K 1/10W(2012)
R1702	1-216-699-11 s	RESISTOR,CHIP 100K 1/10W(2012)
R1703	1-216-683-11 s	RESISTOR,CHIP 22K 1/10W (2012)
R1704	1-216-699-11 s	RESISTOR,CHIP 100K 1/10W(2012)
R1705	1-216-699-11 s	RESISTOR,CHIP 100K 1/10W(2012)
R1706	1-216-699-11 s	RESISTOR,CHIP 100K 1/10W(2012)
R1707	1-216-699-11 s	RESISTOR,CHIP 100K 1/10W(2012)
R1708	1-216-699-11 s	RESISTOR,CHIP 100K 1/10W(2012)
R1709	1-216-699-11 s	RESISTOR,CHIP 100K 1/10W(2012)

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
R1710	1-216-611-11 s	RESISTOR,CHIP 22 1/10W (2012)
R1711	1-216-611-11 s	RESISTOR,CHIP 22 1/10W (2012)
R1712	1-216-611-11 s	RESISTOR,CHIP 22 1/10W (2012)
R1713	1-216-611-11 s	RESISTOR,CHIP 22 1/10W (2012)
R1714	1-216-611-11 s	RESISTOR,CHIP 22 1/10W (2012)
R1715	1-216-611-11 s	RESISTOR,CHIP 22 1/10W (2012)
R1716	1-216-611-11 s	RESISTOR,CHIP 22 1/10W (2012)
R1717	1-216-611-11 s	RESISTOR,CHIP 22 1/10W (2012)
R1718	1-216-611-11 s	RESISTOR,CHIP 22 1/10W (2012)
R1719	1-216-611-11 s	RESISTOR,CHIP 22 1/10W (2012)
R1720	1-216-611-11 s	RESISTOR,CHIP 22 1/10W (2012)
R1721	1-216-611-11 s	RESISTOR,CHIP 22 1/10W (2012)
R1722	1-216-611-11 s	RESISTOR,CHIP 22 1/10W (2012)
R1723	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R1725	1-216-611-11 s	RESISTOR,CHIP 22 1/10W (2012)
R1726	1-216-611-11 s	RESISTOR,CHIP 22 1/10W (2012)
R1727	1-216-611-11 s	RESISTOR,CHIP 22 1/10W (2012)
R1728	1-216-611-11 s	RESISTOR,CHIP 22 1/10W (2012)
R1729	1-216-611-11 s	RESISTOR,CHIP 22 1/10W (2012)
R1743	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R1744	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R1745	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R1746	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R1748	1-216-611-11 s	RESISTOR,CHIP 22 1/10W (2012)
R1749	1-216-655-11 s	RESISTOR,CHIP 1.5K 1/10W(2012)
R1750	1-216-655-11 s	RESISTOR,CHIP 1.5K 1/10W(2012)
R1752	1-216-611-11 s	RESISTOR,CHIP 22 1/10W (2012)
R1767	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R1768	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R1769	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R1770	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R1771	1-211-985-11 s	RESISTOR,CHIP 47 1/16W (1608)
R1772	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R1773	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R1774	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R1775	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608)
R1776	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608)
R1777	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608)
R1778	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608)
R1779	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608)
R1780	1-218-847-11 s	RESISTOR, CHIP 1K 1/16W (1608)
R1781	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R1782	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R1801	1-211-969-11 s	RESISTOR,CHIP 10 1/16W (1608)
R1802	1-215-413-00 s	RESISTOR,METAL FILM 470 1/4W
R2001	1-211-969-11 s	RESISTOR,CHIP 10 1/16W (1608)
R2002	1-215-413-00 s	RESISTOR,METAL FILM 470 1/4W
R5001	1-211-969-11 s	RESISTOR,CHIP 10 1/16W (1608)
R5002	1-215-413-00 s	RESISTOR,METAL FILM 470 1/4W
R8001	1-211-969-11 s	RESISTOR,CHIP 10 1/16W (1608)
R8002	1-215-413-00 s	RESISTOR,METAL FILM 470 1/4W
RB201	1-239-412-11 s	NETWORK, RESISTOR 100 (1608)
RB202	1-239-412-11 s	NETWORK, RESISTOR 100 (1608)
RB203	1-239-412-11 s	NETWORK, RESISTOR 100 (1608)
RB204	1-239-412-11 s	NETWORK, RESISTOR 100 (1608)
RB205	1-239-412-11 s	NETWORK, RESISTOR 100 (1608)
RB301	1-233-270-11 o	RESISTOR, NETWORK (8 GANG) 10K
RB302	1-239-389-11 s	RESISTOR,NETWORK 47K (1608)

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
RB501	1-239-412-11 s	NETWORK, RESISTOR 100 (1608)
RB502	1-239-412-11 s	NETWORK, RESISTOR 100 (1608)
RB503	1-239-412-11 s	NETWORK, RESISTOR 100 (1608)
RB504	1-239-412-11 s	NETWORK, RESISTOR 100 (1608)
RB505	1-239-412-11 s	NETWORK, RESISTOR 100 (1608)
RB601	1-233-270-11 o	RESISTOR, NETWORK (8 GANG) 10K
RB602	1-239-389-11 s	RESISTOR,NETWORK 47K (1608)
RB801	1-239-412-11 s	NETWORK, RESISTOR 100 (1608)
RB802	1-239-412-11 s	NETWORK, RESISTOR 100 (1608)
RB803	1-239-412-11 s	NETWORK, RESISTOR 100 (1608)
RB804	1-239-412-11 s	NETWORK, RESISTOR 100 (1608)
RB805	1-239-412-11 s	NETWORK, RESISTOR 100 (1608)
RB901	1-233-270-11 o	RESISTOR, NETWORK (8 GANG) 10K
RB902	1-239-389-11 s	RESISTOR,NETWORK 47K (1608)
RB1101	1-239-412-11 s	NETWORK, RESISTOR 100 (1608)
RB1102	1-239-412-11 s	NETWORK, RESISTOR 100 (1608)
RB1103	1-239-412-11 s	NETWORK, RESISTOR 100 (1608)
RB1104	1-239-412-11 s	NETWORK, RESISTOR 100 (1608)
RB1105	1-239-412-11 s	NETWORK, RESISTOR 100 (1608)
RB1201	1-233-270-11 o	RESISTOR, NETWORK (8 GANG) 10K
RB1202	1-239-389-11 s	RESISTOR,NETWORK 47K (1608)
RB1301	1-239-621-11 s	NETWORK RESISTOR 22 (1608)
RB1302	1-239-621-11 s	NETWORK RESISTOR 22 (1608)
RB1303	1-234-397-11 s	NETWORK, RES (8 GANG) 100K
RB1401	1-239-621-11 s	NETWORK RESISTOR 22 (1608)
RB1402	1-239-621-11 s	NETWORK RESISTOR 22 (1608)
RB1403	1-234-397-11 s	NETWORK, RES (8 GANG) 100K
RB1501	1-239-621-11 s	NETWORK RESISTOR 22 (1608)
RB1502	1-239-621-11 s	NETWORK RESISTOR 22 (1608)
RB1503	1-234-397-11 s	NETWORK, RES (8 GANG) 100K
RB1601	1-239-621-11 s	NETWORK RESISTOR 22 (1608)
RB1602	1-239-621-11 s	NETWORK RESISTOR 22 (1608)
RB1603	1-234-397-11 s	NETWORK, RES (8 GANG) 100K
RB1701	1-234-397-11 s	NETWORK, RES (8 GANG) 100K
RB1702	1-234-397-11 s	NETWORK, RES (8 GANG) 100K
RB1703	1-234-397-11 s	NETWORK, RES (8 GANG) 100K
RB1704	1-233-663-91 s	NETWORK, RES (8 GANG) 4.7K
RB1705	1-233-663-91 s	NETWORK, RES (8 GANG) 4.7K
RB1706	1-233-663-91 s	NETWORK, RES (8 GANG) 4.7K
RB1707	1-233-663-91 s	NETWORK, RES (8 GANG) 4.7K
RB1708	1-233-477-11 s	NETWORK, RES (8 GANG) 1K
RV101	1-225-789-21 s	RES, ADJ, CERMET 2K
RV102	1-225-787-21 s	RES, ADJ, CERMET 500
RV103	1-225-787-21 s	RES, ADJ, CERMET 500
RV104	1-225-789-21 s	RES, ADJ, CERMET 2K
RV201	1-225-787-21 s	RES, ADJ, CERMET 500
RV202	1-225-789-21 s	RES, ADJ, CERMET 2K
RV203	1-225-789-21 s	RES, ADJ, CERMET 2K
RV204	1-225-789-21 s	RES, ADJ, CERMET 2K
RV205	1-225-789-21 s	RES, ADJ, CERMET 2K
RV206	1-225-787-21 s	RES, ADJ, CERMET 500
RV207	1-225-787-21 s	RES, ADJ, CERMET 500
RV301	1-237-037-11 s	RESISTOR,ADJ,CERMET 20K
RV302	1-237-035-11 s	RESISTOR,ADJ,CERMET 5K
RV303	1-237-035-11 s	RESISTOR,ADJ,CERMET 5K
RV401	1-225-789-21 s	RES, ADJ, CERMET 2K
RV402	1-225-787-21 s	RES, ADJ, CERMET 500
RV403	1-225-787-21 s	RES, ADJ, CERMET 500

(VIF-19/19P BOARD (Suffix -11))

Ref. No. or Q'ty	Part No.	SP Description
RV404	1-225-789-21	s RES, ADJ, CERMET 2K
RV501	1-225-787-21	s RES, ADJ, CERMET 500
RV502	1-225-789-21	s RES, ADJ, CERMET 2K
RV503	1-225-789-21	s RES, ADJ, CERMET 2K
RV504	1-225-789-21	s RES, ADJ, CERMET 2K
RV505	1-225-789-21	s RES, ADJ, CERMET 2K
RV506	1-225-787-21	s RES, ADJ, CERMET 500
RV507	1-225-787-21	s RES, ADJ, CERMET 500
RV601	1-237-037-11	s RESISTOR, ADJ, CERMET 20K
RV602	1-237-035-11	s RESISTOR, ADJ, CERMET 5K
RV603	1-237-035-11	s RESISTOR, ADJ, CERMET 5K
RV701	1-225-789-21	s RES, ADJ, CERMET 2K
RV702	1-225-787-21	s RES, ADJ, CERMET 500
RV703	1-225-787-21	s RES, ADJ, CERMET 500
RV704	1-225-789-21	s RES, ADJ, CERMET 2K
RV801	1-225-787-21	s RES, ADJ, CERMET 500
RV802	1-225-789-21	s RES, ADJ, CERMET 2K
RV803	1-225-789-21	s RES, ADJ, CERMET 2K
RV804	1-225-789-21	s RES, ADJ, CERMET 2K
RV805	1-225-789-21	s RES, ADJ, CERMET 2K
RV806	1-225-787-21	s RES, ADJ, CERMET 500
RV807	1-225-787-21	s RES, ADJ, CERMET 500
RV901	1-237-037-11	s RESISTOR, ADJ, CERMET 20K
RV902	1-237-035-11	s RESISTOR, ADJ, CERMET 5K
RV903	1-237-035-11	s RESISTOR, ADJ, CERMET 5K
RV1001	1-225-789-21	s RES, ADJ, CERMET 2K
RV1002	1-225-787-21	s RES, ADJ, CERMET 500
RV1003	1-225-787-21	s RES, ADJ, CERMET 500
RV1004	1-225-789-21	s RES, ADJ, CERMET 2K
RV1101	1-225-787-21	s RES, ADJ, CERMET 500
RV1102	1-225-789-21	s RES, ADJ, CERMET 2K
RV1103	1-225-789-21	s RES, ADJ, CERMET 2K
RV1104	1-225-789-21	s RES, ADJ, CERMET 2K
RV1105	1-225-789-21	s RES, ADJ, CERMET 2K
RV1106	1-225-787-21	s RES, ADJ, CERMET 500
RV1107	1-225-787-21	s RES, ADJ, CERMET 500
RV1201	1-237-037-11	s RESISTOR, ADJ, CERMET 20K
RV1202	1-237-035-11	s RESISTOR, ADJ, CERMET 5K
RV1203	1-237-035-11	s RESISTOR, ADJ, CERMET 5K
X101	1-767-617-11	s OSCILLATOR, CRYSTAL (for NTSC)
	1-767-619-11	s OSCILLATOR, CRYSTAL (for PAL)
X401	1-767-617-11	s OSCILLATOR, CRYSTAL (for PAL)
	1-767-619-11	s OSCILLATOR, CRYSTAL (for PAL)
X701	1-767-617-11	s OSCILLATOR, CRYSTAL (for NTSC)
	1-767-619-11	s OSCILLATOR, CRYSTAL (for PAL)
X1001	1-767-617-11	s OSCILLATOR, CRYSTAL (for NTSC)
	1-767-619-11	s OSCILLATOR, CRYSTAL (for PAL)

VIF-20/20P BOARD ; for BKDF-701

Ref. No. or Q'ty	Part No.	SP Description
*1	LOT NO. 911-002	
*2	LOT NO. 003 and Higher	
2pcs	3-624-100-02	o LEVER, PWB
7pcs	4-886-821-11	s SCREW, M3X6 CASE (SILVER)
2pcs	7-626-300-54	o SPRING PIN 3X6
C101	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C102	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C103	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C104	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C105	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C106	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C107	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C108	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C109	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C110	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C111	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C112	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C113	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C114	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C115	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C116	1-163-235-11	s CAPACITOR, CHIP CERAMIC22PF/50V
C117	1-163-235-11	s CAPACITOR, CHIP CERAMIC22PF/50V
C118	1-163-235-11	s CAPACITOR, CHIP CERAMIC22PF/50V
C119	1-163-235-11	s CAPACITOR, CHIP CERAMIC22PF/50V
C122	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C123	1-163-113-00	s CAPACITOR, CHIP CERAMIC 68PF/50
C124	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C125	1-163-259-91	s CAPACITOR, CHIP CERAMIC 220PF
C126	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C127	1-163-259-91	s CAPACITOR, CHIP CERAMIC 220PF
C129	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C130	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C131	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C132	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C134	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C135	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C136	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C137	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C138	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C139	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C140	1-164-690-11	s CAPACITOR, CERAMIC 2200PF CH
C141	1-164-690-11	s CAPACITOR, CERAMIC 2200PF CH
C142	1-164-690-11	s CAPACITOR, CERAMIC 2200PF CH
C143	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C144	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C145	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C146	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C147	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C148	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C149	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C150	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C151	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C152	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C153	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C154	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C155	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C156	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C157	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V

(VIF-20/20P BOARD ; for BKDF-701)

Ref. No. or Q'ty	Part No.	SP Description
C158	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C159	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C160	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C161	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C162	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C163	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C164	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C165	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C166	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C167	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C168	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C169	1-164-346-11	s CAPACITOR CHIP CERAMIC 1MF/16V
C170	1-164-346-11	s CAPACITOR CHIP CERAMIC 1MF/16V
C171	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C172	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C173	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C174	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C176	1-164-346-11	s CAPACITOR CHIP CERAMIC 1MF/16V
C177	1-164-346-11	s CAPACITOR CHIP CERAMIC 1MF/16V
C178	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C179	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C180	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C181	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C182	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C183	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C184	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C185	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C186	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C187	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C188	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C189	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C190	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C191	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C201	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C202	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C203	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C204	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C205	1-163-005-11	s CAPACITOR CHIP CERAMIC 470PF
C206	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C207	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C208	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C209	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C210	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C211	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C212	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C213	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C214	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C215	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C216	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C217	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C218	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C219	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C220	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C221	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C222	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C223	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C224	1-163-009-11	s CAPACITOR,CERAMIC 1000PF/50V
C225	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C226	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V

(VIF-20/20P BOARD ; for BKDF-701)

Ref. No. or Q'ty	Part No.	SP Description
C227	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C228	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C229	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C230	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C231	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C233	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C234	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C235	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C236	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C237	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C238	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C239	1-163-037-11	s CAPACITOR,CHIP CERAMIC 0.022MF
C240	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C241	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C242	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C243	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C244	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C245	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C246	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C247	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C248	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C249	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C250	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C251	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C301	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C302	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C303	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C304	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C305	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C306	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C307	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C308	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C309	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C310	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C311	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C312	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C313	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C314	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C315	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C316	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C317	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C318	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C319	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C322	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C323	1-163-113-00	s CAPACITOR,CHIP CERAMIC 68PF/50
C324	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C325	1-163-259-91	s CAPACITOR,CHIP CERAMIC 220PF
C326	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C327	1-163-259-91	s CAPACITOR,CHIP CERAMIC 220PF
C329	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C330	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C331	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C332	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C334	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C335	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C336	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C337	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C338	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C339	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V

(VIF-20/20P BOARD ; for BKDF-701)

Ref. No. or Q'ty	Part No.	SP Description
C340	1-164-690-11	s CAPACITOR , CERAMIC 2200PF CH
C341	1-164-690-11	s CAPACITOR , CERAMIC 2200PF CH
C342	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C343	1-164-690-11	s CAPACITOR , CERAMIC 2200PF CH
C344	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C345	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C346	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C347	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C348	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C349	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C350	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C351	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C352	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C353	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C354	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C355	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C356	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C357	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C358	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C359	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C360	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C361	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C362	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C363	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C364	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C365	1-125-817-11	s CAPACITOR , CERAMIC 10MF/6.3V
C366	1-125-817-11	s CAPACITOR , CERAMIC 10MF/6.3V
C367	1-125-817-11	s CAPACITOR , CERAMIC 10MF/6.3V
C368	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C369	1-164-346-11	s CAPACITOR CHIP CERAMIC 1MF/16V
C370	1-164-346-11	s CAPACITOR CHIP CERAMIC 1MF/16V
C371	1-125-817-11	s CAPACITOR , CERAMIC 10MF/6.3V
C372	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C373	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C374	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C375	1-125-817-11	s CAPACITOR , CERAMIC 10MF/6.3V
C376	1-164-346-11	s CAPACITOR CHIP CERAMIC 1MF/16V
C377	1-164-346-11	s CAPACITOR CHIP CERAMIC 1MF/16V
C378	1-125-817-11	s CAPACITOR , CERAMIC 10MF/6.3V
C379	1-125-817-11	s CAPACITOR , CERAMIC 10MF/6.3V
C380	1-125-817-11	s CAPACITOR , CERAMIC 10MF/6.3V
C381	1-125-817-11	s CAPACITOR , CERAMIC 10MF/6.3V
C382	1-125-817-11	s CAPACITOR , CERAMIC 10MF/6.3V
C383	1-125-817-11	s CAPACITOR , CERAMIC 10MF/6.3V
C384	1-125-817-11	s CAPACITOR , CERAMIC 10MF/6.3V
C385	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C386	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C387	1-125-817-11	s CAPACITOR , CERAMIC 10MF/6.3V
C388	1-125-817-11	s CAPACITOR , CERAMIC 10MF/6.3V
C389	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C390	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C399	1-163-235-11	s CAPACITOR, CHIP CERAMIC22PF/50V
C401	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C402	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C403	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C404	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C405	1-163-005-11	s CAPACITOR CHIP CERAMIC 470PF
C406	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C407	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V

(VIF-20/20P BOARD ; for BKDF-701)

Ref. No. or Q'ty	Part No.	SP Description
C408	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C409	1-163-038-00	s CAPACITOR , CERAMIC 0.1MF/25V
C410	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C411	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C412	1-164-004-11	s CAPACITOR, CERAMIC 0.1MF/25V
C413	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C414	1-163-021-91	s CAPACITOR , CERAMIC 0.01MF/50V
C415	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C416	1-163-038-00	s CAPACITOR , CERAMIC 0.1MF/25V
C417	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C418	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C419	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C420	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C421	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C422	1-163-038-00	s CAPACITOR , CERAMIC 0.1MF/25V
C423	1-163-038-00	s CAPACITOR , CERAMIC 0.1MF/25V
C424	1-163-009-11	s CAPACITOR, CERAMIC 1000PF/50V
C425	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C426	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C427	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C428	1-163-235-11	s CAPACITOR, CHIP CERAMIC22PF/50V
C429	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C430	1-163-021-91	s CAPACITOR , CERAMIC 0.01MF/50V
C431	1-163-038-00	s CAPACITOR , CERAMIC 0.1MF/25V
C433	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C434	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C435	1-163-038-00	s CAPACITOR , CERAMIC 0.1MF/25V
C436	1-125-817-11	s CAPACITOR , CERAMIC 10MF/6.3V
C437	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C438	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C439	1-163-037-11	s CAPACITOR, CHIP CERAMIC 0.022MF
C440	1-163-038-00	s CAPACITOR , CERAMIC 0.1MF/25V
C441	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C442	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C443	1-163-038-00	s CAPACITOR , CERAMIC 0.1MF/25V
C444	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C445	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C446	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C447	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C448	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C449	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C450	1-163-038-00	s CAPACITOR , CERAMIC 0.1MF/25V
C451	1-109-982-11	s CAPACITOR, CHIP CERAMIC 1MF/10V
C501	1-125-817-11	s CAPACITOR , CERAMIC 10MF/6.3V
C502	1-125-817-11	s CAPACITOR , CERAMIC 10MF/6.3V
C503	1-125-817-11	s CAPACITOR , CERAMIC 10MF/6.3V
C504	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C505	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C506	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C507	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C508	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C509	1-126-392-11	s CAPACITOR, CHIP ELECT100MF/6.3V
C510	1-125-817-11	s CAPACITOR , CERAMIC 10MF/6.3V
C511	1-125-817-11	s CAPACITOR , CERAMIC 10MF/6.3V
C512	1-125-817-11	s CAPACITOR , CERAMIC 10MF/6.3V
C513	1-125-817-11	s CAPACITOR , CERAMIC 10MF/6.3V
C514	1-125-817-11	s CAPACITOR , CERAMIC 10MF/6.3V
C515	1-125-817-11	s CAPACITOR , CERAMIC 10MF/6.3V
C516	1-163-235-11	s CAPACITOR, CHIP CERAMIC22PF/50V

(VIF-20/20P BOARD ; for BKDF-701)

Ref. No. or Q'ty	Part No.	SP Description
C517	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C518	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C519	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C522	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C523	1-163-113-00	s CAPACITOR,CHIP CERAMIC 68PF/50
C524	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C525	1-163-259-91	s CAPACITOR,CHIP CERAMIC 220PF
C526	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C527	1-163-259-91	s CAPACITOR,CHIP CERAMIC 220PF
C529	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C530	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C531	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C532	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C534	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C535	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C536	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C537	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C538	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C539	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C540	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C541	1-164-690-11	s CAPACITOR ,CERAMIC 2200PF CH
C542	1-164-690-11	s CAPACITOR ,CERAMIC 2200PF CH
C543	1-164-690-11	s CAPACITOR ,CERAMIC 2200PF CH
C544	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C545	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C546	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C547	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C548	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C549	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C550	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C551	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C552	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C553	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C554	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C555	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C556	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C557	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C558	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C559	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C560	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C561	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C562	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C563	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C564	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C565	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C566	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C567	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C568	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C569	1-164-346-11	s CAPACITOR CHIP CERAMIC 1MF/16V
C570	1-164-346-11	s CAPACITOR CHIP CERAMIC 1MF/16V
C571	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C572	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C573	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C574	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C575	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C576	1-164-346-11	s CAPACITOR CHIP CERAMIC 1MF/16V
C577	1-164-346-11	s CAPACITOR CHIP CERAMIC 1MF/16V
C578	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C579	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V

(VIF-20/20P BOARD ; for BKDF-701)

Ref. No. or Q'ty	Part No.	SP Description
C580	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C581	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C582	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C583	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C584	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C585	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C586	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C587	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C588	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C589	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C590	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C599	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C601	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C602	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C603	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C604	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C605	1-163-005-11	s CAPACITOR CHIP CERAMIC 470PF
C606	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C607	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C608	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C609	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C610	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C611	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C612	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C613	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C614	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C615	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C616	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C617	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C618	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C619	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C620	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C621	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C622	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C623	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C624	1-163-009-11	s CAPACITOR,CERAMIC 1000PF/50V
C625	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C626	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C627	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C628	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C629	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C630	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C631	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C633	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C634	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C635	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C636	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C637	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C638	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C639	1-163-037-11	s CAPACITOR,CHIP CERAMIC 0.022MF
C640	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C641	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C642	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C643	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C644	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C645	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C646	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C647	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C648	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V

(VIF-20/20P BOARD ; for BKDF-701)

Ref. No. or Q'ty	Part No.	SP Description
C649	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C650	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C651	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C701	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C702	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C703	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C704	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C705	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C706	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C707	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C708	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C709	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C710	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C711	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C712	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C713	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C714	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C715	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C716	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C717	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C718	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C719	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C722	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C723	1-163-113-00	s CAPACITOR,CHIP CERAMIC 68PF/50
C724	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C725	1-163-259-91	s CAPACITOR,CHIP CERAMIC 220PF
C726	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C727	1-163-259-91	s CAPACITOR,CHIP CERAMIC 220PF
C729	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C730	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C731	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C732	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C734	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C735	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C736	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C737	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C738	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C739	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C740	1-164-690-11	s CAPACITOR ,CERAMIC 2200PF CH
C741	1-164-690-11	s CAPACITOR ,CERAMIC 2200PF CH
C742	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C743	1-164-690-11	s CAPACITOR ,CERAMIC 2200PF CH
C744	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C745	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C746	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C747	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C748	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C749	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C750	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C751	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C752	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C753	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C754	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C755	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C756	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C757	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C758	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C759	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C760	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V

(VIF-20/20P BOARD ; for BKDF-701)

Ref. No. or Q'ty	Part No.	SP Description
C761	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C762	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C763	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C764	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C765	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C766	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C767	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C768	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C769	1-164-346-11	s CAPACITOR CHIP CERAMIC 1MF/16V
C770	1-164-346-11	s CAPACITOR CHIP CERAMIC 1MF/16V
C771	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C772	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C773	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C774	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C775	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C776	1-164-346-11	s CAPACITOR CHIP CERAMIC 1MF/16V
C777	1-164-346-11	s CAPACITOR CHIP CERAMIC 1MF/16V
C778	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C779	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C780	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C781	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C782	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C783	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C784	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C785	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C786	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C787	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C788	1-125-817-11	s CAPACITOR, CERAMIC 10MF/6.3V
C789	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C790	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C799	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V
C801	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C802	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C803	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C804	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C805	1-163-005-11	s CAPACITOR CHIP CERAMIC 470PF
C806	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C807	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C808	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C809	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C810	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C811	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C812	1-164-004-11	s CAPACITOR,CERAMIC 0.1MF/25V
C813	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C814	1-163-021-91	s CAPACITOR, CERAMIC 0.01MF/50V
C815	1-126-392-11	s CAPACITOR,CHIP ELECT100MF/6.3V
C816	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C817	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C818	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C819	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C820	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C821	1-163-251-11	s CAPACITOR CERAMIC 100PF/50V
C822	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C823	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C824	1-163-009-11	s CAPACITOR,CERAMIC 1000PF/50V
C825	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C826	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C827	1-109-982-11	s CAPACITOR,CHIP CERAMIC 1MF/10V
C828	1-163-235-11	s CAPACITOR,CHIP CERAMIC22PF/50V

(VIF-20/20P BOARD ; for BKDF-701)

Ref. No. or Q'ty	Part No.	SP Description
C829	1-126-392-11 s	CAPACITOR,CHIP ELECT100MF/6.3V
C830	1-163-021-91 s	CAPACITOR, CERAMIC 0.01MF/50V
C831	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C833	1-126-392-11 s	CAPACITOR,CHIP ELECT100MF/6.3V
C834	1-109-982-11 s	CAPACITOR,CHIP CERAMIC 1MF/10V
C835	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C836	1-125-817-11 s	CAPACITOR, CERAMIC 10MF/6.3V
C837	1-109-982-11 s	CAPACITOR,CHIP CERAMIC 1MF/10V
C838	1-109-982-11 s	CAPACITOR,CHIP CERAMIC 1MF/10V
C839	1-163-037-11 s	CAPACITOR,CHIP CERAMIC 0.022MF
C840	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C841	1-109-982-11 s	CAPACITOR,CHIP CERAMIC 1MF/10V
C842	1-163-251-11 s	CAPACITOR CERAMIC 100PF/50V
C843	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C844	1-163-251-11 s	CAPACITOR CERAMIC 100PF/50V
C845	1-109-982-11 s	CAPACITOR,CHIP CERAMIC 1MF/10V
C846	1-163-251-11 s	CAPACITOR CERAMIC 100PF/50V
C847	1-126-392-11 s	CAPACITOR,CHIP ELECT100MF/6.3V
C848	1-126-392-11 s	CAPACITOR,CHIP ELECT100MF/6.3V
C849	1-126-392-11 s	CAPACITOR,CHIP ELECT100MF/6.3V
C850	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C851	1-109-982-11 s	CAPACITOR,CHIP CERAMIC 1MF/10V
C901	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C902	1-126-394-11 s	CAPACITOR,ELECT 10MF/16V(CHIP)
C903	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C904	1-126-394-11 s	CAPACITOR,ELECT 10MF/16V(CHIP)
C905	1-164-346-11 s	CAPACITOR CHIP CERAMIC 1MF/16V
C906	1-164-346-11 s	CAPACITOR CHIP CERAMIC 1MF/16V
C907	1-164-346-11 s	CAPACITOR CHIP CERAMIC 1MF/16V
C908	1-164-346-11 s	CAPACITOR CHIP CERAMIC 1MF/16V
C909	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C910	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C911	1-164-346-11 s	CAPACITOR CHIP CERAMIC 1MF/16V
C912	1-164-346-11 s	CAPACITOR CHIP CERAMIC 1MF/16V
C913	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C914	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C915	1-164-346-11 s	CAPACITOR CHIP CERAMIC 1MF/16V
C916	1-164-346-11 s	CAPACITOR CHIP CERAMIC 1MF/16V
C917	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C918	1-126-394-11 s	CAPACITOR,ELECT 10MF/16V(CHIP)
C919	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C920	1-126-394-11 s	CAPACITOR,ELECT 10MF/16V(CHIP)
C921	1-163-243-11 s	CAPACITOR CHIP CERAMIC 47PF/50
C922	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C923	1-163-243-11 s	CAPACITOR CHIP CERAMIC 47PF/50
C924	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C925	1-164-346-11 s	CAPACITOR CHIP CERAMIC 1MF/16V
C926	1-164-346-11 s	CAPACITOR CHIP CERAMIC 1MF/16V
C927	1-164-346-11 s	CAPACITOR CHIP CERAMIC 1MF/16V
C928	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C929	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C930	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C931	1-164-346-11 s	CAPACITOR CHIP CERAMIC 1MF/16V
C932	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C933	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C934	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C935	1-164-346-11 s	CAPACITOR CHIP CERAMIC 1MF/16V
C936	1-164-346-11 s	CAPACITOR CHIP CERAMIC 1MF/16V
C937	1-163-227-11 s	CAPACITOR CERAMIC 10PF/50V(CH)

(VIF-20/20P BOARD ; for BKDF-701)

Ref. No. or Q'ty	Part No.	SP Description
C938	1-163-227-11 s	CAPACITOR CERAMIC 10PF/50V(CH)
C939	1-164-346-11 s	CAPACITOR CHIP CERAMIC 1MF/16V
C940	1-164-346-11 s	CAPACITOR CHIP CERAMIC 1MF/16V
C941	1-164-346-11 s	CAPACITOR CHIP CERAMIC 1MF/16V
C942	1-164-346-11 s	CAPACITOR CHIP CERAMIC 1MF/16V
C943	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C944	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C945	1-164-346-11 s	CAPACITOR CHIP CERAMIC 1MF/16V
C946	1-164-346-11 s	CAPACITOR CHIP CERAMIC 1MF/16V
C947	1-164-346-11 s	CAPACITOR CHIP CERAMIC 1MF/16V
C948	1-164-346-11 s	CAPACITOR CHIP CERAMIC 1MF/16V
C949	1-164-346-11 s	CAPACITOR CHIP CERAMIC 1MF/16V
C950	1-164-346-11 s	CAPACITOR CHIP CERAMIC 1MF/16V
C951	1-117-372-11 s	CAP,ELECT (SMD) 100MF/10V
C952	1-117-372-11 s	CAP,ELECT (SMD) 100MF/10V
C953	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C954	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C955	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C956	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C957	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C958	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C959	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C960	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C961	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C962	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C963	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C964	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C965	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C966	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C967	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C968	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C969	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C970	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C971	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C972	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C1001	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C1002	1-126-394-11 s	CAPACITOR,ELECT 10MF/16V(CHIP)
C1003	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C1004	1-126-394-11 s	CAPACITOR,ELECT 10MF/16V(CHIP)
C1005	1-164-346-11 s	CAPACITOR CHIP CERAMIC 1MF/16V
C1006	1-164-346-11 s	CAPACITOR CHIP CERAMIC 1MF/16V
C1007	1-164-346-11 s	CAPACITOR CHIP CERAMIC 1MF/16V
C1008	1-164-346-11 s	CAPACITOR CHIP CERAMIC 1MF/16V
C1009	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C1010	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C1011	1-164-346-11 s	CAPACITOR CHIP CERAMIC 1MF/16V
C1012	1-164-346-11 s	CAPACITOR CHIP CERAMIC 1MF/16V
C1013	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C1014	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C1015	1-164-346-11 s	CAPACITOR CHIP CERAMIC 1MF/16V
C1016	1-164-346-11 s	CAPACITOR CHIP CERAMIC 1MF/16V
C1017	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C1018	1-126-394-11 s	CAPACITOR,ELECT 10MF/16V(CHIP)
C1019	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C1020	1-126-394-11 s	CAPACITOR,ELECT 10MF/16V(CHIP)
C1021	1-163-243-11 s	CAPACITOR CHIP CERAMIC 47PF/50
C1022	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V
C1023	1-163-243-11 s	CAPACITOR CHIP CERAMIC 47PF/50
C1024	1-163-038-00 s	CAPACITOR, CERAMIC 0.1MF/25V

(VIF-20/20P BOARD ; for BKDF-701)

Ref. No. or Q'ty	Part No.	SP	Description
C1314	1-109-982-11	s	CAPACITOR,CHIP CERAMIC 1MF/10V
C1315	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1316	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1317	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1318	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1319	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1320	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1321	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1323	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1324	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1327	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1330	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1331	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1332	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1333	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1334	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1335	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1338	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1339	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1340	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1341	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1342	1-109-982-11	s	CAPACITOR,CHIP CERAMIC 1MF/10V
C1343	1-109-982-11	s	CAPACITOR,CHIP CERAMIC 1MF/10V
C1344	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1403	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C1404	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C1405	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C1406	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C1407	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C1408	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1409	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1410	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C1411	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C1412	1-117-372-11	s	CAP,ELECT (SMD) 100MF/10V
C1421	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C1422	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C1423	1-126-396-11	s	CAPACITOR,ELECT 47MF/16V(CHIP)
C1424	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1425	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1426	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1427	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C1428	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C1429	1-126-392-11	s	CAPACITOR,CHIP ELECT100MF/6.3V
C1430	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1431	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C1432	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
D101	8-719-801-78	s	DIODE 1SS184
D102	8-719-801-78	s	DIODE 1SS184
D103	8-719-801-78	s	DIODE 1SS184
D301	8-719-801-78	s	DIODE 1SS184
D302	8-719-801-78	s	DIODE 1SS184
D303	8-719-801-78	s	DIODE 1SS184
D501	8-719-801-78	s	DIODE 1SS184
D502	8-719-801-78	s	DIODE 1SS184
D503	8-719-801-78	s	DIODE 1SS184
D701	8-719-801-78	s	DIODE 1SS184
D702	8-719-801-78	s	DIODE 1SS184
D703	8-719-801-78	s	DIODE 1SS184

(VIF-20/20P BOARD ; for BKDF-701)

Ref. No. or Q'ty	Part No.	SP Description
F1401	Δ 1-576-329-11	s FUSE CHIP 10A/125V (6125)
F1402	Δ 1-576-329-11	s FUSE CHIP 10A/125V (6125)
FL101	1-239-913-41	s FILTER, LOW PASS
FL102	1-233-599-11	s FILTER, LOW PASS
FL103	1-233-599-11	s FILTER, LOW PASS
FL301	1-239-913-41	s FILTER, LOW PASS
FL302	1-233-599-11	s FILTER, LOW PASS
FL303	1-233-599-11	s FILTER, LOW PASS
FL501	1-239-913-41	s FILTER, LOW PASS
FL502	1-233-599-11	s FILTER, LOW PASS
FL503	1-233-599-11	s FILTER, LOW PASS
FL701	1-239-913-41	s FILTER, LOW PASS
FL702	1-233-599-11	s FILTER, LOW PASS
FL703	1-233-599-11	s FILTER, LOW PASS
IC101	8-759-573-91	s IC AD8055ART-REEL7
IC102	8-759-422-82	s IC HA4314BCB-E2
IC103	8-759-422-82	s IC HA4314BCB-E2
IC104	8-759-573-91	s IC AD8055ART-REEL7
IC105	8-759-700-78	s IC NJM082M
IC106	8-759-324-03	s IC HA17431UA(TL)
IC107	8-759-447-90	s IC TLC5733AIPM
IC108	8-759-175-27	s IC TC74VHC574F
IC109	8-759-175-27	s IC TC74VHC574F
IC110	8-759-175-27	s IC TC74VHC574F
IC111	8-759-081-48	s IC TC74VHC08F
IC112	8-759-186-38	s IC TC74VHC32F
IC113	8-759-175-27	s IC TC74VHC574F
IC114	8-759-186-51	s IC TC74VHC157F
IC115	8-759-186-51	s IC TC74VHC157F
IC116	8-759-175-27	s IC TC74VHC574F
IC117	8-759-676-03	o IC AT27C010-LEVT-V1.00
IC118	8-759-175-27	s IC TC74VHC574F
IC119	8-759-175-27	s IC TC74VHC574F
IC120	8-759-573-91	s IC AD8055ART-REEL7
IC201	8-759-344-12	s IC GS4981CTA
IC202	8-759-239-58	s IC TC74HC221AF
IC203	8-759-927-46	s IC SN74HC00ANS
IC204	8-759-902-88	s IC SN74LS123NS
IC205	8-759-700-78	s IC NJM082M
IC206	8-759-239-58	s IC TC74HC221AF
IC207	8-759-669-75	s IC TLC2932IPWR
IC208	8-759-925-74	s IC SN74HC04ANS
IC209	8-759-700-78	s IC NJM082M
IC210	8-759-186-39	s IC TC74VHC74F
IC211	8-759-081-44	s IC TC74VHC04F
IC212	8-759-186-53	s IC TC74VHC163F
IC213	8-759-186-53	s IC TC74VHC163F
IC214	8-759-186-53	s IC TC74VHC163F
IC215	8-759-081-44	s IC TC74VHC04F
IC216	8-759-186-54	s IC TC74VHC164F
IC217	8-759-186-54	s IC TC74VHC164F
IC218	8-759-186-39	s IC TC74VHC74F
IC219	8-759-186-39	s IC TC74VHC74F
IC301	8-759-573-91	s IC AD8055ART-REEL7
IC302	8-759-422-82	s IC HA4314BCB-E2
IC303	8-759-422-82	s IC HA4314BCB-E2
IC304	8-759-573-91	s IC AD8055ART-REEL7
IC305	8-759-700-78	s IC NJM082M

(VIF-20/20P BOARD ; for BKDF-701)

Ref. No. or Q'ty	Part No.	SP Description
IC306	8-759-324-03	s IC HA17431UA(TL)
IC307	8-759-447-90	s IC TLC5733AIPM
IC308	8-759-175-27	s IC TC74VHC574F
IC309	8-759-175-27	s IC TC74VHC574F
IC310	8-759-175-27	s IC TC74VHC574F
IC311	8-759-081-48	s IC TC74VHC08F
IC312	8-759-186-38	s IC TC74VHC32F
IC313	8-759-175-27	s IC TC74VHC574F
IC314	8-759-186-51	s IC TC74VHC157F
IC315	8-759-186-51	s IC TC74VHC157F
IC316	8-759-175-27	s IC TC74VHC574F
IC317	8-759-676-03	o IC AT27C010-LEVT-V1.00
IC318	8-759-175-27	s IC TC74VHC574F
IC319	8-759-175-27	s IC TC74VHC574F
IC320	8-759-573-91	s IC AD8055ART-REEL7
IC401	8-759-344-12	s IC GS4981CTA
IC402	8-759-239-58	s IC TC74HC221AF
IC403	8-759-927-46	s IC SN74HC00ANS
IC404	8-759-902-88	s IC SN74LS123NS
IC405	8-759-700-78	s IC NJM082M
IC406	8-759-239-58	s IC TC74HC221AF
IC407	8-759-669-75	s IC TLC2932IPWR
IC408	8-759-925-74	s IC SN74HC04ANS
IC409	8-759-700-78	s IC NJM082M
IC410	8-759-186-39	s IC TC74VHC74F
IC411	8-759-081-44	s IC TC74VHC04F
IC412	8-759-186-53	s IC TC74VHC163F
IC413	8-759-186-53	s IC TC74VHC163F
IC414	8-759-186-53	s IC TC74VHC163F
IC415	8-759-081-44	s IC TC74VHC04F
IC416	8-759-186-54	s IC TC74VHC164F
IC417	8-759-186-54	s IC TC74VHC164F
IC418	8-759-186-39	s IC TC74VHC74F
IC419	8-759-186-39	s IC TC74VHC74F
IC501	8-759-573-91	s IC AD8055ART-REEL7
IC502	8-759-422-82	s IC HA4314BCB-E2
IC503	8-759-422-82	s IC HA4314BCB-E2
IC504	8-759-573-91	s IC AD8055ART-REEL7
IC505	8-759-700-78	s IC NJM082M
IC506	8-759-324-03	s IC HA17431UA(TL)
IC507	8-759-447-90	s IC TLC5733AIPM
IC508	8-759-175-27	s IC TC74VHC574F
IC509	8-759-175-27	s IC TC74VHC574F
IC510	8-759-175-27	s IC TC74VHC574F
IC511	8-759-081-48	s IC TC74VHC08F
IC512	8-759-186-38	s IC TC74VHC32F
IC513	8-759-175-27	s IC TC74VHC574F
IC514	8-759-186-51	s IC TC74VHC157F
IC515	8-759-186-51	s IC TC74VHC157F
IC516	8-759-175-27	s IC TC74VHC574F
IC517	8-759-676-03	o IC AT27C010-LEVT-V1.00
IC518	8-759-175-27	s IC TC74VHC574F
IC519	8-759-175-27	s IC TC74VHC574F
IC520	8-759-573-91	s IC AD8055ART-REEL7
IC601	8-759-344-12	s IC GS4981CTA
IC602	8-759-239-58	s IC TC74HC221AF
IC603	8-759-927-46	s IC SN74HC00ANS
IC604	8-759-902-88	s IC SN74LS123NS
IC605	8-759-700-78	s IC NJM082M

(VIF-20/20P BOARD ; for BKDF-701)

Ref. No. or Q'ty	Part No.	SP Description
IC606	8-759-239-58	s IC TC74HC221AF
IC607	8-759-669-75	s IC TLC2932IPWR
IC608	8-759-925-74	s IC SN74HC04ANS
IC609	8-759-700-78	s IC NJM082M
IC610	8-759-186-39	s IC TC74VHC74F
IC611	8-759-081-44	s IC TC74VHC04F
IC612	8-759-186-53	s IC TC74VHC163F
IC613	8-759-186-53	s IC TC74VHC163F
IC614	8-759-186-53	s IC TC74VHC163F
IC615	8-759-081-44	s IC TC74VHC04F
IC616	8-759-186-54	s IC TC74VHC164F
IC617	8-759-186-54	s IC TC74VHC164F
IC618	8-759-186-39	s IC TC74VHC74F
IC619	8-759-186-39	s IC TC74VHC74F
IC701	8-759-573-91	s IC AD8055ART-REEL7
IC702	8-759-422-82	s IC HA4314BCB-E2
IC703	8-759-422-82	s IC HA4314BCB-E2
IC704	8-759-573-91	s IC AD8055ART-REEL7
IC705	8-759-700-78	s IC NJM082M
IC706	8-759-324-03	s IC HA17431UA(TL)
IC707	8-759-447-90	s IC TLC5733AIPM
IC708	8-759-175-27	s IC TC74VHC574F
IC709	8-759-175-27	s IC TC74VHC574F
IC710	8-759-175-27	s IC TC74VHC574F
IC711	8-759-081-48	s IC TC74VHC08F
IC712	8-759-186-38	s IC TC74VHC32F
IC713	8-759-175-27	s IC TC74VHC574F
IC714	8-759-186-51	s IC TC74VHC157F
IC715	8-759-186-51	s IC TC74VHC157F
IC716	8-759-175-27	s IC TC74VHC574F
IC717	8-759-676-03	o IC AT27C010-LEVT-V1.00
IC718	8-759-175-27	s IC TC74VHC574F
IC719	8-759-175-27	s IC TC74VHC574F
IC720	8-759-573-91	s IC AD8055ART-REEL7
IC801	8-759-344-12	s IC GS4981CTA
IC802	8-759-239-58	s IC TC74HC221AF
IC803	8-759-927-46	s IC SN74HC00ANS
IC804	8-759-902-88	s IC SN74LS123NS
IC805	8-759-700-78	s IC NJM082M
IC806	8-759-239-58	s IC TC74HC221AF
IC807	8-759-669-75	s IC TLC2932IPWR
IC808	8-759-925-74	s IC SN74HC04ANS
IC809	8-759-700-78	s IC NJM082M
IC810	8-759-186-39	s IC TC74VHC74F
IC811	8-759-081-44	s IC TC74VHC04F
IC812	8-759-186-53	s IC TC74VHC163F
IC813	8-759-186-53	s IC TC74VHC163F
IC814	8-759-186-53	s IC TC74VHC163F
IC815	8-759-081-44	s IC TC74VHC04F
IC816	8-759-186-54	s IC TC74VHC164F
IC817	8-759-186-54	s IC TC74VHC164F
IC818	8-759-186-39	s IC TC74VHC74F
IC819	8-759-186-39	s IC TC74VHC74F
IC901	8-752-078-34	s IC CXB1342R
IC902	8-759-360-60	s IC CXD8976AR
IC903	8-752-078-34	s IC CXB1342R
IC904	8-759-360-60	s IC CXD8976AR
IC905	8-759-524-10	s IC TC74VHC157FT (EL)
IC906	8-759-524-10	s IC TC74VHC157FT (EL)

(VIF-20/20P BOARD ; for BKDF-701)

Ref. No. or Q'ty	Part No.	SP Description
IC907	8-759-524-10	s IC TC74VHC157FT (EL)
IC908	8-759-524-10	s IC TC74VHC157FT (EL)
IC909	8-759-524-10	s IC TC74VHC157FT (EL)
IC910	8-759-524-10	s IC TC74VHC157FT (EL)
IC911	8-759-456-03	s IC M66256GP (E2)
IC912	8-759-456-03	s IC M66256GP (E2)
IC913	8-759-456-03	s IC M66256GP (E2)
IC914	8-759-456-03	s IC M66256GP (E2)
IC915	8-759-549-22	s IC SN74LV574APWR
IC916	8-759-549-22	s IC SN74LV574APWR
IC917	8-759-524-10	s IC TC74VHC157FT (EL)
IC918	8-759-524-10	s IC TC74VHC157FT (EL)
IC919	8-759-524-10	s IC TC74VHC157FT (EL)
IC920	8-759-524-10	s IC TC74VHC157FT (EL)
IC1001	8-752-078-34	s IC CXB1342R
IC1002	8-759-360-60	s IC CXD8976AR
IC1003	8-752-078-34	s IC CXB1342R
IC1004	8-759-360-60	s IC CXD8976AR
IC1005	8-759-524-10	s IC TC74VHC157FT (EL)
IC1006	8-759-524-10	s IC TC74VHC157FT (EL)
IC1007	8-759-524-10	s IC TC74VHC157FT (EL)
IC1008	8-759-524-10	s IC TC74VHC157FT (EL)
IC1009	8-759-524-10	s IC TC74VHC157FT (EL)
IC1010	8-759-524-10	s IC TC74VHC157FT (EL)
IC1011	8-759-456-03	s IC M66256GP (E2)
IC1012	8-759-456-03	s IC M66256GP (E2)
IC1013	8-759-456-03	s IC M66256GP (E2)
IC1014	8-759-456-03	s IC M66256GP (E2)
IC1015	8-759-549-22	s IC SN74LV574APWR
IC1016	8-759-549-22	s IC SN74LV574APWR
IC1017	8-759-524-10	s IC TC74VHC157FT (EL)
IC1018	8-759-524-10	s IC TC74VHC157FT (EL)
IC1019	8-759-524-10	s IC TC74VHC157FT (EL)
IC1020	8-759-524-10	s IC TC74VHC157FT (EL)
IC1301	8-759-549-22	s IC SN74LV574APWR
IC1302	8-759-549-20	s IC SN74LV541APWR
IC1303	8-759-549-20	s IC SN74LV541APWR
IC1304	8-759-549-15	s IC SN74LV245APWR
IC1305	8-759-549-22	s IC SN74LV574APWR
IC1306	8-759-505-06	s IC CXD8058Q
IC1307	8-759-549-15	s IC SN74LV245APWR
IC1309	8-759-505-06	s IC CXD8058Q
IC1310	8-759-549-13	s IC SN74LV240APWR
IC1311	8-759-549-13	s IC SN74LV240APWR
IC1312	8-759-674-01	o IC XC1765E-VIFS-V1.00
IC1313	8-759-524-10	s IC TC74VHC157FT (EL)
IC1314	8-759-549-13	s IC SN74LV240APWR
IC1315	8-759-549-20	s IC SN74LV541APWR
IC1316	8-759-549-13	s IC SN74LV240APWR
IC1317	8-759-549-13	s IC SN74LV240APWR
IC1318	8-759-549-20	s IC SN74LV541APWR
IC1319	8-759-524-10	s IC TC74VHC157FT (EL)
IC1320	8-759-505-06	s IC CXD8058Q
IC1321	8-759-505-06	s IC CXD8058Q
IC1322	8-759-524-10	s IC TC74VHC157FT (EL)
IC1323	8-759-505-06	s IC CXD8058Q
IC1324	8-759-524-10	s IC TC74VHC157FT (EL)
IC1326	8-759-505-06	s IC CXD8058Q
IC1327	8-759-665-33	o IC XC5202-6PC84

(VIF-20/20P BOARD ; for BKDF-701)

Ref. No. or Q'ty	Part No.	SP Description
IC1328	8-759-549-20	s IC SN74LV541APWR
IC1330	8-759-578-68	s IC SN74LVCC4245APWR
IC1332	8-759-549-20	s IC SN74LV541APWR
IC1333	8-759-549-20	s IC SN74LV541APWR
IC1402	8-759-358-38	s IC NJM78M05DLA (TE1)
IC1403	8-759-358-38	s IC NJM78M05DLA (TE1)
IC1404	8-759-586-98	s IC NJM79M05DLA (TE1)
IS117	1-540-151-21	s SOCKET, IC
IS317	1-540-151-21	s SOCKET, IC
IS517	1-540-151-21	s SOCKET, IC
IS717	1-540-151-21	s SOCKET, IC
IS1312	1-526-652-21	o SOCKET, IC 8P
L101	1-408-781-00	s CHIP INDUCTOR 22UH (4532)
L102	1-408-781-00	s CHIP INDUCTOR 22UH (4532)
L201	1-408-787-00	s CHIP INDUCTOR 68UH (4532)
L202	1-408-781-00	s CHIP INDUCTOR 22UH (4532)
L301	1-408-781-00	s CHIP INDUCTOR 22UH (4532)
L302	1-408-781-00	s CHIP INDUCTOR 22UH (4532)
L401	1-408-787-00	s CHIP INDUCTOR 68UH (4532)
L402	1-408-781-00	s CHIP INDUCTOR 22UH (4532)
L501	1-408-781-00	s CHIP INDUCTOR 22UH (4532)
L502	1-408-781-00	s CHIP INDUCTOR 22UH (4532)
L601	1-408-787-00	s CHIP INDUCTOR 68UH (4532)
L602	1-408-781-00	s CHIP INDUCTOR 22UH (4532)
L701	1-408-781-00	s CHIP INDUCTOR 22UH (4532)
L702	1-408-781-00	s CHIP INDUCTOR 22UH (4532)
L801	1-408-787-00	s CHIP INDUCTOR 68UH (4532)
L802	1-408-781-00	s CHIP INDUCTOR 22UH (4532)
L901	1-410-797-11	s CHIP INDUCTOR 0.015UH (3225)
L902	1-410-797-11	s CHIP INDUCTOR 0.015UH (3225)
L903	1-410-385-11	s INDUCTOR,CHIP 22UH (3225)
L904	1-410-385-11	s INDUCTOR,CHIP 22UH (3225)
L905	1-410-385-11	s INDUCTOR,CHIP 22UH (3225)
L906	1-410-385-11	s INDUCTOR,CHIP 22UH (3225)
L1001	1-410-797-11	s CHIP INDUCTOR 0.015UH (3225)
L1002	1-410-797-11	s CHIP INDUCTOR 0.015UH (3225)
L1003	1-410-385-11	s INDUCTOR,CHIP 22UH (3225)
L1004	1-410-385-11	s INDUCTOR,CHIP 22UH (3225)
L1005	1-410-385-11	s INDUCTOR,CHIP 22UH (3225)
L1006	1-410-385-11	s INDUCTOR,CHIP 22UH (3225)
L1401	1-421-459-21	s COIL,CHOKE
L1402	1-421-459-21	s COIL,CHOKE
L1403	1-469-529-11	s INDUCTOR, (SMD) 10UH
L1404	1-469-529-11	s INDUCTOR, (SMD) 10UH
PS1403	1-533-282-21	s CIRCUIT PROTECTOR 2A (3225)
PS1404	1-533-282-21	s CIRCUIT PROTECTOR 2A (3225)
Q101	8-729-216-22	s TRANSISTOR 2SA1162-G
Q102	8-729-216-22	s TRANSISTOR 2SA1162-G
Q103	8-729-216-22	s TRANSISTOR 2SA1162-G
Q104	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q105	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q106	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q107	8-729-216-22	s TRANSISTOR 2SA1162-G
Q108	8-729-216-22	s TRANSISTOR 2SA1162-G
Q109	8-729-216-22	s TRANSISTOR 2SA1162-G
Q110	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q111	8-729-120-28	s TRANSISTOR 2SC1623-L5L6

(VIF-20/20P BOARD ; for BKDF-701)

Ref. No. or Q'ty	Part No.	SP Description
Q112	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q118	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q119	8-729-216-22	s TRANSISTOR 2SA1162-G
Q201	8-729-216-22	s TRANSISTOR 2SA1162-G
Q301	8-729-216-22	s TRANSISTOR 2SA1162-G
Q302	8-729-216-22	s TRANSISTOR 2SA1162-G
Q303	8-729-216-22	s TRANSISTOR 2SA1162-G
Q304	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q305	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q306	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q307	8-729-216-22	s TRANSISTOR 2SA1162-G
Q308	8-729-216-22	s TRANSISTOR 2SA1162-G
Q309	8-729-216-22	s TRANSISTOR 2SA1162-G
Q310	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q311	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q312	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q318	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q319	8-729-216-22	s TRANSISTOR 2SA1162-G
Q401	8-729-216-22	s TRANSISTOR 2SA1162-G
Q501	8-729-216-22	s TRANSISTOR 2SA1162-G
Q502	8-729-216-22	s TRANSISTOR 2SA1162-G
Q503	8-729-216-22	s TRANSISTOR 2SA1162-G
Q504	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q505	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q506	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q507	8-729-216-22	s TRANSISTOR 2SA1162-G
Q508	8-729-216-22	s TRANSISTOR 2SA1162-G
Q509	8-729-216-22	s TRANSISTOR 2SA1162-G
Q510	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q511	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q512	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q518	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q519	8-729-216-22	s TRANSISTOR 2SA1162-G
Q601	8-729-216-22	s TRANSISTOR 2SA1162-G
Q701	8-729-216-22	s TRANSISTOR 2SA1162-G
Q702	8-729-216-22	s TRANSISTOR 2SA1162-G
Q703	8-729-216-22	s TRANSISTOR 2SA1162-G
Q704	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q705	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q706	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q707	8-729-216-22	s TRANSISTOR 2SA1162-G
Q708	8-729-216-22	s TRANSISTOR 2SA1162-G
Q709	8-729-216-22	s TRANSISTOR 2SA1162-G
Q710	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q711	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q712	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q718	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q719	8-729-216-22	s TRANSISTOR 2SA1162-G
Q801	8-729-216-22	s TRANSISTOR 2SA1162-G
R101	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R102	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R103	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R104	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R105	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R106	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R107	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R108	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R109	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R110	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)

(VIF-20/20P BOARD ; for BKDF-701)

Ref. No. or Q'ty	Part No.	SP Description
R111	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R112	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R113	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R114	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R115	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R116	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R117	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R118	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R119	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R120	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R121	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R122	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R123	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R124	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R125	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R126	1-216-295-91	s RESISTOR, CHIP 0 (1/10W)
R127	1-216-295-91	s RESISTOR, CHIP 0 (1/10W)
R128	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R129	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R130	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R131	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R132	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R134	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R135	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R136	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R138	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R140	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R143	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R144	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R145	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R146	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R147	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R148	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R149	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R150	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R151	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R152	1-216-636-11	s RESISTOR,CHIP 240 1/10W (2012)
R154	1-216-637-11	s RESISTOR,CHIP 270 1/10W (2012)
R155	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R156	1-216-637-11	s RESISTOR,CHIP 270 1/10W (2012)
R157	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R158	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R159	1-216-641-11	s RESISTOR,CHIP 390 1/10W(2012)
R160	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R161	1-216-641-11	s RESISTOR,CHIP 390 1/10W(2012)
R162	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R163	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R165	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R166	1-216-615-11	s RESISTOR,CHIP 33 1/10W(2012)
R167	1-216-621-11	s RESISTOR,CHIP 56 1/10W (2012)
R168	1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012)
R169	1-216-611-11	s RESISTOR,CHIP 22 1/10W (2012)
R170	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R171	1-216-615-11	s RESISTOR,CHIP 33 1/10W(2012)
R172	1-216-621-11	s RESISTOR,CHIP 56 1/10W (2012)
R173	1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012)
R174	1-216-611-11	s RESISTOR,CHIP 22 1/10W (2012)
R175	*1 1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
	*2 1-216-645-11	s RESISTOR,CHIP 560 1/10W(2012)

(VIF-20/20P BOARD ; for BKDF-701)

Ref. No. or Q'ty	Part No.	SP Description
R176	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R177	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R178	*1 1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
	*2 1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R179	1-216-625-11	s RESISTOR,CHIP 82 1/10W
R180	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R181	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R182	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R183	1-216-669-11	s RESISTOR,CHIP 5.6K 1/10W(2012)
R184	1-216-658-11	s RESISTOR,CHIP 2.0K 1/10W(2012)
R185	1-216-655-11	s RESISTOR,CHIP 1.5K 1/10W(2012)
R186	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R187	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R189	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R190	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R191	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R192	1-216-603-11	s RESISTOR,CHIP 10 1/10W(2012)
R193	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R194	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R195	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R196	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R197	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R198	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R199	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R201	1-216-641-11	s RESISTOR,CHIP 390 1/10W(2012)
R203	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R205	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R206	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R207	1-218-772-11	s RESISTOR,CHIP 680K 1/10W(2012)
R208	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R209	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R210	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R211	1-218-760-11	s RESISTOR,CHIP 220K 1/10W(2012)
R212	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R213	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R214	1-216-687-11	s RESISTOR,CHIP 33K 1/10W (2012)
R215	1-216-689-11	s RESISTOR,CHIP 39K 1/10W(2012)
R216	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R217	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R223	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R224	1-216-694-11	s RESISTOR,CHIP 62K 1/10W(2012)
R225	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R226	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R227	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R228	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R229	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R230	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R231	1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012)
R232	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R233	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R301	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R302	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R303	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R304	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R305	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R306	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R307	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)

(VIF-20/20P BOARD ; for BKDF-701)

Ref. No. or Q'ty	Part No.	SP Description
R308	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R309	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R310	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R311	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R312	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R313	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R314	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R315	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R316	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R317	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R318	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R319	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R320	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R321	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R322	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R323	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R324	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R325	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R326	1-216-295-91	s RESISTOR, CHIP 0 (1/10W)
R327	1-216-295-91	s RESISTOR, CHIP 0 (1/10W)
R328	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R329	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R330	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R331	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R332	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R334	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R335	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R336	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R338	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R340	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R343	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R344	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R345	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R346	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R347	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R348	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R349	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R350	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R351	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R352	1-216-636-11	s RESISTOR,CHIP 240 1/10W (2012)
R354	1-216-637-11	s RESISTOR,CHIP 270 1/10W (2012)
R355	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R356	1-216-637-11	s RESISTOR,CHIP 270 1/10W (2012)
R357	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R358	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R359	1-216-641-11	s RESISTOR,CHIP 390 1/10W(2012)
R360	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R361	1-216-641-11	s RESISTOR,CHIP 390 1/10W(2012)
R362	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R363	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R365	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R366	1-216-615-11	s RESISTOR,CHIP 33 1/10W(2012)
R367	1-216-621-11	s RESISTOR,CHIP 56 1/10W (2012)
R368	1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012)
R369	1-216-611-11	s RESISTOR,CHIP 22 1/10W (2012)
R370	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R371	1-216-615-11	s RESISTOR,CHIP 33 1/10W(2012)
R372	1-216-621-11	s RESISTOR,CHIP 56 1/10W (2012)
R373	1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012)

(VIF-20/20P BOARD ; for BKDF-701)

Ref. No. or Q'ty	Part No.	SP Description
R374	1-216-611-11	s RESISTOR,CHIP 22 1/10W (2012)
R375	*1 1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
	*2 1-216-645-11	s RESISTOR,CHIP 560 1/10W(2012)
R376	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R377	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R378	*1 1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
	*2 1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R379	1-216-625-11	s RESISTOR,CHIP 82 1/10W
R380	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R381	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R382	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R383	1-216-669-11	s RESISTOR,CHIP 5.6K 1/10W(2012)
R384	1-216-658-11	s RESISTOR,CHIP 2.0K 1/10W(2012)
R385	1-216-655-11	s RESISTOR,CHIP 1.5K 1/10W(2012)
R386	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R387	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R389	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R390	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R391	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R392	1-216-603-11	s RESISTOR,CHIP 10 1/10W(2012)
R393	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R394	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R395	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R396	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R397	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R398	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R399	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R401	1-216-641-11	s RESISTOR,CHIP 390 1/10W(2012)
R403	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R405	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R406	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R407	1-218-772-11	s RESISTOR,CHIP 680K 1/10W(2012)
R408	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R409	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R410	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R411	1-218-760-11	s RESISTOR,CHIP 220K 1/10W(2012)
R412	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R413	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R414	1-216-687-11	s RESISTOR,CHIP 33K 1/10W (2012)
R415	1-216-689-11	s RESISTOR,CHIP 39K 1/10W(2012)
R416	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R417	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R423	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R424	1-216-694-11	s RESISTOR,CHIP 62K 1/10W(2012)
R425	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R426	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R427	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R428	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R429	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R430	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R431	1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012)
R432	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R433	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R501	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R502	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R503	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)
R504	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)

(VIF-20/20P BOARD ; for BKDF-701)

Ref. No. or Q'ty	Part No.	SP Description
R505	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R506	1-216-691-11	s RESISTOR,CHIP 47K 1/10W(2012)
R507	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R508	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R509	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R510	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R511	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R512	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R513	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R514	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R515	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R516	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R517	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R518	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R519	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R520	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R521	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R522	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R523	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R524	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R525	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R526	1-216-295-91	s RESISTOR,CHIP 0 (1/10W)
R527	1-216-295-91	s RESISTOR,CHIP 0 (1/10W)
R528	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R529	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R530	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R531	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R532	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R534	1-216-657-11	s RESISTOR,CHIP 1.8K 1/10W(2012)
R535	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R536	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R538	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R540	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R543	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R544	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R545	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R546	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R547	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R548	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R549	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R550	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R551	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R552	1-216-636-11	s RESISTOR,CHIP 240 1/10W (2012)
R554	1-216-637-11	s RESISTOR,CHIP 270 1/10W (2012)
R555	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R556	1-216-637-11	s RESISTOR,CHIP 270 1/10W (2012)
R557	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R558	1-216-639-11	s RESISTOR,CHIP 330 1/10W (2012)
R559	1-216-641-11	s RESISTOR,CHIP 390 1/10W (2012)
R560	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R561	1-216-641-11	s RESISTOR,CHIP 390 1/10W(2012)
R562	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R563	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R565	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R566	1-216-615-11	s RESISTOR,CHIP 33 1/10W(2012)
R567	1-216-621-11	s RESISTOR,CHIP 56 1/10W (2012)
R568	1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012)
R569	1-216-611-11	s RESISTOR,CHIP 22 1/10W (2012)
R570	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)

(VIF-20/20P BOARD ; for BKDF-701)

Ref. No. or Q'ty	Part No.	SP Description
R571	1-216-615-11	s RESISTOR,CHIP 33 1/10W(2012)
R572	1-216-621-11	s RESISTOR,CHIP 56 1/10W (2012)
R573	1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012)
R574	1-216-611-11	s RESISTOR,CHIP 22 1/10W (2012)
R575	*1 1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
	*2 1-216-645-11	s RESISTOR,CHIP 560 1/10W(2012)
R576	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R577	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R578	*1 1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
	*2 1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R579	1-216-625-11	s RESISTOR,CHIP 82 1/10W
R580	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R581	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R582	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R583	1-216-669-11	s RESISTOR,CHIP 5.6K 1/10W(2012)
R584	1-216-658-11	s RESISTOR,CHIP 2.0K 1/10W(2012)
R585	1-216-655-11	s RESISTOR,CHIP 1.5K 1/10W(2012)
R586	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R587	1-216-635-11	s RESISTOR,CHIP 220 1/10W (2012)
R589	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R590	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R591	1-216-679-11	s RESISTOR,CHIP 15K 1/10W (2012)
R592	1-216-603-11	s RESISTOR,CHIP 10 1/10W(2012)
R593	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R594	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R595	1-216-643-11	s RESISTOR,CHIP 470 1/10W (2012)
R596	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R597	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R598	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R599	1-216-619-11	s RESISTOR,CHIP 47 1/10W(2012)
R601	1-216-641-11	s RESISTOR,CHIP 390 1/10W(2012)
R603	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R605	1-216-651-11	s RESISTOR,CHIP 1K 1/10W(2012)
R606	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R607	1-218-772-11	s RESISTOR,CHIP 680K 1/10W(2012)
R608	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R609	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R610	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R611	1-218-760-11	s RESISTOR,CHIP 220K 1/10W(2012)
R612	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R613	1-216-667-11	s RESISTOR,CHIP 4.7K 1/10W(2012)
R614	1-216-687-11	s RESISTOR,CHIP 33K 1/10W (2012)
R615	1-216-689-11	s RESISTOR,CHIP 39K 1/10W(2012)
R616	1-216-659-11	s RESISTOR,CHIP 2.2K 1/10W(2012)
R617	1-216-663-11	s RESISTOR,CHIP 3.3K 1/10W(2012)
R623	1-216-627-11	s RESISTOR,CHIP 100 1/10W (2012)
R624	1-216-694-11	s RESISTOR,CHIP 62K 1/10W(2012)
R625	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R626	1-216-675-11	s RESISTOR,CHIP 10K 1/10W(2012)
R627	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R628	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R629	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R630	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R631	1-216-647-11	s RESISTOR,CHIP 680 1/10W (2012)
R632	1-216-671-11	s RESISTOR,CHIP 6.8K 1/10W(2012)
R633	1-216-009-00	s RESISTOR,CHIP 22 1/10W (2012)
R701	1-216-624-11	s RESISTOR,CHIP 75 1/10W(2012)

(VIF-20/20P BOARD ; for BKDF-701)

Ref. No. or Q'ty	Part No.	SP Description
R702	1-216-624-11 s	RESISTOR,CHIP 75 1/10W(2012)
R703	1-216-624-11 s	RESISTOR,CHIP 75 1/10W(2012)
R704	1-216-691-11 s	RESISTOR,CHIP 47K 1/10W(2012)
R705	1-216-691-11 s	RESISTOR,CHIP 47K 1/10W(2012)
R706	1-216-691-11 s	RESISTOR,CHIP 47K 1/10W(2012)
R707	1-216-643-11 s	RESISTOR,CHIP 470 1/10W (2012)
R708	1-216-643-11 s	RESISTOR,CHIP 470 1/10W (2012)
R709	1-216-643-11 s	RESISTOR,CHIP 470 1/10W (2012)
R710	1-216-675-11 s	RESISTOR,CHIP 10K 1/10W(2012)
R711	1-216-675-11 s	RESISTOR,CHIP 10K 1/10W(2012)
R712	1-216-675-11 s	RESISTOR,CHIP 10K 1/10W(2012)
R713	1-216-635-11 s	RESISTOR,CHIP 220 1/10W (2012)
R714	1-216-635-11 s	RESISTOR,CHIP 220 1/10W (2012)
R715	1-216-635-11 s	RESISTOR,CHIP 220 1/10W (2012)
R716	1-216-659-11 s	RESISTOR,CHIP 2.2K 1/10W(2012)
R717	1-216-659-11 s	RESISTOR,CHIP 2.2K 1/10W(2012)
R718	1-216-659-11 s	RESISTOR,CHIP 2.2K 1/10W(2012)
R719	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R720	1-216-657-11 s	RESISTOR,CHIP 1.8K 1/10W(2012)
R721	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R722	1-216-657-11 s	RESISTOR,CHIP 1.8K 1/10W(2012)
R723	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R724	1-216-657-11 s	RESISTOR,CHIP 1.8K 1/10W(2012)
R725	1-216-639-11 s	RESISTOR,CHIP 330 1/10W (2012)
R726	1-216-295-91 s	RESISTOR, CHIP 0 (1/10W)
R727	1-216-295-91 s	RESISTOR, CHIP 0 (1/10W)
R728	1-216-635-11 s	RESISTOR,CHIP 220 1/10W (2012)
R729	1-216-635-11 s	RESISTOR,CHIP 220 1/10W (2012)
R730	1-216-635-11 s	RESISTOR,CHIP 220 1/10W (2012)
R731	1-216-659-11 s	RESISTOR,CHIP 2.2K 1/10W(2012)
R732	1-216-679-11 s	RESISTOR,CHIP 15K 1/10W (2012)
R734	1-216-657-11 s	RESISTOR,CHIP 1.8K 1/10W(2012)
R735	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R736	1-216-659-11 s	RESISTOR,CHIP 2.2K 1/10W(2012)
R738	1-216-659-11 s	RESISTOR,CHIP 2.2K 1/10W(2012)
R740	1-216-639-11 s	RESISTOR,CHIP 330 1/10W (2012)
R743	1-216-635-11 s	RESISTOR,CHIP 220 1/10W (2012)
R744	1-216-635-11 s	RESISTOR,CHIP 220 1/10W (2012)
R745	1-216-635-11 s	RESISTOR,CHIP 220 1/10W (2012)
R746	1-216-619-11 s	RESISTOR CHIP 47 1/10W(2012)
R747	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R748	1-216-619-11 s	RESISTOR CHIP 47 1/10W(2012)
R749	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R750	1-216-619-11 s	RESISTOR CHIP 47 1/10W(2012)
R751	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R752	1-216-636-11 s	RESISTOR CHIP 240 1/10W (2012)
R754	1-216-637-11 s	RESISTOR,CHIP 270 1/10W (2012)
R755	1-216-671-11 s	RESISTOR,CHIP 6.8K 1/10W(2012)
R756	1-216-637-11 s	RESISTOR,CHIP 270 1/10W (2012)
R757	1-216-671-11 s	RESISTOR,CHIP 6.8K 1/10W(2012)
R758	1-216-639-11 s	RESISTOR,CHIP 330 1/10W (2012)
R759	1-216-641-11 s	RESISTOR,CHIP 390 1/10W(2012)
R760	1-216-627-11 s	RESISTOR,CHIP 100 1/10W (2012)
R761	1-216-641-11 s	RESISTOR,CHIP 390 1/10W(2012)
R762	1-216-627-11 s	RESISTOR,CHIP 100 1/10W (2012)
R763	1-216-643-11 s	RESISTOR,CHIP 470 1/10W (2012)
R765	1-216-635-11 s	RESISTOR,CHIP 220 1/10W (2012)
R766	1-216-615-11 s	RESISTOR,CHIP 33 1/10W(2012)
R767	1-216-621-11 s	RESISTOR,CHIP 56 1/10W (2012)

(VIF-20/20P BOARD ; for BKDF-701)

Ref. No. or Q'ty	Part No.	SP Description
R768	1-216-647-11 s	RESISTOR,CHIP 680 1/10W (2012)
R769	1-216-611-11 s	RESISTOR,CHIP 22 1/10W (2012)
R770	1-216-635-11 s	RESISTOR,CHIP 220 1/10W (2012)
R771	1-216-615-11 s	RESISTOR,CHIP 33 1/10W(2012)
R772	1-216-621-11 s	RESISTOR,CHIP 56 1/10W (2012)
R773	1-216-647-11 s	RESISTOR,CHIP 680 1/10W (2012)
R774	1-216-611-11 s	RESISTOR,CHIP 22 1/10W (2012)
R775	*1 1-216-635-11 s	RESISTOR,CHIP 220 1/10W (2012)
	*2 1-216-645-11 s	RESISTOR,CHIP 560 1/10W(2012)
R776	1-216-619-11 s	RESISTOR CHIP 47 1/10W(2012)
R777	1-216-619-11 s	RESISTOR CHIP 47 1/10W(2012)
R778	*1 1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
	*2 1-216-659-11 s	RESISTOR,CHIP 2.2K 1/10W(2012)
R779	1-216-625-11 s	RESISTOR,CHIP 82 1/10W
R780	1-216-643-11 s	RESISTOR,CHIP 470 1/10W (2012)
R781	1-216-635-11 s	RESISTOR,CHIP 220 1/10W (2012)
R782	1-216-659-11 s	RESISTOR,CHIP 2.2K 1/10W(2012)
R783	1-216-669-11 s	RESISTOR,CHIP 5.6K 1/10W(2012)
R784	1-216-658-11 s	RESISTOR,CHIP 2.0K 1/10W(2012)
R785	1-216-655-11 s	RESISTOR,CHIP 1.5K 1/10W(2012)
R786	1-216-635-11 s	RESISTOR,CHIP 220 1/10W (2012)
R787	1-216-635-11 s	RESISTOR,CHIP 220 1/10W (2012)
R789	1-216-679-11 s	RESISTOR,CHIP 15K 1/10W (2012)
R790	1-216-679-11 s	RESISTOR,CHIP 15K 1/10W (2012)
R791	1-216-679-11 s	RESISTOR,CHIP 15K 1/10W (2012)
R792	1-216-603-11 s	RESISTOR,CHIP 10 1/10W(2012)
R793	1-216-643-11 s	RESISTOR,CHIP 470 1/10W (2012)
R794	1-216-643-11 s	RESISTOR,CHIP 470 1/10W (2012)
R795	1-216-643-11 s	RESISTOR,CHIP 470 1/10W (2012)
R796	1-216-619-11 s	RESISTOR CHIP 47 1/10W(2012)
R797	1-216-619-11 s	RESISTOR CHIP 47 1/10W(2012)
R798	1-216-619-11 s	RESISTOR CHIP 47 1/10W(2012)
R799	1-216-619-11 s	RESISTOR CHIP 47 1/10W(2012)
R801	1-216-641-11 s	RESISTOR,CHIP 390 1/10W(2012)
R803	1-216-667-11 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R805	1-216-651-11 s	RESISTOR,CHIP 1K 1/10W(2012)
R806	1-216-659-11 s	RESISTOR,CHIP 2.2K 1/10W(2012)
R807	1-218-772-11 s	RESISTOR,CHIP 680K 1/10W(2012)
R808	1-216-675-11 s	RESISTOR,CHIP 10K 1/10W(2012)
R809	1-216-663-11 s	RESISTOR,CHIP 3.3K 1/10W(2012)
R810	1-216-659-11 s	RESISTOR,CHIP 2.2K 1/10W(2012)
R811	1-218-760-11 s	RESISTOR,CHIP 220K 1/10W(2012)
R812	1-216-675-11 s	RESISTOR,CHIP 10K 1/10W(2012)
R813	1-216-667-11 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R814	1-216-687-11 s	RESISTOR CHIP 33K 1/10W (2012)
R815	1-216-689-11 s	RESISTOR,CHIP 39K 1/10W(2012)
R816	1-216-659-11 s	RESISTOR,CHIP 2.2K 1/10W(2012)
R817	1-216-663-11 s	RESISTOR,CHIP 3.3K 1/10W(2012)
R823	1-216-627-11 s	RESISTOR,CHIP 100 1/10W (2012)
R824	1-216-694-11 s	RESISTOR,CHIP 62K 1/10W(2012)
R825	1-216-671-11 s	RESISTOR,CHIP 6.8K 1/10W(2012)
R826	1-216-675-11 s	RESISTOR,CHIP 10K 1/10W(2012)
R827	1-216-009-00 s	RESISTOR,CHIP 22 1/10W (2012)
R828	1-216-009-00 s	RESISTOR,CHIP 22 1/10W (2012)
R829	1-216-009-00 s	RESISTOR,CHIP 22 1/10W (2012)
R830	1-216-009-00 s	RESISTOR,CHIP 22 1/10W (2012)
R831	1-216-647-11 s	RESISTOR,CHIP 680 1/10W (2012)

(VIF-20/20P BOARD ; for BKDF-701)

Ref. No. or Q'ty	Part No.	SP Description
RB101	1-239-430-11	s NETWORK RESISTOR 4.7K (1608)
RB102	1-239-430-11	s NETWORK RESISTOR 4.7K (1608)
RB103	1-233-663-91	s NETWORK, RES (8 GANG) 4.7K
RB301	1-239-430-11	s NETWORK RESISTOR 4.7K (1608)
RB302	1-239-430-11	s NETWORK RESISTOR 4.7K (1608)
RB303	1-233-663-91	s NETWORK, RES (8 GANG) 4.7K
RB501	1-239-430-11	s NETWORK RESISTOR 4.7K (1608)
RB502	1-239-430-11	s NETWORK RESISTOR 4.7K (1608)
RB503	1-233-663-91	s NETWORK, RES (8 GANG) 4.7K
RB701	1-239-430-11	s NETWORK RESISTOR 4.7K (1608)
RB702	1-239-430-11	s NETWORK RESISTOR 4.7K (1608)
RB703	1-233-663-91	s NETWORK, RES (8 GANG) 4.7K
RB901	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB902	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB903	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB904	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB905	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB906	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB907	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB908	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB909	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB910	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB1001	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB1002	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB1003	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB1004	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB1005	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB1006	1-239-412-11	s NETWORK, RESISTOR 100 (1608)
RB1007	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB1008	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB1009	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB1010	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB1301	1-234-397-11	s NETWORK, RES (8 GANG) 100K
RB1302	1-234-397-11	s NETWORK, RES (8 GANG) 100K
RB1304	1-234-397-11	s NETWORK, RES (8 GANG) 100K
RB1305	1-233-664-11	s NETWORK, RES (8 GANG) 22K
RB1308	1-233-664-11	s NETWORK, RES (8 GANG) 22K
RV101	1-237-032-11	s RESISTOR, ADJ, CERMET 500
RV102	1-237-032-11	s RESISTOR, ADJ, CERMET 500
RV103	1-237-030-11	s RESISTOR, ADJ, CERMET 100
RV104	1-237-030-11	s RESISTOR, ADJ, CERMET 100
RV105	1-237-030-11	s RESISTOR, ADJ, CERMET 100
RV201	1-237-035-11	s RESISTOR, ADJ, CERMET 5K
RV301	1-237-032-11	s RESISTOR, ADJ, CERMET 500
RV302	1-237-032-11	s RESISTOR, ADJ, CERMET 500
RV303	1-237-030-11	s RESISTOR, ADJ, CERMET 100
RV304	1-237-030-11	s RESISTOR, ADJ, CERMET 100
RV305	1-237-030-11	s RESISTOR, ADJ, CERMET 100
RV401	1-237-035-11	s RESISTOR, ADJ, CERMET 5K
RV501	1-237-032-11	s RESISTOR, ADJ, CERMET 500
RV502	1-237-032-11	s RESISTOR, ADJ, CERMET 500
RV503	1-237-030-11	s RESISTOR, ADJ, CERMET 100

(VIF-20/20P BOARD ; for BKDF-701)

Ref. No. or Q'ty	Part No.	SP Description
RV504	1-237-030-11	s RESISTOR, ADJ, CERMET 100
RV505	1-237-030-11	s RESISTOR, ADJ, CERMET 100
RV601	1-237-035-11	s RESISTOR, ADJ, CERMET 5K
RV701	1-237-032-11	s RESISTOR, ADJ, CERMET 500
RV702	1-237-032-11	s RESISTOR, ADJ, CERMET 500
RV703	1-237-030-11	s RESISTOR, ADJ, CERMET 100
RV704	1-237-030-11	s RESISTOR, ADJ, CERMET 100
RV705	1-237-030-11	s RESISTOR, ADJ, CERMET 100
RV801	1-237-035-11	s RESISTOR, ADJ, CERMET 5K
RV901	1-237-033-11	s RESISTOR, ADJ, CERMET 1K
RV902	1-237-033-11	s RESISTOR, ADJ, CERMET 1K
RV1001	1-237-033-11	s RESISTOR, ADJ, CERMET 1K
RV1002	1-237-033-11	s RESISTOR, ADJ, CERMET 1K
S901	1-570-711-11	s SWITCH, SLIDE
S904	1-570-711-11	s SWITCH, SLIDE
S1001	1-570-711-11	s SWITCH, SLIDE
S1002	1-570-711-11	s SWITCH, SLIDE
X201	1-767-695-21	s OSCILLATOR, CRYSTAL
X401	1-767-695-21	s OSCILLATOR, CRYSTAL
X601	1-767-695-21	s OSCILLATOR, CRYSTAL
X801	1-767-695-21	s OSCILLATOR, CRYSTAL

VR-263 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8323-730-A	o MOUNTED CIRCUIT BOARD, VR-263
CN603	1-691-503-11	o CONNECTOR, FPC 14P
EN601	1-467-809-21	s ENCODER, ROTARY (SWITCH)
EN602	1-467-809-21	s ENCODER, ROTARY (SWITCH)
EN603	1-467-809-21	s ENCODER, ROTARY (SWITCH)
EN604	1-467-809-21	s ENCODER, ROTARY (SWITCH)
EN605	1-467-809-21	s ENCODER, ROTARY (SWITCH)

VR-264 BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	1-675-963-11	o PRINTED WIRING BOARD, VR-264
1pc	3-625-949-01	o BRACKET (2), VR
CN704	1-506-469-11	s PIN, CONNECTOR 4P
EN701	1-467-809-21	s ENCODER, ROTARY (SWITCH)

VSE-36 BOARD ;for BKDF-712

Ref. No. or Q'ty	Part No.	SP Description
C1	1-126-393-11	s CAPACITOR ELECT 33MF/10V(CHIP)
C2	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C3	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C4	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C5	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C6	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C7	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C8	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C9	1-126-393-11	s CAPACITOR ELECT 33MF/10V(CHIP)
C10	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C11	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C12	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C13	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C14	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C15	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C16	1-126-391-11	s CAPACITOR ELECT 47MF/6.3V(105)
C101	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C102	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C103	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C104	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C105	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C106	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C107	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C108	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C109	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C115	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C116	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C119	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C125	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C126	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C129	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C135	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C136	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C139	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C201	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C202	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C203	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C204	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C205	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C206	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C207	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C208	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C209	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C210	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C211	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C212	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C213	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C214	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C251	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C252	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C253	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C301	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C302	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C303	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C304	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V

[illegible]

Ref. No. or Q'ty	Part No.	SP	Description
C519	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C520	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C521	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C522	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C523	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C524	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C525	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C526	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C527	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C528	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C529	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C530	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C531	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C532	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C533	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C535	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C536	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C537	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C538	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C539	1-126-396-11	s	CAPACITOR, ELECT 47MF/16V(CHIP)
C601	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C602	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C603	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C604	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C605	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C606	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C607	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C608	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C609	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C611	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C612	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C613	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C614	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C615	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C617	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C618	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C619	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C620	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C621	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C622	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C623	1-126-401-11	s	CAPACITOR, ELECT 1MF/50V(CHIP)
C624	1-126-401-11	s	CAPACITOR, ELECT 1MF/50V(CHIP)
C625	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C626	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C627	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C628	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C629	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C630	1-126-401-11	s	CAPACITOR, ELECT 1MF/50V(CHIP)
C631	1-126-401-11	s	CAPACITOR, ELECT 1MF/50V(CHIP)
C632	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C633	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C634	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C635	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C636	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C637	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C638	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C639	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C640	1-163-038-00	s	CAPACITOR, CERAMIC 0.1MF/25V
C704	1-104-478-11	s	CAPACITOR, TANTALUM 10MF/35V

(VSE-36 BOARD ;for BKDF-712)

Ref. No. or Q'ty	Part No.	SP Description
C707	1-104-478-11	s CAPACITOR TANTALUM 10MF/35V
CN12	1-566-318-11	s PLUG,D-SUB CONNECTOR 9P
CN201	1-774-879-21	s CONNECTOR, PC BOARD 100P
CN202	1-774-879-21	s CONNECTOR, PC BOARD 100P
CN501	1-566-311-11	s HEADER 10P,CONNECTOR
D401	8-719-024-81	s DIODE 1SS300-TE85L
D402	8-719-024-81	s DIODE 1SS300-TE85L
D403	8-719-024-81	s DIODE 1SS300-TE85L
D404	8-719-024-81	s DIODE 1SS300-TE85L
D405	8-719-024-81	s DIODE 1SS300-TE85L
D406	8-719-024-81	s DIODE 1SS300-TE85L
D407	8-719-024-81	s DIODE 1SS300-TE85L
D601	8-719-027-38	s LED PG1101W-TR
D602	8-719-027-38	s LED PG1101W-TR
D603	8-719-027-38	s LED PG1101W-TR
D604	8-719-027-38	s LED PG1101W-TR
D605	8-719-027-38	s LED PG1101W-TR
D606	8-719-027-38	s LED PG1101W-TR
D607	8-719-027-38	s LED PG1101W-TR
D608	8-719-027-38	s LED PG1101W-TR
D705	8-719-987-43	s LED CL-150PG-CD
D707	8-719-987-43	s LED CL-150PG-CD
FB1	1-406-864-21	s COIL,CHOKE 4.7UH
FB2	1-406-864-21	s COIL,CHOKE 4.7UH
FB3	1-406-864-21	s COIL,CHOKE 4.7UH
IC101	8-759-549-13	s IC SN74LV240APWR
IC102	8-759-549-13	s IC SN74LV240APWR
IC103	8-759-549-22	s IC SN74LV574APWR
IC104	8-759-676-61	o IC EPC1PC8-VSE1-V1.00
IC105	8-759-660-47	s IC EPF10K20TC144-3(04)
IC106	8-759-660-47	s IC EPF10K20TC144-3(04)
IC107	8-759-663-83	s IC TC74VCX16244FT(EL)
IC108	8-759-663-83	s IC TC74VCX16244FT(EL)
IC109	8-759-660-47	s IC EPF10K20TC144-3(04)
IC201	8-759-385-56	s IC CXD8559Q
IC202	8-759-445-73	s IC M66256FP (E2)
IC203	8-759-445-73	s IC M66256FP (E2)
IC204	8-759-445-73	s IC M66256FP (E2)
IC205	8-759-445-73	s IC M66256FP (E2)
IC206	8-759-445-73	s IC M66256FP (E2)
IC207	8-759-445-73	s IC M66256FP (E2)
IC208	8-759-385-56	s IC CXD8559Q
IC209	8-759-445-73	s IC M66256FP (E2)
IC210	8-759-445-73	s IC M66256FP (E2)
IC211	8-759-445-73	s IC M66256FP (E2)
IC212	8-759-445-73	s IC M66256FP (E2)
IC213	8-759-445-73	s IC M66256FP (E2)
IC214	8-759-445-73	s IC M66256FP (E2)
IC251	8-759-663-48	o IC CXD8711R
IC252	8-759-667-50	o IC AT27C010-GAM-V1.00
IC253	8-759-385-57	s IC CXD8560Q
IC301	8-759-663-47	o IC CXD8710R
IC302	8-759-436-44	s IC IDT71024S20Y-TL
IC303	8-759-436-44	s IC IDT71024S20Y-TL
IC304	8-759-436-44	s IC IDT71024S20Y-TL
IC305	8-759-436-44	s IC IDT71024S20Y-TL
IC306	8-759-663-47	o IC CXD8710R

(VSE-36 BOARD ;for BKDF-712)

Ref. No. or Q'ty	Part No.	SP Description
IC307	8-759-436-44	s IC IDT71024S20Y-TL
IC308	8-759-436-44	s IC IDT71024S20Y-TL
IC309	8-759-436-44	s IC IDT71024S20Y-TL
IC310	8-759-436-44	s IC IDT71024S20Y-TL
IC401	8-759-663-45	o IC CXD9083GB
IC402	8-759-663-84	s IC TC74VCX16374FT(EL)
IC403	8-759-663-84	s IC TC74VCX16374FT(EL)
IC404	8-759-663-84	s IC TC74VCX16374FT(EL)
IC405	8-759-663-83	s IC TC74VCX16244FT(EL)
IC406	8-759-663-79	s IC IDT74FST163383PA-TL
IC407	8-759-663-79	s IC IDT74FST163383PA-TL
IC408	8-759-663-79	s IC IDT74FST163383PA-TL
IC409	8-759-663-79	s IC IDT74FST163383PA-TL
IC410	8-759-663-79	s IC IDT74FST163383PA-TL
IC411	8-759-663-79	s IC IDT74FST163383PA-TL
IC412	8-759-663-79	s IC IDT74FST163383PA-TL
IC413	8-759-570-63	s IC IDT71V416S15PH-TL
IC414	8-759-570-63	s IC IDT71V416S15PH-TL
IC415	8-759-570-63	s IC IDT71V416S15PH-TL
IC416	8-759-570-63	s IC IDT71V416S15PH-TL
IC417	8-759-570-63	s IC IDT71V416S15PH-TL
IC418	8-759-570-63	s IC IDT71V416S15PH-TL
IC419	8-759-570-63	s IC IDT71V416S15PH-TL
IC420	8-759-570-63	s IC IDT71V416S15PH-TL
IC451	8-759-389-33	s IC 74LCX244MTCX
IC452	8-759-671-35	o IC CY2292F-CKGEN-V1.00
IC453	8-759-663-80	s IC IDT49FCT3805APY-TL
IC502	8-759-481-11	s IC SN74LVTH16244ADGGR
IC503	8-759-481-11	s IC SN74LVTH16244ADGGR
IC504	8-759-495-92	s IC SN74LVTH16245ADGGR
IC505	8-759-495-92	s IC SN74LVTH16245ADGGR
IC506	8-759-481-11	s IC SN74LVTH16244ADGGR
IC507	8-759-495-92	s IC SN74LVTH16245ADGGR
IC508	8-759-481-11	s IC SN74LVTH16244ADGGR
IC510	8-759-470-59	s IC IDT70V24S35PF
IC511	8-759-973-71	s IC TL7705CPS-B
IC601	8-759-677-58	o IC MBM29F040C-VSEBO-V1.00
IC602	8-759-537-83	s IC MBM29F400BC-70PFTN
IC603	8-759-672-03	o IC MBM29F400BC-VSEP1-V1.00
IC604	8-759-672-04	o IC MBM29F400BC-VSEP2-V1.00
IC605	8-759-672-05	o IC MBM29F400BC-VSEP3-V1.00
IC607	8-759-481-15	s IC SN74LVTH16374DGGR
IC608	8-759-667-42	o IC EPM7064STC100-VSEMX-V1.00
IC609	8-759-481-15	s IC SN74LVTH16374DGGR
IC611	8-759-481-11	s IC SN74LVTH16244ADGGR
IC612	8-759-679-13	s IC HM5264165FTT-A60
IC613	8-759-679-13	s IC HM5264165FTT-A60
IC614	8-759-521-15	s IC MAX232CWE
IC615	8-759-679-13	s IC HM5264165FTT-A60
IC616	8-759-679-13	s IC HM5264165FTT-A60
IC701	8-759-572-86	s IC LT1085CM-TR
IS104	1-526-652-21	o SOCKET, IC 8P
IS601	1-540-151-21	s SOCKET, IC
IS617	1-540-151-21	s SOCKET, IC
JC402	1-216-295-91	s RESISTOR, CHIP 0 (1/10W)
JC403	1-216-295-91	s RESISTOR, CHIP 0 (1/10W)
JC404	1-216-295-91	s RESISTOR, CHIP 0 (1/10W)
JC405	1-216-295-91	s RESISTOR, CHIP 0 (1/10W)

(VSE-36 BOARD ;for BKDF-712)

Ref. No. or Q'ty	Part No.	SP Description
JC406	1-216-295-91 s	RESISTOR, CHIP 0 (1/10W)
JC407	1-216-295-91 s	RESISTOR, CHIP 0 (1/10W)
JC408	1-216-295-91 s	RESISTOR, CHIP 0 (1/10W)
JC409	1-216-295-91 s	RESISTOR, CHIP 0 (1/10W)
JC410	1-216-295-91 s	RESISTOR, CHIP 0 (1/10W)
JC411	1-216-295-91 s	RESISTOR, CHIP 0 (1/10W)
JC412	1-216-295-91 s	RESISTOR, CHIP 0 (1/10W)
JC413	1-216-295-91 s	RESISTOR, CHIP 0 (1/10W)
JC414	1-216-295-91 s	RESISTOR, CHIP 0 (1/10W)
JC415	1-216-295-91 s	RESISTOR, CHIP 0 (1/10W)
JC451	1-216-295-91 s	RESISTOR, CHIP 0 (1/10W)
JC452	1-216-295-91 s	RESISTOR, CHIP 0 (1/10W)
JC453	1-216-295-91 s	RESISTOR, CHIP 0 (1/10W)
JC454	1-216-295-91 s	RESISTOR, CHIP 0 (1/10W)
JC455	1-216-295-91 s	RESISTOR, CHIP 0 (1/10W)
JC456	1-216-295-91 s	RESISTOR, CHIP 0 (1/10W)
JC502	1-216-295-91 s	RESISTOR, CHIP 0 (1/10W)
JC602	1-216-295-91 s	RESISTOR, CHIP 0 (1/10W)
JC603	1-216-295-91 s	RESISTOR, CHIP 0 (1/10W)
JC605	1-216-295-91 s	RESISTOR, CHIP 0 (1/10W)
JC608	1-216-295-91 s	RESISTOR, CHIP 0 (1/10W)
JC609	1-216-295-91 s	RESISTOR, CHIP 0 (1/10W)
JC611	1-216-295-91 s	RESISTOR, CHIP 0 (1/10W)
JC613	1-216-295-91 s	RESISTOR, CHIP 0 (1/10W)
JC614	1-216-295-91 s	RESISTOR, CHIP 0 (1/10W)
JC702	1-216-295-91 s	RESISTOR, CHIP 0 (1/10W)
PS1	Δ 1-533-282-21 s	CIRCUIT PROTECTOR 2A (3225)
PS2	Δ 1-533-282-21 s	CIRCUIT PROTECTOR 2A (3225)
R101	1-216-097-91 s	RESISTOR,CHIP 100K 1/10W(2012)
R102	1-216-049-91 s	RESISTOR,CHIP 1K 1/10W(2125)
R103	1-216-049-91 s	RESISTOR,CHIP 1K 1/10W(2125)
R104	1-216-049-91 s	RESISTOR,CHIP 1K 1/10W(2125)
R105	1-216-049-91 s	RESISTOR,CHIP 1K 1/10W(2125)
R106	1-216-049-91 s	RESISTOR,CHIP 1K 1/10W(2125)
R107	1-216-049-91 s	RESISTOR,CHIP 1K 1/10W(2125)
R108	1-216-097-91 s	RESISTOR,CHIP 100K 1/10W(2012)
R109	1-216-097-91 s	RESISTOR,CHIP 100K 1/10W(2012)
R110	1-216-097-91 s	RESISTOR,CHIP 100K 1/10W(2012)
R451	1-216-009-00 s	RESISTOR,CHIP 22 1/10W (2012)
R452	1-216-009-00 s	RESISTOR,CHIP 22 1/10W (2012)
R453	1-216-009-00 s	RESISTOR,CHIP 22 1/10W (2012)
R454	1-216-009-00 s	RESISTOR,CHIP 22 1/10W (2012)
R501	1-216-065-91 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R502	1-216-065-91 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R503	1-216-065-91 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R504	1-216-025-91 s	RESISTOR,CHIP 100 1/10W(2125)
R505	1-216-025-91 s	RESISTOR,CHIP 100 1/10W(2125)
R506	1-216-025-91 s	RESISTOR,CHIP 100 1/10W(2125)
R507	1-216-025-91 s	RESISTOR,CHIP 100 1/10W(2125)
R508	1-216-065-91 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R509	1-216-065-91 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R510	1-216-065-91 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R511	1-216-065-91 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R512	1-216-073-00 s	RESISTOR,CHIP 10K 1/10W(2012)
R513	1-216-073-00 s	RESISTOR,CHIP 10K 1/10W(2012)
R514	1-216-073-00 s	RESISTOR,CHIP 10K 1/10W(2012)
R515	1-216-073-00 s	RESISTOR,CHIP 10K 1/10W(2012)
R516	1-216-065-91 s	RESISTOR,CHIP 4.7K 1/10W(2012)

(VSE-36 BOARD ;for BKDF-712)

Ref. No. or Q'ty	Part No.	SP Description
R517	1-216-065-91 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R518	1-216-065-91 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R519	1-216-065-91 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R520	1-216-065-91 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R521	1-216-065-91 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R522	1-216-065-91 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R523	1-216-065-91 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R524	1-216-065-91 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R525	1-216-073-00 s	RESISTOR,CHIP 10K 1/10W(2012)
R601	1-216-065-91 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R602	1-216-065-91 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R603	1-216-065-91 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R705	1-216-025-91 s	RESISTOR,CHIP 100 1/10W(2125)
R706	1-216-013-00 s	RESISTOR,CHIP 33 1/10W(2012)
R707	1-216-009-00 s	RESISTOR,CHIP 22 1/10W (2012)
R710	1-216-073-00 s	RESISTOR,CHIP 10K 1/10W(2012)
R711	1-216-073-00 s	RESISTOR,CHIP 10K 1/10W(2012)
R713	1-216-073-00 s	RESISTOR,CHIP 10K 1/10W(2012)
R715	1-216-073-00 s	RESISTOR,CHIP 10K 1/10W(2012)
R718	1-216-073-00 s	RESISTOR,CHIP 10K 1/10W(2012)
R719	1-216-073-00 s	RESISTOR,CHIP 10K 1/10W(2012)
R722	1-216-073-00 s	RESISTOR,CHIP 10K 1/10W(2012)
R724	1-216-049-91 s	RESISTOR,CHIP 1K 1/10W(2125)
R725	1-216-073-00 s	RESISTOR,CHIP 10K 1/10W(2012)
R727	1-216-065-91 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R728	1-216-065-91 s	RESISTOR,CHIP 4.7K 1/10W(2012)
R729	1-216-009-00 s	RESISTOR,CHIP 22 1/10W (2012)
R730	1-216-009-00 s	RESISTOR,CHIP 22 1/10W (2012)
R731	1-216-073-00 s	RESISTOR,CHIP 10K 1/10W(2012)
R732	1-216-073-00 s	RESISTOR,CHIP 10K 1/10W(2012)
R733	1-216-073-00 s	RESISTOR,CHIP 10K 1/10W(2012)
R734	1-216-073-00 s	RESISTOR,CHIP 10K 1/10W(2012)
R735	1-216-073-00 s	RESISTOR,CHIP 10K 1/10W(2012)
R736	1-216-041-00 s	RESISTOR, CHIP 470 1/10W(2012)
R738	1-216-049-91 s	RESISTOR,CHIP 1K 1/10W(2125)
RB100	1-239-309-11 s	RESISTOR ARRAY,CHIP 100K
RB101	1-239-309-11 s	RESISTOR ARRAY,CHIP 100K
RB102	1-239-621-11 s	NETWORK RESISTOR 22 (1608)
RB103	1-239-621-11 s	NETWORK RESISTOR 22 (1608)
RB104	1-239-309-11 s	RESISTOR ARRAY,CHIP 100K
RB105	1-239-309-11 s	RESISTOR ARRAY,CHIP 100K
RB106	1-239-309-11 s	RESISTOR ARRAY,CHIP 100K
RB107	1-239-309-11 s	RESISTOR ARRAY,CHIP 100K
RB108	1-239-309-11 s	RESISTOR ARRAY,CHIP 100K
RB109	1-239-309-11 s	RESISTOR ARRAY,CHIP 100K
RB110	1-239-309-11 s	RESISTOR ARRAY,CHIP 100K
RB111	1-239-309-11 s	RESISTOR ARRAY,CHIP 100K
RB112	1-239-309-11 s	RESISTOR ARRAY,CHIP 100K
RB113	1-239-309-11 s	RESISTOR ARRAY,CHIP 100K
RB114	1-239-309-11 s	RESISTOR ARRAY,CHIP 100K
RB115	1-239-309-11 s	RESISTOR ARRAY,CHIP 100K
RB116	1-239-309-11 s	RESISTOR ARRAY,CHIP 100K
RB117	1-239-309-11 s	RESISTOR ARRAY,CHIP 100K
RB118	1-239-309-11 s	RESISTOR ARRAY,CHIP 100K
RB119	1-239-309-11 s	RESISTOR ARRAY,CHIP 100K
RB120	1-239-309-11 s	RESISTOR ARRAY,CHIP 100K
RB121	1-239-309-11 s	RESISTOR ARRAY,CHIP 100K
RB122	1-239-309-11 s	RESISTOR ARRAY,CHIP 100K
RB123	1-239-309-11 s	RESISTOR ARRAY,CHIP 100K

(VSE-36 BOARD ;for BKDF-712)

Ref. No. or Q'ty	Part No.	SP Description
RB124	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB125	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB201	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB401	1-239-306-11	s RESISTOR ARRAY,CHIP 10K
RB402	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB403	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB404	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB405	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB406	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB407	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB408	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB409	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB410	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB411	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB412	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB413	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB414	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB451	1-233-448-11	s RESISTOR, CHIP NETWORK 22
RB601	1-239-999-11	s RESISTOR, CHIP NETWORK 1.0K
RB602	1-233-234-11	s RESISTOR, CHIP NETWORK 2.2K
RB603	1-233-234-11	s RESISTOR, CHIP NETWORK 2.2K
RB604	1-239-999-11	s RESISTOR, CHIP NETWORK 1.0K
RB605	1-239-999-11	s RESISTOR, CHIP NETWORK 1.0K
RB701	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB702	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB703	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB704	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB705	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB706	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB707	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB708	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB709	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB710	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB711	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB712	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB713	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB714	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB715	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB716	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB717	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB718	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB719	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB720	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB721	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB722	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB723	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB724	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB725	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB726	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB727	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB728	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB729	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
S401	1-692-535-11	s SWITCH DIP (4P)
S501	1-572-473-11	s SWITCH, TACTIL
S601	1-692-536-11	s SWITCH DIP (8P)
X451	1-767-283-21	s OSCILLATOR, CRYSTAL

VSW-69/69P BOARD

Ref. No. or Q'ty	Part No.	SP Description
1pc	A-8324-724-A	o MOUNTED CIRCUIT BOARD, VSW-69 (for NTSC)
1pc	A-8325-192-A	o MOUNTED CIRCUIT BOARD, VSW-69P (for PAL)
12pcs	2-280-622-51	o SUPPORT (M3), HEXAGON
2pcs	3-624-100-02	o LEVER, PWB
7pcs	4-886-821-11	s SCREW,M3X6 CASE (SILVER)
2pcs	7-626-300-54	o SPRING PIN 3X6
12pcs	7-682-948-01	s SCREW +PSW 3X8 (EP-FE/ZN/CM2)
C21	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C22	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C23	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C24	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C25	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C26	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C61	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C71	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C72	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C101	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C102	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C103	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C104	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C105	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C106	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C107	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C108	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C109	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C110	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C111	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C112	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C113	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C114	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C115	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C116	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C117	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C118	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C119	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C120	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C121	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C122	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C123	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C124	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C125	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C126	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C127	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C128	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C129	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C130	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C131	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C132	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C133	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C134	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C135	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C136	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C137	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C157	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C167	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C177	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C187	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V

[illegible][illegible]

(VSW-69/69P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
C984	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C985	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C986	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C987	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C1001	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C1002	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C1003	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C1004	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C1005	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C1006	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C1007	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C1008	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C1009	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C1010	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C1011	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C1012	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C1013	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C1014	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C1015	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C1016	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C1017	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C1019	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C1020	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C1021	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C1022	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C1023	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C1024	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C1025	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C1026	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C1027	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C1030	1-107-818-11	s CAPACITOR, DOUBLE LAYERS 1F/5.5
C1031	1-107-818-11	s CAPACITOR, DOUBLE LAYERS 1F/5.5
C1032	1-107-818-11	s CAPACITOR, DOUBLE LAYERS 1F/5.5
C1033	1-104-478-11	s CAPACITOR TANTALUM 10MF/35V
C1034	1-107-818-11	s CAPACITOR, DOUBLE LAYERS 1F/5.5
C1035	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C1036	1-163-038-00	s CAPACITOR, CERAMIC 0.1MF/25V
C1037	1-104-478-11	s CAPACITOR TANTALUM 10MF/35V
CN12	1-566-318-11	s PLUG, D-SUB CONNECTOR 9P
CN101	1-580-194-21	o CONNECTOR, PC BOARD (PLUG) 100P
CN102	1-580-194-21	o CONNECTOR, PC BOARD (PLUG) 100P
CN201	1-580-194-21	o CONNECTOR, PC BOARD (PLUG) 100P
CN202	1-580-194-21	o CONNECTOR, PC BOARD (PLUG) 100P
CN901	1-566-311-11	s HEADER 10P, CONNECTOR
D920	8-719-027-38	s LED PG1101W-TR
D921	8-719-027-38	s LED PG1101W-TR
D922	8-719-027-38	s LED PG1101W-TR
D923	8-719-027-38	s LED PG1101W-TR
D924	8-719-027-38	s LED PG1101W-TR
D925	8-719-027-38	s LED PG1101W-TR
D926	8-719-027-38	s LED PG1101W-TR
D927	8-719-027-38	s LED PG1101W-TR
D970	8-719-800-76	s DIODE 1SS226
D971	8-719-105-57	s DIODE RD3.9M-B1
D972	8-719-800-76	s DIODE 1SS226
D973	8-719-800-76	s DIODE 1SS226
D974	8-719-987-43	s LED CL-150PG-CD
D976	8-719-987-43	s LED CL-150PG-CD

(VSW-69/69P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
F1	Δ 1-576-329-11	s FUSE CHIP 10A/125V (6125)
F2	Δ 1-576-329-11	s FUSE CHIP 10A/125V (6125)
FB1	1-414-581-21	s INDUCTOR, CHIP
FB2	1-414-581-21	s INDUCTOR, CHIP
IC21	8-759-667-44	o IC AT27C010-WGH-V1.00
IC22	8-759-667-45	o IC AT27C010-WGL-V1.00
IC23	8-759-667-28	o IC AT27C010-VBN0-V1.00 (for NTSC)
	8-759-667-30	o IC AT27C010-VBP0-V1.00 (for PAL)
IC24	8-759-667-29	o IC AT27C010-VBN1-V1.00 (for NTSC)
	8-759-667-31	o IC AT27C010-VBP1-V1.00 (for PAL)
IC25	8-759-671-19	o IC AT27C010-REO-V1.00
IC26	8-759-671-20	o IC AT27C010-RE1-V1.00
IC61	8-759-676-57	o IC EPC1PC8-VSW2-V1.00
IC71	8-759-676-58	o IC EPC1PC8-VSW3-V1.00
IC72	8-759-667-32	o IC AT27C010-STL-V1.00
IC91	8-759-676-56	o IC EPC1PC8-VSW1-V1.00
IC100	8-759-660-47	s IC EPF10K20TC144-3(04)
IC101	8-759-549-22	s IC SN74LV574APWR
IC102	8-759-549-22	s IC SN74LV574APWR
IC103	8-759-549-22	s IC SN74LV574APWR
IC104	8-759-549-22	s IC SN74LV574APWR
IC105	8-759-549-22	s IC SN74LV574APWR
IC106	8-759-549-22	s IC SN74LV574APWR
IC107	8-759-549-22	s IC SN74LV574APWR
IC108	8-759-385-57	s IC CXD8560Q
IC109	8-759-179-94	s IC HM530281-20
IC110	8-759-385-57	s IC CXD8560Q
IC111	8-759-445-73	s IC M66256FP (E2)
IC112	8-759-663-48	o IC CXD8711R
IC113	8-759-667-50	o IC AT27C010-GAM-V1.00
IC114	8-759-179-94	s IC HM530281-20
IC115	8-759-179-94	s IC HM530281-20
IC116	8-759-385-57	s IC CXD8560Q
IC117	8-759-179-94	s IC HM530281-20
IC118	8-759-385-57	s IC CXD8560Q
IC119	8-759-179-94	s IC HM530281-20
IC120	8-759-179-94	s IC HM530281-20
IC121	8-759-179-94	s IC HM530281-20
IC122	8-759-491-50	s IC TC74VHCT244AFT(EL)
IC123	8-759-491-50	s IC TC74VHCT244AFT(EL)
IC124	8-759-179-94	s IC HM530281-20
IC125	8-759-179-94	s IC HM530281-20
IC126	8-759-491-50	s IC TC74VHCT244AFT(EL)
IC127	8-759-491-50	s IC TC74VHCT244AFT(EL)
IC128	8-759-549-22	s IC SN74LV574APWR
IC129	8-759-549-22	s IC SN74LV574APWR
IC130	8-759-549-22	s IC SN74LV574APWR
IC131	8-759-549-22	s IC SN74LV574APWR
IC132	8-759-549-22	s IC SN74LV574APWR
IC133	8-759-549-22	s IC SN74LV574APWR
IC134	8-759-549-22	s IC SN74LV574APWR
IC135	8-759-549-22	s IC SN74LV574APWR
IC136	8-759-549-22	s IC SN74LV574APWR
IC137	8-759-549-22	s IC SN74LV574APWR
IC201	8-759-392-82	s IC CXD8613Q
IC202	8-759-667-43	o IC AT27C010-TH-V1.00
IC203	8-759-451-89	s IC IDT74FCT157ATQ-TL
IC204	8-759-451-89	s IC IDT74FCT157ATQ-TL

(VSW-69/69P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC205	8-759-451-89	s IC IDT74FCT157ATQ-TL
IC206	8-759-451-89	s IC IDT74FCT157ATQ-TL
IC207	8-759-663-46	o IC CXD8709R
IC208	8-759-660-47	s IC EPF10K20TC144-3 (04)
IC209	8-759-179-94	s IC HM530281-20
IC210	8-759-179-94	s IC HM530281-20
IC251	8-759-663-46	o IC CXD8709R
IC252	8-759-660-47	s IC EPF10K20TC144-3 (04)
IC253	8-759-549-22	s IC SN74LV574APWR
IC301	8-759-385-57	s IC CXD8560Q
IC302	8-759-663-48	o IC CXD8711R
IC303	8-759-667-50	o IC AT27C010-GAM-V1.00
IC304	8-759-437-50	s IC IDT72201L25J
IC305	8-759-385-57	s IC CXD8560Q
IC306	8-759-385-57	s IC CXD8560Q
IC307	8-759-385-57	s IC CXD8560Q
IC308	8-759-385-56	s IC CXD8559Q
IC309	8-759-445-73	s IC M66256FP (E2)
IC310	8-759-445-73	s IC M66256FP (E2)
IC311	8-759-445-73	s IC M66256FP (E2)
IC312	8-759-445-73	s IC M66256FP (E2)
IC313	8-759-445-73	s IC M66256FP (E2)
IC314	8-759-445-73	s IC M66256FP (E2)
IC315	8-759-385-56	s IC CXD8559Q
IC316	8-759-445-73	s IC M66256FP (E2)
IC317	8-759-445-73	s IC M66256FP (E2)
IC318	8-759-445-73	s IC M66256FP (E2)
IC319	8-759-445-73	s IC M66256FP (E2)
IC320	8-759-445-73	s IC M66256FP (E2)
IC321	8-759-445-73	s IC M66256FP (E2)
IC322	8-759-385-56	s IC CXD8559Q
IC323	8-759-445-73	s IC M66256FP (E2)
IC324	8-759-445-73	s IC M66256FP (E2)
IC325	8-759-445-73	s IC M66256FP (E2)
IC326	8-759-445-73	s IC M66256FP (E2)
IC327	8-759-445-73	s IC M66256FP (E2)
IC328	8-759-445-73	s IC M66256FP (E2)
IC401	8-759-663-46	o IC CXD8709R
IC402	8-759-667-46	o IC AT27C010-YH-V1.00
IC403	8-759-667-47	o IC AT27C010-YL-V1.00
IC404	8-759-667-48	o IC AT27C010-XH-V1.00
IC405	8-759-667-49	o IC AT27C010-XL-V1.00
IC406	8-759-389-45	s IC 74LCX16244MTDX
IC407	8-759-389-45	s IC 74LCX16244MTDX
IC408	8-759-392-82	s IC CXD8613Q
IC409	8-759-667-43	o IC AT27C010-TH-V1.00
IC410	8-759-663-49	o IC CXD9114R
IC411	8-759-570-63	s IC IDT71V416S15PH-TL
IC412	8-759-663-49	o IC CXD9114R
IC413	8-759-570-63	s IC IDT71V416S15PH-TL
IC501	8-759-451-89	s IC IDT74FCT157ATQ-TL
IC502	8-759-451-89	s IC IDT74FCT157ATQ-TL
IC503	8-759-451-89	s IC IDT74FCT157ATQ-TL
IC504	8-759-451-89	s IC IDT74FCT157ATQ-TL
IC505	8-759-663-47	o IC CXD8710R
IC506	8-759-436-44	s IC IDT71024S20Y-TL
IC507	8-759-436-44	s IC IDT71024S20Y-TL
IC508	8-759-436-44	s IC IDT71024S20Y-TL
IC509	8-759-436-44	s IC IDT71024S20Y-TL

(VSW-69/69P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC510	8-759-663-47	o IC CXD8710R
IC511	8-759-436-44	s IC IDT71024S20Y-TL
IC512	8-759-436-44	s IC IDT71024S20Y-TL
IC513	8-759-436-44	s IC IDT71024S20Y-TL
IC514	8-759-436-44	s IC IDT71024S20Y-TL
IC515	8-759-663-47	o IC CXD8710R
IC516	8-759-436-44	s IC IDT71024S20Y-TL
IC517	8-759-436-44	s IC IDT71024S20Y-TL
IC518	8-759-436-44	s IC IDT71024S20Y-TL
IC519	8-759-436-44	s IC IDT71024S20Y-TL
IC601	8-759-660-47	s IC EPF10K20TC144-3 (04)
IC602	8-759-482-20	s IC IDT71V124S15Y-TL
IC603	8-759-466-57	s IC 74LCX157MTCX
IC604	8-759-466-57	s IC 74LCX157MTCX
IC605	8-759-466-57	s IC 74LCX157MTCX
IC606	8-759-466-57	s IC 74LCX157MTCX
IC607	8-759-389-45	s IC 74LCX16244MTDX
IC608	8-759-660-47	s IC EPF10K20TC144-3 (04)
IC609	8-759-570-63	s IC IDT71V416S15PH-TL
IC701	8-759-389-48	s IC 74LCX16374MTDX
IC702	8-759-389-48	s IC 74LCX16374MTDX
IC703	8-759-660-47	s IC EPF10K20TC144-3 (04)
IC704	8-759-570-63	s IC IDT71V416S15PH-TL
IC705	8-759-660-47	s IC EPF10K20TC144-3 (04)
IC706	8-759-667-27	o IC AT27C010-MX-V1.00
IC707	8-759-660-47	s IC EPF10K20TC144-3 (04)
IC708	8-759-179-94	s IC HM530281-20
IC709	8-759-179-94	s IC HM530281-20
IC710	8-759-179-94	s IC HM530281-20
IC711	8-759-386-26	s IC 74LCX574MTCX
IC712	8-759-386-26	s IC 74LCX574MTCX
IC801	8-759-549-13	s IC SN74LV240APWR
IC802	8-759-549-13	s IC SN74LV240APWR
IC803	8-759-549-13	s IC SN74LV240APWR
IC804	8-759-549-14	s IC SN74LV244APWR
IC805	8-759-549-22	s IC SN74LV574APWR
IC806	8-759-549-22	s IC SN74LV574APWR
IC807	8-759-549-22	s IC SN74LV574APWR
IC808	8-759-549-22	s IC SN74LV574APWR
IC809	8-759-660-47	s IC EPF10K20TC144-3 (04)
IC810	8-759-660-47	s IC EPF10K20TC144-3 (04)
IC811	8-759-389-33	s IC 74LCX244MTCX
IC812	8-759-389-45	s IC 74LCX16244MTDX
IC813	8-759-389-45	s IC 74LCX16244MTDX
IC902	8-759-481-11	s IC SN74LVTH16244ADGGR
IC903	8-759-481-11	s IC SN74LVTH16244ADGGR
IC904	8-759-495-92	s IC SN74LVTH16245ADGGR
IC905	8-759-481-11	s IC SN74LVTH16244ADGGR
IC906	8-759-481-11	s IC SN74LVTH16244ADGGR
IC907	8-759-495-92	s IC SN74LVTH16245ADGGR
IC908	8-759-481-11	s IC SN74LVTH16244ADGGR
IC909	8-759-679-13	s IC HM5264165FTT-A60
IC910	8-759-679-13	s IC HM5264165FTT-A60
IC912	8-759-470-59	s IC IDT70V24S35PF
IC913	8-759-973-71	s IC TL7705CPS-B
IC914	8-759-547-71	s IC SN74LVTH244APW-E05
IC915	8-759-663-77	s IC CY7C1021V33L-15VC-T2
IC920	8-759-537-83	s IC MBM29F400BC-70PFTN
IC921	8-759-537-83	s IC MBM29F400BC-70PFTN

(VSW-69/69P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IC922	8-759-677-57	o IC MBM29F040C-VSWBO-V1.00
IC923	8-759-671-21	o IC MBM29F400BC-DATON-V1.00 (for NTSC)
	8-759-671-22	o IC MBM29F400BC-DATOP-V1.00 (for PAL)
IC924	8-759-671-23	o IC MBM29F400BC-DAT1N-V1.00 (for NTSC)
	8-759-671-24	o IC MBM29F400BC-DAT1P-V1.00 (for PAL)
IC926	8-759-481-11	s IC SN74LVTH16244ADGGR
IC927	8-759-667-38	o IC EPM7064STC100-VSWMX-V1.00
IC928	8-759-359-54	s IC SN74ALS244CNS (E20)
IC929	8-759-481-15	s IC SN74LVTH16374DGGR
IC930	8-759-496-96	s IC SN74LVCC00APW (E05)
IC931	8-759-481-11	s IC SN74LVTH16244ADGGR
IC932	8-759-646-59	s IC ML60851BTB
IC933	8-759-923-65	s IC AM26LS31CNS
IC934	8-759-521-15	s IC MAX232CWE
IC935	8-759-578-68	s IC SN74LVCC4245APWR
IC936	8-759-578-68	s IC SN74LVCC4245APWR
IC937	8-759-923-64	s IC AM26LS32ACNS
IC938	8-759-578-68	s IC SN74LVCC4245APWR
IC939	8-759-578-68	s IC SN74LVCC4245APWR
IC940	8-759-481-11	s IC SN74LVTH16244ADGGR
IC941	8-759-537-83	s IC MBM29F400BC-70PFTN
IC942	8-759-671-25	o IC MBM29F400BC-TRL-V1.00
IC943	8-759-495-92	s IC SN74LVTH16245ADGGR
IC944	8-759-660-47	s IC EPF10K20TC144-3 (04)
IC945	8-759-389-45	s IC 74LCX16244MTDX
IC946	8-759-389-45	s IC 74LCX16244MTDX
IC947	8-759-389-33	s IC 74LCX244MTCX
IC950	8-759-481-11	s IC SN74LVTH16244ADGGR
IC951	8-759-667-33	o IC MBM29F040C-FOH-V1.00
IC952	8-759-667-34	o IC MBM29F040C-FOL-V1.00
IC953	8-759-667-35	o IC MBM29F040C-F1H-V1.00
IC954	8-759-667-36	o IC MBM29F040C-F1L-V1.00
IC955	8-759-547-71	s IC SN74LVTH244APW-E05
IC956	8-759-667-37	o IC MBM29F040C-F2H-V1.00
IC970	8-759-572-86	s IC LT1085CM-TR
IC971	8-759-359-54	s IC SN74ALS244CNS (E20)
IS21	1-540-151-21	s SOCKET, IC
IS22	1-540-151-21	s SOCKET, IC
IS23	1-540-151-21	s SOCKET, IC
IS24	1-540-151-21	s SOCKET, IC
IS25	1-540-151-21	s SOCKET, IC
IS26	1-540-151-21	s SOCKET, IC
IS61	1-526-652-21	o SOCKET, IC 8P
IS71	1-526-652-21	o SOCKET, IC 8P
IS72	1-540-151-21	s SOCKET, IC
IS91	1-526-652-21	o SOCKET, IC 8P
IS402	1-540-151-21	s SOCKET, IC
IS403	1-540-151-21	s SOCKET, IC
IS404	1-540-151-21	s SOCKET, IC
IS405	1-540-151-21	s SOCKET, IC
IS922	1-540-151-21	s SOCKET, IC
IS951	1-540-151-21	s SOCKET, IC
IS952	1-540-151-21	s SOCKET, IC
IS953	1-540-151-21	s SOCKET, IC
IS954	1-540-151-21	s SOCKET, IC
IS956	1-540-151-21	s SOCKET, IC

(VSW-69/69P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
IS957	1-540-151-21	s SOCKET, IC
IS958	1-540-151-21	s SOCKET, IC
JC902	1-216-295-91	s RESISTOR, CHIP 0 (1/10W)
JC920	1-216-295-91	s RESISTOR, CHIP 0 (1/10W)
JC923	1-216-295-91	s RESISTOR, CHIP 0 (1/10W)
JC925	1-216-295-91	s RESISTOR, CHIP 0 (1/10W)
JC926	1-216-295-91	s RESISTOR, CHIP 0 (1/10W)
JC928	1-216-295-91	s RESISTOR, CHIP 0 (1/10W)
JC931	1-216-295-91	s RESISTOR, CHIP 0 (1/10W)
JC932	1-216-295-91	s RESISTOR, CHIP 0 (1/10W)
JC934	1-216-295-91	s RESISTOR, CHIP 0 (1/10W)
JC935	1-216-295-91	s RESISTOR, CHIP 0 (1/10W)
JC971	1-216-295-91	s RESISTOR, CHIP 0 (1/10W)
L1	1-421-459-21	s COIL, CHOKE
L3	1-421-459-21	s COIL, CHOKE
L920	1-412-054-21	s INDUCTOR, SMALL TYPE
Q970	8-729-120-28	s TRANSISTOR 2SC1623-L5L6
Q971	8-729-114-48	s TRANSISTOR 2SB962-Z-P
R101	1-216-049-91	s RESISTOR, CHIP 1K 1/10W(2125)
R102	1-216-049-91	s RESISTOR, CHIP 1K 1/10W(2125)
R103	1-216-073-00	s RESISTOR, CHIP 10K 1/10W(2012)
R104	1-216-073-00	s RESISTOR, CHIP 10K 1/10W(2012)
R105	1-216-073-00	s RESISTOR, CHIP 10K 1/10W(2012)
R106	1-216-073-00	s RESISTOR, CHIP 10K 1/10W(2012)
R107	1-216-073-00	s RESISTOR, CHIP 10K 1/10W(2012)
R108	1-216-073-00	s RESISTOR, CHIP 10K 1/10W(2012)
R109	1-216-073-00	s RESISTOR, CHIP 10K 1/10W(2012)
R110	1-216-073-00	s RESISTOR, CHIP 10K 1/10W(2012)
R111	1-216-073-00	s RESISTOR, CHIP 10K 1/10W(2012)
R112	1-216-073-00	s RESISTOR, CHIP 10K 1/10W(2012)
R113	1-216-073-00	s RESISTOR, CHIP 10K 1/10W(2012)
R114	1-216-073-00	s RESISTOR, CHIP 10K 1/10W(2012)
R201	1-216-049-91	s RESISTOR, CHIP 1K 1/10W(2125)
R202	1-216-049-91	s RESISTOR, CHIP 1K 1/10W(2125)
R203	1-216-073-00	s RESISTOR, CHIP 10K 1/10W(2012)
R204	1-216-073-00	s RESISTOR, CHIP 10K 1/10W(2012)
R251	1-216-073-00	s RESISTOR, CHIP 10K 1/10W(2012)
R252	1-216-073-00	s RESISTOR, CHIP 10K 1/10W(2012)
R601	1-216-073-00	s RESISTOR, CHIP 10K 1/10W(2012)
R602	1-216-073-00	s RESISTOR, CHIP 10K 1/10W(2012)
R603	1-216-073-00	s RESISTOR, CHIP 10K 1/10W(2012)
R604	1-216-049-91	s RESISTOR, CHIP 1K 1/10W(2125)
R605	1-216-049-91	s RESISTOR, CHIP 1K 1/10W(2125)
R606	1-216-049-91	s RESISTOR, CHIP 1K 1/10W(2125)
R607	1-216-049-91	s RESISTOR, CHIP 1K 1/10W(2125)
R701	1-216-049-91	s RESISTOR, CHIP 1K 1/10W(2125)
R702	1-216-049-91	s RESISTOR, CHIP 1K 1/10W(2125)
R703	1-216-049-91	s RESISTOR, CHIP 1K 1/10W(2125)
R704	1-216-049-91	s RESISTOR, CHIP 1K 1/10W(2125)
R705	1-216-049-91	s RESISTOR, CHIP 1K 1/10W(2125)
R706	1-216-073-00	s RESISTOR, CHIP 10K 1/10W(2012)
R707	1-216-073-00	s RESISTOR, CHIP 10K 1/10W(2012)
R708	1-216-073-00	s RESISTOR, CHIP 10K 1/10W(2012)
R709	1-216-073-00	s RESISTOR, CHIP 10K 1/10W(2012)
R879	1-216-049-91	s RESISTOR, CHIP 1K 1/10W(2125)
R880	1-216-049-91	s RESISTOR, CHIP 1K 1/10W(2125)
R901	1-216-065-91	s RESISTOR, CHIP 4.7K 1/10W(2012)

(VSW-69/69P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
RB605	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB606	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB607	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB608	1-239-306-11	s RESISTOR ARRAY,CHIP 10K
RB609	1-239-306-11	s RESISTOR ARRAY,CHIP 10K
RB610	1-239-306-11	s RESISTOR ARRAY,CHIP 10K
RB611	1-239-306-11	s RESISTOR ARRAY,CHIP 10K
RB612	1-239-306-11	s RESISTOR ARRAY,CHIP 10K
RB613	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB701	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB702	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB703	1-239-306-11	s RESISTOR ARRAY,CHIP 10K
RB704	1-239-306-11	s RESISTOR ARRAY,CHIP 10K
RB705	1-239-306-11	s RESISTOR ARRAY,CHIP 10K
RB706	1-239-306-11	s RESISTOR ARRAY,CHIP 10K
RB707	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB708	1-239-306-11	s RESISTOR ARRAY,CHIP 10K
RB709	1-239-306-11	s RESISTOR ARRAY,CHIP 10K
RB710	1-239-306-11	s RESISTOR ARRAY,CHIP 10K
RB711	1-239-306-11	s RESISTOR ARRAY,CHIP 10K
RB712	1-239-306-11	s RESISTOR ARRAY,CHIP 10K
RB713	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB801	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB802	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB803	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB804	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB805	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB806	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB807	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB808	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB809	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB810	1-239-621-11	s NETWORK RESISTOR 22 (1608)
RB811	1-239-309-11	s RESISTOR ARRAY,CHIP 100K
RB812	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB813	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB814	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB815	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB816	1-236-908-11	s RESISTOR,NETWORK 10K (3216)
RB920	1-239-999-11	s RESISTOR, CHIP NETWORK 1.0K
RB921	1-233-234-11	s RESISTOR, CHIP NETWORK 2.2K
RB922	1-233-234-11	s RESISTOR, CHIP NETWORK 2.2K
RB923	1-233-234-11	s RESISTOR, CHIP NETWORK 2.2K
RB924	1-239-999-11	s RESISTOR, CHIP NETWORK 1.0K
RB925	1-239-999-11	s RESISTOR, CHIP NETWORK 1.0K
RB926	1-233-448-11	s RESISTOR, CHIP NETWORK 22
RB927	1-233-448-11	s RESISTOR, CHIP NETWORK 22
RB928	1-233-448-11	s RESISTOR, CHIP NETWORK 22
RB940	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB941	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB942	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB943	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB944	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB945	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB946	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB947	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB948	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB949	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB950	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB951	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K

(VSW-69/69P BOARD)

Ref. No. or Q'ty	Part No.	SP Description
RB952	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB953	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB954	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB955	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB956	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB957	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB958	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB959	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB960	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB961	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB962	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB963	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB964	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB965	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB966	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB970	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB971	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB972	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB973	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB974	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB975	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB976	1-233-237-11	s RESISTOR, CHIP NETWORK 100K
RB977	1-233-237-11	s RESISTOR, CHIP NETWORK 100K
RB978	1-233-237-11	s RESISTOR, CHIP NETWORK 100K
RB979	1-233-237-11	s RESISTOR, CHIP NETWORK 100K
RB980	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB981	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB982	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
RB983	1-233-449-11	s RESISTOR, CHIP NETWORK 4.7K
S901	1-572-473-11	s SWITCH, TACTIL
S920	1-692-536-11	s SWITCH DIP (8P)
X901	1-760-527-11	s OSCILLATOR, CRYSTAL
X920	1-760-965-21	s VIBRATOR, CRYSTAL

1-3-2. Frame List

FRAME

Ref. No. or Q'ty	Part No.	SP Description
1pc	1-467-705-11	s ENCODER, ROTARY
1pc	Δ 1-468-480-11	s REGULATOR, SWITCHING
1pc	1-517-970-11	s VFD (WITH DRIVER, 40X2 LINE)
1pc	Δ 1-551-812-11	s CORD, POWER (for UC)
1pc	1-698-080-11	s MOTOR, DC FAN (ASF9038001)
1pc	1-765-378-51	o CABLE ASSY, DIGITAL VIDEO
1pc	Δ 1-782-929-11	s CORD, POWER (BS 3P) (for CE)
1pc	Δ 1-783-969-11	s CORD, POWER (for J)

1-3-3. Cables/Harnesses List

CABLES/HARNESSSES

Q'ty	Part No.	SP Description
HN001	Δ 1-960-443-11	o HARNESS (WITH INLET) (TO AC INLET) (TO CN31/MB-874 BOARD)
HN002	1-960-442-11	o HARNESS (VFD) (TO CN1/VFD ASSEMBLY) (TO CN63/CPU-305 BOARD)
HN003	-----	SUB HARNESS (DC) (TO CN62/CPU-305 BOARD)
1pc	1-562-285-11	o HOUSING, CONNECTOR 4P
4pcs	1-562-210-11	s CONTACT, CONNECTOR (TO CN102/KY-466 BOARD)
1pc	1-562-285-11	o HOUSING, CONNECTOR 4P
4pcs	1-562-210-11	s CONTACT, CONNECTOR
1pc	1-537-568-11	o TERMINAL, GROUND
HN004	-----	SUB HARNESS (JS) (TO CN106/KY-466 BOARD)
1pc	1-569-197-11	o HOUSING, CONNECTOR 4P
4pcs	1-569-191-11	s TERMINAL, SOLDERLESS (TO CN806/LC-40 BOARD)
1pc	1-569-197-11	o HOUSING, CONNECTOR 4P
4pcs	1-569-191-11	s TERMINAL, SOLDERLESS
HN005	-----	SUB HARNESS (JS) (TO CN104/KY-466 BOARD)
1pc	1-569-197-11	o HOUSING, CONNECTOR 4P
4pcs	1-569-191-11	s TERMINAL, SOLDERLESS (TO CN704/VR-264 BOARD)
1pc	1-569-197-11	o HOUSING, CONNECTOR 4P
4pcs	1-569-191-11	s TERMINAL, SOLDERLESS
HN006	1-792-572-11	s CABLE FLAT (WITH SHIELD) (TO CN61/CPU-305 BOARD) (TO CN101/KY-466 BOARD)
HN007	1-792-573-11	s CABLE FLAT (WITH SHIELD) (TO CN103/KY-466 BOARD) (TO CN603/VR-263 BOARD)
HN008	1-792-573-11	s CABLE FLAT (WITH SHIELD) (TO CN105/KY-466 BOARD) (TO CN505/LE-227 BOARD)
HN009	1-792-573-11	s CABLE FLAT (WITH SHIELD) (TO CN111/KY-466 BOARD) (TO CN411/KY-468 BOARD)
HN010	1-792-574-12	s CABLE FLAT (WITH SHIELD) (TO CN107/KY-466 BOARD) (TO CN307/KY-467 BOARD)

1-3-4. External Connectors List

EXTERNAL CONNECTORS

Part No.	SP Description
CONTROL PANEL UNIT	
1-563-772-11	o SOCKET, D-SUB CONNECTOR 25P
EDITOR	
1-568-676-11	o CONNECTOR, D-SUB 9P
PANEL, TALLY	
1-568-677-11	o CONNECTOR, D-SUB 25P
REF. VIDEO, DSK KEY IN, GPI/T	
1-573-582-11	s CONNECTOR, BNC (RECEPTACLE)
VIDEO INPUT COMPONENT 5/1 to 8/4	
VIDEO INPUT COMPOSITE 5 to 8	
PGM OUT COMPONENT 1,2	
PGM OUT COMPOSITE	
BLACK BURST OUT	
1-573-584-11	s CONNECTOR, BNC (RECEPTACLE)
S VIDEO INPUT 5 to 8	
S VIDEO OUTPUT 1,2	
1-573-590-13	s CONNECTOR, (S) TERMINAL 4P
SDI INPUT 1 to 8	
PGM OUT 1,2	
CLEAN OUT	
1-764-274-11	s CONNECTOR, COAXIAL (BNC TYPE)
TERMINAL	
1-794-293-11	s CONNECTOR, USB (B)

1-4. Supplied Accessories List

DFS-700 (J)

Ref. No. or Q'ty	Part No.	SP Description
1pc	1-765-378-51	o CABLE ASSY, DIGITAL VIDEO
1pc	Δ 1-783-969-11	s CORD, POWER
1pc	3-179-054-01	o TOOL, CAP PULL
1pc	3-203-834-01	s MANUAL, INSTRUCTION
1pc	3-625-952-01	s CHIP(B), SW (PET)

DFS-700 (UC)

Ref. No. or Q'ty	Part No.	SP Description
1pc	Δ 1-551-812-11	s CORD, POWER
1pc	1-765-378-51	o CABLE ASSY, DIGITAL VIDEO
1pc	3-179-054-01	o TOOL, CAP PULL
1pc	3-203-834-11	s MANUAL, INSTRUCTION
1pc	3-203-834-21	s MANUAL, INSTRUCTION
1pc	3-625-952-01	s CHIP(B), SW (PET)

DFS-700P (CE)

Ref. No. or Q'ty	Part No.	SP Description
1pc	1-765-378-51	o CABLE ASSY, DIGITAL VIDEO
1pc	Δ 1-782-929-11	s CORD, POWER (BS 3P)
1pc	3-179-054-01	o TOOL, CAP PULL
1pc	3-203-834-31	s MANUAL, INSTRUCTION
1pc	3-625-952-01	s CHIP(B), SW (PET)

BKDF-711

Ref. No. or Q'ty	Part No.	SP Description
6pcs	7-682-947-01	s SCREW +PSW 3X6(EP-FE/ZN/CM2)

BKDF-712

Ref. No. or Q'ty	Part No.	SP Description
6pcs	7-682-947-01	s SCREW +PSW 3X6(EP-FE/ZN/CM2)

1-5. Optical Fixtures List

OPTIONAL FIXTURE

Part No.	SP Description
A-8324-779-A	o EXTENSION BOARD, EX-732
J-6031-820-A	o MULTI CONNECTOR CABLE (DIBNC)
J-6031-830-A	o MULTI CONNECTOR CABLE (DOBNC)
J-6035-070-A	o EXTRACTION TOOL, IC (CT-2101)
J-6381-380-A	o S-BNC VIDEO CORD
1-575-065-13	o CABLE ASSY (DIGITAL VIDEO)
3-179-054-01	o TOOL, CAP PULL

Section 2

Semiconductor Pin Assignments

The following describes the semiconductor types used in this unit.

For semiconductors marked with page numbers in the index, refer to the corresponding pages in this section.

However, in some cases incompatible types are also listed, therefore, when a part is to be replaced, also refer to the Spare Parts section.

In addition, for semiconductors with ID Nos., refer to the separate CD-ROM titled "Semiconductor Pin Assignments" (Sony Part No. 9-968-546-xx) that allows searching for parts by semiconductor type or ID No.

The semiconductors in the manual or on the CD-ROM are listed by equivalent types. Thus the external view or the index mark indication may differ from the actual type.

Pin assignments and block diagrams are based on the IC manufacturer's data book.

本機に使用されている半導体型名の一覧を下記に示します。索引中、ページが記載されている半導体は、本章の該当ページを参照してください。ただし、互換性のない型名を併記している場合がありますので、部品を交換するときは、Spare Partsの章を参照してください。

また、ID番号が記載されている半導体は、別途発行の "Semiconductor Pin Assignments" CD-ROM版 (ソニー部品番号: 9-968-546-xx) を参照してください。半導体型名またはID番号から検索ができます。

マニュアルまたはCD-ROMに掲載されている半導体は、それぞれの機能を等価的に表わしたものです。外観やインデックスマークの表示方法が実物と異なる場合があります。

ピン配置およびブロック図はICメーカーのデータブックに従いました。

DIODE	Page or ID No.	LED	Page or ID No.
1S2835-T1	DC001-02	CL-150PG-CD	LC001-01
1S2836	DC001-02	CL-150PG-CD-T	LC001-01
1S2837-T1	DC001-03	CL-150Y-CD	LC001-01
1SS123-T1	DC001-01	CL-150Y-CD-T	LC001-01
1SS184	DC001-03	CL-191YG-CD-T	LC004-01
1SS226	DC001-01		
1SS300-TE85L	DC001-02	HDSP-4850-S22	LR086-01
1SS301-TE85L	DC001-03	HDSP-7801	LR072-01
1SS302	DC001-01		
1SS302-TE85L	DC001-01	LD-701MG	LR058-01
DA204U	DC001-01	PG1101W-TR	LC003-01
DA204UT106	DC001-01		
DE5SC3ML-TA	DC015-01		
EC10QS-04	DC007-01		
EC10QS04-TE12L5	DC007-01		
F25P04QS	DM001-01		
KV1470	DC001-13		
KV1470TL00	DC001-13		
KV1851	DC001-14		
MA141WK	DC001-03		
RD3.6M-B1	DC001-04		
RD3.6M-T1B	DC001-04		
RD3.9M-B1	DC001-04		
RD3.9M-T1B	DC001-04		
RD4.7M-B	DC001-04		
RD4.7M-T1B	DC001-04		
RD5.1SB-T1	DC008-04		
RD5.1SB-T2	DC008-04		
RD5.6M-B2	DC001-04		
RD5.6M-T1B	DC001-04		

Index

TRANSISTOR

Page or ID No.

2SA1162G	TC001-01
2SA1611-M5M6	TC001-01
2SA1611T1-M5M6	TC001-01
2SA812-T1-M5M6	TC001-01
2SB962-Z-P	TR031-02
2SC1623-L5L6	TC001-02
2SC1623-T1-L5L6	TC001-02
2SC3356-K	TC001-02
2SC3356-T1K	TC001-02
2SC4177-L6	TC001-02
2SC4177-T1L5L6	TC001-02
2SJ143	TM004-06
2SK508-K51	TC001-05
2SK508-K53	TC001-05
2SK508-T1K51	TC001-05
2SK508-T1K53	TC001-05
2SK94-T1X3	TC001-05
2SK94-X4	TC001-05
DTA124XUA-T106	TC001-04
DTB113ZK	TC001-04
DTB113ZK-T-146	TC001-04
DTB122JK-T146	TC001-04
DTC123EUA-T106	TC001-03
DTC123JKA-T146	TC001-03
HN1A01FU-TE85R	TC006-11
HN1B01FU-TE85R	2-5
SI4431DY-T1	TC012-04
SI9936DY	TC012-01
SI9936DY-T1	TC012-01
XP4401	TC006-11

IC

Page or ID No.

74LCX157MTCX	TC74HC157P
74LCX16244MTDX	IDT74FCT16244ATPV
74LCX16374MTDX	SN74ABT16374DL
74LCX244MTCX	TC74HC244P
74LCX574MTCX	TC74HC574P
AD8011AR-REEL	AD8011AR
AD8041AR	AD8041AR
AD8041AR-REEL	AD8041AR
AD8055ART-REEL7	2-5
ADC10321CIVT	2-6
ADV7176AKS	ADV7176AKS
AL422B-TEL	2-5
AM26LS31CNS	AM26LS31PC
AM26LS31CNSR	AM26LS31PC
AM26LS32ACNS	AM26LS32PC
AM26LS32ACNSR	AM26LS32PC
AT27C010-45JC	2-6
BA05FP-E2	L78M05T-FA
CXA1260Q-Z	2-7
CXA1432M	CXA1432M
CXA1432M-T4	CXA1432M
CXA3178M-T4	CX22017
CXB1341R	CXB1341R
CXB1342R	CXB1342R
CXD1095BR	CXD1095AR
CXD1175AM-TH	CXD1175P
CXD1178Q	CXD1178Q
CXD1216M	CXD1216M
CXD1216M-TH	CXD1216M
CXD1217M	CXD1217M
CXD1217M-TH	CXD1217M
CXD8058Q	CXD8058Q
CXD8161AQ	CXD8161AQ
CXD8243AM	CXD8243M
CXD8243AM-ER	CXD8243M
CXD8335AQ	CXD8335AQ
CXD8559Q	CXD8559Q
CXD8560Q	CXD8560Q
CXD8613Q	CXD8613Q
CXD8709R	2-7
CXD8710R	2-8
CXD8711R	2-9
CXD8890Q	CXD8890Q
CXD8891Q	CXD8891Q
CXD8976AR	CXD8976AR
CXD9002Q	CXD8852Q
CXD9030R	CXD9030R
CXD9041R	CXD9041R
CXD9083GB	2-10
CXD9114R	2-9
CXK1203AR	CXK1203R
CXK1203AR-T4	CXK1203R
CY2292F	2-11
CY7C1021V33L-15VC-T2	IDT71V016S20Y-TL
CY7C136-55JC	CY7C136-55JC


IC	Page or ID No.	IC	Page or ID No.
EPC1PC8	EPC1PC8	NJM78L09A-T1	UA78L05AWC
EPC2LC20	2-11	NJM78M05DLA(TE1)	2-18
EPF10K20TC144-3(04)	EPF10K20TC144-3	NJM79M05DLA(TE1)	2-18
EPF6016TC144-3	2-11		
EPM7032SLC44-10(05)	2-12	SN74ALS244CNS-E20	SN74LS244N
EPM7064SLC44-10(05)	2-12	SN74ALS244CNSR	SN74LS244N
EPM7064SLC44-15	2-12	SN74HC00ANS	TC74HC00P
EPM7064STC100-10	2-13	SN74HC00ANSR	TC74HC00P
		SN74HC04ANS-E20	TC74HC04P
GS4981CTA	GS4981CTA	SN74HC04ANSR	TC74HC04P
		SN74HC05APW-E05	2-18
HA17431UA	NJM431U	SN74HC14ANS	TC74HC14P
HA17431UA-TL	NJM431U	SN74HC14ANSR	TC74HC14P
HA4314BCB-E2	HA4314BCB-E2	SN74HC166APW-E05	TC74HC166P
HD6417750BP200M	2-14	SN74HC166APW-E20	TC74HC166P
HM5264165FTT-B60	2-15	SN74HC32ANS	TC74HC32P
HM530281-20	HM530281-25	SN74HC32ANSR	TC74HC32P
HM530281RTT-20	HM530281-25	SN74HC574APWR	TC74HC574P
HM628512BLFP-5	HM628512LP-7	SN74LS123NS	SN74123N
		SN74LS123NSR	SN74123N
IDT49FCT3805APY-TL	IDT49FCT805SO	SN74LS221NS	SN74221N
IDT70V24S35PF	IDT70V24S35PF	SN74LS221NSR	SN74221N
IDT71024S20Y-TL	IDT71024S20Y-TL	SN74LV08APWR	TC74HC08P
IDT71V124S15Y-TL	HM62W8127HJP-27	SN74LV240APWR	TC74HC240P
IDT71V416S15PH-TL	2-15	SN74LV244APWR	TC74HC244P
IDT72201L25J	2-16	SN74LV245APWR	TC74HC245P
IDT74FCT157ATQ-TL	TC74HC157P	SN74LV541APWR	MC74HC541N
IDT74FCT374ATQ-TL	TC74HC374P	SN74LV574APWR	TC74HC574P
IDT74FST163383PA-TL	2-18	SN74LVC00APW-E05	TC74HC00P
ISPLSI2032E-110LT48	2-16	SN74LVCC4245APWR	74LVX4245QSCX
		SN74LVTH16244ADGGR	IDT74FCT16244ATPV
LM1881M	LM1881N	SN74LVTH16245ADGGR	IDT74FCT16245ATPV-TR
LM1881MX	LM1881N	SN74LVTH16374DGGR	SN74ABT16374DL
LM358PS	LM358N	SN74LVTH244APW-E05	TC74HC244P
LM358PSR	LM358N	SN75C1167NS-E05	SN75C1167NS
LM6361M	LM6361N		
LMC6032IMX	RC4558	TA78L09F-T1	NJM78L12UA
LT1085CM-TR	2-16	TA78L09F-TE12L	NJM78L12UA
LTC1628CG	2-17	TA78L09S	UA78L05AWC
		TC4W53FU	TC4W53FU
M66256FP-E2	M66256FP	TC4W53FU(TE12R)	TC4W53FU
M66256GP-E2	M66256FP	TC4W66FU	TC4W66F
M66258FP-E2	2-17	TC4W66FU(TE12R)	TC4W66F
MAX202CSE	MAX202CSE	TC74HC221AF	TC74HC221P
MAX202CSE-T	MAX202CSE	TC74HC221AF(EL)	TC74HC221P
MAX232CWE	MAX232CPE	TC74VCX16244FT(EL)	IDT74FCT16244ATPV
MAX232CWE-TE-2	MAX232CPE	TC74VCX16374FT(EL)	SN74ABT16374DL
MBM29F040C-90PD	AM29F040-90JC	TC74VHC00FT(EL)	TC74HC00P
MBM29F400BC-70PFTN	MBM29F400BA-12PF	TC74VHC04F	TC74HC04P
MC14053BF	MC74HC4053F	TC74VHC04F(EL)	TC74HC04P
MC14053BFEL	MC74HC4053F	TC74VHC04FT(EL)	TC74HC04P
ML60851BTB	2-19	TC74VHC08F(EL)	TC74HC08P
ML60851CTB	2-19	TC74VHC08FT(EL)	TC74HC08P
		TC74VHC11FT(EL)	TC74HC11P
NJM082M	RC4558	TC74VHC14FT(EL)	TC74HC14P
NJM13700M	NJM13700M	TC74VHC153FT(EL)	TC74HC153P
NJM2233BM	NJM2233AM	TC74VHC157F	TC74HC157P
NJM2233BM(TE2)	NJM2233AM	TC74VHC157F(EL)	TC74HC157P
NJM2257M(TE2)	NJM2257M	TC74VHC157FT(EL)	TC74HC157P

Index

IC	Page or ID No.
TC74VHC163F	TC74HC163P
TC74VHC163F(EL)	TC74HC163P
TC74VHC163FT(EL)	TC74HC163P
TC74VHC164F	TC74HC164P
TC74VHC164F(EL)	TC74HC164P
TC74VHC164FT(EL)	TC74HC164P
TC74VHC165FT(EL)	TC74HC165P
TC74VHC174FT(EL)	TC74HC174P
TC74VHC21FT(EL)	TC74HC21P
TC74VHC244FT(EL)	TC74HC244P
TC74VHC32F	TC74HC32P
TC74VHC32F(EL)	TC74HC32P
TC74VHC32FT(EL)	TC74HC32P
TC74VHC540FT(EL)	MC74HC540N
TC74VHC574F	TC74HC574P
TC74VHC574F(EL)	TC74HC574P
TC74VHC574FT(EL)	TC74HC574P
TC74VHC595FT(EL)	TC74HC595P
TC74VHC74F	TC74HC74P
TC74VHC74F(EL)	TC74HC74P
TC74VHC74FT(EL)	TC74HC74P
TC74VHCT240AFT(EL)	TC74HC240P
TC74VHCT244AFT(EL)	TC74HC244P
TC74VHCT541AFT(EL)	MC74HC541N
TC74VHCT574AFT(EL)	TC74HC574P
TC7S04FU(TE85R)	TC7S04F
TC7S66FU	SC14S66F
TC7S66FU(TE85R)	SC14S66F
TC7SH14FU-TE85R	TC7S14FU
TC7SU04F(TE85R)	TC7S04F
TC7W14F(TE12R)	TC7W14FU
TC7W14F-TE12L	TC7W14FU
TD62083F(S, EL)	TD62083AP
TL082CPS-E20	RC4558
TL084CPWR	TL084CN
TL1451ACNS	TL1451CNS
TL7705CPS-B	TL7705CP
TL7705CPS-B-E20	TL7705CP
TLC2932IPW-E20	TLC2932IPW
TLC5733AIPM	TLC5733IPM
TMP68301AFR-16	TMP68301AFR-16
UPD4701AGT	UPD4701AC
UPD4702G	UPD4702G
UPD7004C	UPD7004C
XC1765EPD8C	XC1736A-PD8C
XC5202-6PC84	2-19
XC5202-6PC84C	2-19

TRANSISTOR

—TOP VIEW—




HN1B01FU-TE85R

IC

AD8055ART-REEL7 (AD)

SINGLE OPERATIONAL AMPLIFIER


—TOP VIEW—



AL422B-TEL (AVER LOGIC)

3M (393216 × 8)-BIT FIFO MEMORY


—TOP VIEW—

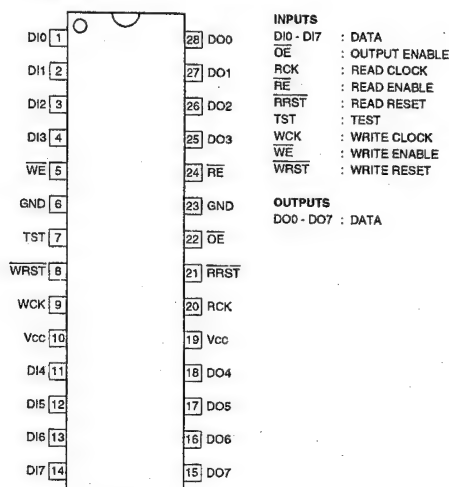

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	I	DIO	8	I	WRST	15	O	DO7	22	I	OE
2	I	DI1	9	I	WCK	16	O	DO6	23	—	GND
3	I	DI2	10	—	Vcc	17	O	DO5	24	I	RE
4	I	DI3	11	I	DI4	18	O	DO4	25	O	DO3
5	I	WE	12	I	DI5	19	—	Vcc	26	O	DO2
6	—	GND	13	I	DI6	20	I	RCK	27	O	DO1
7	I	TST	14	I	DI7	21	I	RRST	28	O	DO0

ADC10321CIVT (NS)

10-BIT A/D CONVERTER
—TOP VIEW—



PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	O	VREF-S	9	I	CLK	17	O	D3	25	O	D9
2	I	VREF-F	10	—	V _D	18	O	D4	26	I	OE
3	—	V _A	11	—	D.GND	19	O	D5	27	—	A.GND
4	—	A.GND	12	—	V _D /I/O	20	—	D.GND I/O	28	—	V _A
5	—	V _D	13	—	D.GND I/O	21	—	V _D /I/O	29	—	A.GND
6	—	D.GND	14	O	D0	22	O	D6	30	I	V _{IN}
7	—	V _A	15	O	D1	23	O	D7	31	I	VREF-F
8	I	PD	16	O	D2	24	O	D8	32	O	VREF+S


INPUTS
CLK : CONVERTER DIGITAL CLOCK
OE : OUTPUT ENABLE
PD : POWER DOWN
V_{IN} : ANALOG SIGNAL
VREF-F : REFERENCE LOW FORCE
VREF+S : REFERENCE HIGH FORCE

OUTPUTS
D0 - D9 : DIGITAL DATA
VREF-S : REFERENCE LOW SENSE
VREF+S : REFERENCE HIGH SENSE

OTHERS
A.GND : ANALOG GROUND
D.GND, D.GND I/O : DIGITAL GROUND
V_A : ANALOG POWER SUPPLY
V_D, V_D/I/O : DIGITAL POWER SUPPLY

AT27C010-45JC (ATMEL)

1M (131072 × 8)-BIT ONE TIME PROM
—TOP VIEW—




INPUTS
A0 - A16 : ADDRESS
CE (E) : CHIP ENABLE
OE (G) : OUTPUT ENABLE
PGM (P) : PROGRAM ENABLE


INPUTS/OUTPUTS
DQ0 - DQ7 : DATA

OTHERS
NC : NO CONNECTION
VPP : PROGRAM SUPPLY VOLTAGE

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	—	VPP	9	I	A3	17	I/O	DQ3	25	I	A11
2	I	A16	10	I	A2	18	I/O	DQ4	26	I	A9
3	I	A15	11	I	A1	19	I/O	DQ5	27	I	A8
4	I	A12	12	I	A0	20	I/O	DQ6	28	I	A13
5	I	A7	13	I/O	DQ0	21	I/O	DQ7	29	I	A14
6	I	A6	14	I/O	DQ1	22	I	CE (E)	30	—	NC
7	I	A5	15	I/O	DQ2	23	I	A10	31	I	PGM (P)
8	I	A4	16	—	GND	24	I	OE (G)	32	—	Vcc

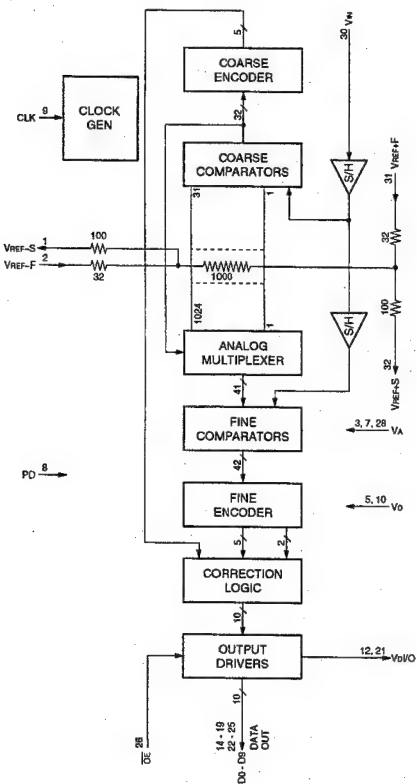

CXA1260Q-Z (SONY)

8-BIT 35MHz 3-CHANNEL D/A CONVERTER
—TOP VIEW—

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	I	G1	13	I	B5	25	O	VREF	37	—	D.GND
2	I	G2	14	I	B6	26	—	NC	38	—	NC
3	I	G3	15	I	B7	27	—	A.Vcc	39	I	R1
4	I	G4	16	I	B8	28	—	NC	40	I	R2
5	I	G5	17	—	NC	29	O	B OUT	41	I	R3
6	I	G6	18	I	CLK	30	—	NC	42	I	R4
7	I	G7	19	—	D.GND	31	O	G OUT	43	—	D.GND
8	I	G8	20	—	D.Vcc	32	—	NC	44	I	R5
9	I	B1	21	—	NC	33	O	R OUT	45	I	R6
10	I	B2	22	—	NC	34	—	NC	46	I	R7
11	I	B3	23	—	A.GND	35	—	NC	47	I	R8
12	I	B4	24	I	VSET	36	—	NC	48	—	NC

INPUTS


B1 - B8 : B CHANNEL DIGITAL DATA (LSB TO MSB)
 CLK : D/A CONVERSION CLOCK
 G1 - G8 : G CHANNEL DIGITAL DATA (LSB TO MSB)
 R1 - R8 : R CHANNEL DIGITAL DATA (LSB TO MSB)
 VSET : BIAS (VSET = +0.87 V : D/A OUT = 1 VP-P)

OUTPUTS


B OUT : B CHANNEL ANALOG SIGNAL
 G OUT : G CHANNEL ANALOG SIGNAL
 R OUT : R CHANNEL ANALOG SIGNAL
 VREF : REFERENCE VOLTAGE, +1.2 V TYP.

OTHER

NC : NO CONNECTION

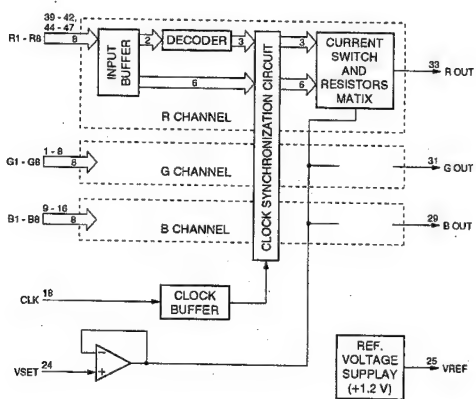

CXD8709R (SONY)

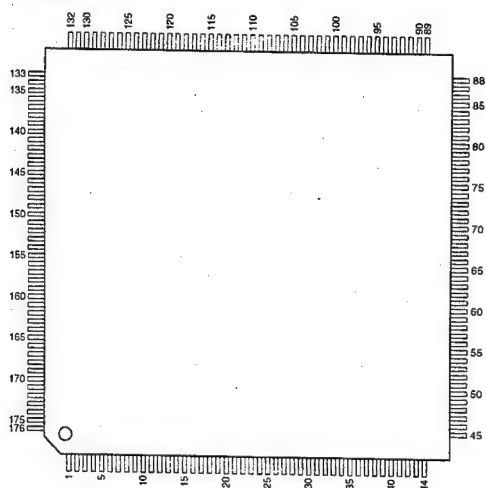IMAGE MEMORY ADDRESS GENERATOR
—TOP VIEW—

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	O	LN0	45	O	TIX14	89	I	TDX13	133	O	X11
2	O	LN1	46	O	TIX15	90	I	TDX14	134	O	X10
3	—	GND	47	—	GND	91	—	GND	135	—	GND
4	O	AR0	48	O	TIX16	92	I	TDX15	136	O	X9
5	O	AR1	49	O	TIX17	93	I	TDY0	137	O	X8
6	I	D8	50	O	TIX18	94	I	TDY1	138	O	X7
7	I	D9	51	O	TIX19	95	I	TDY2	139	O	X6
8	I	D10	52	O	TIY0	96	I	TDY3	140	O	X5
9	I	D11	53	O	TIY1	97	I	TDY4	141	O	X4
10	I	D12	54	O	TIY2	98	I	TDY5	142	O	X3
11	I	D13	55	O	TIY3	99	I	TDY6	143	O	X2
12	—	GND	56	—	GND	100	—	GND	144	—	GND
13	I	D14	57	O	TIY4	101	I	TDY7	145	O	X1
14	I	D15	58	O	TIY5	102	I	TDY8	146	O	X0
15	I	FD	59	O	TIY6	103	I	TDY9	147	O	ST0
16	I	VD	60	O	TIY7	104	I	TDY10	148	O	ST1
17	I	HD	61	O	TIY8	105	I	TDY11	149	O	ST2
18	I	CE	62	O	TIY9	106	I	TDY12	150	I	A1
19	I	C0	63	O	TIY10	107	I	TDY13	151	I	A2
20	I	C1	64	O	TIY11	108	I	TDY14	152	I	A3
21	I	C2	65	I	TDX0	109	I	TDY15	153	I	A4
22	—	Vcc	66	—	Vcc	110	—	Vcc	154	—	Vcc
23	I	C3	67	I	TDX1	111	—	NC	155	I	WE0
24	I	C4	68	I	TDX2	112	O	Y15	156	I	WE1
25	I	C5	69	I	TDX3	113	O	Y14	157	I	WE2
26	I	C6	70	I	TDX4	114	O	Y13	158	I	WE3
27	I	C7	71	I	TDX5	115	O	Y12	159	I	WE4
28	O	TIX0	72	O	TIY12	116	O	Y11	160	I	WE5
29	O	TIX1	73	O	TIY13	117	O	Y10	161	—	NC
30	O	TIX2	74	O	TIY14	118	O	Y9	162	I	OSEL
31	O	TIX3	75	O	TIY15	119	O	Y8	163	I	CLK
32	—	GND	76	—	GND	120	—	GND	164	—	GND
33	O	TIX4	77	O	TIY16	121	O	Y7	165	I	OCLK
34	O	TIX5	78	O	TIY17	122	O	Y6	166	I	OMOD
35	O	TIX6	79	O	TIY18	123	O	Y5	167	—	NC
36	O	TIX7	80	O	TIY19	124	O	Y4	168	I	D0
37	—	NC	81	I	TDX6	125	O	Y3	169	I	D1
38	—	NC	82	I	TDX7	126	O	Y2	170	I	D2
39	O	TIX8	83	I	TDX8	127	O	Y1	171	I	D3
40	O	TIX9	84	I	TDX9	128	O	Y0	172	I	D4
41	O	TIX10	85	I	TDX10	129	O	X15	173	I	D5
42	O	TIX11	86	—	Vcc	130	O	X14	174	—	Vcc
43	O	TIX12	87	I	TDX11	131	O	X13	175	I	D6
44	O	TIX13	88	I	TDX12	132	O	X12	176	I	D7

INPUTS

C0 - C7 : CONTROL COMMAND SIGNAL
 CE : CHIP ENABLE SIGNAL
 CLK : CLOCK (13.5 MHz)
 D0 - D15 : REGISTER DATA
 FD : FIELD DISCRIMINATION SIGNAL
 HD : HORIZONTAL SYNC SIGNAL
 OCLK : CLOCK (27 MHz)
 OMOD : OUTPUT MODE SELECT
 OSEL : OUTPUT SIGNAL SELECT
 TDX : X TABLE DATA
 TDY : Y TABLE DATA
 VD : VERTICAL SYNC SIGNAL
 WE0 - WE5 : REGISTER WRITE ENABLE SIGNAL

OUTPUTS

LN0, LN1 : LINE SIGNAL
 ST0 - ST2 : OPERATING STATUS SIGNAL
 TIX0 - TIX19 : X TABLE INDEX
 TIY0 - TIY19 : Y TABLE INDEX
 X0 - X15 : X ADDRESS
 Y0 - Y15 : Y ADDRESS


OTHER

NC : NO CONNECTION

CXD8710R (SONY)

MEMORY CONTROLLER

-TOP VIEW-

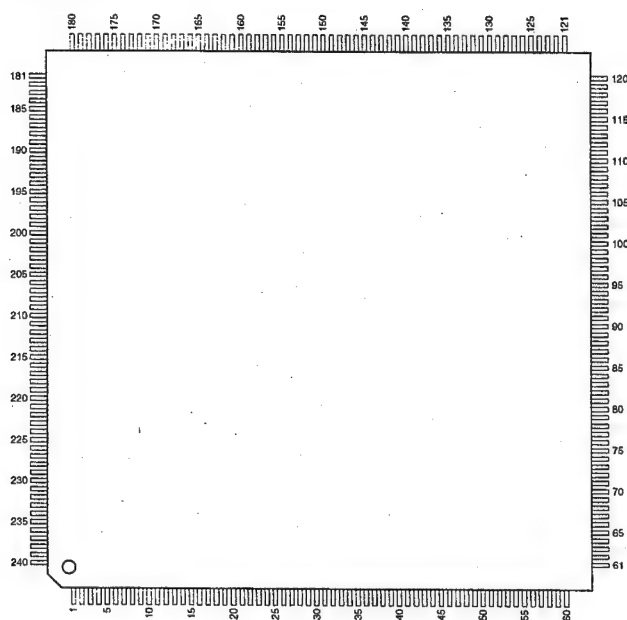

INPUTS

A1 - A3 : REGISTER ADDRESS
 AA0 - AA15 : A ADDRESS
 AAS : A ADDRESS STATUS SIGNAL (L : ADDRESS ENABLE)
 BA0 - BA15 : B ADDRESS
 BAS : B ADDRESS STATUS SIGNAL (L : ADDRESS ENABLE)
 CAS : C ADDRESS STATUS SIGNAL (L : ADDRESS ENABLE)
 CKW : BASIC CLOCK
 CLK : CLOCK FOR PICTURE ELEMENT RATE FREQUENCY
 D0 - D15 : REGISTER DATA
 DAS : D ADDRESS STATUS SIGNAL (L : ADDRESS ENABLE)
 FD : FIELD DISCRIMINATION SIGNAL
 HD : HORIZONTAL SYNC SIGNAL
 MCE0L : CHIP ENABLE FOR MEMORY
 MCE0F, MCE0F1 : OUTPUT ENABLE SIGNAL
 VD : VERTICAL SYNC SIGNAL
 WD0 - WD7 : WRITE DATA FOR MEMORY
 WE0 - WE3 : WRITE ENABLE SIGNAL FOR REGISTER BLOCK 0 - 3

OUTPUTS


MA000 - MA016 : ADDRESS FOR SRAM0
 MA100 - MA116 : ADDRESS FOR SRAM1
 MA200 - MA216 : ADDRESS FOR SRAM2
 MA300 - MA316 : ADDRESS FOR SRAM4
 MCE0 - MCE3 : CHIP ENABLE FOR SRAM0 - SRAM3
 MWE0F, MWE0F1 : WRITE ENABLE FOR SRAM
 PS00, PS01, PS10, PS11 : PRIORITY NUMBER
 PS20, PS21, PS30, PS31 :
 RD0 - RD7 : PROCESS DATA
 XC0 - XC3 : DECIMAL PART OUTPUT IN THE X DIRECTION READ ADDRESS
 YC0 - YC3 : DECIMAL PART OUTPUT IN THE Y DIRECTION READ ADDRESS

INPUTS/OUTPUTS

MD00 - MD07 : DATA INPUT/OUTPUT FOR SRAM0
 MD10 - MD17 : DATA INPUT/OUTPUT FOR SRAM1
 MD20 - MD27 : DATA INPUT/OUTPUT FOR SRAM2
 MD30 - MD37 : DATA INPUT/OUTPUT FOR SRAM3

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	I	WD7	61	I	D10	121	I/O	MD26	181	I	MCE0F0
2	O	PS00	62	I	D9	122	I/O	MD25	182	O	MWE0F0
3	O	PS01	63	I	D8	123	I/O	MD24	183	I/O	MD07
4	O	PS10	64	I	D7	124	I/O	MD23	184	I/O	MD06
5	O	PS11	65	I	D6	125	I/O	MD22	185	I/O	MD05
6	—	Vcc	66	—	Vcc	126	—	Vcc	186	—	Vcc
7	—	GND	67	—	GND	127	—	GND	187	—	GND
8	O	PS20	68	I	D5	128	I/O	MD21	188	I/O	MD04
9	O	PS21	69	I	D4	129	I/O	MD20	189	I/O	MD03
10	O	PS30	70	I	D3	130	O	MCE2	190	I/O	MD02
11	O	PS31	71	I	D2	131	O	MA200	191	I/O	MD01
12	I	AA0	72	I	D1	132	O	MA201	192	I/O	MD00
13	I	AA1	73	I	D0	133	O	MA202	193	O	MCE0
14	I	AA2	74	I	A3	134	O	MA203	194	O	MA000
15	I	AA3	75	I	A2	135	O	MA204	195	O	MA001
16	I	AA4	76	I	A1	136	O	MA205	196	O	MA002
17	I	AA5	77	I	CLK	137	O	MA206	197	O	MA003
18	—	Vcc	78	—	GND	138	—	Vcc	198	—	GND
19	—	GND	79	I	CKW	139	—	GND	199	O	MA004
20	I	AA6	80	I	WE3	140	O	MA207	200	O	MA005
21	I	AA7	81	I	WE2	141	O	MA208	201	O	MA006
22	I	AA8	82	I	WE1	142	O	MA209	202	O	MA007
23	I	AA9	83	I	WE0	143	O	MA210	203	O	MA008
24	I	AA10	84	I	HD	144	O	MA211	204	O	MA009
25	I	AA11	85	I	VD	145	O	MA212	205	O	MA010
26	I	AA12	86	I	FD	146	O	MA213	206	O	MA011
27	I	AA13	87	I/O	MD37	147	O	MA214	207	O	MA012
28	I	AA14	88	I/O	MD36	148	O	MA215	208	O	MA013
29	I	AA15	89	—	Vcc	149	O	MA216	209	—	Vcc
30	—	GND	90	—	GND	150	—	GND	210	—	GND
31	I	AAS	91	I/O	MD35	151	I/O	MD17	211	O	MA014
32	I	BA0	92	I/O	MD34	152	I/O	MD16	212	O	MA015
33	I	BA1	93	I/O	MD33	153	I/O	MD15	213	O	MA016
34	I	BA2	94	I/O	MD32	154	I/O	MD14	214	I	MCE0L
35	I	BA3	95	I/O	MD31	155	I/O	MD13	215	I	WD0
36	I	BA4	96	I/O	MD30	156	I/O	MD12	216	I	WD1
37	I	BA5	97	O	MCE3	157	I/O	MD11	217	I	WD2
38	I	BA6	98	O	MA300	158	I/O	MD10	218	O	BD0
39	I	BA7	99	O	MA301	159	O	MCE1	219	O	BD1
40	I	BA8	100	O	MA302	160	O	MA100	220	O	BD2
41	I	BA9	101	O	MA303	161	O	MA101	221	O	BD3
42	—	Vcc	102	—	GND	162	—	Vcc	222	—	GND
43	—	GND	103	O	MA304	163	—	GND	223	O	BD4
44	I	BA10	104	O	MA305	164	O	MA102	224	O	BD5
45	I	BA11	105	O	MA306	165	O	MA103	225	O	BD6
46	I	BA12	106	O	MA307	166	O	MA104	226	O	BD7
47	I	BA13	107	O	MA308	167	O	MA105	227	I	WD3
48	I	BA14	108	O	MA309	168	O	MA106	228	I	WD4
49	I	BA15	109	O	MA310	169	O	MA107	229	I	WD5
50	I	BAS	110	O	MA311	170	O	MA108	230	O	XC0
51	I	CAS	111	O	MA312	171	O	MA109	231	O	XC1
52	I	DAS	112	O	MA313	172	O	MA110	232	O	XC2
53	—	NC	113	O	MA314	173	O	MA111	233	O	XC3
54	—	Vcc	114	—	Vcc	174	—	Vcc	234	—	Vcc
55	—	GND	115	—	GND	175	—	GND	235	—	GND
56	I	D15	116	O	MA315	176	O	MA112	236	O	YC0
57	I	D14	117	O	MA316	177	O	MA113	237	O	YC1
58	I	D13	118	O	MWE0F1	178	O	MA114	238	O	YC2
59	I	D12	119	I	MCE0F1	179	O	MA115	239	O	YC3
60	I	D11	120	I/O	MD27	180	O	MA116	240	I	WD6

CXD8711R (SONY)

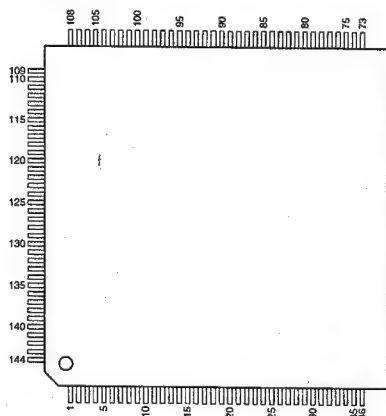KEY GENERATOR AND COLOR CORRECTION
—TOP VIEW—

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	—	Vcc	37	I	VBC6	73	—	Vcc	109	I	D11
2	I	VB0	38	I	VBC7	74	I	A1	110	I	D12
3	I	VB1	39	I	TEST	75	I	A2	111	I	D13
4	I	VB2	40	I	GY0	76	I	A3	112	I	D14
5	I	VB3	41	I	GY1	77	I	D0	113	I	D15
6	O	QRG0	42	O	QY5	78	O	QK0	114	I	VSC
7	O	QRG1	43	O	QY6	79	O	QK1	115	I	CLR
8	O	QRG2	44	O	QY7	80	O	QK2	116	I	VAY0
9	—	GND	45	—	GND	81	—	GND	117	—	GND
10	O	QRG3	46	O	QC0	82	O	QK3	118	I	VAY1
11	O	QRG4	47	O	QC1	83	O	QK4	119	I	VAY2
12	O	QRG5	48	O	QC2	84	O	QK5	120	I	VAY3
13	I	VB4	49	I	GY2	85	I	D1	121	I	VAY4
14	I	VB5	50	I	GY3	86	I	D2	122	I	VAY5
15	I	VB6	51	I	GY4	87	I	D3	123	I	VAY6
16	O	QRG6	52	O	QC3	88	O	QK6	124	I	VAY7
17	O	QRG7	53	O	QC4	89	O	QK7	125	O	QSC
18	—	Vcc	54	—	Vcc	90	—	Vcc	126	—	Vcc
19	—	GND	55	—	GND	91	—	GND	127	—	GND
20	O	QRG8	56	O	QC5	92	O	QK8	128	O	QFY0
21	O	QRG9	57	O	QC6	93	O	QK9	129	O	QFY1
22	O	QRG10	58	O	QC7	94	O	QK10	130	I	VAC0
23	I	VB7	59	I	GY5	95	I	D4	131	I	VAC1
24	I	VBC0	60	I	GY6	96	I	D5	132	I	VAC2
25	I	VBC1	61	I	GY7	97	I	D6	133	I	VAC3
26	I	VBC2	62	I	HD	98	I	D7	134	I	VAC4
27	O	QRG11	63	I	VD	99	O	QK11	135	O	QFY2
28	O	QY0	64	I	FLD	100	O	QFR	136	O	QFY3
29	O	QY1	65	I	EXMK	101	O	QFW	137	O	QFY4
30	—	GND	66	—	GND	102	—	GND	138	—	GND
31	O	QY2	67	I	CLK	103	O	QCSR	139	O	QFY5
32	O	QY3	68	I	FR	104	O	QARA	140	O	QFY6
33	O	QY4	69	I	WE0	105	O	QMSK	141	O	QFY7
34	I	VBC3	70	I	WE1	106	I	D8	142	I	VAC5
35	I	VBC4	71	I	WE2	107	I	D9	143	I	VAC6
36	I	VBC5	72	I	A0	108	I	D10	144	I	VAC7


INPUTS

A0 - A3 : CPU ADDRESS
 CLK : CLOCK
 CLR : REGISTER CLEAR
 DO - D15 : CPU DATA
 EXMK : EXTERNAL MASK
 FLD : FIELD
 FR : FIFO READ
 GY0 - GY7 : KEY FILL WITH GAMMA CORRECTED
 HD : H BLANKING
 TEST : TEST MODE
 VAC0 - VAC7 : U/V DATA FOR VIDEO A
 VAY0 - VAY7 : Y DATA FOR VIDEO A
 VBC0 - VBC7 : U/V DATA FOR VIDEO B
 VB0 - VB7 : Y DATA FOR VIDEO B
 VD : V BLANKING
 VSC : U/V DISCRIMINATE IN INPUT VIDEO SIGNAL (0: U, 1: V)
 WE0 - WE2 : CPU WRITE ENABLE

OUTPUTS

QARA : L SHIFT IN CURSOR AREA
 QC0 - QC7 : COLOR-CORRECTED U/V DATA
 QCSR : CURSOR SIGNAL
 QFR : FIFO READ ENABLE OF AUTO CHROMAKEY
 QFW : FIFO WRITE ENABLE OF AUTO CHROMAKEY
 QFY0 - QFY7 : Y OR R DATA SELECTED AS KEY FILL
 QK0 - QK11 : KEY DATA
 QMSK : MASK AREA
 QRG0 - QRG11 : RGA REGISTER
 QSC : U/V DISCRIMINATE IN KEY FILL
 QY0 - QY7 : COLOR-CORRECTED Y DATA

CXD9114R (SONY)

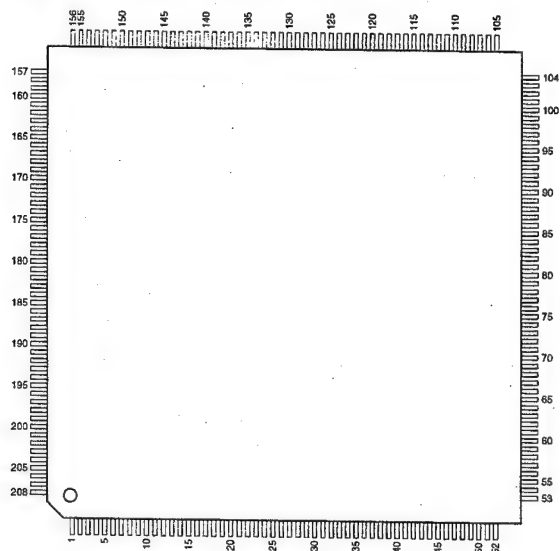
POLAR/RECTANGULAR COORDINATES CONVERTER
—TOP VIEW—

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	O	MA 4	53	I	XI 9	105	I	HI 7	157	—	GND
2	O	MA 5	54	I	XI 10	106	I	HI 8	158	I	OE0
3	O	MA 6	55	I	XI 11	107	I	HI 9	159	I	OEMA
4	O	MA 7	56	I	XI 12	108	I	HI 10	160	I	OEMD
5	—	GND	57	I	XI 13	109	I	HI 11	161	I	SC
6	O	MA 8	58	I	XI 14	110	I	HI 12	162	I	MODE
7	O	MA 9	59	I	XI 15	111	I	HI 13	163	I	ADPH
8	O	MA 10	60	—	GND	112	I	HI 14	164	—	GND
9	O	MA 11	61	—	Vcc	113	I	HI 15	165	—	Vcc
10	—	Vcc	62	I	YI 1	114	—	Vcc	166	I	CE
11	O	MA 12	63	I	YI 2	115	—	GND	167	I	SRAM
12	O	MA 13	64	I	YI 3	116	O	XO 0	168	I	A 0
13	O	MA 14	65	I	YI 4	117	O	XO 1	169	I	A 1
14	O	MA 15	66	I	YI 5	118	O	XO 2	170	I	A 2
15	—	GND	67	I	YI 6	119	—	GND	171	I	A 3
16	O	MA 16	68	I	YI 7	120	O	XO 3	172	I	D 0
17	O	MA 17	69	I	YI 8	121	O	XO 4	173	I	D 1
18	O	MA 18	70	I	YI 9	122	O	XO 5	174	I	D 2
19	O	MA 19	71	I	YI 10	123	O	XO 6	175	I	D 3
20	O	MWE	72	I	YI 11	124	O	XO 7	176	I	D 4
21	—	GND	73	I	YI 12	125	O	XO 8	177	I	D 5
22	—	GND	74	I	YI 13	126	O	XO 9	178	I	D 6
23	—	Vcc	75	I	YI 14	127	—	GND	179	I	D 7
24	I/O	MD 0	76	I	YI 15	128	O	XO 10	180	I	D 8
25	I/O	MD 1	77	I	YI 16	129	O	XO 11	181	I	D 9
26	I/O	MD 2	78	—	GND	130	O	XO 12	182	I	D 10
27	I/O	MD 3	79	—	Vcc	131	O	XO 13	183	I	D 11
28	I/O	MD 4	80	I	RI 0	132	O	XO 14	184	I	D 12
29	I/O	MD 5	81	I	RI 1	133	O	XO 15	185	I	D 13
30	I/O	MD 6	82	I	RI 2	134	—	Vcc	186	I	D 14
31	I/O	MD 7	83	I	RI 3	135	—	GND	187	I	D 15
32	—	GND	84	I	RI 4	136	O	LTK	188	—	GND
33	I/O	MD 8	85	I	RI 5	137	O	YO 0	189	I	CLK
34	I/O	MD 9	86	I	RI 6	138	O	YO 1	190	—	Vcc
35	I/O	MD 10	87	I	RI 7	139	O	YO 2	191	I	CLR
36	I/O	MD 11	88	I	RI 8	140	O	YO 3	192	—	GND
37	I/O	MD 12	89	I	RI 9	141	O	YO 4	193	I	TSTMI
38	—	GND	90	I	RI 10	142	—	GND	194	I	TSTMO 0
39	I/O	MD 13	91	I	RI 11	143	O	YO 5	195	I	TSTMO 1
40	I/O	MD 14	92	I	RI 12	144	O	YO 6	196	I	TSTMO 2
41	I/O	MD 15	93	I	RI 13	145	O	YO 7	197	I	TMODE
42	—	GND	94	I	RI 14	146	O	YO 8	198	O	SPSO
43	—	Vcc	95	I	RI 15	147	—	Vcc	199	I	SPSI
44	I	XI 0	96	—	GND	148	—	GND	200	—	GND
45	I	XI 1	97	—	Vcc	149	—	GND	201	—	Vcc
46	I	XI 2	98	I	HI 0	150	O	YO 9	202	I	SPACK
47	I	XI 3	99	I	HI 1	151	O	YO 10	203	I	SPBCK
48	I	XI 4	100	I	HI 2	152	O	YO 11	204	—	GND
49	I	XI 5	101	I	HI 3	153	O	YO 12	205	O	MA 0
50	I	XI 6	102	I	HI 4	154	O	YO 13	206	O	MA 1
51	I	XI 7	103	I	HI 5	155	O	YO 14	207	O	MA 2
52	I	XI 8	104	I	HI 6	156	O	YO 15	208	O	MA 3

CXD9083GB (SONY)

DIGITAL DIFFERENTIATION

—BOTTOM VIEW—

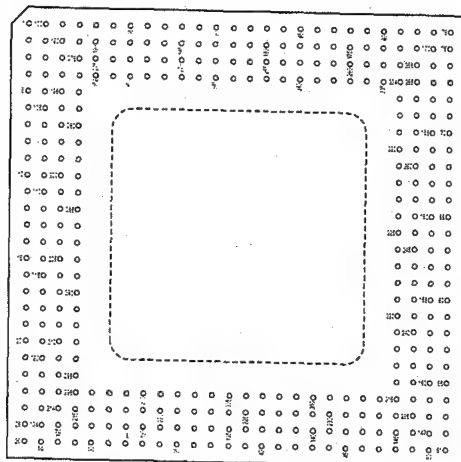

INPUTS

CA0 - CA8	: ADDRESS (HOST CPU I/F)
CBNK0 - CBNK2	: BANK (HOST CPU I/F)
CGE	: CHIP ENABLE (HOST CPU I/F)
CDIG - CDI31	: DATA INPUT (HOST CPU I/F)
CLK	: CLOCK (MAX 40 MHz)
CLR	: ASYNCHRONOUS RESET
COE	: DATA OUTPUT ENABLE (HOST CPU I/F)
CRD	: READ (HOST CPU I/F)
CWR	: WRITE (HOST CPU I/F)
CWT	: 1 CLOCK WAIT MODE (HOST CPU I/F)
CWTR	: READ 1 CLOCK WAIT MODE (HOST CPU I/F)
ID0 - ID2	: DDA CHIP ID
MWGY	: MEMORY WRITE CYCLE
MWSEL	: MEMORY WRITE CYCLE SELECT
MWTIME0 - MWTIME2	: DELAY FOR MWPR OUTPUT
NUM0, NUM1	: DDA CHIP NUMBER
QFAP	: OUTPUT FIFO ALMOST FULL
SYNC	: SRAM MODE SELECT
TCK	: TEST CONTROL CIRCUIT CLOCK FOR JTAG
TDI	: SCAN DATA INPUT FOR JTAG
TMS	: TEST CONTROL MODE SETTING FOR JTAG
TRST	: TEST CONTROL MODE RESET FOR JTAG
TWAIT	: TEST WAIT
VPD	: ONLY FOR THE PULL-UP/DOWN CURRENT MEASUREMENT
XSM	: SCAN MODE
XTST	: TEST MODE

OUTPUTS


AUX0 - AUX7	: AUX BITS OF INTERNAL REGISTER
CACK	: ACKNOWLEDGE (HOST CPU I/F)
CD00 - CD05	: DATA OUTPUT (HOST CPU I/F)
MA0 - MA21	: MEMORY ADDRESS
MCEA	: MEMORY CHIP ENABLE A
MCEB	: MEMORY CHIP ENABLE B
MRED	: MEMORY READ ENABLE
MW	: MEMORY WRITE ENABLE
MWRA	: MEMORY WRITE ENABLE A
MWRB	: MEMORY WRITE ENABLE B
MWRP	: MEMORY WRITE ENABLE PULSE
QFW	: OUTPUT FIFO WRITE
TDO	: SCAN DATA OUTPUT FOR JTAG

INPUTS/OUTPUTS

MPA0 - MPA47 : MEMORY A INPUT/OUTPUT DATA
MPB0 - MPB47 : MEMORY B INPUT/OUTPUT DATA
MZLA0 - MZLA31 : MEMORY A INPUT/OUTPUT DATA
MZLB0 - MZLB31 : MEMORY B INPUT/OUTPUT DATA

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	—	GND	45	—	GND	89	I/O	MPB9	133	I/O	MPA30	177	I/O	MZLB26	221	I/O	MPA34	265	I/O	MPB5
2	I/O	MPB45	46	I/O	MZLA29	90	I/O	MPB12	134	I/O	MPA26	178	I/O	MZLB29	222	I/O	MPA31	266	I/O	MPB8
3	—	GND	47	—	GND	91	I/O	MPB16	135	I/O	MPA23	179	I/O	MPB1	223	I/O	MPA27	267	I/O	MPB11
4	I/O	MPB47	48	I/O	MZLA28	92	I/O	MPB19	136	I/O	MPA21	180	I/O	MPB4	224	I/O	MPA24	268	I/O	MPB14
5	O	AUX2	49	I/O	MZLA22	93	I/O	MPB23	137	I/O	MPA17	181	I/O	MPB7	225	I/O	MPA22	269	I/O	MPB18
6	—	GND	50	I/O	MZLA21	94	I/O	MPB26	138	I/O	MPA14	182	I/O	MPB10	226	I/O	MPA18	270	I/O	MPB21
7	O	AUX7	51	—	GND	95	—	GND	139	I/O	MPA10	183	I/O	MPB13	227	I/O	MPA15	271	I/O	MPB25
8	I	CA3	52	I/O	MZLA18	96	I/O	MPB31	140	I/O	MPA7	184	I/O	MPB17	228	I/O	MPA11	272	I/O	MPB28
9	I	CA6	53	—	GND	97	I/O	MPB34	141	I/O	MPA4	185	I/O	MPB20	229	I/O	MPA5	273	I/O	MPB30
10	I	CA8	54	I/O	MZLA14	98	I/O	MPB37	142	I/O	MPA0	186	I/O	MPB24	230	I/O	MPA5	274	I/O	MPB33
11	J	CRD	55	I/O	MZLA10	99	I/O	MPB40	143	I/O	MPA30	187	I/O	MPB27	231	I/O	MPA1	275	I/O	MPB36
12	I	CD10	56	—	GND	100	I/O	MPB42	144	I/O	MZLA27	188	I/O	MPB29	232	I/O	MZLA31	276	I/O	MPB39
13	—	GND	57	I/O	MZLA5	101	I/O	MPB43	145	I/O	MZLA25	189	I/O	MPB32	233	I/O	MZLA28	277	I/O	MPB36
14	I	CDE	58	I/O	MZLA2	102	I/O	MPB46	146	I/O	MZLA23	190	I/O	MPB35	234	I/O	MZLA26	278	O	AUX5
15	O	CD04	59	O	QFV	103	O	AUX6	147	I/O	MZLA19	191	I/O	MPB38	235	I/O	MZLA20	279	—	GND
16	I	CD14	60	I	OFAF	104	O	AUX3	148	I/O	MZLA17	192	I/O	MPB41	236	I/O	MZLA16	280	I	CA2
17	I	CD17	61	O	MCEAE	105	—	GND	149	I/O	MZLA15	193	I/O	MPB44	237	I/O	MZLA12	281	—	Vcc
18	I	CLK	62	O	MA18	106	—	CA0	150	I/O	MZLA11	194	O	AUX1	238	I/O	MZLA9	282	—	Vcc
19	I	CD12	63	—	GND	107	I	CA4	151	—	GND	195	O	AUX4	239	I/O	MZLA7	283	I	CBNK2
20	I	CDH15	64	O	MA13	108	I	CA7	152	I/O	MZLA6	196	O	AUX6	240	I/O	MZLA4	284	—	GND
21	I	CDH19	65	O	MA12	109	I	CCE	153	I/O	MZLA3	197	I/O	CA1	241	I/O	MZLA1	285	O	CD01
22	I	CDI22	66	O	MA11	110	I	CWR	154	I/O	MZLA0	198	I	CA5	242	I	MWTM1	286	—	Vcc
23	I	CDI26	67	O	MA10	111	O	CD00	155	O	MWRA	199	I	CA8	243	O	MA21	287	—	Vcc
24	I	CDI29	68	O	MA7	112	I	CDI2	156	O	MA20	200	I	CBNK0	244	O	MA19	288	I	CWTR
25	I	CDI31	69	O	MA4	113	O	CDI3	157	I	MWTM0	201	O	CAK	245	O	MA17	289	—	GND
26	—	GND	70	—	GND	114	O	CD05	158	O	MA16	202	I	CDI1	246	O	MA15	290	—	GND
27	I	TCV	71	O	MA1	115	I	CDI5	159	O	MA14	203	O	CD02	247	O	MW	291	—	Vcc
28	—	GND	72	O	MCEB	116	I	CDI8	160	I	SYNC	204	O	CD03	248	O	MRD	292	I	CD18
29	I	VPD	73	I/O	MZLB0	117	I	CDI10	161	I	JD2	205	I	CDT	249	I	JD0	293	I	CDH3
30	I/O	MPA47	74	I/O	MZLB3	118	I	CDI13	162	O	MWRF	206	I	CDI6	250	I	MA9	294	—	GND
31	—	GND	75	I/O	MZLB5	119	I	CDI16	163	O	MA8	207	I	CDI9	251	O	MA8	295	I	CDI25
32	I/O	MPA42	76	—	GND	120	I	CDI20	164	O	MA5	208	I	CDI11	252	I	NUM1	296	—	Vcc
33	I/O	MPA39	77	I/O	MZLB6	121	I	CDI23	165	O	MA3	209	I	CDI14	253	O	NUM0	297	I	GND
34	I/O	MPA36	78	—	GND	122	I	CDI27	166	O	MA2	210	I	CDI17	254	O	MA0	298	I	TDI
35	I/O	MPA32	79	I/O	MZLB10	123	I	CDI30	167	O	MWRF	211	I	CDI21	255	I/O	MZLB2	299	I/O	MPA45
36	I/O	MPA29	80	I/O	MZLB13	124	I	CDI3	168	I/O	MZLB1	212	I	CDI24	256	I/O	MZLB7	300	—	Vcc
37	I/O	MPA25	81	—	GND	125	I	XTST	169	I/O	MZLB4	213	I	CDI28	257	I/O	MZLB12	301	—	Vcc
38	—	GND	82	I/O	MZLB18	126	I	TRST	170	I/O	MZLB6	214	I	XSM	258	I/O	MZLB15	302	I/O	MPA35
39	I/O	MPA20	83	I/O	MZLB22	127	I	TWAIT	171	I/O	MZLB9	215	I	TMS	259	I/O	MZLB17	303	—	GND
40	I/O	MPA16	84	I/O	MZLB25	128	—	GND	172	I/O	MZLB11	216	O	TD0	260	I/O	MZLB20	304	I/O	MPA28
41	I/O	MPA13	85	I/O	MZLB28	129	I/O	MPA43	173	I/O	MZLB11	217	I/O	MPA46	261	I/O	MZLB24	305	—	Vcc
42	I/O	MPA9	86	I/O	MPB0	130	I/O	MPA40	174	—	GND	218	I/O	MPA44	262	I/O	MZLB27	306	—	Vcc
43	I/O	MPA6	87	I/O	MPB3	131	I/O	MPB17	175	I/O	MZLB19	219	I/O	MPA41	263	I/O	MZLB30	307	I/O	MPA19
44	I/O	MPA3	88	—	GND	132	I/O	MPA33	176	I/O	MZLB23	220	I/O	MPA38	264	I/O	MPB2	308	—	GND

CY2292F (CYPRESS)

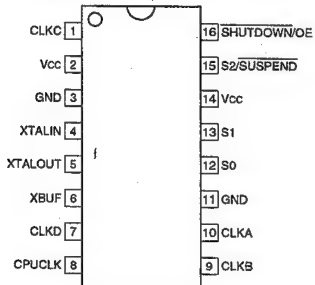EPROM PROGRAMMABLE CLOCK GENERATOR
—TOP VIEW—


INPUTS

OE : OUTPUT ENABLE
 S0 - S2 : CPU CLOCK SELECT
 SHUTDOWN : SHUTDOWN
 SUSPEND : OPTIONALLY ENABLES SUSPEND
 XTALIN : REFERENCE CRYSTAL
 OR EXTERNAL REFERENCE CLOCK

OUTPUTS

CLKA - CLKD : CONFIGURABLE CLOCK
 CPCLK : CPU FREQUENCY CLOCK
 XBUF : BUFFERED REFERENCE CLOCK
 XTALOUT : REFERENCE CRYSTAL (FEEDBACK)

EPC2LC20 (ALTERA)

CONFIGURATION EPROM
—TOP VIEW—

INPUTS

CS : CHIP SELECT
 OE : OUTPUT ENABLE
 TD : JTAG DATA
 TCK : JTAG CLOCK
 TMS : JTAG MODE SELECT
 VccSEL : MODE SELECT FOR Vcc SUPPLY
 VppSEL : MODE SELECT FOR Vpp

OUTPUTS

CASC : CASCADE SELECT
 DATA : DATA
 INIT-CONF : INITIATE CONFIGURATION
 TD : JTAG DATA


INPUT/OUTPUT

DCLK : CLOCK

OTHER

NC : NO CONNECTION

EPF6016TC144-3 (ALTERA)

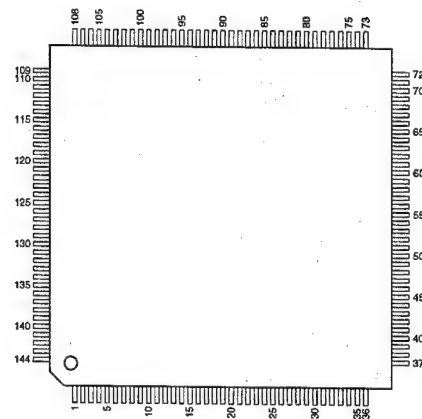
PLD
—TOP VIEW—

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	I/O	I/O	37	I/O	I/O	73	I/O	I/O (TDO)	109	I/O	I/O
2	I/O	I/O	38	I/O	I/O	74	I/O	I/O	110	I/O	I/O
3	I/O	I/O	39	I/O	I/O	75	I/O	I/O	111	I/O	I/O (CS)
4	I/O	CE	40	I/O	I/O	76	—	GND	112	I/O	I/O
5	—	GND	41	I/O	I/O	77	—	Vcc	113	I/O	I/O
6	—	Vcc	42	I/O	I/O	78	—	Vcc	114	I/O	I/O (CS)
7	—	Vcc	43	I/O	I/O	79	I/O	I/O	115	I/O	I/O
8	I/O	I/O	44	I/O	I/O	80	I/O	I/O	116	I/O	I/O
9	I/O	I/O	45	I/O	I/O	81	I/O	I/O	117	I/O	I/O (WS)
10	I/O	I/O	46	I/O	I/O	82	I/O	I/O	118	I/O	I/O
11	I/O	I/O	47	I/O	I/O	83	I/O	I/O	119	I/O	I/O
12	I/O	I/O	48	I/O	I/O	84	I/O	I/O	120	I/O	I/O (RS)
13	I/O	I/O (TDI)	49	I/O	I/O	85	I/O	I/O	121	I/O	I/O
14	I/O	I/O	50	I/O	I/O	86	I/O	I/O	122	I/O	I/O
15	I/O	I/O	51	I/O	I/O	87	I/O	I/O	123	I/O	I/O (DEV OE)
16	I/O	I/O	52	I/O	I/O	88	I/O	I/O	124	I/O	I/O
17	I	INPUT	53	I/O	CONFIG	89	I	INPUT	125	I	DATA
18	—	GND	54	—	GND	90	—	GND	126	—	GND
19	—	Vcc	55	—	Vcc	91	—	Vcc	127	—	Vcc
20	I	INPUT	56	I/O	STATUS	92	I	INPUT	128	I	DCLK
21	I/O	I/O	57	I/O	I/O	93	I/O	I/O	129	I/O	I/O
22	I/O	I/O	58	I/O	I/O	94	I/O	I/O (INIT DONE)	130	I/O	I/O (DEV CLR)
23	I/O	I/O	59	I/O	I/O	95	I/O	I/O	131	I/O	I/O
24	I/O	I/O	60	I/O	I/O	96	I/O	I/O	132	I/O	I/O
25	I/O	I/O	61	I/O	I/O	97	I/O	I/O	133	I/O	I/O
26	I/O	I/O	62	I/O	I/O	98	I/O	I/O	134	I/O	I/O
27	I/O	I/O (TMS)	63	I/O	I/O	99	I/O	I/O	135	I/O	I/O
28	I/O	I/O	64	I/O	I/O	100	I/O	I/O (CLKUSR)	136	I/O	I/O
29	I/O	I/O	65	I/O	I/O	101	I/O	I/O	137	I/O	I/O
30	—	GND	66	I/O	I/O	102	—	GND	138	I/O	I/O
31	—	Vcc	67	I/O	I/O	103	—	Vcc	139	I/O	I/O
32	—	Vcc	68	I/O	I/O	104	—	Vcc	140	I/O	I/O
33	I	MSEL	69	I/O	I/O	105	I/O	CONF DONE	141	I/O	I/O
34	I/O	I/O (TCK)	70	I/O	I/O (CEO)	106	I/O	I/O	142	I/O	I/O
35	I/O	I/O	71	I/O	I/O	107	I/O	I/O	143	I/O	I/O
36	I/O	I/O	72	I/O	I/O	108	I/O	I/O	144	I/O	I/O


EPM7032SLC44-10(05) (ALTERA)

PROGRAMMABLE LOGIC DEVICE

—TOP VIEW—



PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	I	INPUT/GCLR	12	I/O	I/O	23	—	Vcc	34	I/O	I/O
2	I	INPUT/OE2	13	I/O	I/O (TMS)	24	I/O	I/O	35	—	Vcc
3	—	Vcc	14	I/O	I/O	25	I/O	I/O	36	I/O	I/O
4	I/O	I/O	15	—	Vcc	26	I/O	I/O	37	I/O	I/O
5	I/O	I/O	16	I/O	I/O	27	I/O	I/O	38	I/O	I/O (TDO)
6	I/O	I/O	17	I/O	I/O	28	I/O	I/O	39	I/O	I/O
7	I/O	I/O (TDI)	18	I/O	I/O	29	I/O	I/O	40	I/O	I/O
8	I/O	I/O	19	I/O	I/O	30	—	GND	41	I/O	I/O
9	I/O	I/O	20	I/O	I/O	31	I/O	I/O	42	—	GND
10	—	GND	21	I/O	I/O	32	I/O	I/O (TCK)	43	I	INPUT/GCLK1
11	—	Vcc	22	—	GND	33	I/O	I/O	44	I	INPUT/OE1

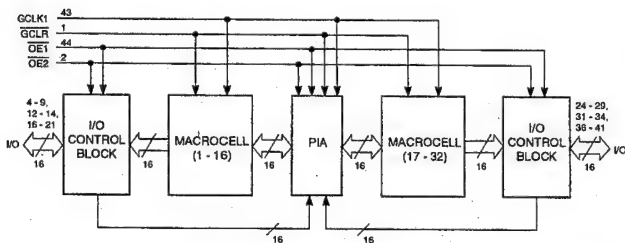


EPM7064SLC44-15 (ALTERA)

EPM7064SLC44-10(05)

PROGRAMMABLE LOGIC DEVICE


—TOP VIEW—



PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	I	INPUT/GCLR	12	I/O	I/O	23	—	Vcc	34	I/O	I/O
2	I	INPUT/OE2/GCLK2	13	I/O	I/O (TMS)	24	I/O	I/O	35	—	Vcc
3	—	Vcc	14	I/O	I/O	25	I/O	I/O	36	I/O	I/O
4	I/O	I/O	15	—	Vcc	26	I/O	I/O	37	I/O	I/O
5	I/O	I/O	16	I/O	I/O	27	I/O	I/O	38	I/O	I/O (TDO)
6	I/O	I/O	17	I/O	I/O	28	I/O	I/O	39	I/O	I/O
7	I/O	I/O (TDI)	18	I/O	I/O	29	I/O	I/O	40	I/O	I/O
8	I/O	I/O	19	I/O	I/O	30	—	GND	41	I/O	I/O
9	I/O	I/O	20	I/O	I/O	31	I/O	I/O	42	—	GND
10	—	GND	21	I/O	I/O	32	I/O	I/O (TCK)	43	I	INPUT/GCLK1
11	—	Vcc	22	—	GND	33	I/O	I/O	44	I	INPUT/OE1

INPUTS
GCLK1, GCLK2 : GLOBAL CLOCK 1, 2
GCLR : GLOBAL CLEAR
OE1, OE2 : OUTPUT ENABLE 1, 2


INPUTS/OUTPUTS
I/O : DATA

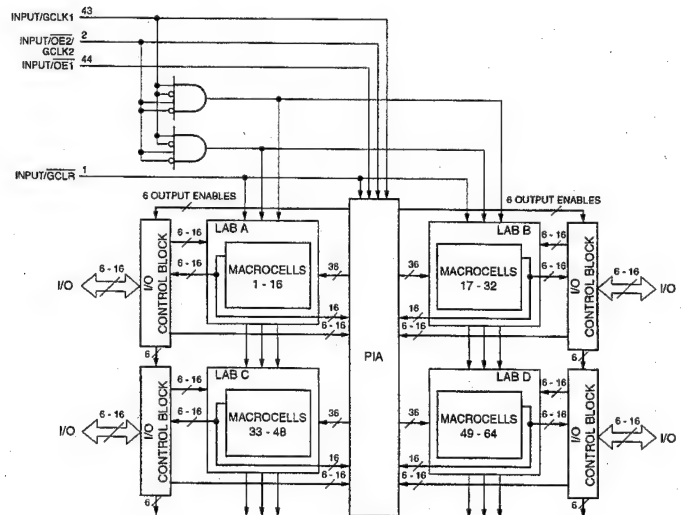

EPM7064STC100-10 (ALTERA)

PROGRAMMABLE LOGIC DEVICE

—TOP VIEW—



INPUTS

GCLK1 : GLOBAL CLOCK
 GCLR : GLOBAL CLEAR
 OE1, OE2 : OUTPUT ENABLE
 TCK : TAG TEST CLOCK
 TDI : TAG TEST DATA
 TMS : TAG TEST MODE SELECT


OUTPUT

TDO : TAG TEST DATA

INPUTS/OUTPUTS

I/O : DATA


PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	—	NC	26	—	GND	51	—	Vcc2	76	I/O	I/O
2	—	NC	27	—	NC	52	I/O	I/O	77	—	NC
3	—	Vcc2	28	—	NC	53	—	NC	78	—	NC
4	I	TDI	29	I/O	I/O	54	I/O	I/O	79	I/O	I/O
5	—	NC	30	I/O	I/O	55	—	NC	80	I/O	I/O
6	I/O	I/O	31	I/O	I/O	56	I/O	I/O	81	I/O	I/O
7	—	NC	32	I/O	I/O	57	I/O	I/O	82	—	Vcc2
8	I/O	I/O	33	I/O	I/O	58	I/O	I/O	83	I/O	I/O
9	I/O	I/O	34	—	Vcc2	59	—	GND	84	I/O	I/O
10	I/O	I/O	35	I/O	I/O	60	I/O	I/O	85	I/O	I/O
11	—	GND	36	I/O	I/O	61	I/O	I/O	86	—	GND
12	I/O	I/O	37	I/O	I/O	62	I	TCK	87	I	GCLK1
13	I/O	I/O	38	—	GND	63	I/O	I/O	88	I	OE1
14	I/O	I/O	39	—	Vcc1	64	I/O	I/O	89	I	GCLR
15	I	TMS	40	I/O	I/O	65	I/O	I/O	90	I	OE2
16	I/O	I/O	41	I/O	I/O	66	—	Vcc2	91	—	Vcc1
17	I/O	I/O	42	I/O	I/O	67	I/O	I/O	92	I/O	I/O
18	—	Vcc2	43	—	GND	68	I/O	I/O	93	I/O	I/O
19	I/O	I/O	44	I/O	I/O	69	I/O	I/O	94	I/O	I/O
20	I/O	I/O	45	I/O	I/O	70	—	NC	95	—	GND
21	I/O	I/O	46	I/O	I/O	71	I/O	I/O	96	I/O	I/O
22	—	NC	47	I/O	I/O	72	—	NC	97	I/O	I/O
23	I/O	I/O	48	I/O	I/O	73	O	TDO	98	I/O	I/O
24	—	NC	49	—	NC	74	—	GND	99	I/O	I/O
25	I/O	I/O	50	—	NC	75	I/O	I/O	100	I/O	I/O

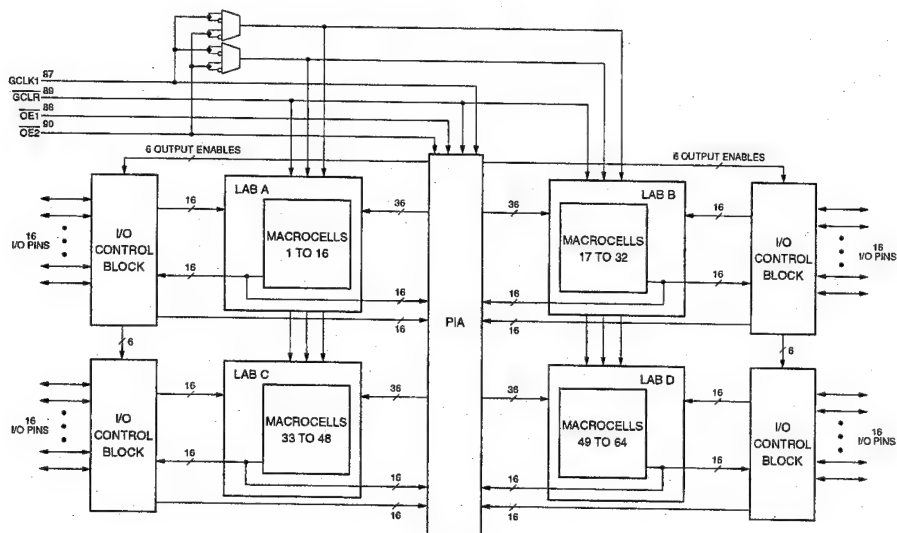

HD6417750BP200M (HITACHI)

32-BIT RISC MICROPROCESSOR

—TOP VIEW—

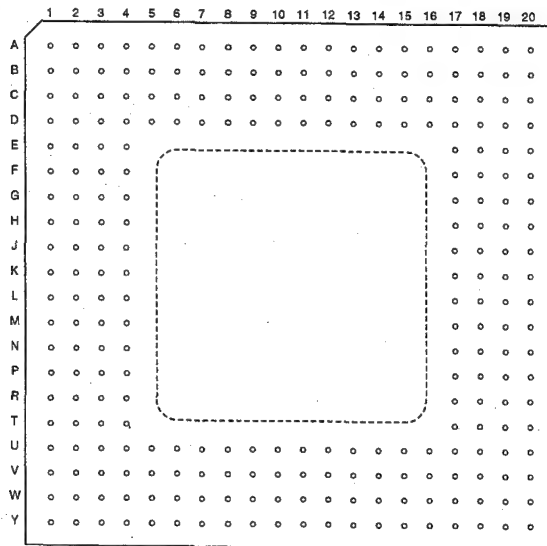

INPUTS

BREQ	: BUS REQUEST
BSACK	: BUS ACKNOWLEDGEMENT
CKIO2ENB	: CKIO2, RD2, RDWR2 ENABLE
DREQ0, DREQ1	: REQUEST FROM DMAC0, DMAC1
EXTAL	: EXTERNAL INPUT CLOCK/CRYSTAL RESONATOR
EXTAL2	: CRYSTAL RESONATOR FOR RTC
IOIS16	: INPUT/OUTPUT 16-BIT COMMAND
IRL0 - IRL3	: INTERRUPT
MD2, MD6	: MODE CONTROL
MRESET	: MANUAL PROGRAM RESET
NMI	: NONMASKABLE INTERRUPT
RDY	: BUS READY
RESERVED	: RESERVED
RESET	: RESET
RXD, RXD2	: RECEIVE DATA INPUT
SCK2	: SCIF CLOCK
TCK	: CLOCK
TDI	: DATA INPUT
TMS	: MODE
TRST	: RESET

OUTPUTS

A0 - A25	: ADDRESS
BACK	: BUS ACKNOWLEDGE
BS	: BURST START
BSREQ	: BUS REQUEST
CAS0 - CAS7	: COLUMN ADDRESS STROBE
CASS	: CAS SELECTION
CKE	: CLOCK OUTPUT ENABLE
CKIO, CKIO2	: CLOCK
CS0 - CS6	: CHIP SELECT
DACK0, DACK1	: DMA TRANSFER STROBE
DQM0 - DQM7	: DATA SELECT SIGNAL
DRAK0, DRAK1	: DMA REQUEST ACKNOWLEDGE
FRAME	: FRAME
ICIOR0	: PCMCIA I/O-READ
ICIOR1	: PCMCIA I/O-WRITE
RAS	: ROW ADDRESS STROBE
RD, RD, RD2	: READ
REG	: DATA SELECT SIGNAL
STATUS0, STATUS1	: STATUS
TDO	: DATA
WE0 - WE7	: WRITE ENABLE
WR, WR2	: WRITE
XTAL, XTAL2	: CRYSTAL RESONATOR


INPUTS/OUTPUTS

ASEBRK	: PIN BREAK
BRKACK	: BREAK ACKNOWLEDGE
CE2A, CE2B	: PCMCIA-CHIP ENABLE
CTS2, RTS2	: SCIF DATA CONTROL
D0 - D63	: DATA OR I/O PORT (D32 TO D47)
MD0, MD1, MD3 - MD5, MD7, MD8	: MODE
RAS2	: ROW ADDRESS STROBE
SCK	: SCI CLOCK
TCLK	: TIMER CLOCK
TXD, TXD2	: TRANSMISSION DATA

OTHER

NC	: NO CONNECTION
----	-----------------


PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
A1	I	EXTAL	B13	O	A21	D5	—	GND	G1	I/O	D34	L1	I/O	D41	R1	I/O	D13	U17	I	DREQ0
A2	O	XTAL	B14	O	A19	D6	—	GND	G2	I/O	D45	L2	I/O	D38	R2	I/O	D2	U18	I	DREQ1
A3	—	Vcc	B15	I/O	MD7/TXD	D7	—	GND	G3	—	Vcc	L3	—	Vcc	R3	—	Vcc	U19	I/O	D20
A4	—	Vcc	B16	I/O	MD8/RTS2	D8	O	A1	G4	—	GND	L4	—	GND	R4	—	GND	U20	I/O	D27
A5	I	TCK	B17	—	Vcc	D9	—	GND	G17	—	GND	L17	—	GND	R17	—	GND	V1	I/O	D19
A6	O	TDO	B18	—	GND	D10	—	GND	G18	—	Vcc	L18	—	Vcc	R18	—	Vcc	V2	I/O	D5
A7	I	MD6/IOIS16	B19	O	XTAL2	D11	—	GND	G19	I/O	D61	L19	I/O	D54	R19	I/O	D18	V3	I	BREQ/BSACK
A8	O	STATUS0	B20	I	IRL2	D12	—	GND	G20	I/O	D50	L20	I/O	D57	R20	I/O	D29	V4	—	NC
A9	O	DACK0	C1	O	CS1	D13	—	GND	H1	I/O	D35	M1	I/O	D40	T1	I/O	D12	V5	—	Vcc
A10	I/O	MD4/CE2B	C2	O	CS0	D14	—	GND	H2	I/O	D44	M2	I/O	D39	T2	I/O	D3	V6	—	Vcc
A11	I/O	MD3/CE2A	C3	I	CKIO2ENB	D15	—	GND	H3	—	Vcc	M3	—	Vcc	T3	—	Vcc	V7	—	Vcc
A12	O	A24	C4	I	TRST	D16	—	NC	H4	—	GND	M4	—	GND	T4	—	GND	V8	—	Vcc
A13	O	A22	C5	—	NC	D17	I	RESERVED	H17	—	NC	M17	—	GND	T17	—	GND	V9	—	Vcc
A14	O	A20	C6	—	NC	D18	I	MD2/RXD2	H18	—	NC	M18	—	Vcc	T18	—	Vcc	V10	—	Vcc
A15	O	A18	C7	—	Vcc	D19	I/O	MD1/TXD2	H19	I/O	D60	M19	I/O	D55	T19	I/O	D19	V11	—	Vcc
A16	I	SCK2/MRESET	C8	O	A0	D20	I/O	MD0/SCK	H20	I/O	D51	M20	I/O	D56	T20	I/O	D28	V12	O	DRAK1
A17	I/O	TCLK	C9	—	Vcc	E1	I/O	D32	J1	I/O	D36	N1	I/O	D15	U1	I/O	D11	V13	—	Vcc
A18	—	Vcc	C10	—	Vcc	E2	I/O	D47	J2	I/O	D43	N2	I/O	D0	U2	I/O	D4	V14	—	Vcc
A19	I	EXTAL2	C11	—	Vcc	E3	O	RD2	J3	—	Vcc	N3	—	NC	U3	O	BACK/BSREQ	V15	—	Vcc
A20	I	NMI	C12	—	Vcc	E4	—	GND	J4	—	GND	N4	—	NC	U4	—	NC	V16	—	Vcc
B1	I	RESET	C13	—	Vcc	E17	—	GND	J17	—	GND	N17	—	GND	U5	—	GND	V17	I	RXD
B2	I	RDY	C14	—	Vcc	E18	O	RDWR2	J18	—	Vcc	N18	—	Vcc	U6	—	GND	V18	—	NC
B3	—	GND	C15	—	Vcc	E19	I/O	D48	J19	I/O	D59	N19	I/O	D16	U7	—	GND	V19	I/O	D21
B4	—	Vcc	C16	I/O	CTS2	E20	I/O	D33	J20	I/O	D52	N20	I/O	D31	U8	—	GND	V20	I/O	D26
B5	I	TDI	C17	—	GND	F1	I/O	D46	K2	I/O	D42	P2	I/O	D1	U9	—	GND	W1	I/O	D9
B6	I	TMS	C18	I	IRL3	F2	I/O	D43	K3	—	Vcc	P3	—	Vcc	U10	—	GND	W2	I/O	D8
B7	I/O	ASEBRK/BRKACK	C19	I	IRL1	F3	—	Vcc	K4	—	GND	P4	—	Vcc	U11	—	GND	W3	O	CKE
B8	O	STATUS1	C20	I	IRL0	F4	—	GND	K5	—	GND	P5	—	GND	U12	—	GND	W4	O	WE4/CAS4/DQM4
B9	O	DACK1	D1	O	BS	F17	—	GND	K17	—	GND	P17	—	GND	U13	O	DRAK0	W5	O	WE0/CAS0/DQM0
B10	I/O	MD5/RAS2	D2	O	CS6	F18	—	Vcc	K18	—	Vcc	P18	—	Vcc	U14	—	GND	W6	O	A18
B11	O	A25	D3	O	CS5	F19	I/O	D62	K19	I/O	D58	P19	I/O	D17	U15	—	GND	W7	O	A14
B12	O	A23	D4	O	CS4	F20	I/O	D49	K20	I/O	D53	P20	I/O	D30	U16	—	GND	W8	O	A12

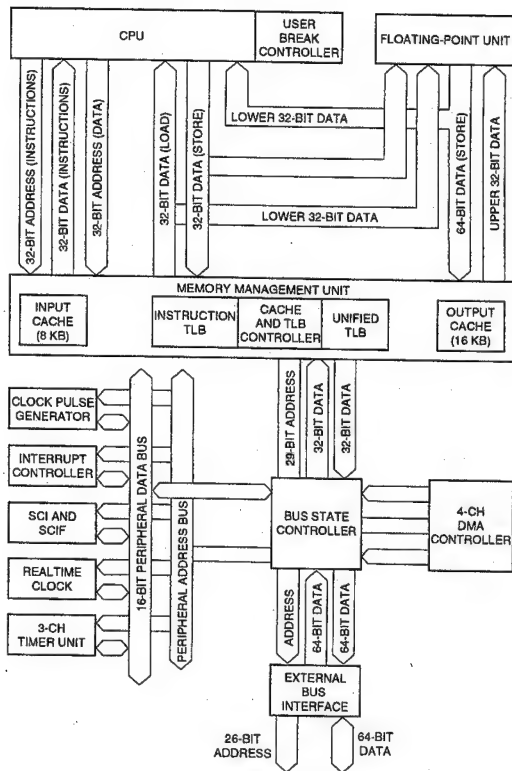

SCI : SERIAL COMMUNICATION INTERFACE
 SCIF : SERIAL COMMUNICATION INTERFACE WITH FIFO
 TLB : TRANSLATION LOOKASIDE BUFFER


HM5264165FTT-B60 (HITACHI)

64M (1048576 x 4 x 16)-BIT SDRAM
 —TOP VIEW—

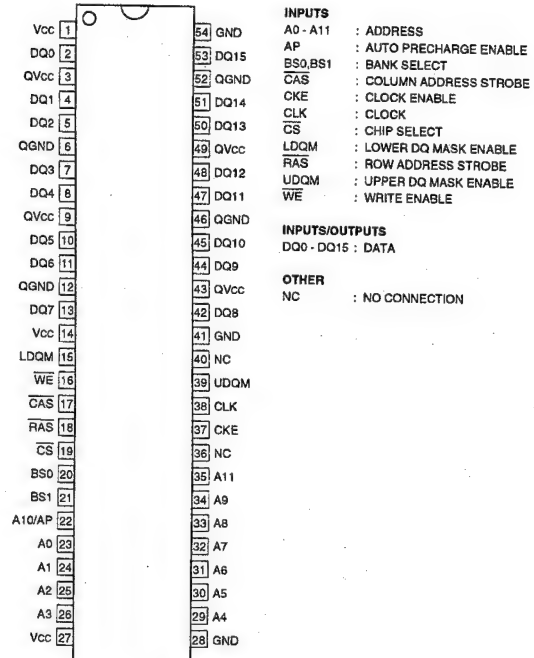


IDT71V416S15PH-TL (IDT)

4M (262144 x 16)-BIT SRAM
 —TOP VIEW—

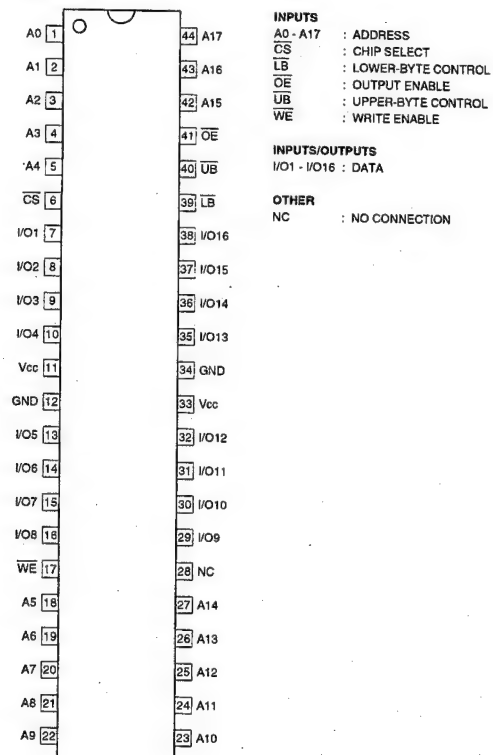

IDT72201L25J (IDT)


256 x 9-BIT SYNCHRONOUS FIFO
—TOP VIEW—

INPUTS
 D0 - D8 : DATA
 LD : LOAD
 OE : OUTPUT ENABLE
 RCLK : READ CLOCK
 REN1, REN2 : READ ENABLE 1, 2
 RS : RESET
 WCLK : WRITE CLOCK
 WEN1, WEN2 : WRITE ENABLE 1, 2


OUTPUTS
 EF : EMPTY FLAG
 FF : FULL FLAG
 PAE : PROGRAMMABLE ALMOST-EMPTY FLAG
 PAF : PROGRAMMABLE ALMOST-FULL FLAG
 Q0 - Q8 : DATA

PIN No.	I/O	SIGNAL	PIN No.	I/O	SIGNAL	PIN No.	I/O	SIGNAL
1	I	D5	12	I	REN2	23	O	Q7
2	I	D4	13	I	OE	24	O	Q8
3	I	D3	14	O	EF	25	—	Vcc
4	I	D2	15	O	FF	26	I	WEN2/LD
5	I	D1	16	O	Q0	27	I	WCLK
6	I	D0	17	O	Q1	28	I	WEN1
7	O	PAE	18	O	Q2	29	I	RS
8	O	PAF	19	O	Q3	30	I	D8
9	—	GND	20	O	Q4	31	I	D7
10	I	REN1	21	O	Q5	32	I	D6
11	I	RCLK	22	O	Q6			

ISPLSI2032E-110LT48 (LATTICE)

PLD
—TOP VIEW—

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	I/O	I/O 28	13	I/O	I/O 3	25	I/O	I/O 12	37	I/O	I/O 19
2	I/O	I/O 29	14	I/O	I/O 4	26	I/O	I/O 13	38	I/O	I/O 20
3	I/O	I/O 30	15	I/O	I/O 5	27	I/O	I/O 14	39	I/O	I/O 21
4	I/O	I/O 31	16	I/O	I/O 6	28	I/O	I/O 15	40	I/O	I/O 22
5	I	Y0	17	I/O	I/O 7	29	I	TCK/Y2	41	I/O	I/O 23
6	—	Vcc	18	—	GND	30	—	Vcc	42	—	GND
7	I	BSCAN	19	I/O	TDO/IN 1	31	I	RESET/Y1	43	I	GOE 0
8	I	TD/IN 0	20	I/O	I/O 8	32	I	TMS/NC	44	I/O	I/O 24
9	I/O	I/O 0	21	I/O	I/O 9	33	I/O	I/O 16	45	I/O	I/O 25
10	I/O	I/O 1	22	I/O	I/O 10	34	I/O	I/O 17	46	I/O	I/O 26
11	I/O	I/O 2	23	I/O	I/O 11	35	I/O	I/O 18	47	I/O	I/O 27
12	—	GND	24	—	VccIO	36	—	GND	48	—	VccIO

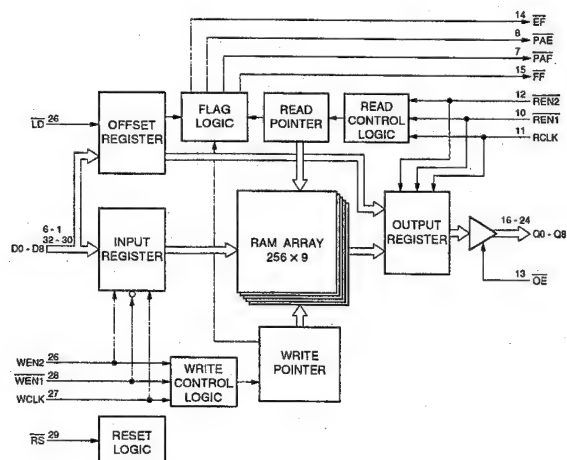


INPUTS
 BSCAN : IN-SYSTEM PROGRAMMING ENABLE
 GOE 0 : GLOBAL OUTPUT ENABLE
 IN0, IN1 : INPUT
 RESET : RESET
 TCK : CLOCK
 TDI : PROGRAMMING DATA
 TMS : ISP STATE MACHINE OPERATION CONTROL WHEN ISP MODE
 Y0 - Y2 : CLOCK

OUTPUT
 TDO : SHIFT REGISTER DATA

INPUTS/OUTPUTS
 I/O 0 - I/O 31 : INPUT/OUTPUT


OTHERS
 NC : NO CONNECTION WHEN NO ISP MODE
 VccIO : SUPPLY VOLTAGE FOR OUTPUT DRIVERS

LT1085CM-TR (LINEAR TECH)

POSITIVE ADJUSTABLE REGULATOR
—FRONT VIEW—

IDT74FST163383PA-TL (IDT)

20-BIT BUS EXCHANGE SWITCH
—TOP VIEW—

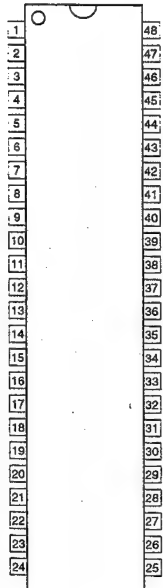

INPUTS
BE1, BE2 : BUS SWITCH ENABLE (ACTIVE LOW)
BX1, BX2 : BUS EXCHANGE

INPUTS/OUTPUTS


A0 - A9 : BUS A
B0 - B9 : BUS B
C0 - C9 : BUS C
D0 - D9 : BUS D

BE1	BX1	A0 - A9	B0 - B9	FUNCTION
1	x	HI-Z	HI-Z	DISCONNECT
0	0	C0 - C4	D0 - D4	CONNECT
0	1	D0 - D4	C0 - C4	EXCHANGE

BE2	BX2	A5 - A9	B5 - B9	FUNCTION
1	x	HI-Z	HI-Z	DISCONNECT
0	0	C5 - C9	D5 - D9	CONNECT
0	1	D5 - D9	C5 - C9	EXCHANGE


0 : LOW LEVEL
1 : HIGH LEVEL
x : DON'T CARE
HI-Z : HIGH IMPEDANCE

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	I	BE1	13	I	BE2	25	I	BX2	37	I	BX1
2	I/O	C0	14	I/O	C5	26	I/O	B7	38	I/O	B2
3	I/O	A0	15	I/O	A5	27	I/O	D7	39	I/O	D2
4	I/O	B0	16	I/O	B5	28	I/O	C8	40	I/O	C3
5	I/O	D0	17	I/O	D5	29	I/O	A8	41	I/O	A3
6	I/O	C1	18	I/O	C6	30	I/O	B8	42	I/O	B3
7	I/O	A1	19	I/O	A6	31	I/O	D8	43	I/O	D3
8	I/O	B1	20	I/O	B6	32	I/O	C9	44	I/O	C4
9	I/O	D1	21	I/O	D6	33	I/O	A9	45	I/O	A4
10	I/O	C2	22	I/O	C7	34	I/O	B9	46	I/O	B4
11	I/O	A2	23	I/O	A7	35	I/O	D9	47	I/O	D4
12	—	GND	24	—	GND	36	—	Vcc	48	—	Vcc

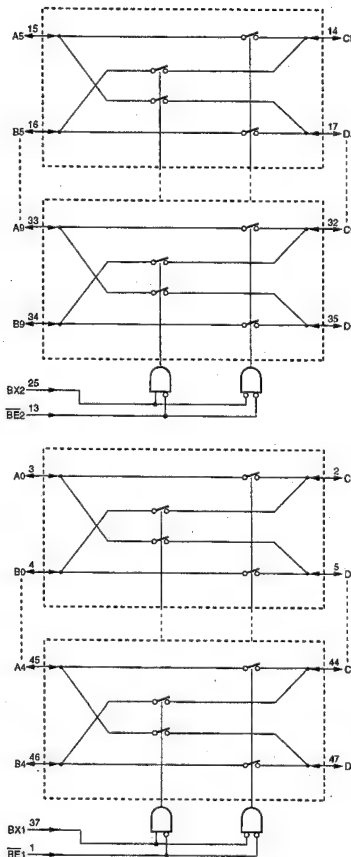


NJM78M05DLA(TE1) (JRC)

POSITIVE VOLTAGE REGULATOR
—FRONT VIEW—




NJM79M05DLA(TE1) (JRC)(5V)


NEGATIVE VOLTAGE REGULATOR
—FRONT VIEW—



SN74HC05APW-E05 (TI)

HEX INVERTER WITH OPEN-DRAIN
—TOP VIEW—

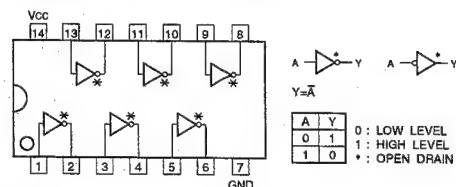

ML60851BTB (OKI)
ML60851CTB
USB DEVICE CONTROLLER
 —TOP VIEW—


PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	I/O	D+	12	O	INTR	23	I	ALE	34	O	DREQ
2	I/O	D-	13	I/O	D15	24	I	ADSEL	35	I/O	AD7
3	—	Vcc	14	I/O	D14	25	I	A7	36	I/O	AD6
4	I	TEST1	15	I/O	D13	26	I	A6	37	I/O	AD5
5	I	TEST2	16	I/O	D12	27	I	A5	38	I/O	AD4
6	I	XIN	17	—	GND	28	I	A4	39	—	GND
7	O	XOUT	18	—	Vcc	29	I	A3	40	—	Vcc
8	I	CS	19	I/O	D11	30	I	A2	41	I/O	AD3
9	I	RD	20	I/O	D10	31	I	A1	42	I/O	AD2
10	I	WR	21	I/O	D9	32	I	A0	43	I/O	AD1
11	I	RESET	22	I/O	D8	33	I	DACK	44	I/O	AD0

INPUTS



A0 - A7 : ADDRESS
 ADSEL : ADDRESS INPUT FORMAT SELECT
 ALE : ADDRESS LATCH ENABLE
 CS : CHIP SELECT
 DACK : DMA ACKNOWLEDGEMENT
 RD : READ
 RESET : RESET
 TEST1, TEST2 : TEST
 WR : WRITE
 XIN : CRYSTAL OR EXTERNAL CLOCK

OUTPUTS

DREQ : DMA REQUEST
 INTR : INTERRUPT REQUEST
 XOUT : CRYSTAL FEEDBACK

INPUTS/OUTPUTS

AD0 - AD7 : DATA BUS (LSB)/ADDRESS (INPUT)
 D+, D- : DIFFERENTIAL USB DATA
 D8 - D15 : DATA BUS (MSB)

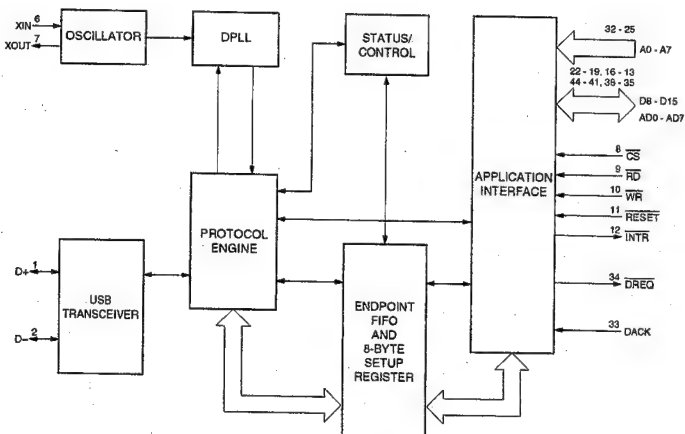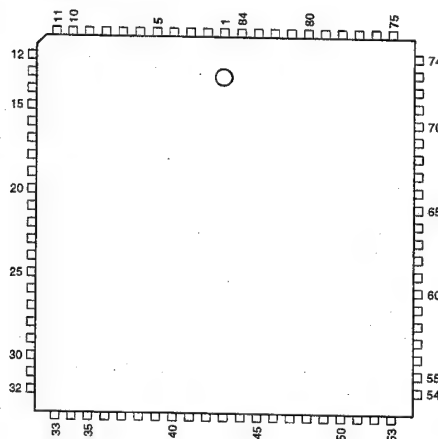
XC5202-6PC84 (XILINX)
XC5202-6PC84C
FIELD PROGRAMABLE LOGIC DEVICE
 —TOP VIEW—


PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	—	GND	22	—	Vcc	43	—	GND	64	—	GND
2	—	Vcc	23	I/O	I/O	44	I/O	I/O	65	I/O	I/O (D3)
3	I/O	I/O (A8)	24	I/O	I/O	45	I/O	I/O	66	I/O	I/O (RS)
4	I/O	I/O (A9)	25	I/O	I/O	46	I/O	I/O	67	I/O	I/O (D2)
5	I/O	I/O (A10)	26	I/O	I/O	47	I/O	I/O	68	I/O	I/O
6	I/O	I/O (A11)	27	I/O	I/O	48	I/O	I/O	69	I/O	I/O (D1)
7	I/O	I/O (A12)	28	I/O	I/O	49	I/O	I/O	70	I/O	I/O (RCLK/BSY/RDY)
8	I/O	I/O (A13)	29	I/O	I/O	50	I/O	I/O	71	I/O	I/O (D0, DIN)
9	I/O	I/O (A14)	30	I/O	M1 (I/O)	51	I/O	I/O	72	I/O	I/O (DOUT)
10	I/O	I/O (A15)	31	—	GND	52	—	GND	73	I/O	CCLK
11	—	Vcc	32	I/O	M0 (I/O)	53	I/O	DONE	74	—	Vcc
12	—	GND	33	—	Vcc	54	—	Vcc	75	I/O	I/O (TDO)
13	I/O	GCK1 (A16, I/O)	34	I/O	M2 (I/O)	55	I	PROGRAM	76	—	GND
14	I/O	I/O (A17)	35	I/O	GCK2 (I/O)	56	I/O	I/O (D7)	77	I/O	I/O (A0, WS)
15	I/O	I/O (TDI)	36	I/O	I/O (HDC)	57	I/O	GCK3 (I/O)	78	I/O	GCK4 (A1, I/O)
16	I/O	I/O (TCK)	37	I/O	I/O (LDC)	58	I/O	I/O (D6)	79	I/O	I/O (A2, CS1)
17	I/O	I/O (TMS)	38	I/O	I/O	59	I/O	I/O (D5)	80	I/O	I/O (A3)
18	I/O	I/O	39	I/O	I/O	60	I/O	I/O (CS0)	81	I/O	I/O (A4)
19	I/O	I/O	40	I/O	I/O	61	I/O	I/O (D4)	82	I/O	I/O (A5)
20	I/O	I/O	41	I/O	I/O (ERR, INIT)	62	I/O	I/O	83	I/O	I/O (A6)
21	—	GND	42	—	Vcc	63	—	Vcc	84	I/O	I/O (A7)

INPUTS

CS0, CS1 : CHIP SELECT
 D0 - D7 : DATA
 DIN : SERIAL CONFIGURATION DATA
 GCK1 - GCK4 : GLOBAL CLOCK
 M0 - M2 : MODE
 PROGRAM : FPGA CONFIGURATION MEMORY CLEAR
 RS : READ STROBE
 TCK : TEST CLOCK
 TDI : TEST DATA
 TMS : TEST MODE SELECT
 WS : WRITE STROBE

OUTPUTS

A0 - A17 : ADDRESS
 DOUT : SERIAL CONFIGURATION DATA
 HDC : HIGH DURING CONFIGURATION
 LDC : LOW DURING CONFIGURATION
 RCLK : USEFUL FOR CLOCKED PROMS
 RDY/BSY : TIMING INDICATION TO WRITE INTO THE FPGA
 TDO : TEST DATA

INPUTS/OUTPUTS


CCLK : CONFIGURATION CLOCK
 DONE : INPUT FOR DELAYING THE GLOBAL LOGIC INITIALIZATION AND OUTPUT ENABLE/OUTPUT FOR INDICATING THE COMPLETION OF THE CONFIGURATION PROCESS

ERR : ERROR I/O
 I/O : INPUT/OUTPUT
 INIT : INTERNAL CONFIGURATION MEMORY CLEAR


Section 3
Block Diagrams

Index


Board Name	Function	Model	Page
OVERALL (1/2)	Processor	—	3-2
OVERALL (2/2)	Control Panel	—	3-3
CMB-12	Digital Multi Effects Board	BKDF-711	3-4
CPU-305	CPU Board	DFS-700/700P	3-5
DD-37	DC-DC Conversion Board	DFS-700/700P	3-6
IPM-96/96P	Input Processor Board	DFS-700/700P	3-7
KY-466/467	Switch Board	DFS-700/700P	3-10
KY-468	Switch Board	DFS-700/700P	3-12
OPM-39/39P	Output Processor Board	DFS-700/700P	3-13
VIF-19/19P	Analog Composite Input Board	BKDF-702/702P	3-16
VIF-20/20P	Digital Analog Input Board	BKDF-701	3-18
VSE-36	3D Video Mapping Effects Board	BKDF-712	3-20
VSW-69/69P	Video Processor Board	DFS-700/700P	3-21

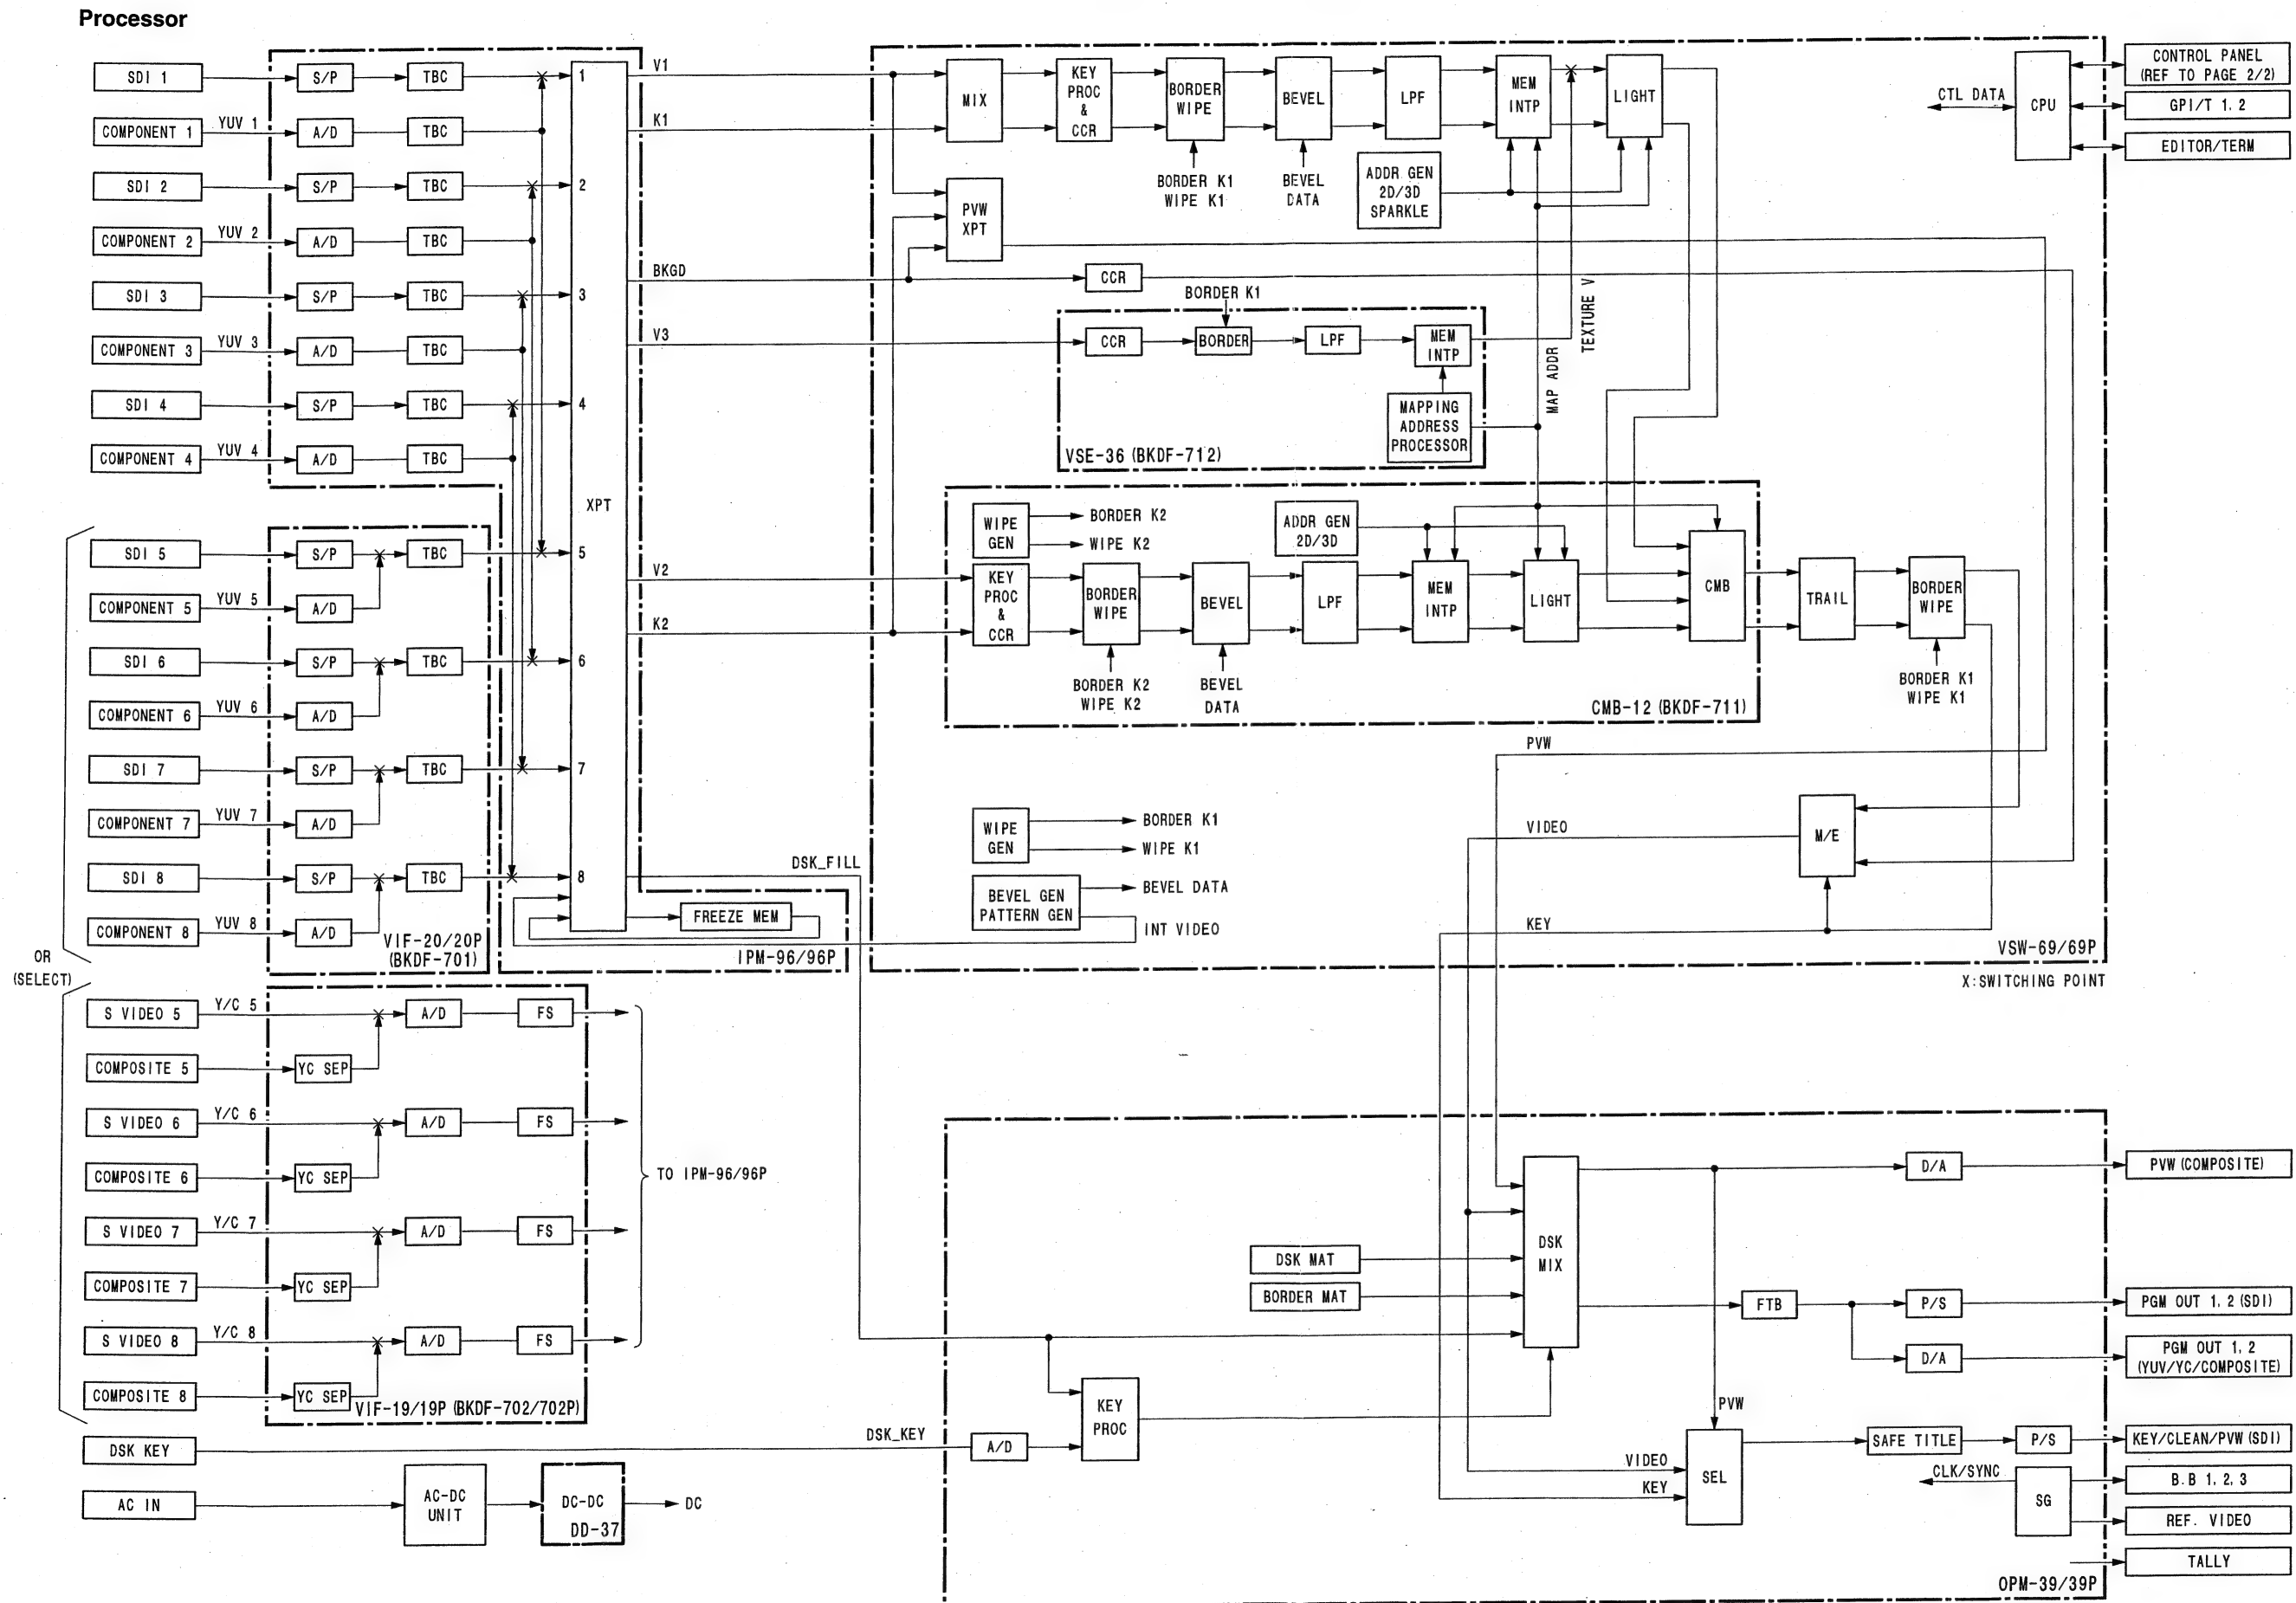

Control Panel

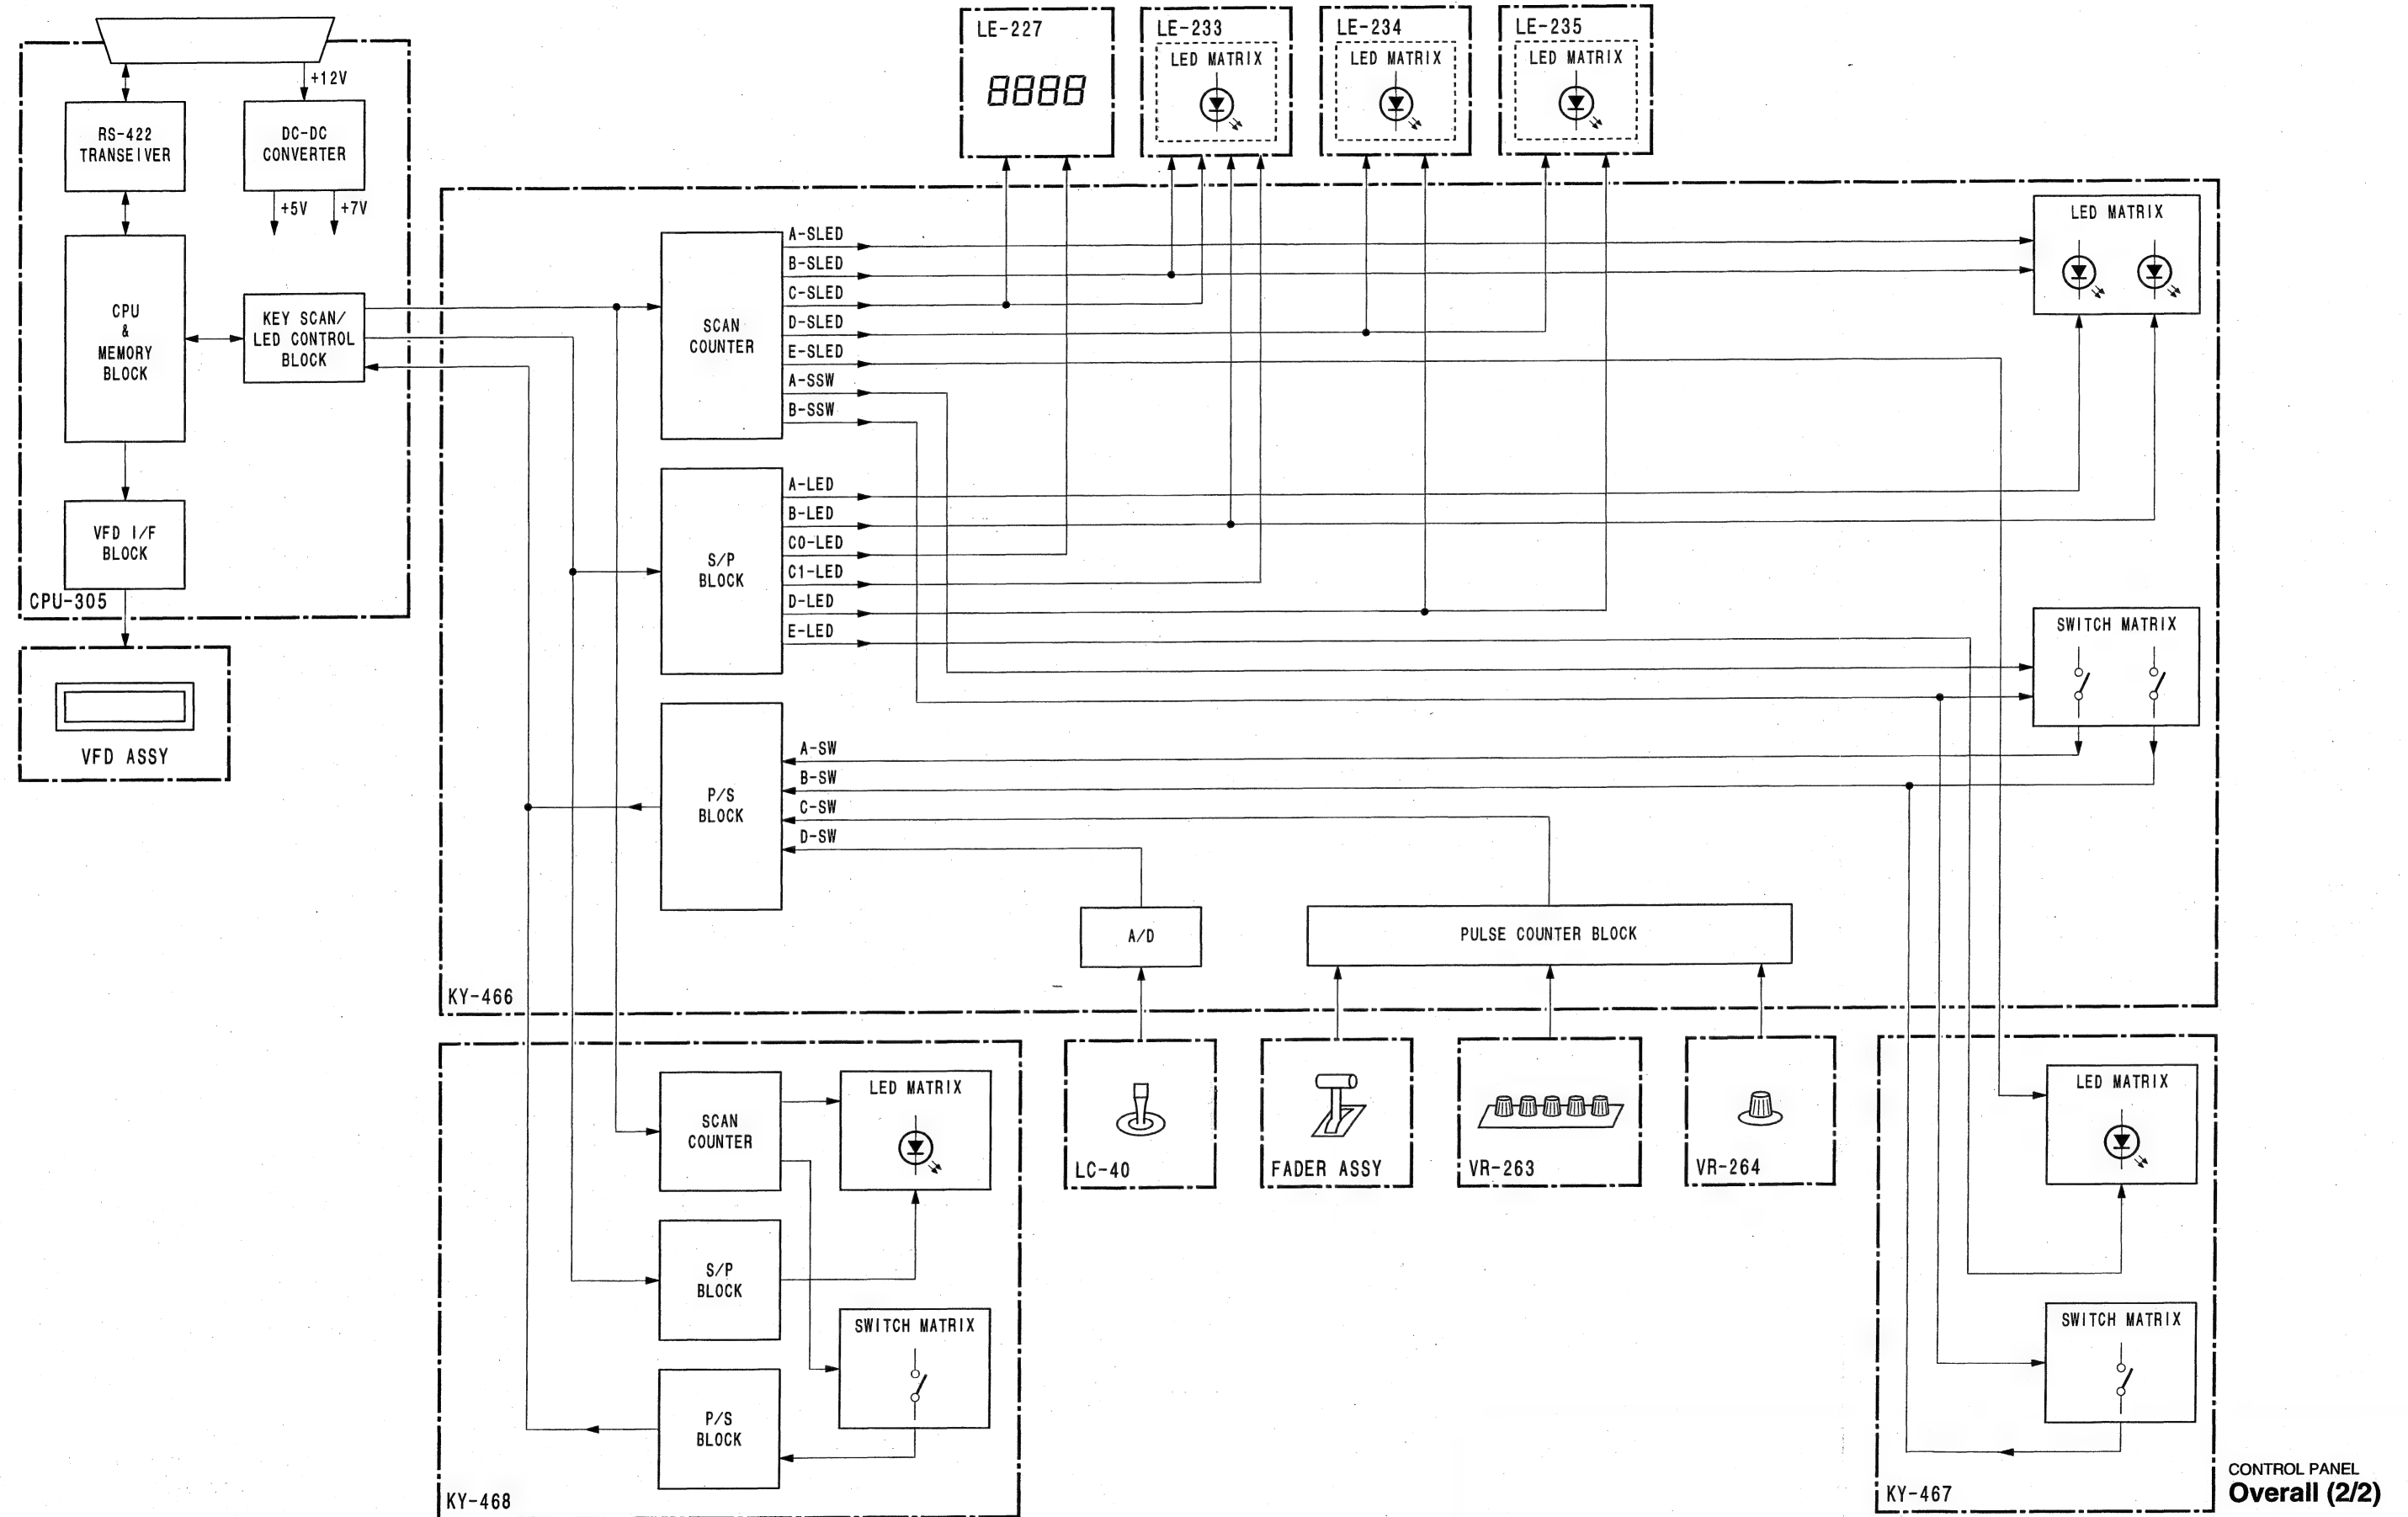


CMB-12 CMB-12

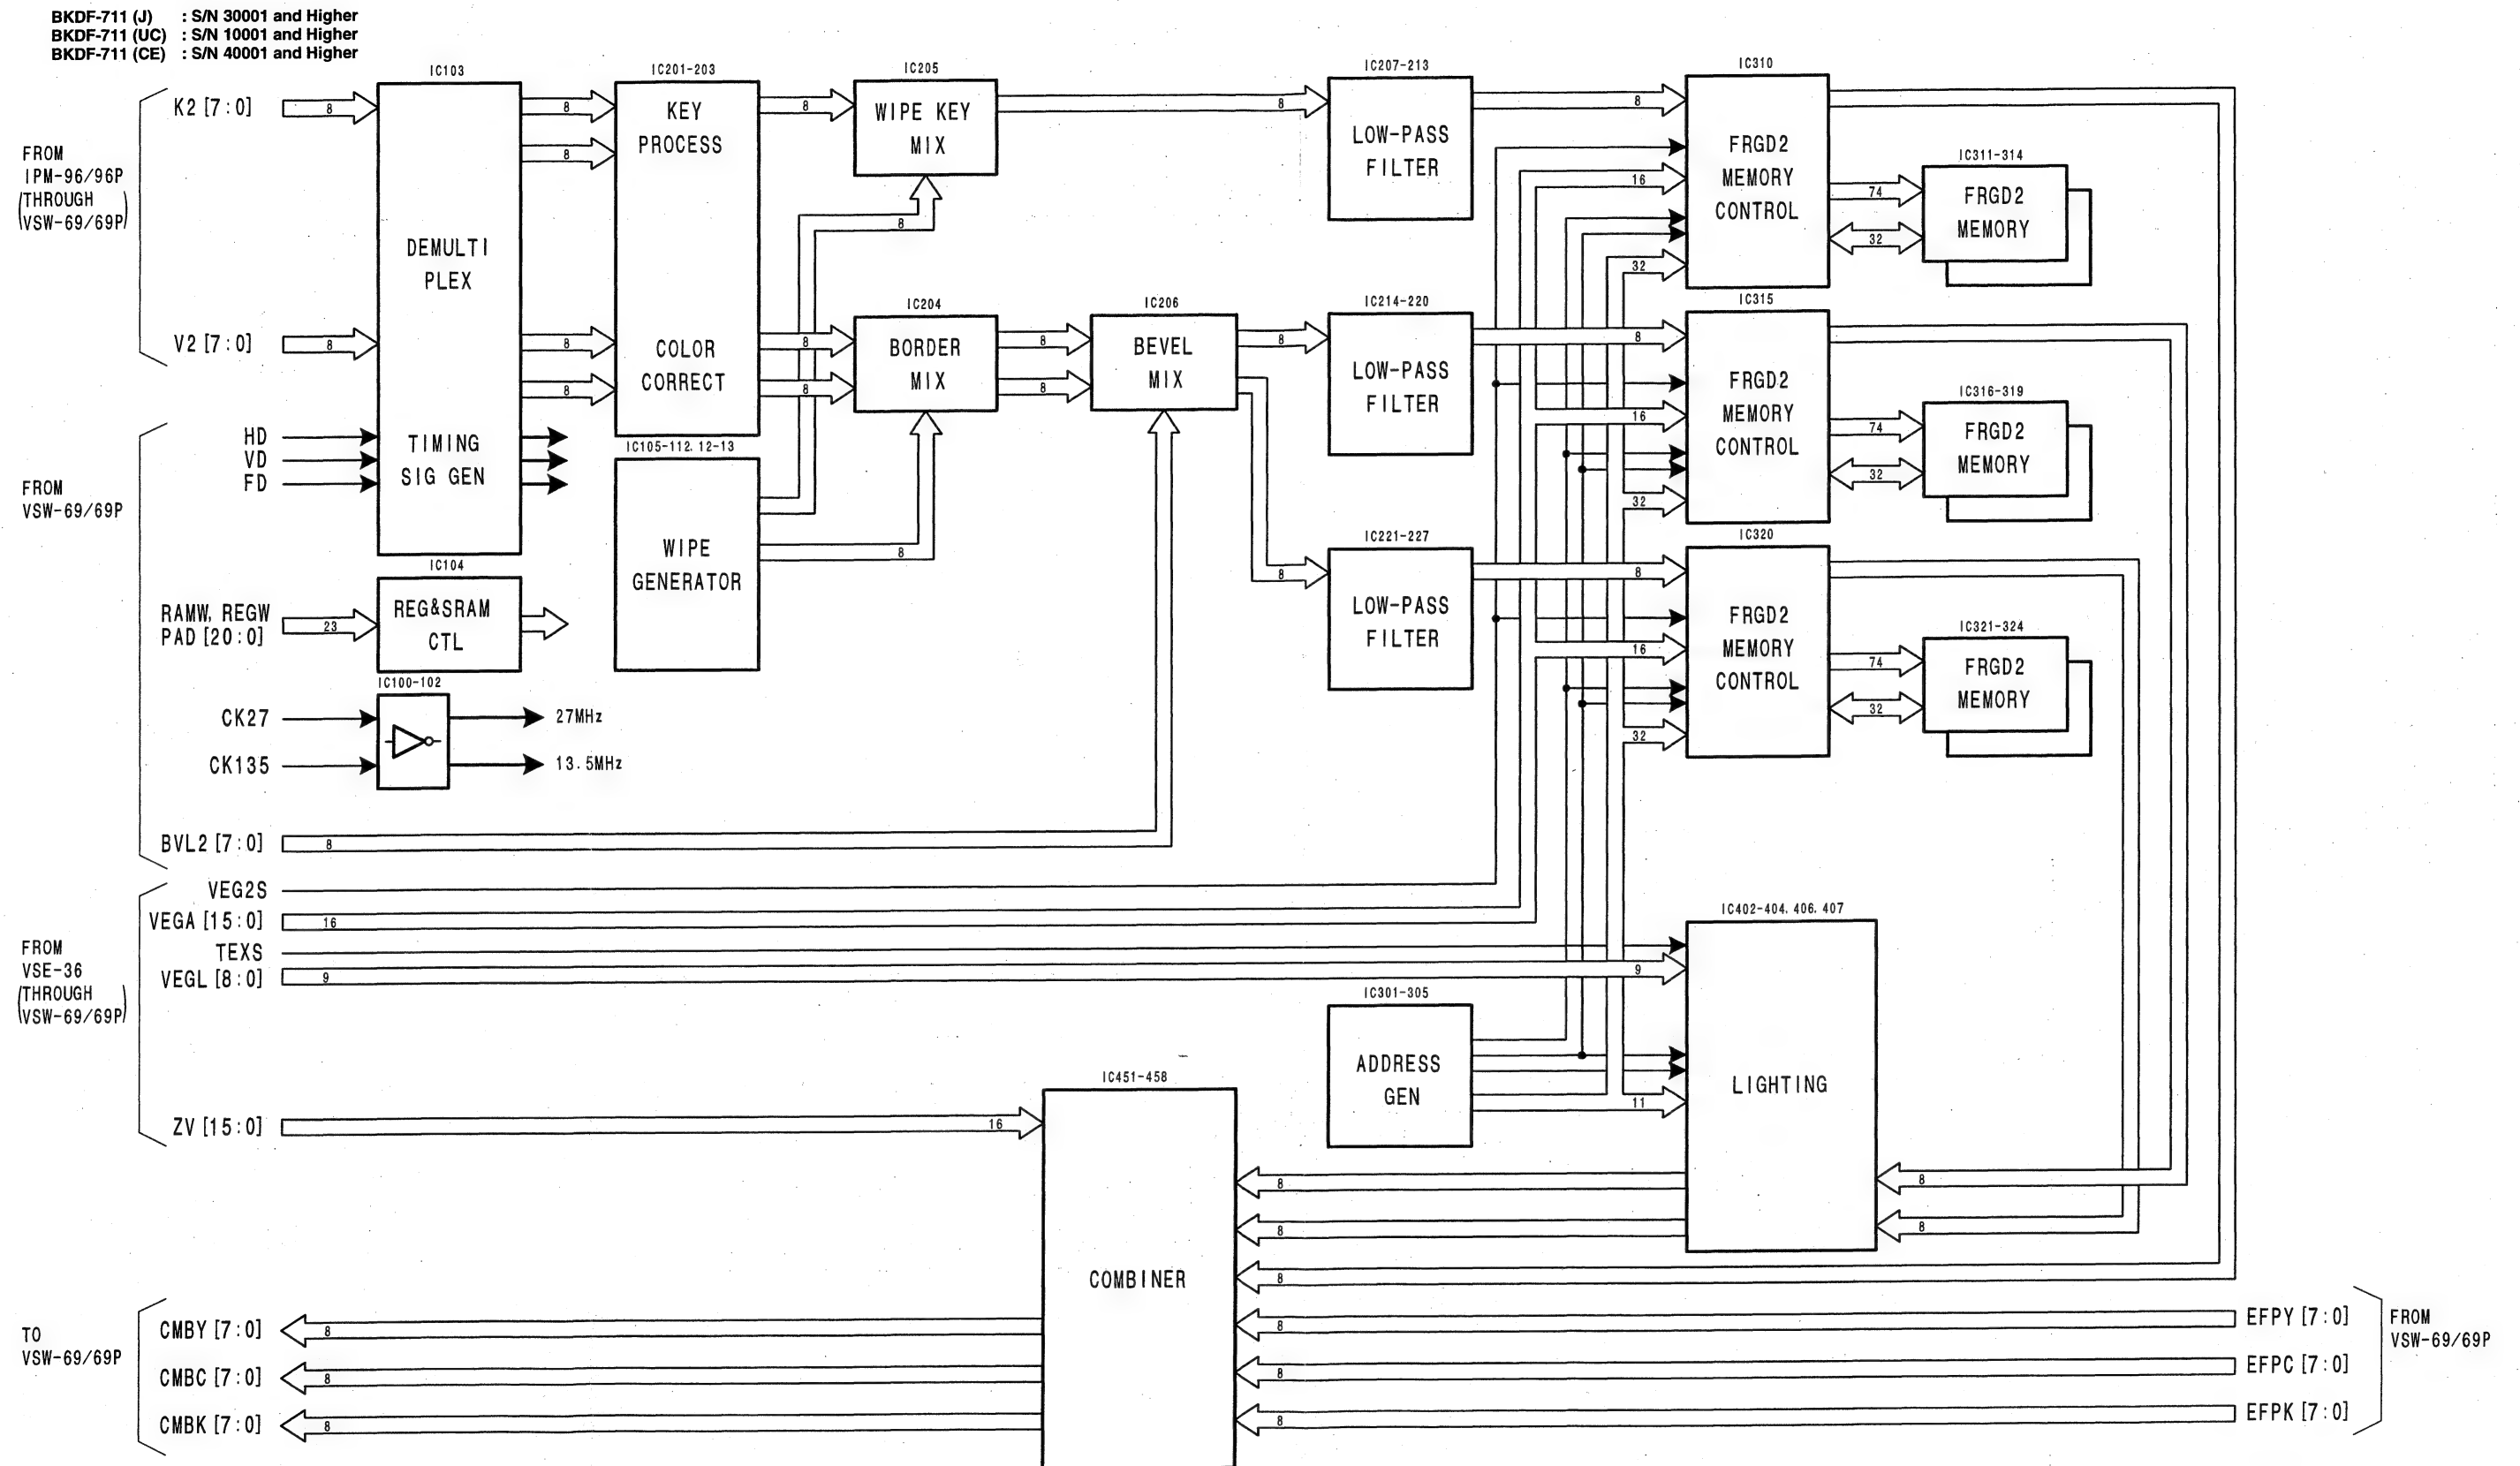

DIGITAL MULTI EFFECTS BOARD
CMB-12
 BKDF-711

CPU-305 CPU-305


DFS-700 (J) : S/N 30001 and Higher
DFS-700 (UC) : S/N 10001 and Higher
DFS-700P (CE) : S/N 40001 and Higher

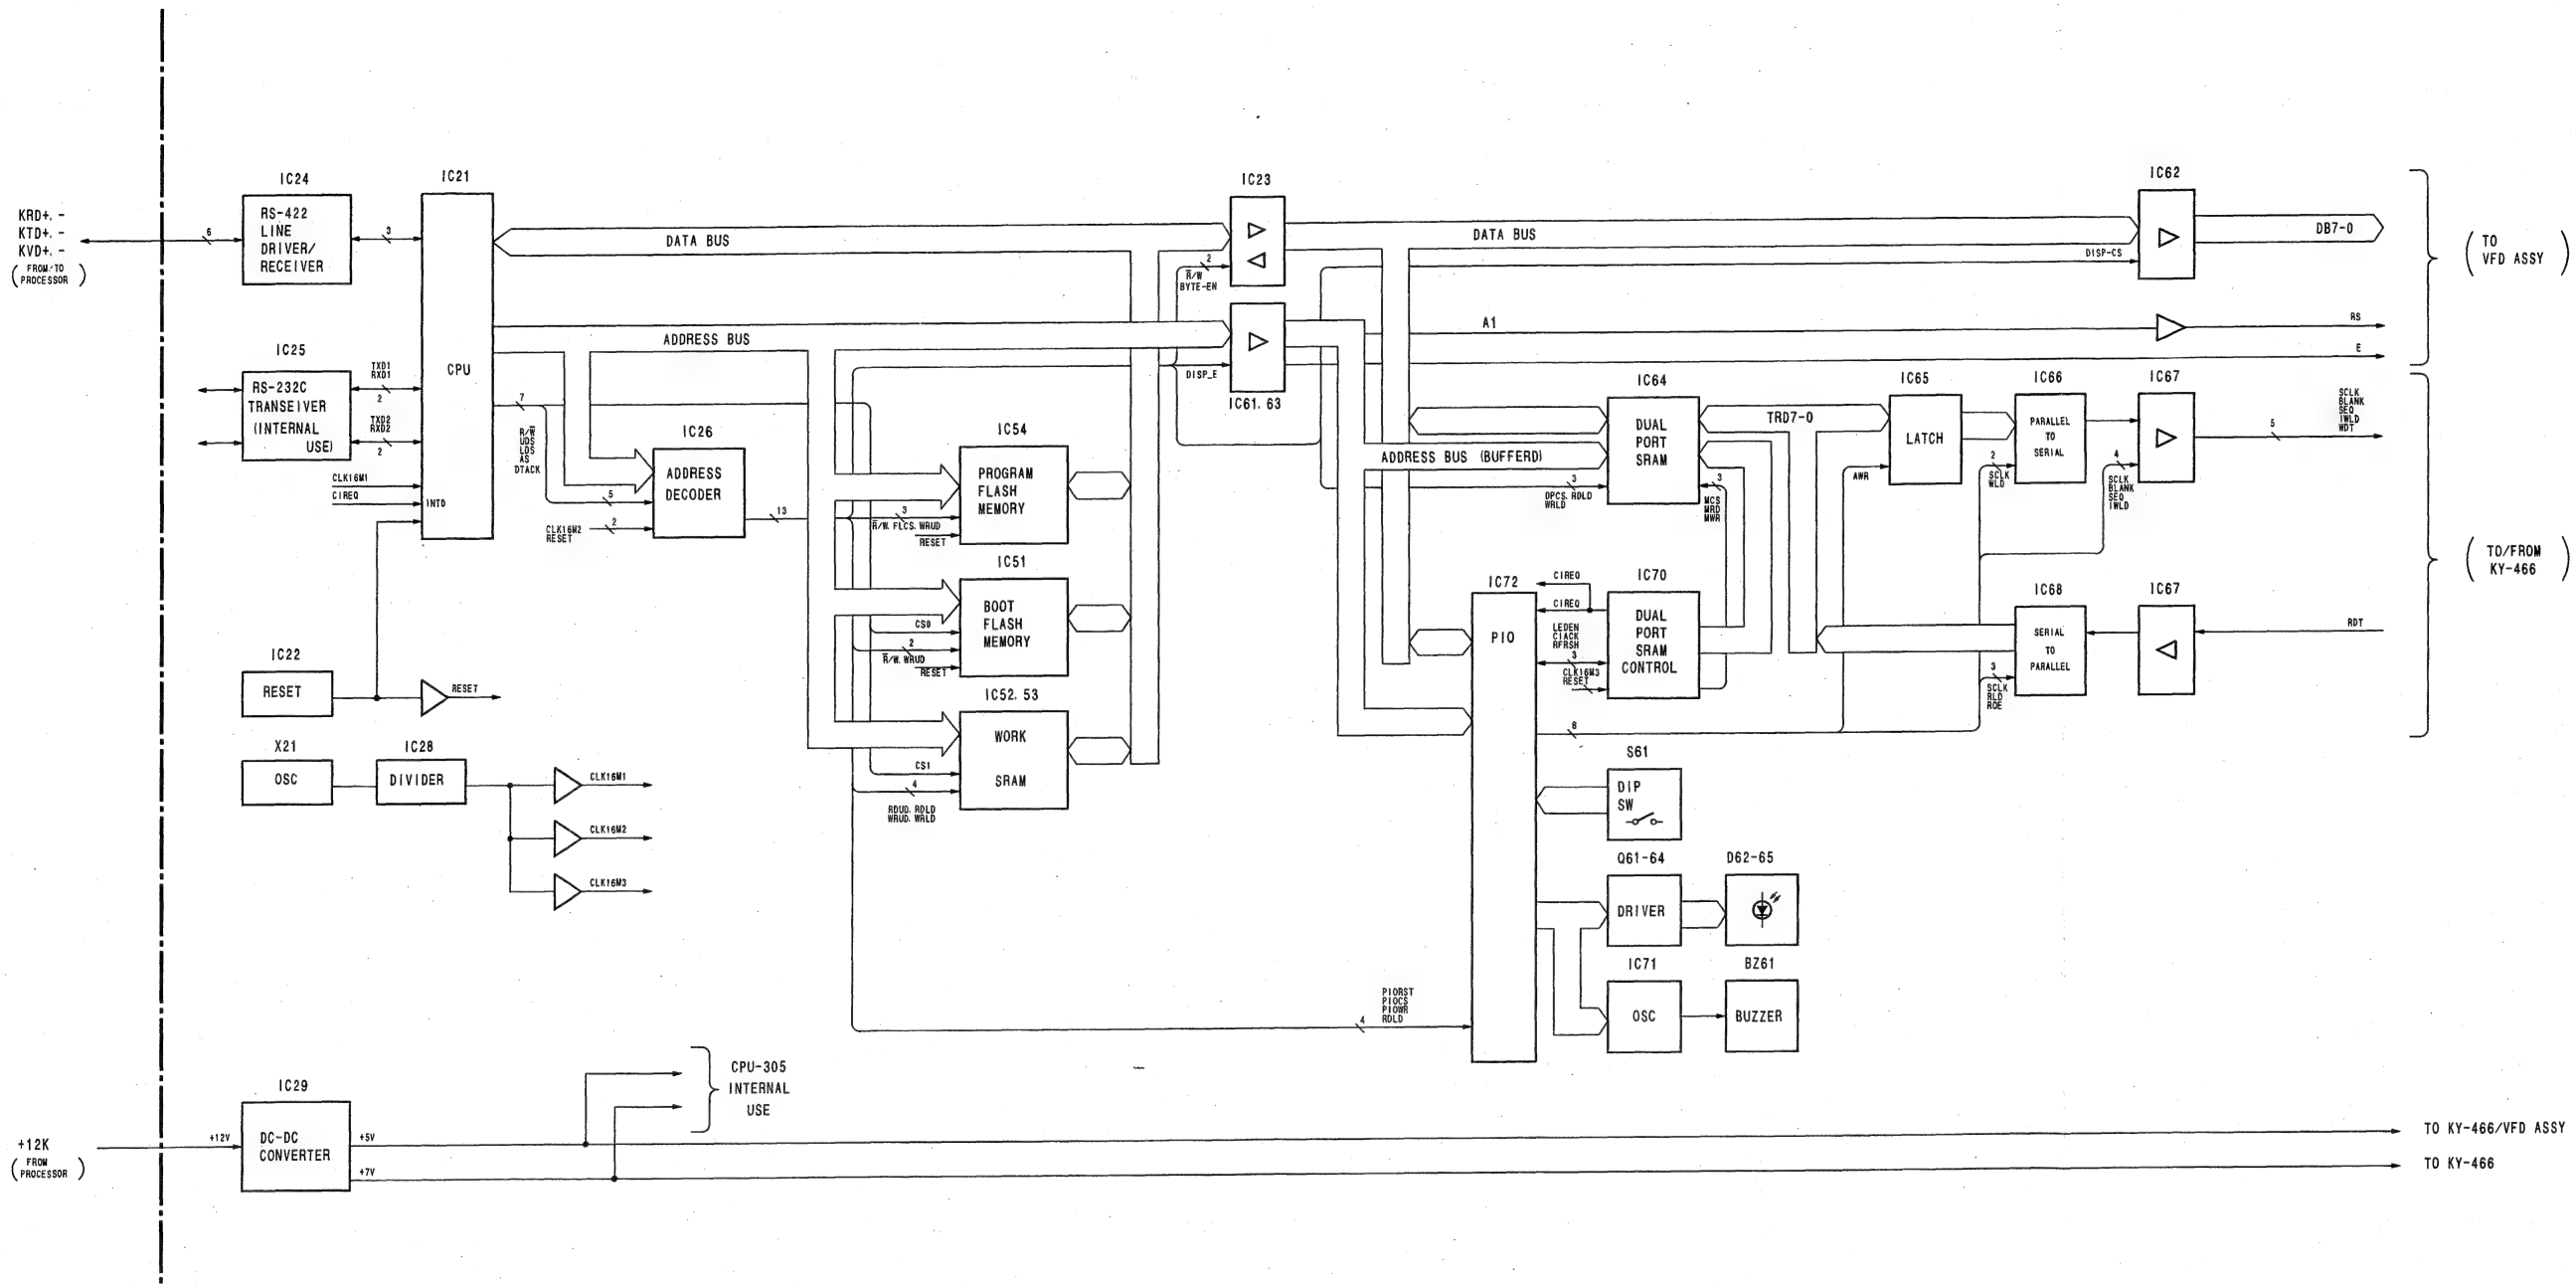

CPU BOARD
CPU-305
DFS-700/700P


DD-37 DD-37

DFS-700 (J) : S/N 30001 and Higher
 DFS-700 (UC) : S/N 10001 and Higher
 DFS-700P (CE) : S/N 40001 and Higher

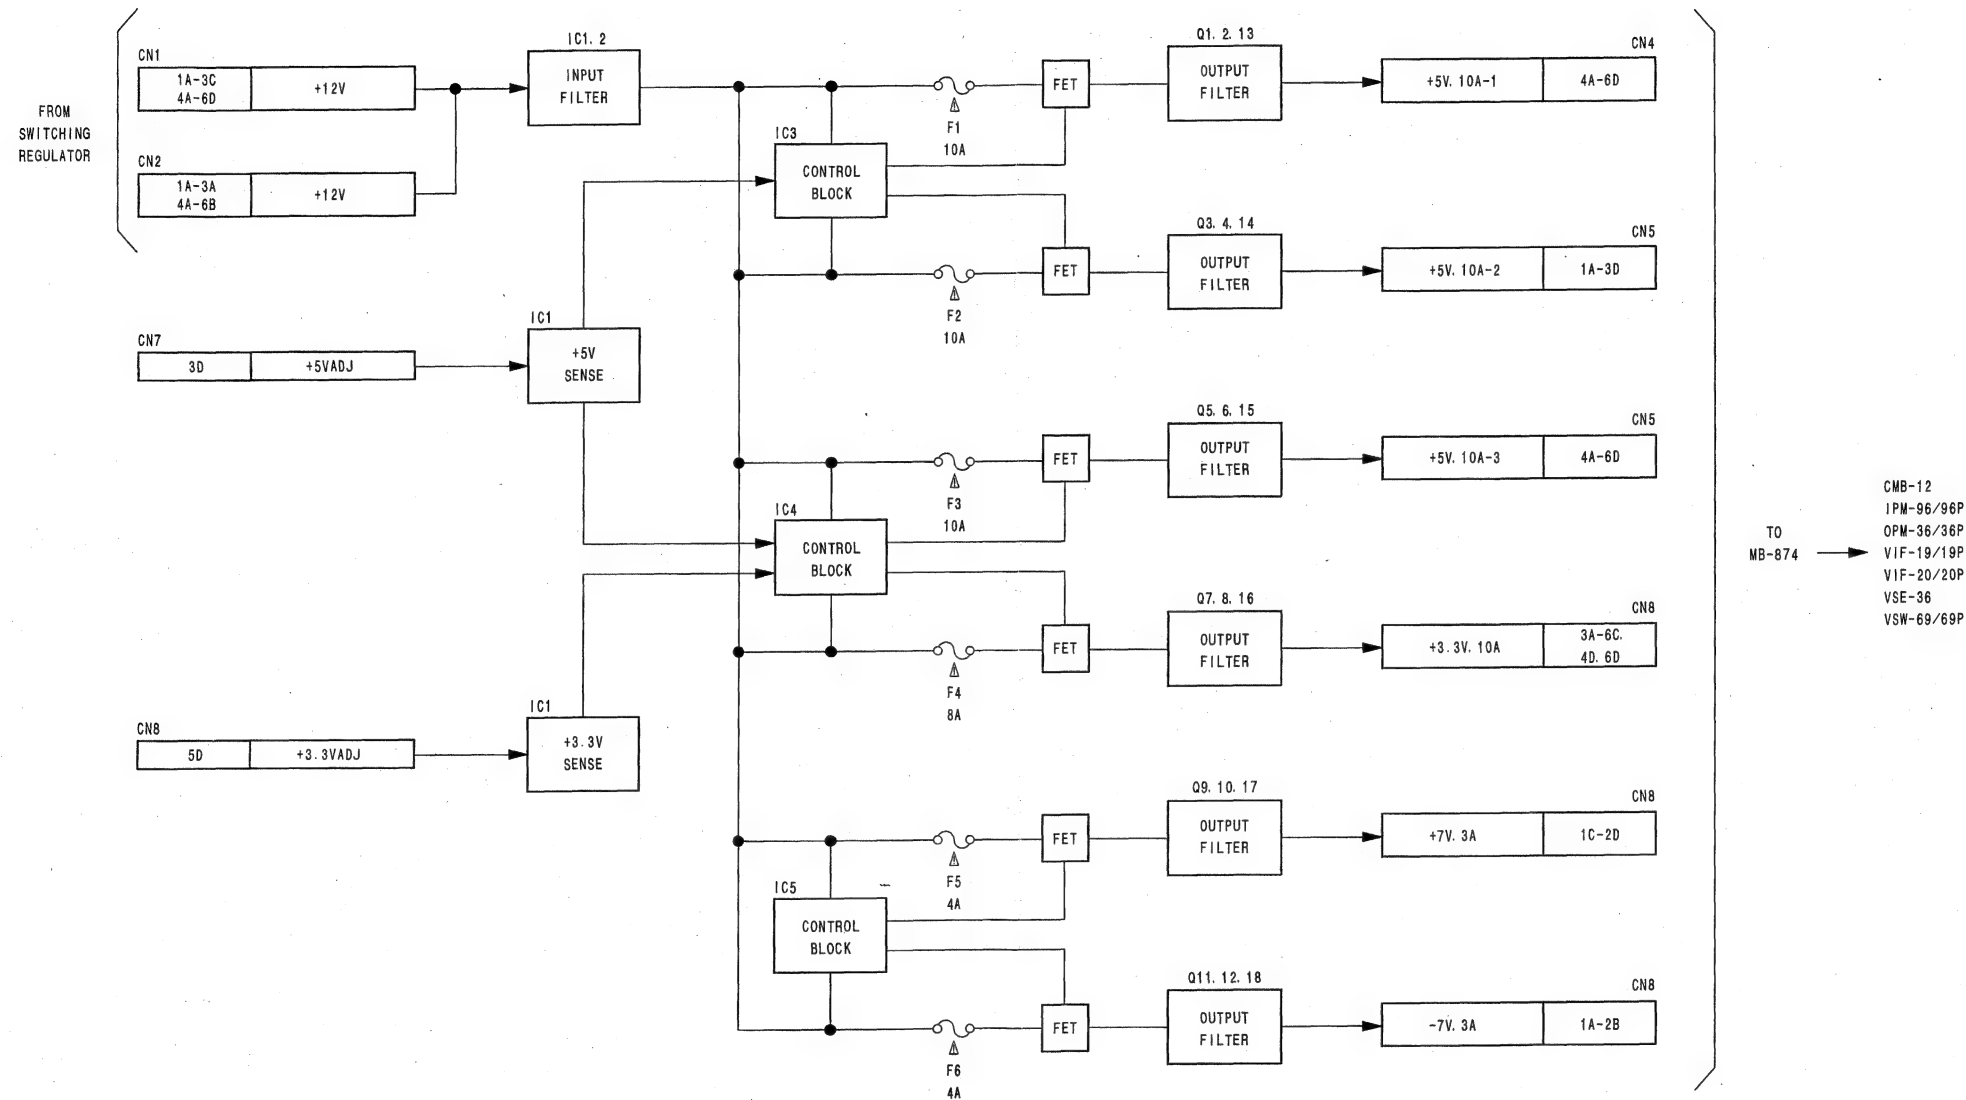


IPM-96/96P (1/3) IPM-96/96P (1/3)

DFS-700 (J) : S/N 30001 and Higher
 DFS-700 (UC) : S/N 10001 and Higher
 DFS-700P (CE) : S/N 40001 and Higher

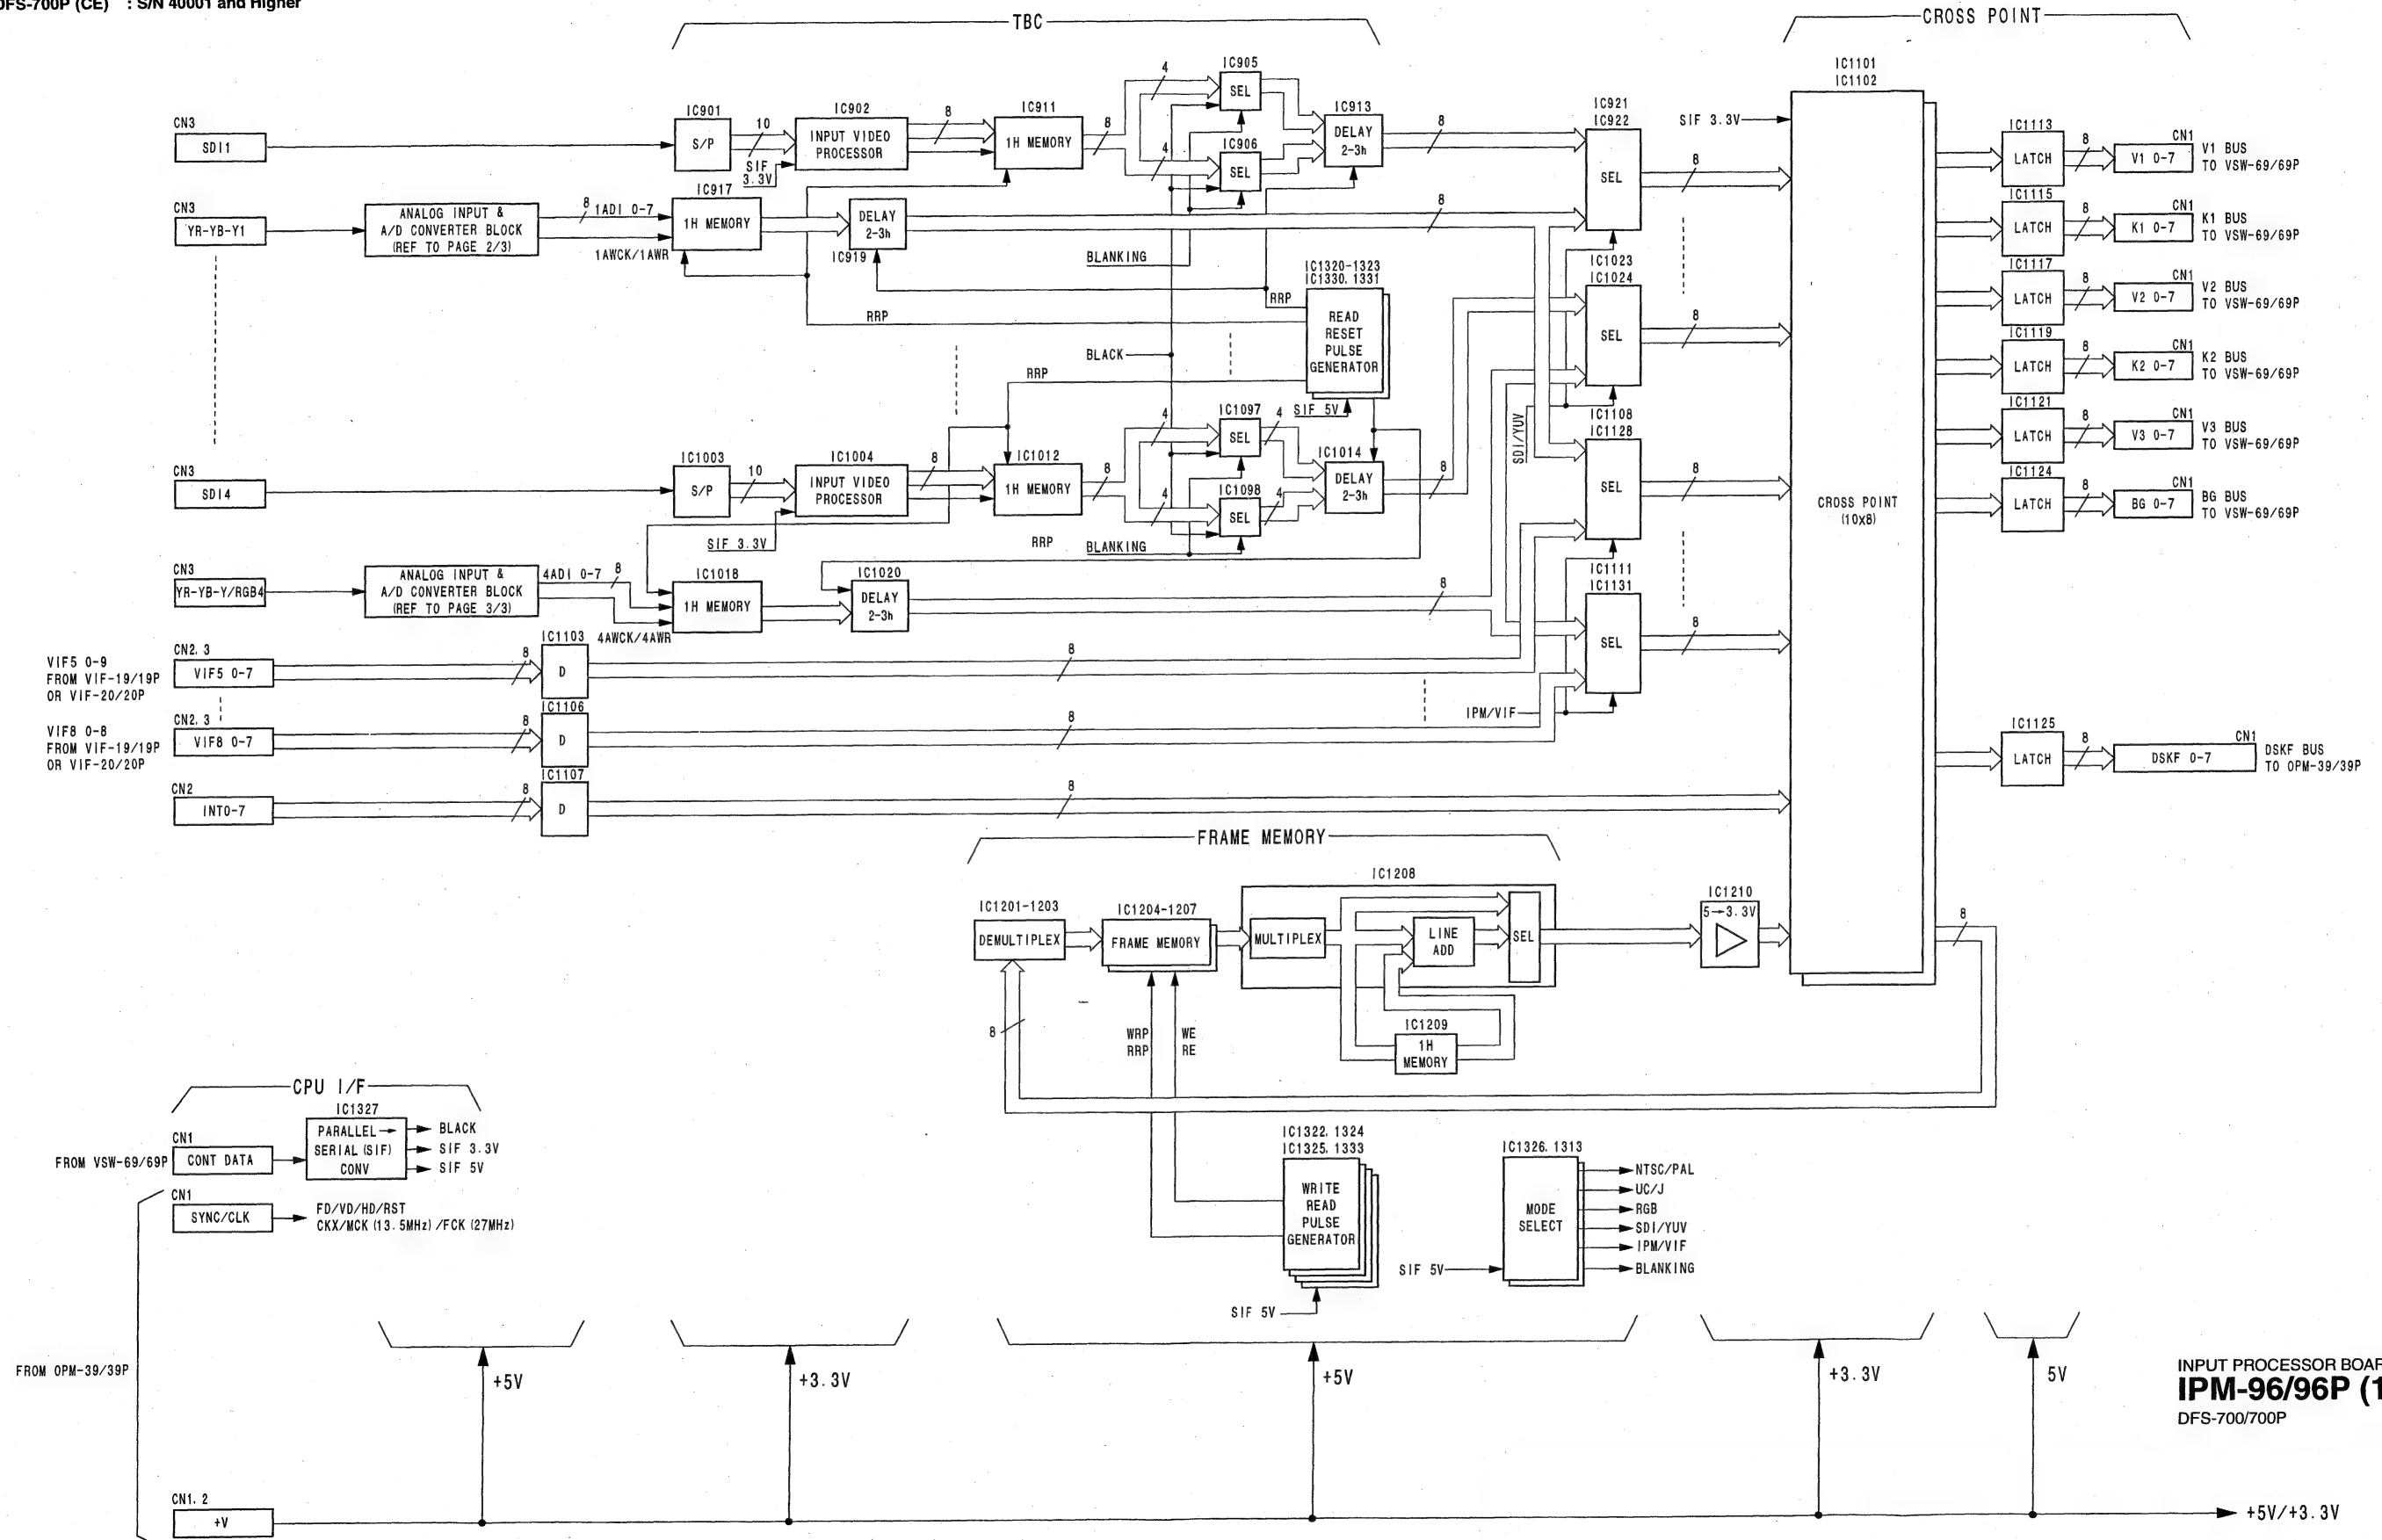


INPUT PROCESSOR BOARD
 IPM-96/96P (1/3)
 DFS-700/700P

DFS-700 (J) : S/N 30001 and Higher
DFS-700 (UC) : S/N 10001 and Higher
DFS-700P (CE) : S/N 40001 and Higher

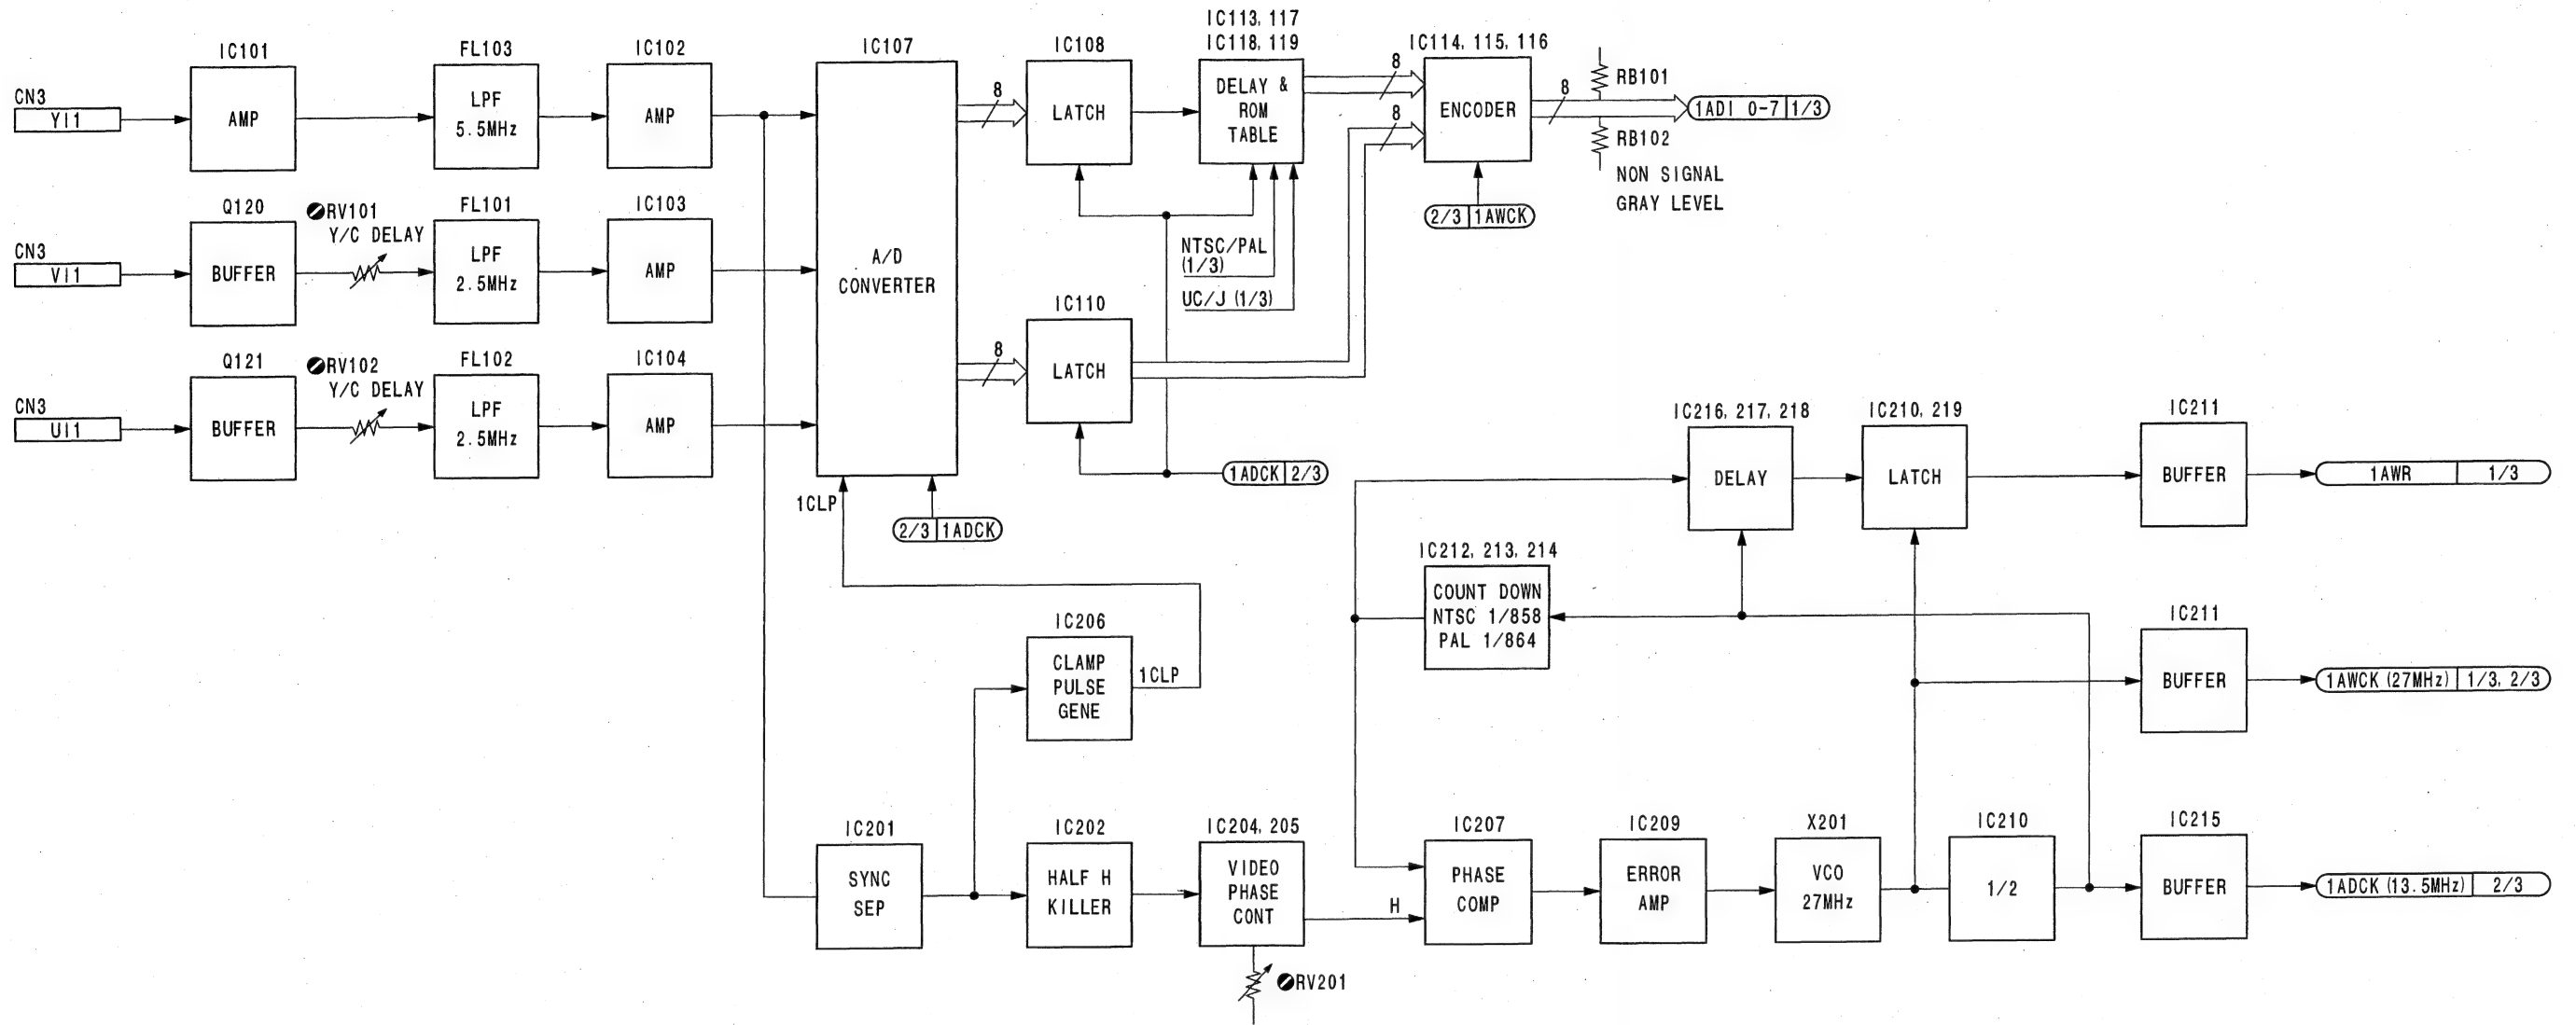


INPUT PROCESSOR BOARD
IPM-96/96P (2/3)
DFS-700/700P

DFS-700 (J) : S/N 30001 and Higher
 DFS-700 (UC) : S/N 10001 and Higher
 DFS-700P (CE) : S/N 40001 and Higher

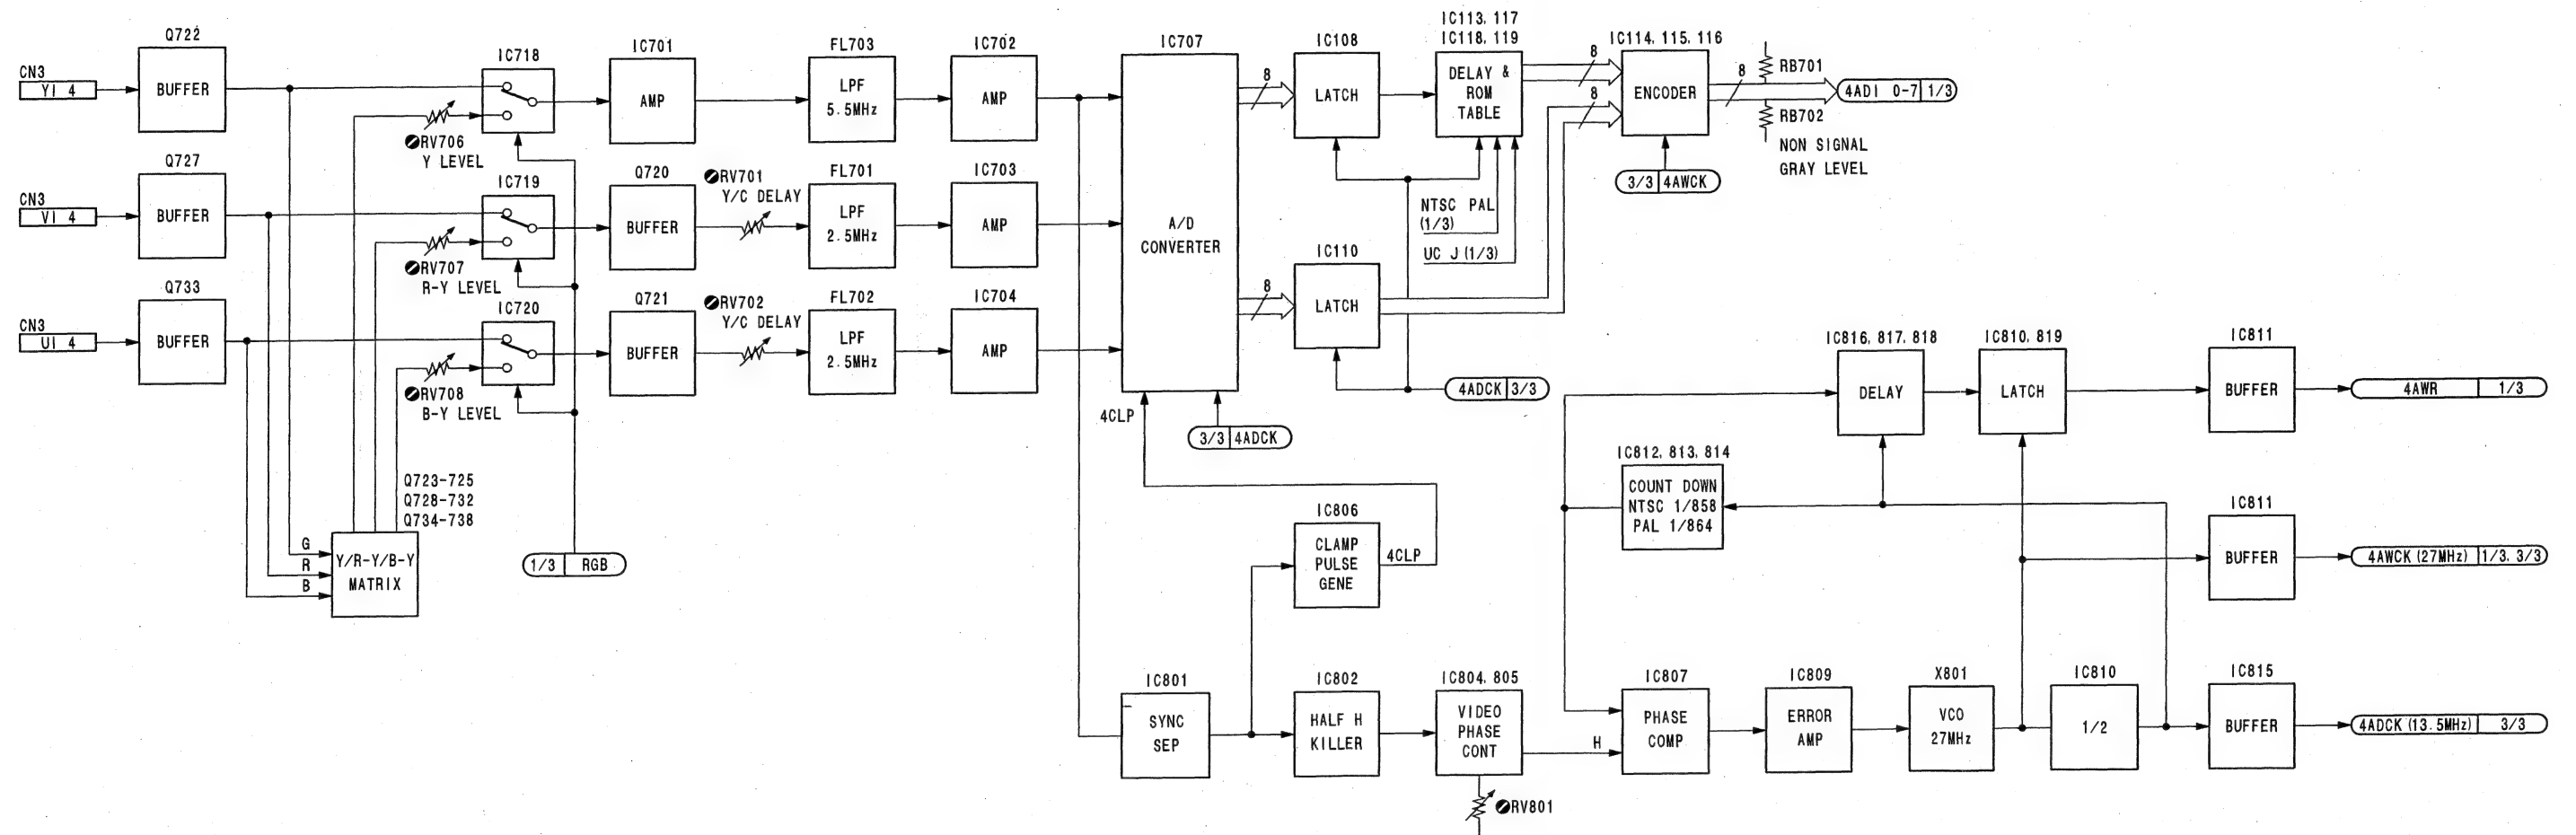


INPUT PROCESSOR BOARD
IPM-96/96P (3/3)
 DFS-700/700P


DFS-700 (J) : S/N 30001 and Higher
 DFS-700 (UC) : S/N 10001 and Higher
 DFS-700P (CE) : S/N 40001 and Higher

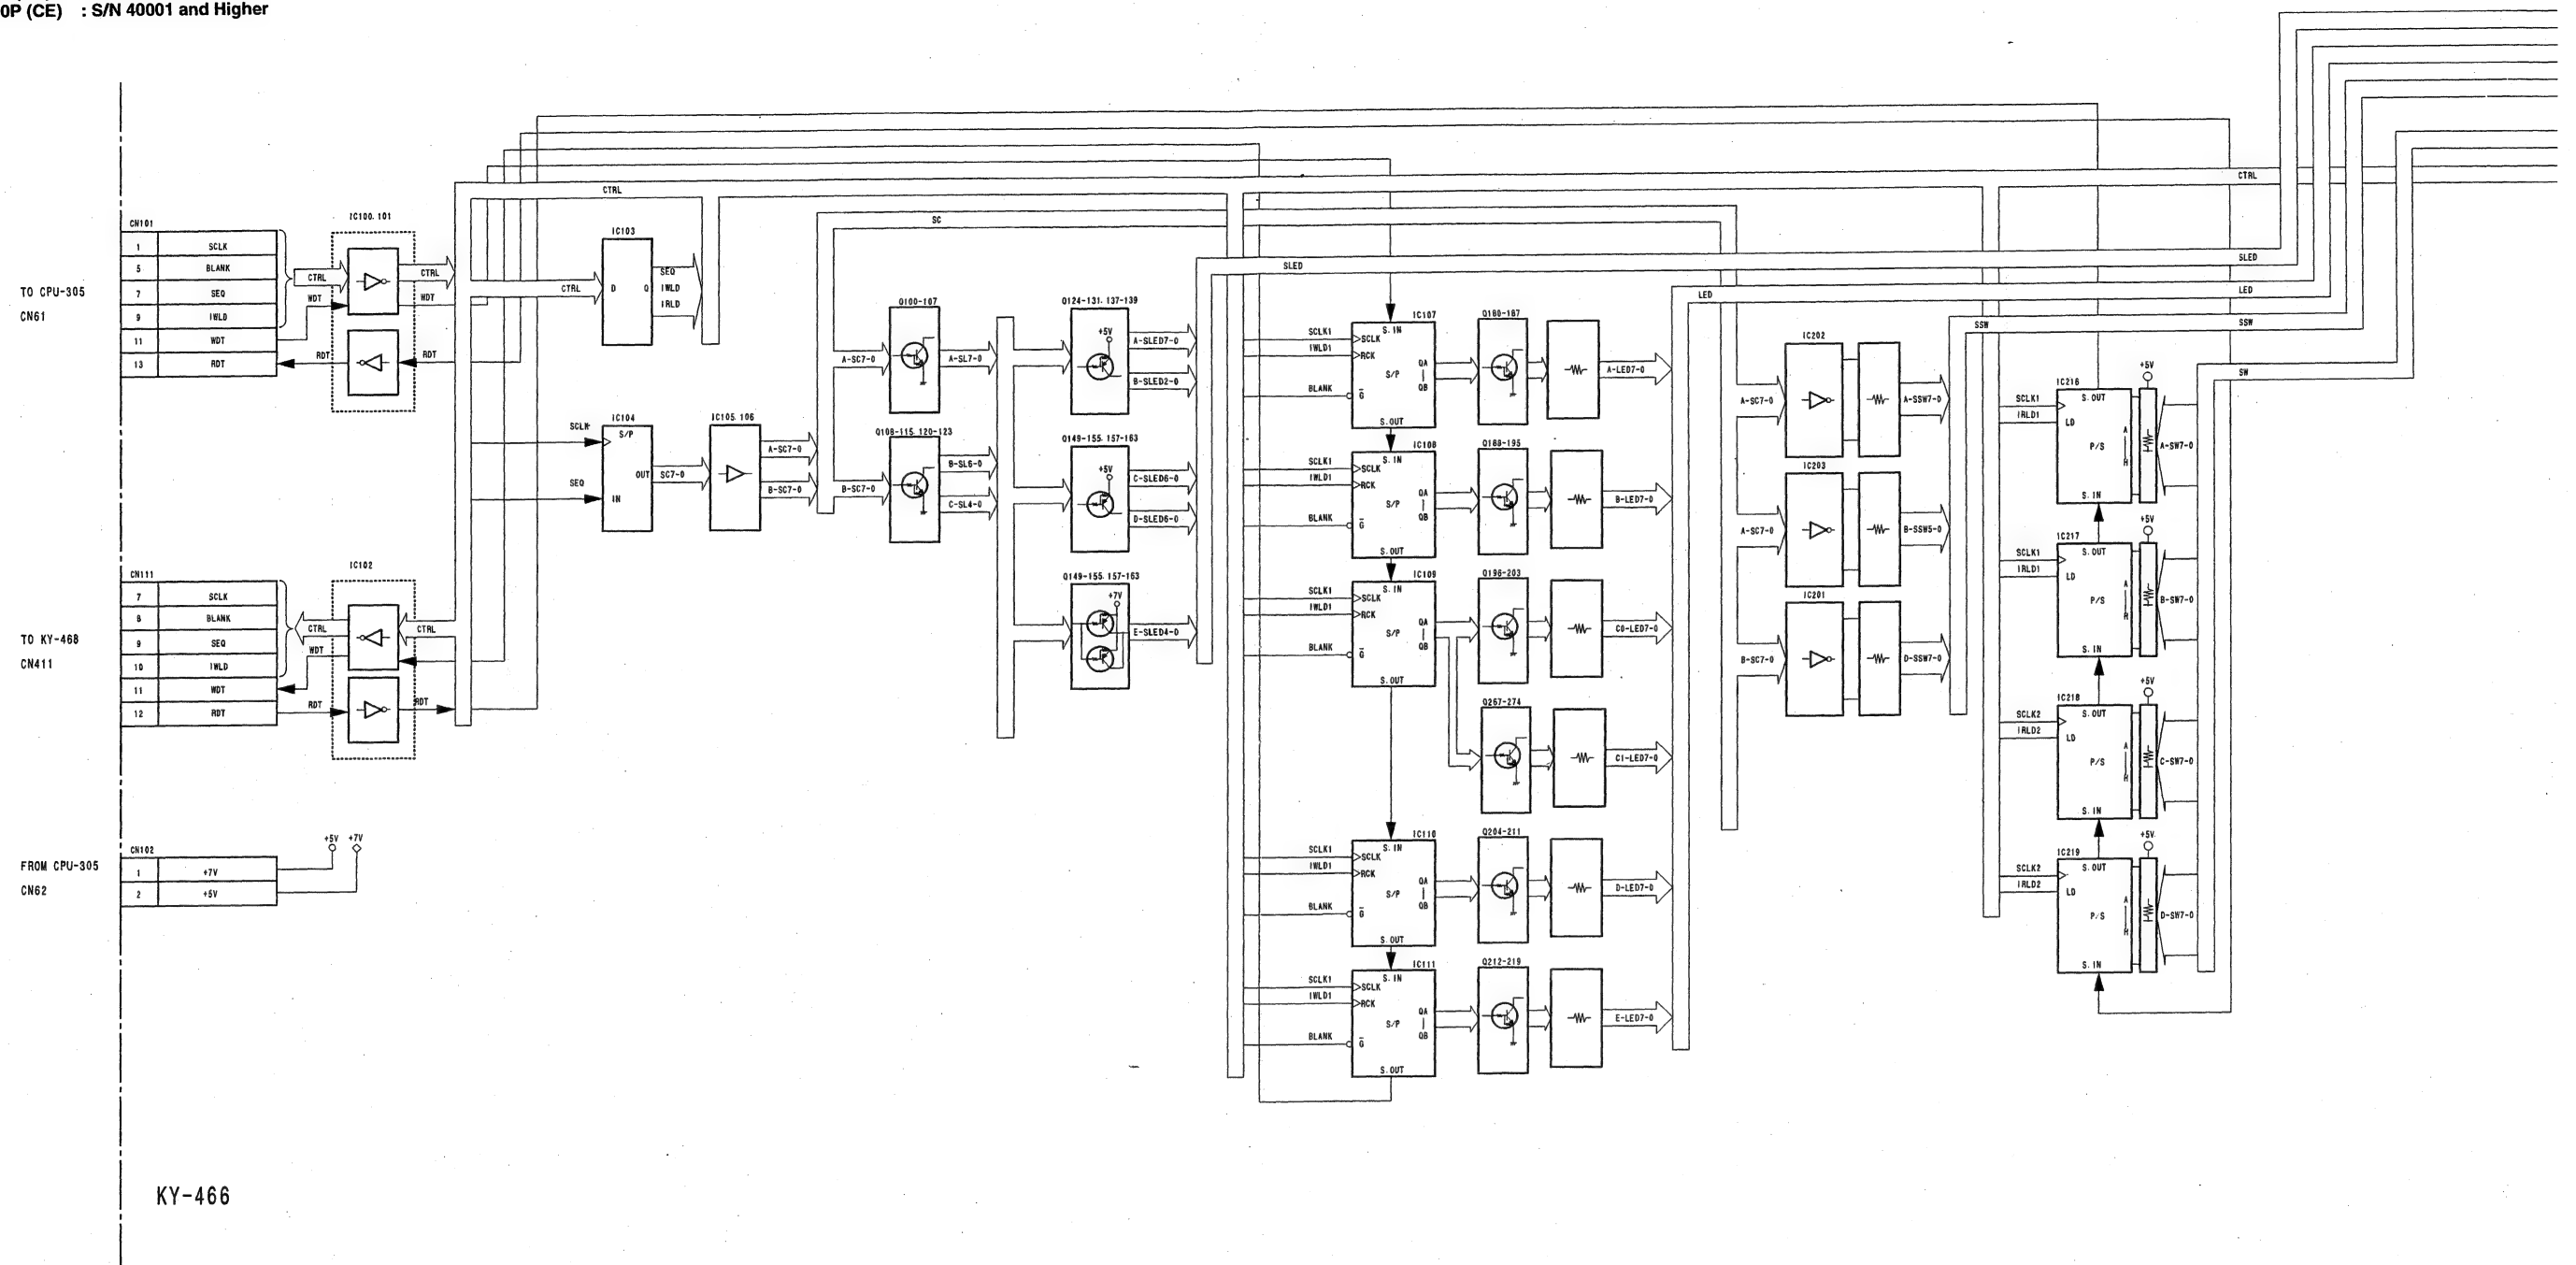

KY-466

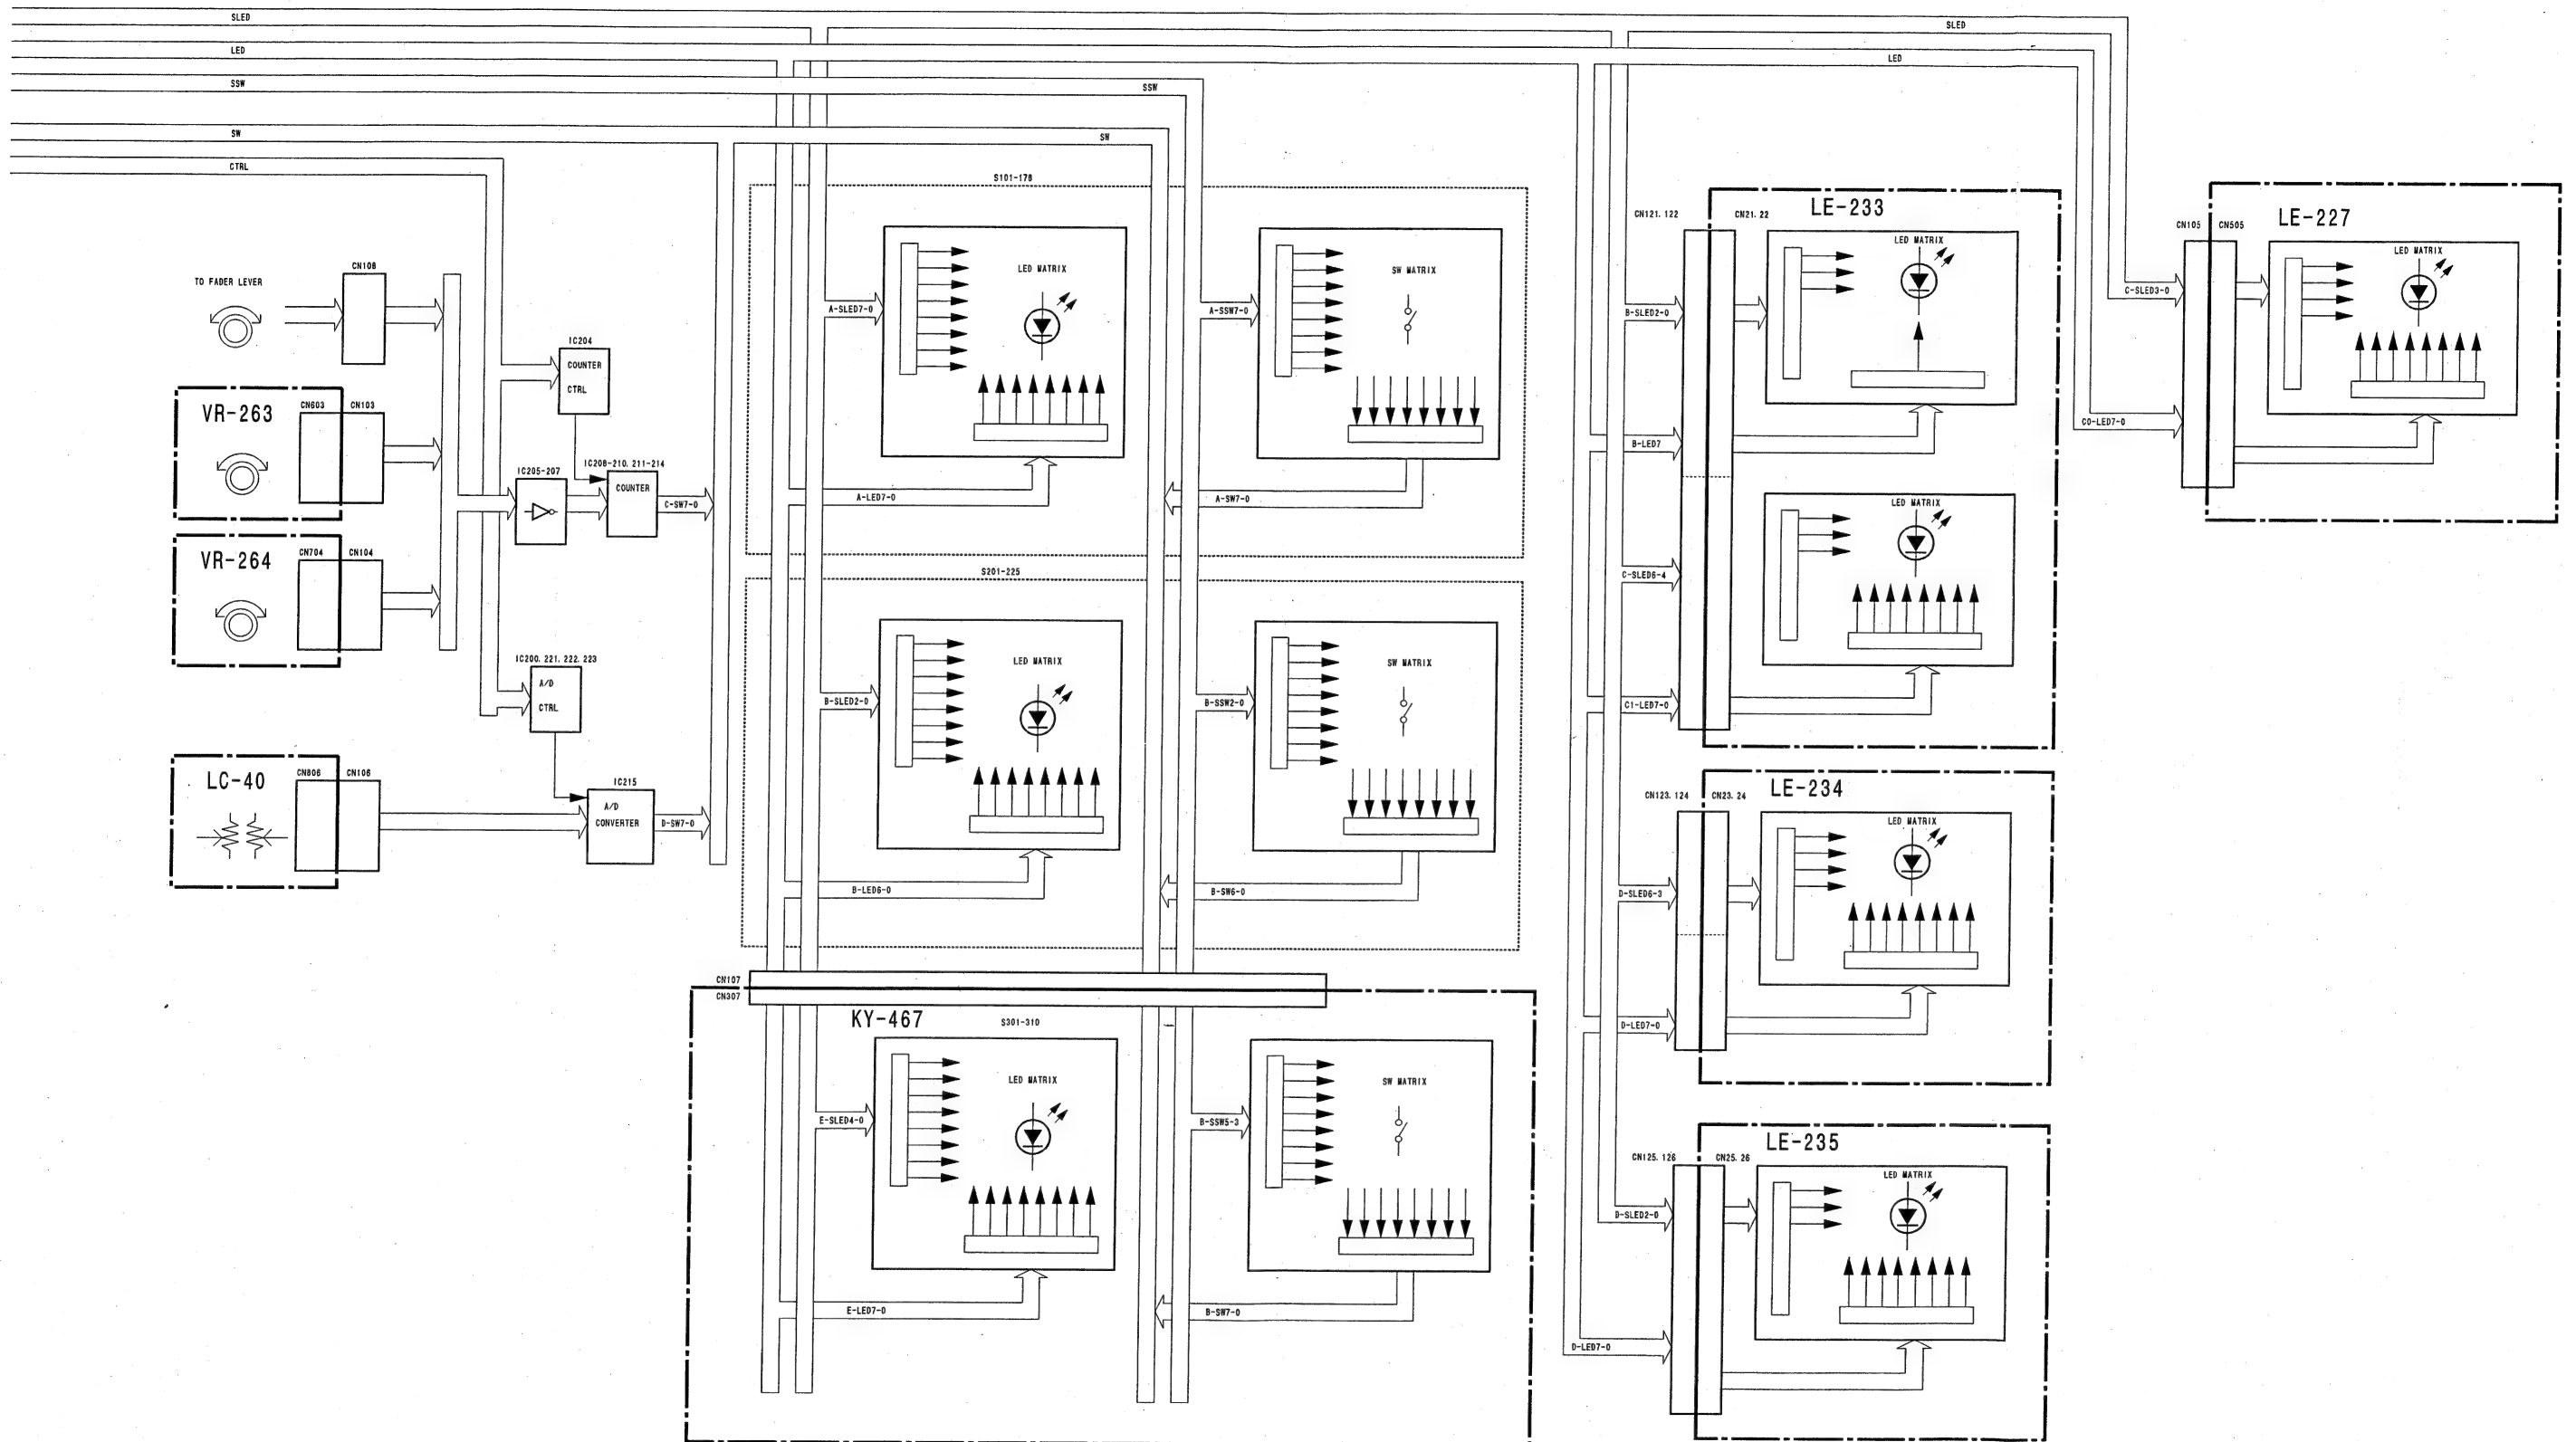


DFS-700 (J) : S/N 30001 and Higher
DFS-700 (UC) : S/N 10001 and Higher
DFS-700P (CE) : S/N 40001 and Higher

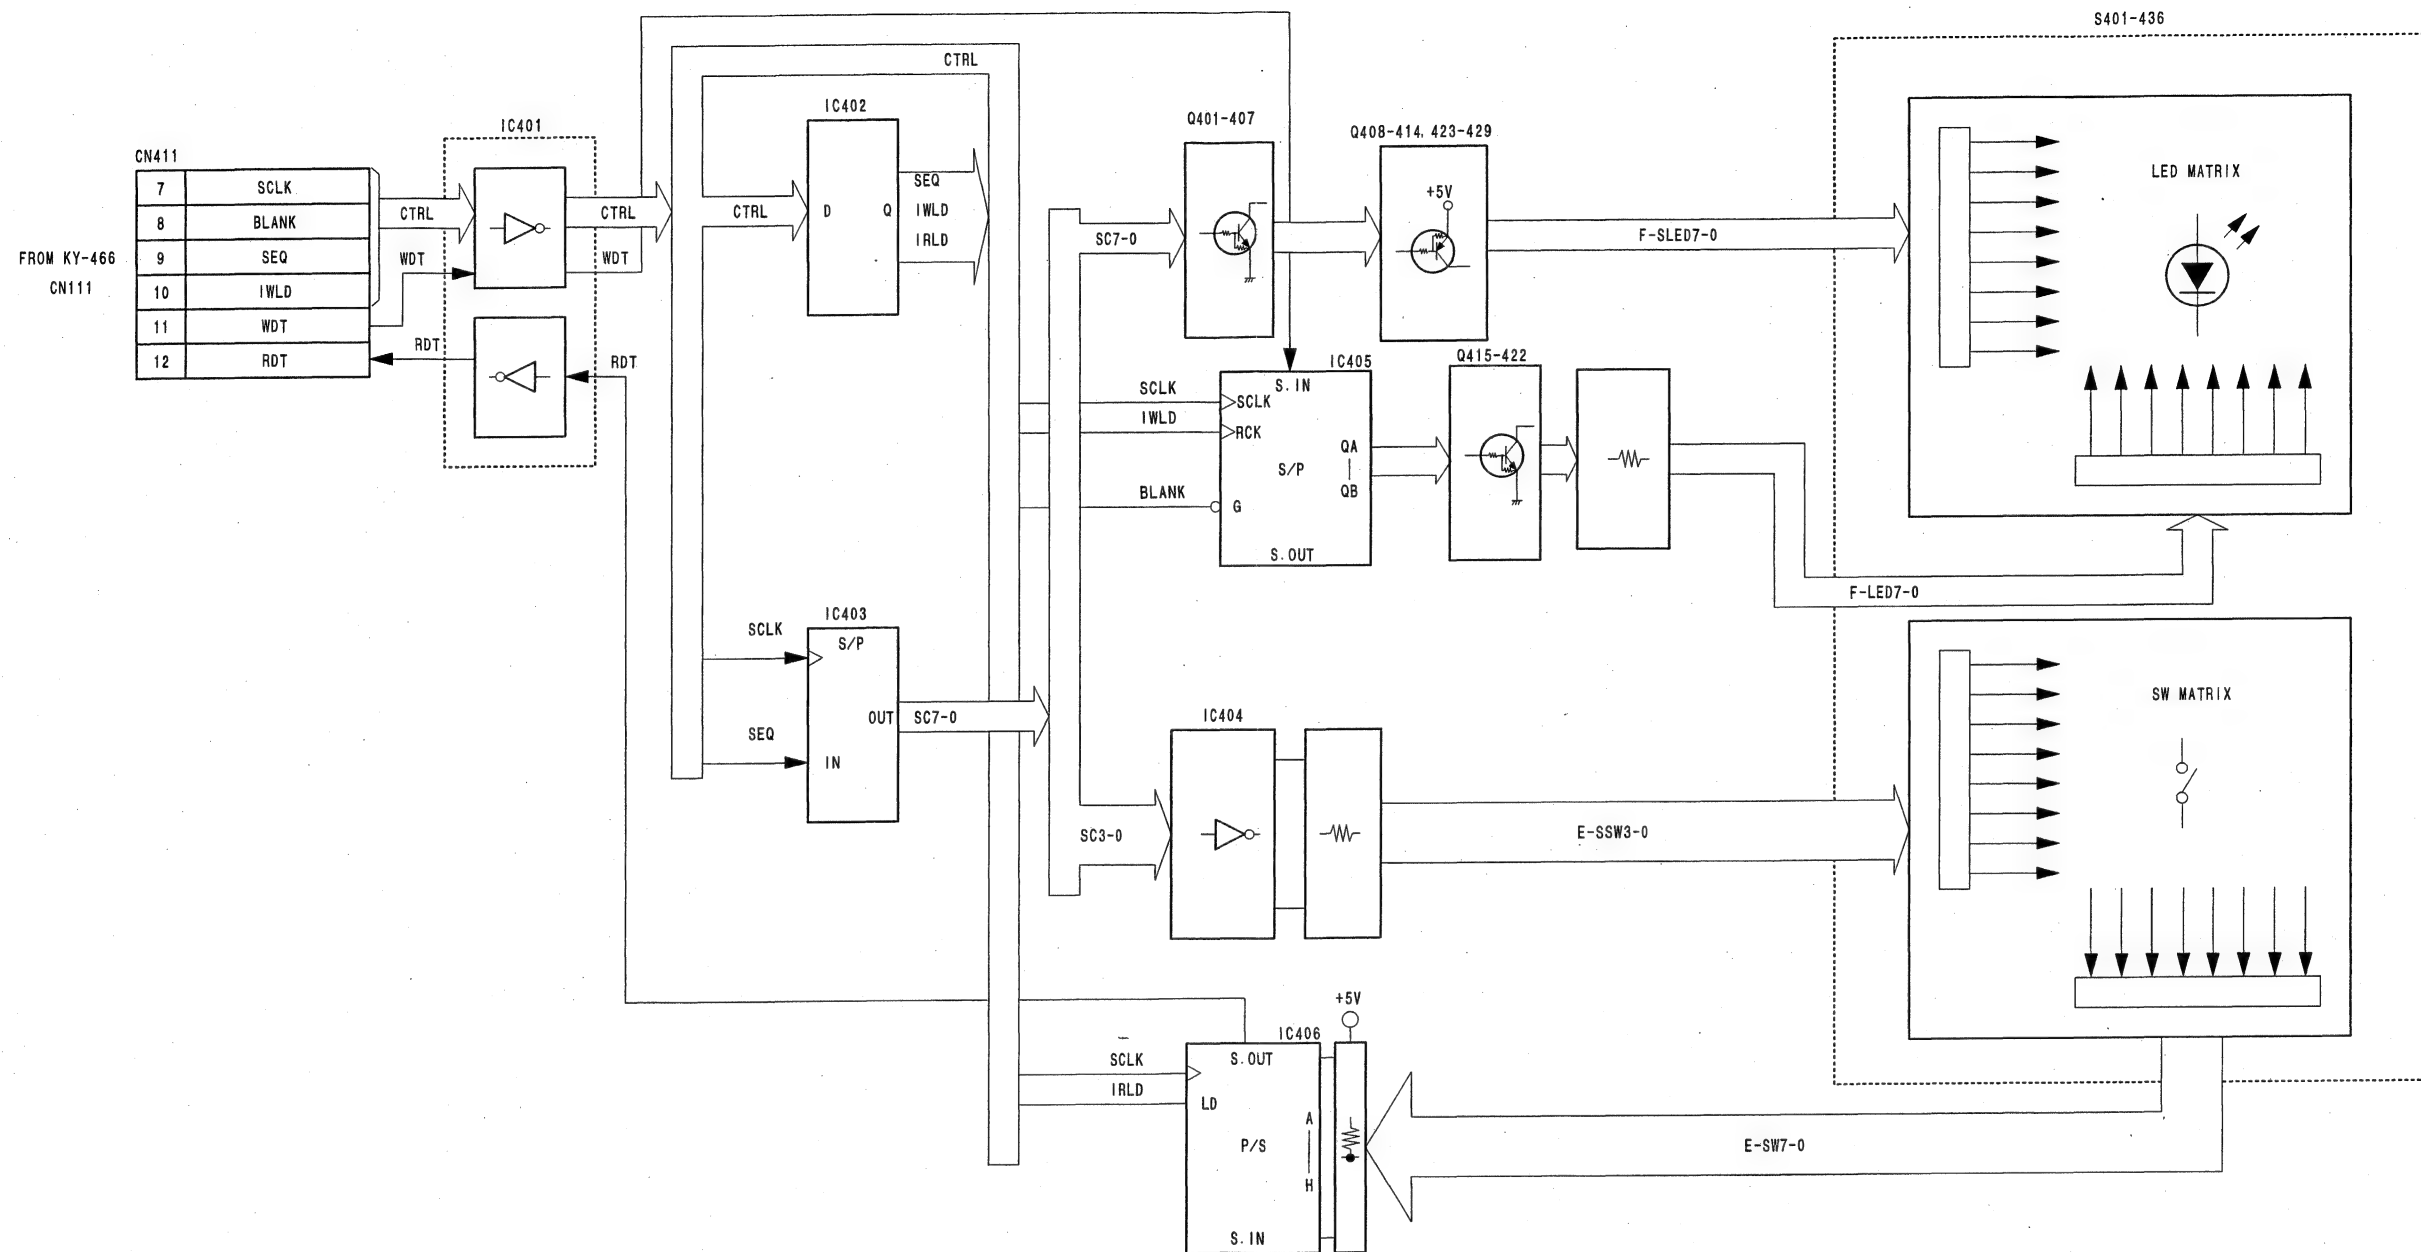

SWITCH BOARD
KY-468
DFS-700/700P


OPM-39/39P (1/3) OPM-39/39P (1/3)

DFS-700 (J) : S/N 30001 and Higher
 DFS-700 (UC) : S/N 10001 and Higher
 DFS-700P (CE) : S/N 40001 and Higher

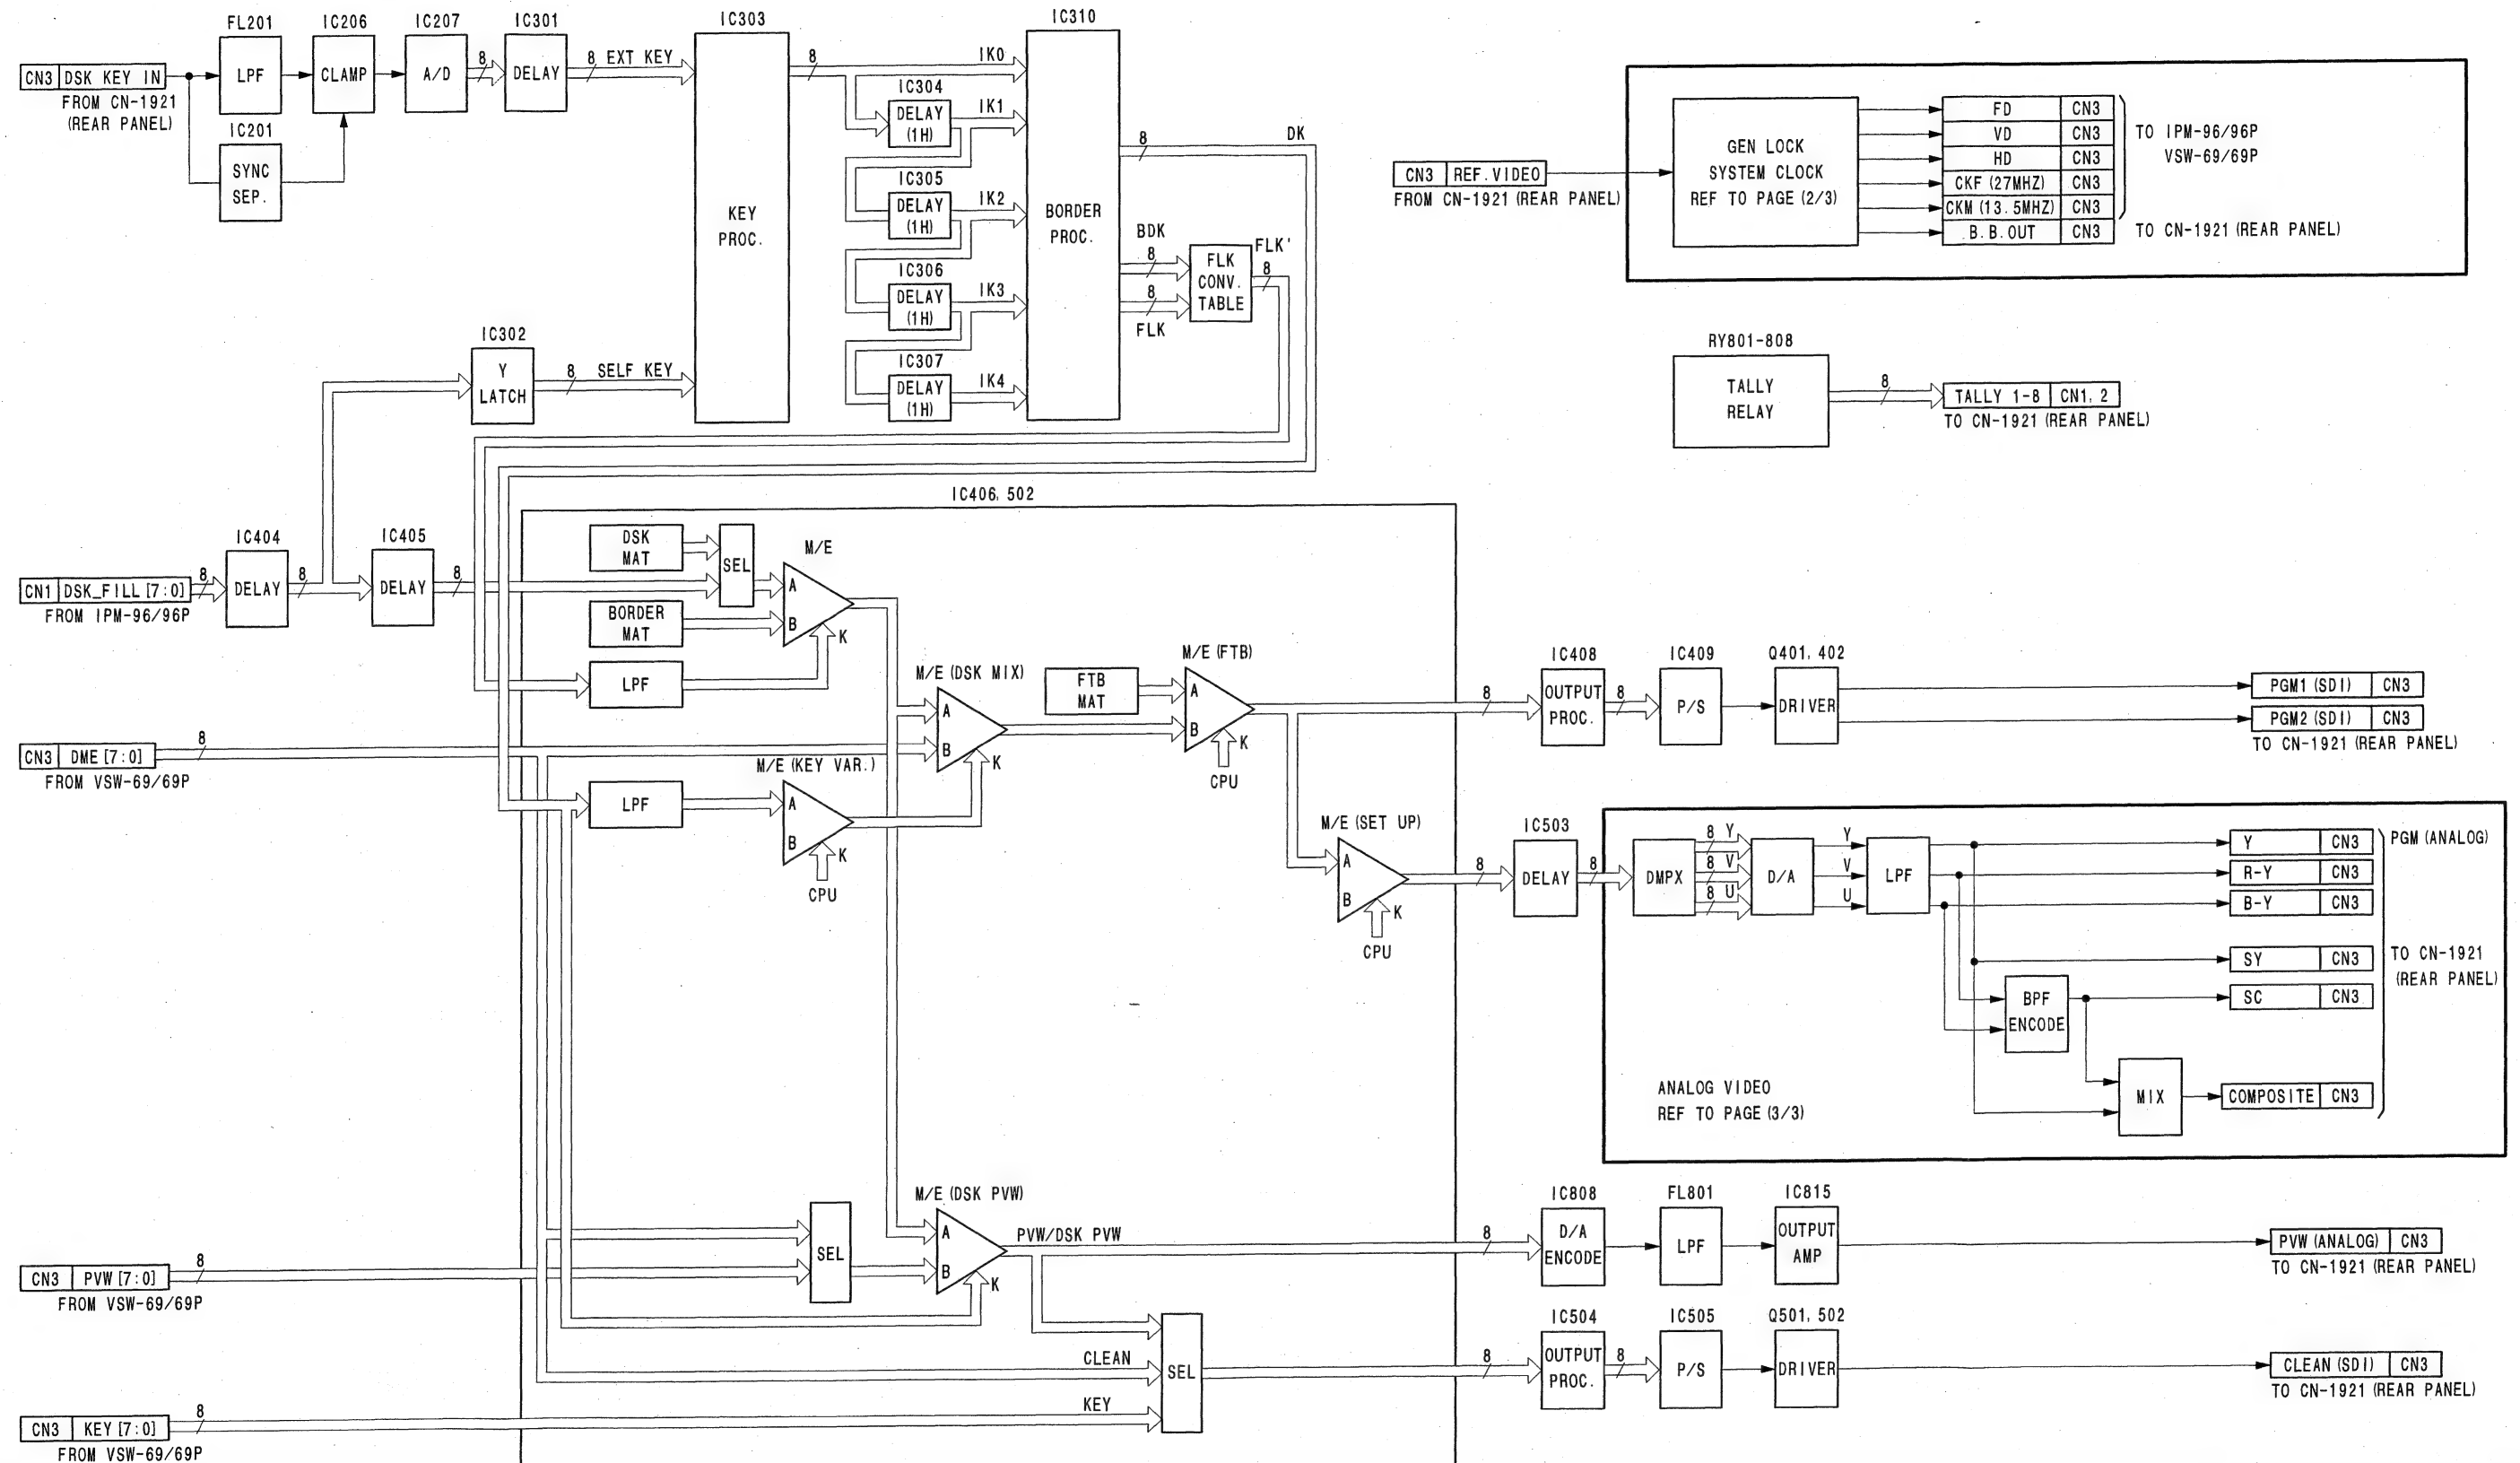

OUTPUT PROCESSOR BOARD
OPM-39/39P (1/3)
 DFS-700/700P


DFS-700 (J) : S/N 30001 and Higher
 DFS-700 (UC) : S/N 10001 and Higher
 DFS-700P (CE) : S/N 40001 and Higher

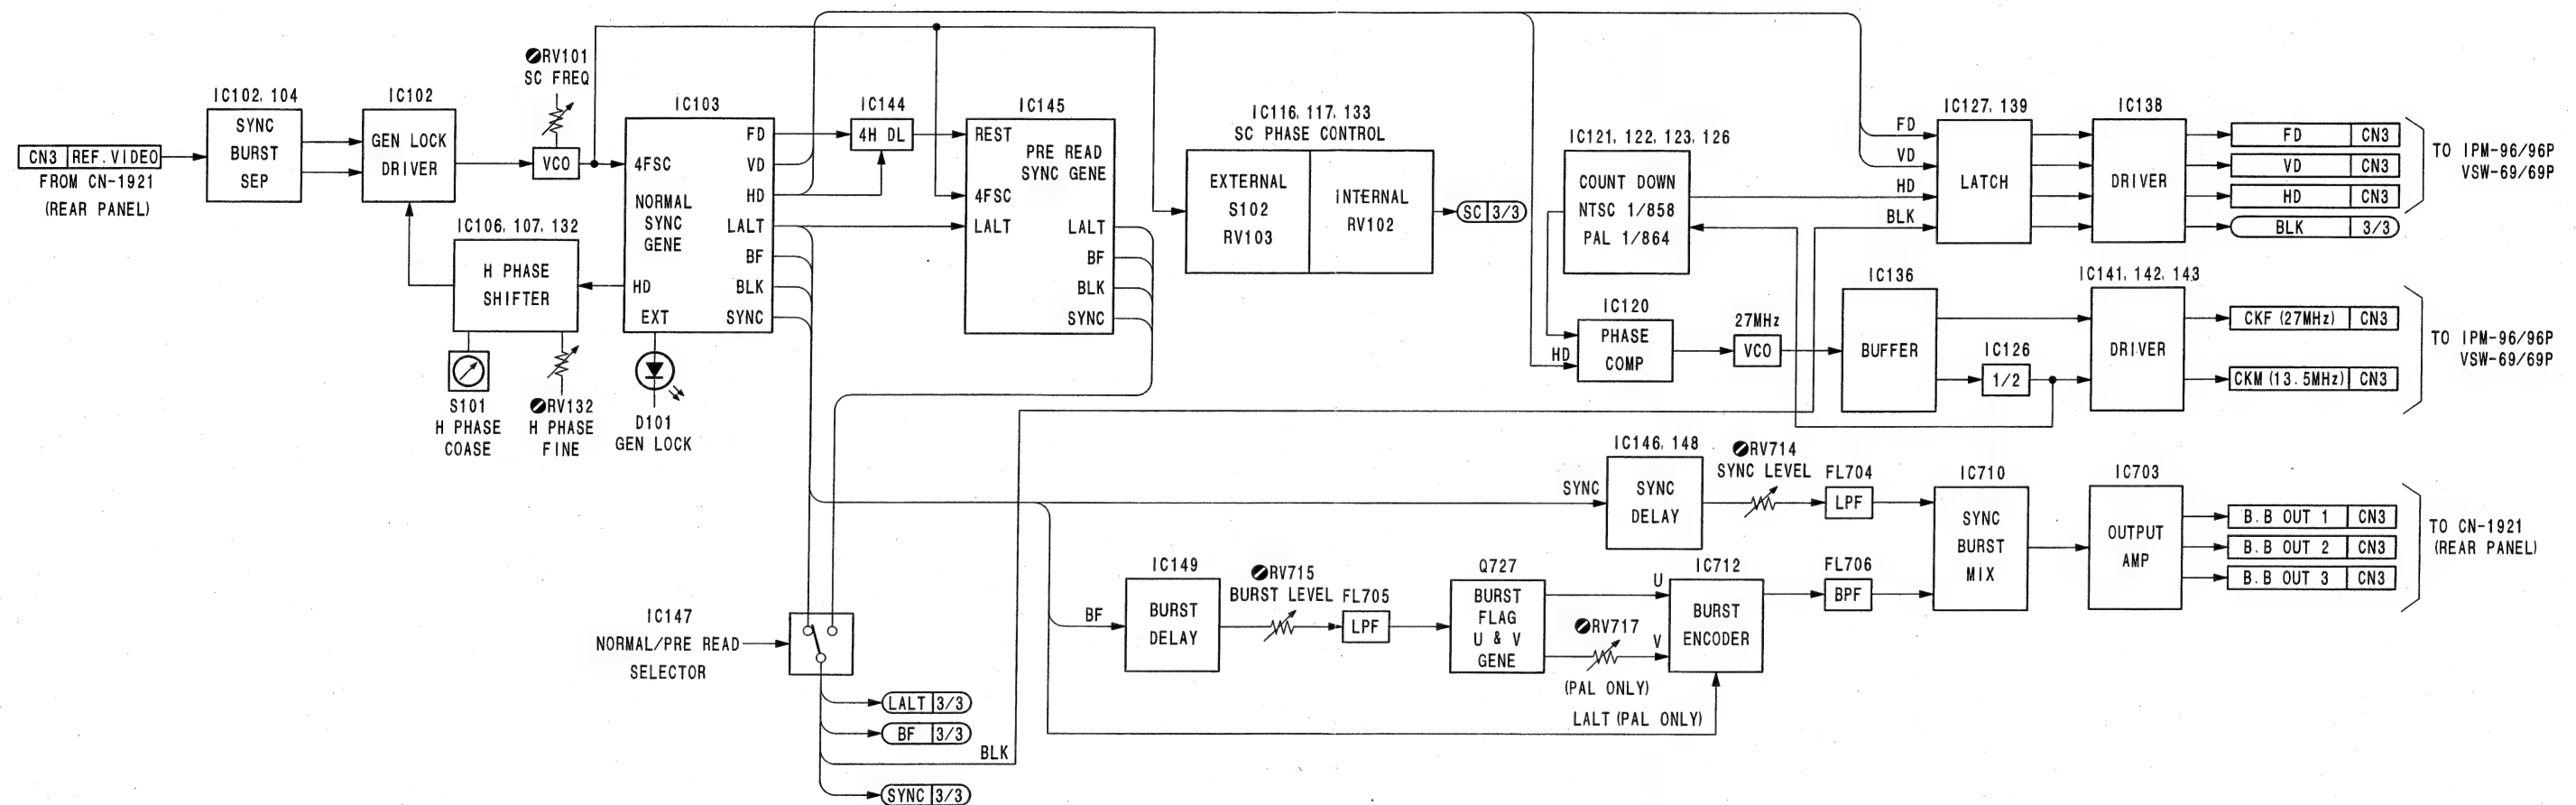

OUTPUT PROCESSOR BOARD
OPM-39/39P (2/3)
 DFS-700/700P

OPM-39/39P (3/3) OPM-39/39P (3/3)


DFS-700 (J) : S/N 30001 and Higher
 DFS-700 (UC) : S/N 10001 and Higher
 DFS-700P (CE) : S/N 40001 and Higher

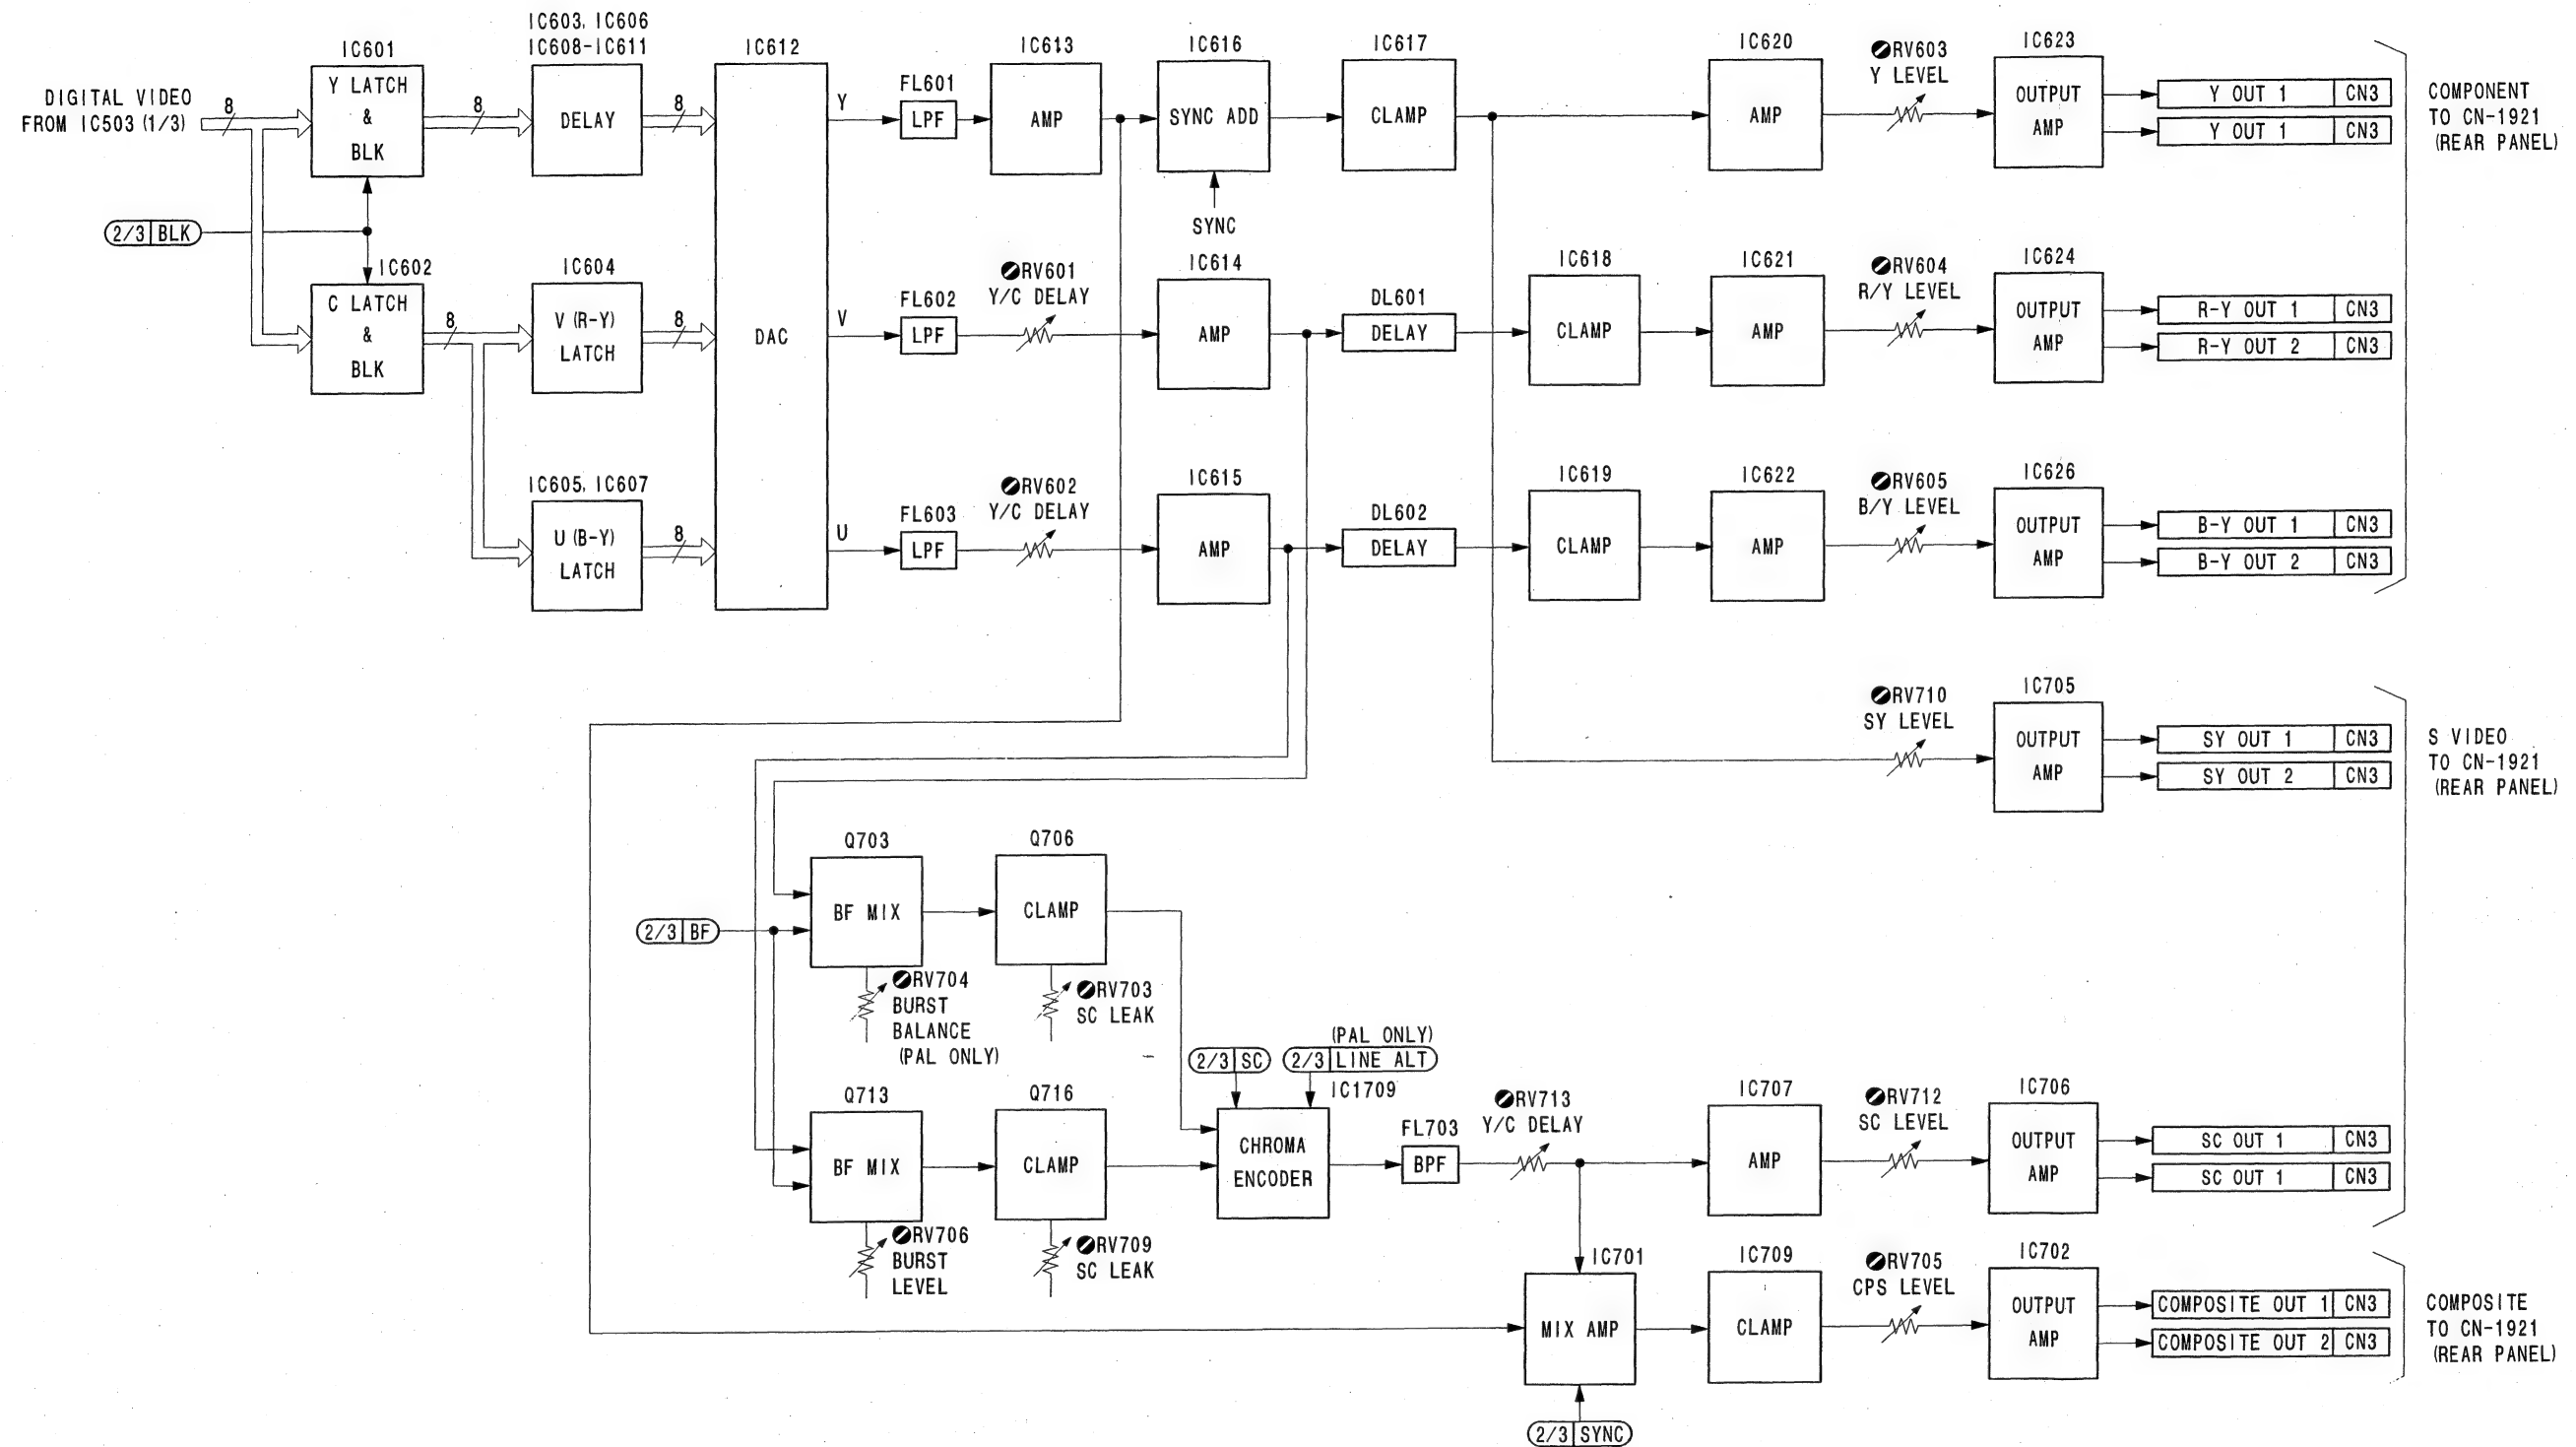

OUTPUT PROCESSOR BOARD
OPM-39/39P (3/3)
 DFS-700/700P


VIF-19/19P (1/2) VIF-19/19P (1/2)

BKDF-702 (J) : S/N 30001 and Higher
 BKDF-702 (UC) : S/N 10001 and Higher
 BKDF-702P (CE) : S/N 40001 and Higher

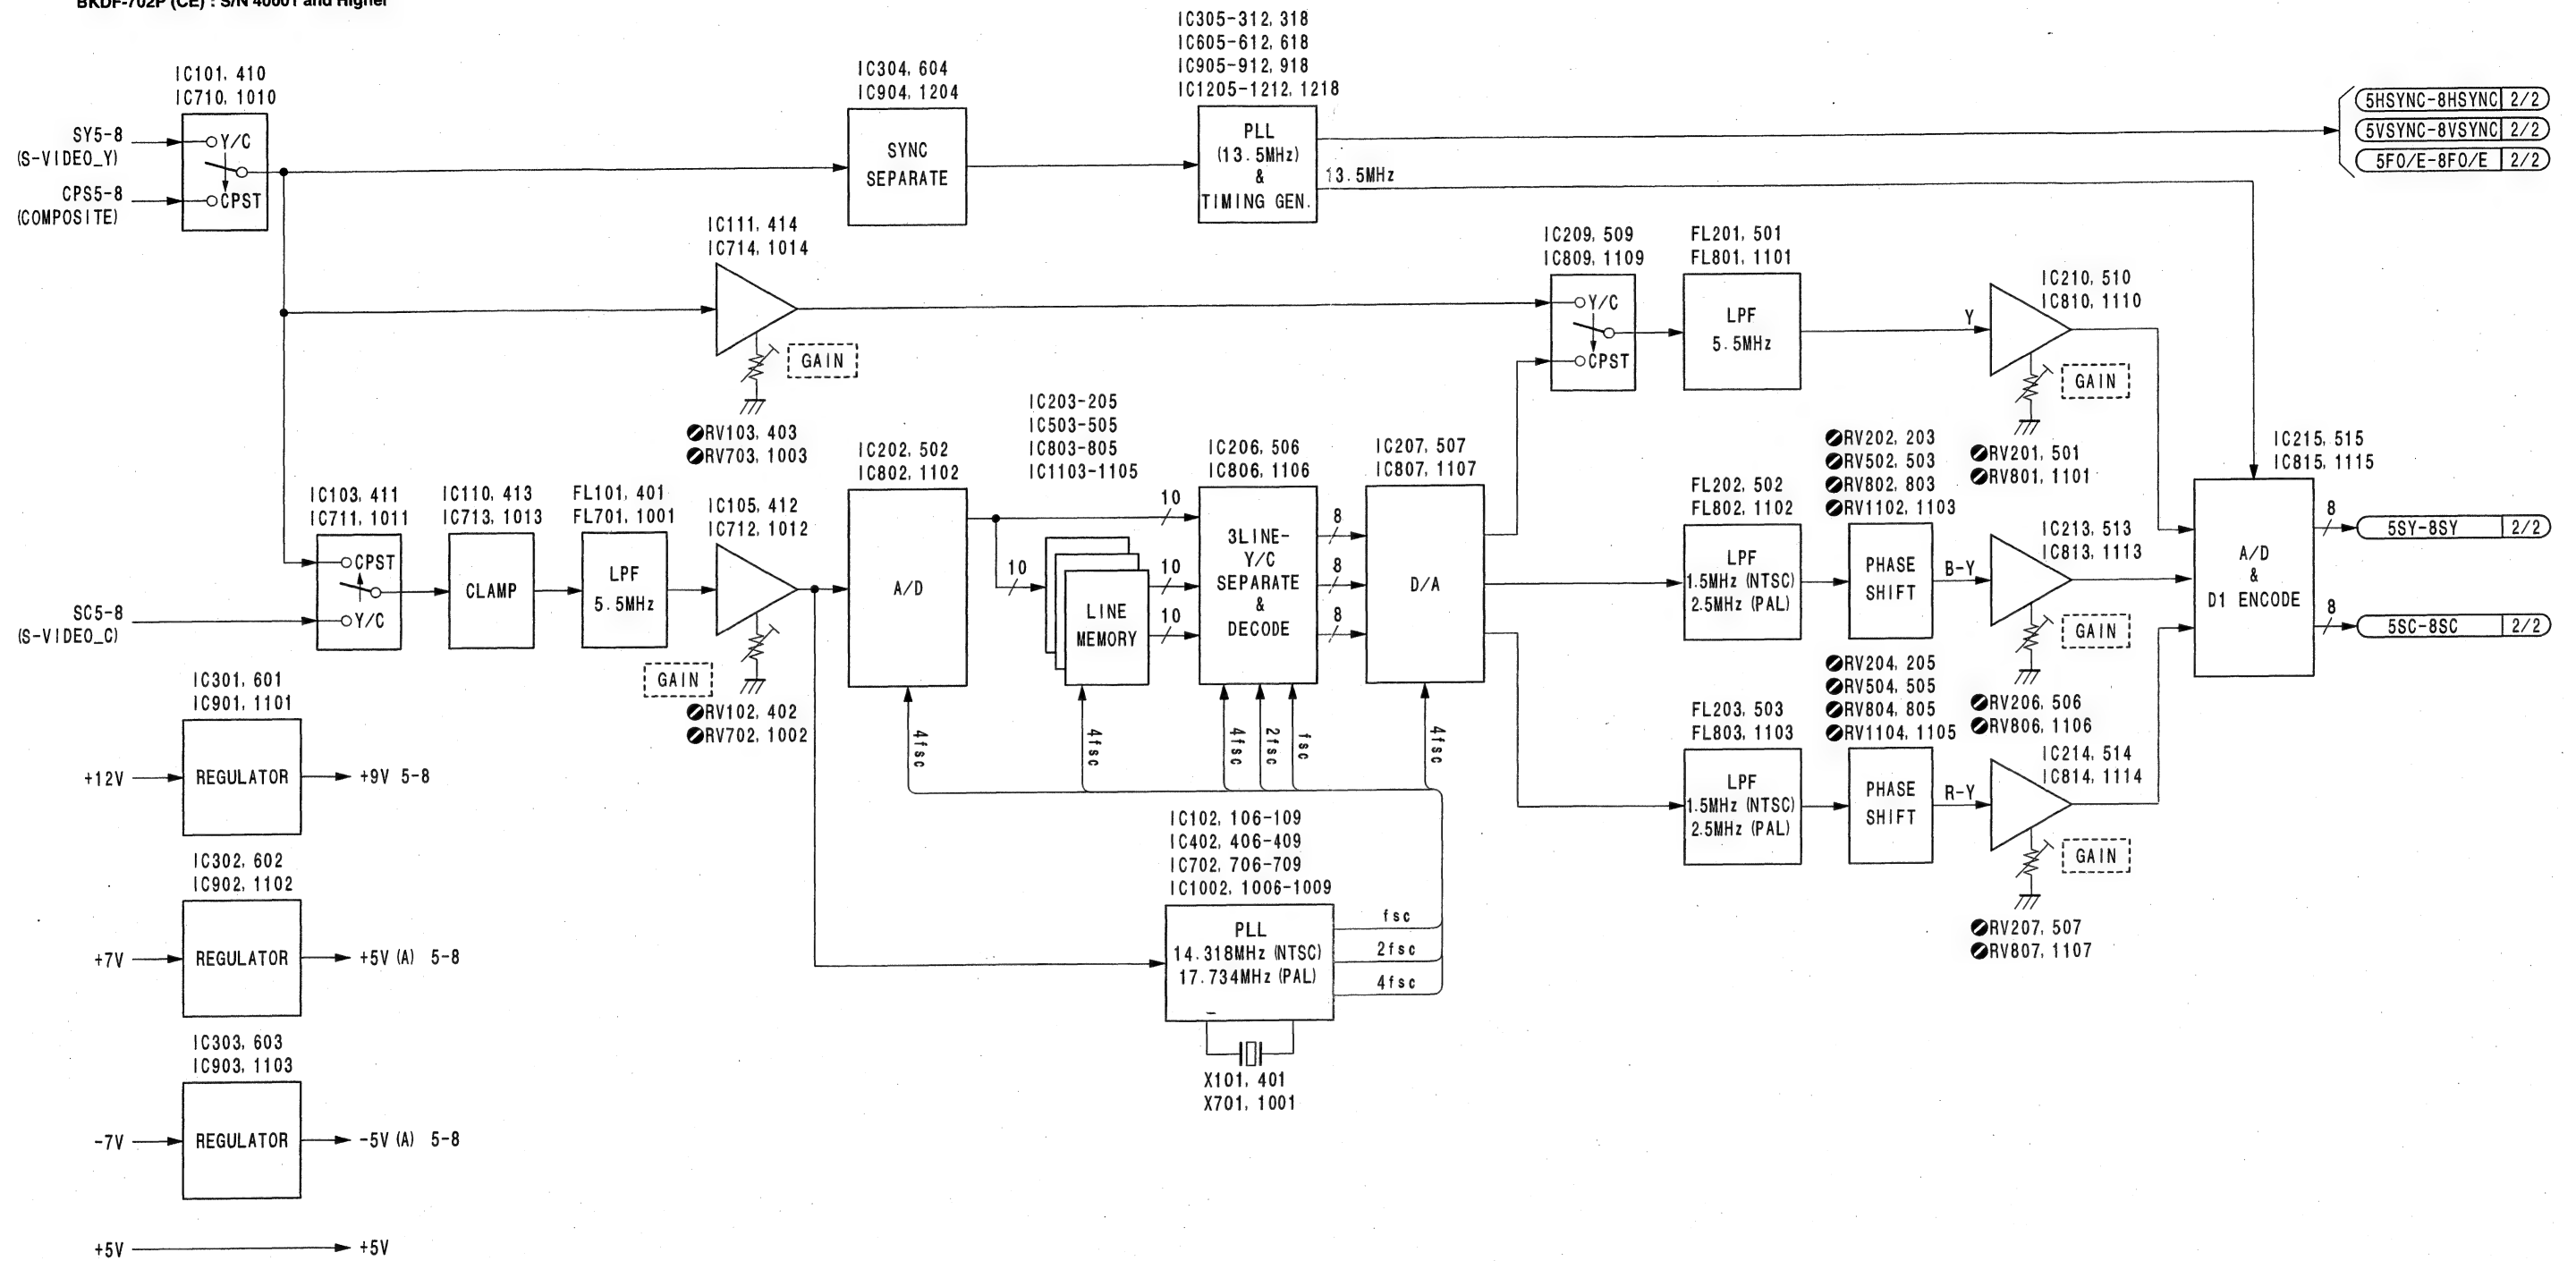

ANALOG COMPOSITE INPUT BOARD
VIF-19/19P (1/2)
 BKDF-702/702P


BKDF-702 (J) : S/N 30001 and Higher
 BKDF-702 (UC) : S/N 10001 and Higher
 BKDF-702P (CE) : S/N 40001 and Higher

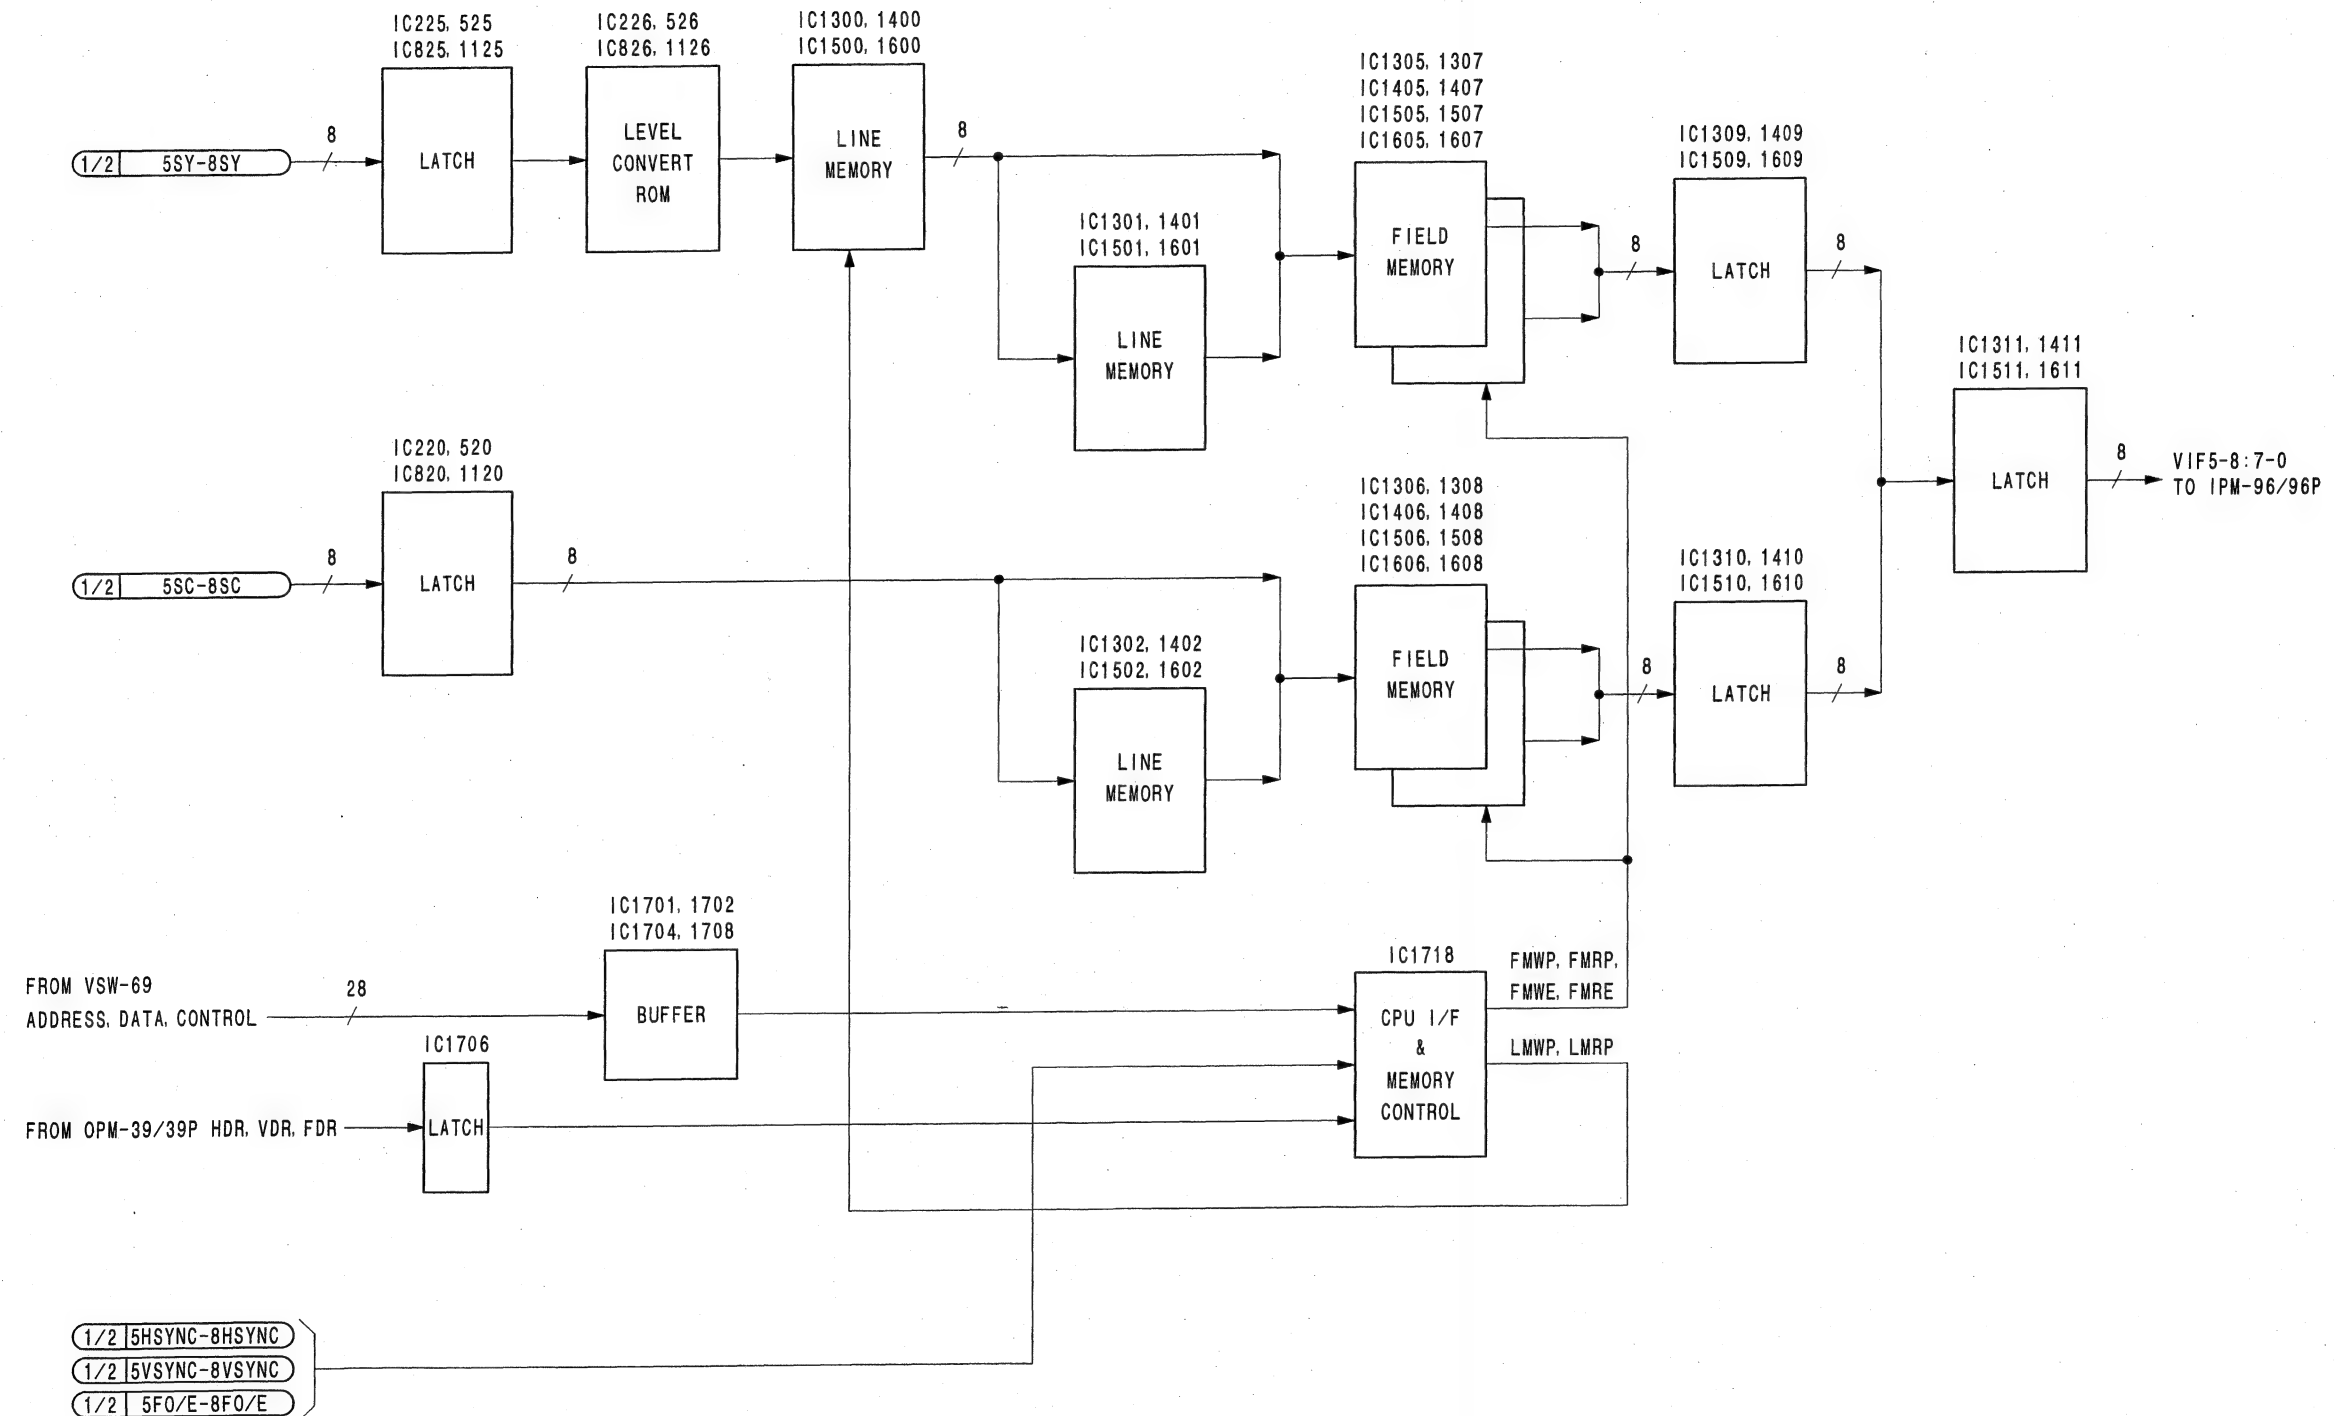

ANALOG COMPOSITE INPUT BOARD
VIF-19/19P (2/2)
 BKDF-702/702P

VIF-20/20P (1/2) VIF-20/20P (1/2)

BKDF-701 (J) : S/N 30001 and Higher
BKDF-701 (UC) : S/N 10001 and Higher
BKDF-701 (CE) : S/N 40001 and Higher

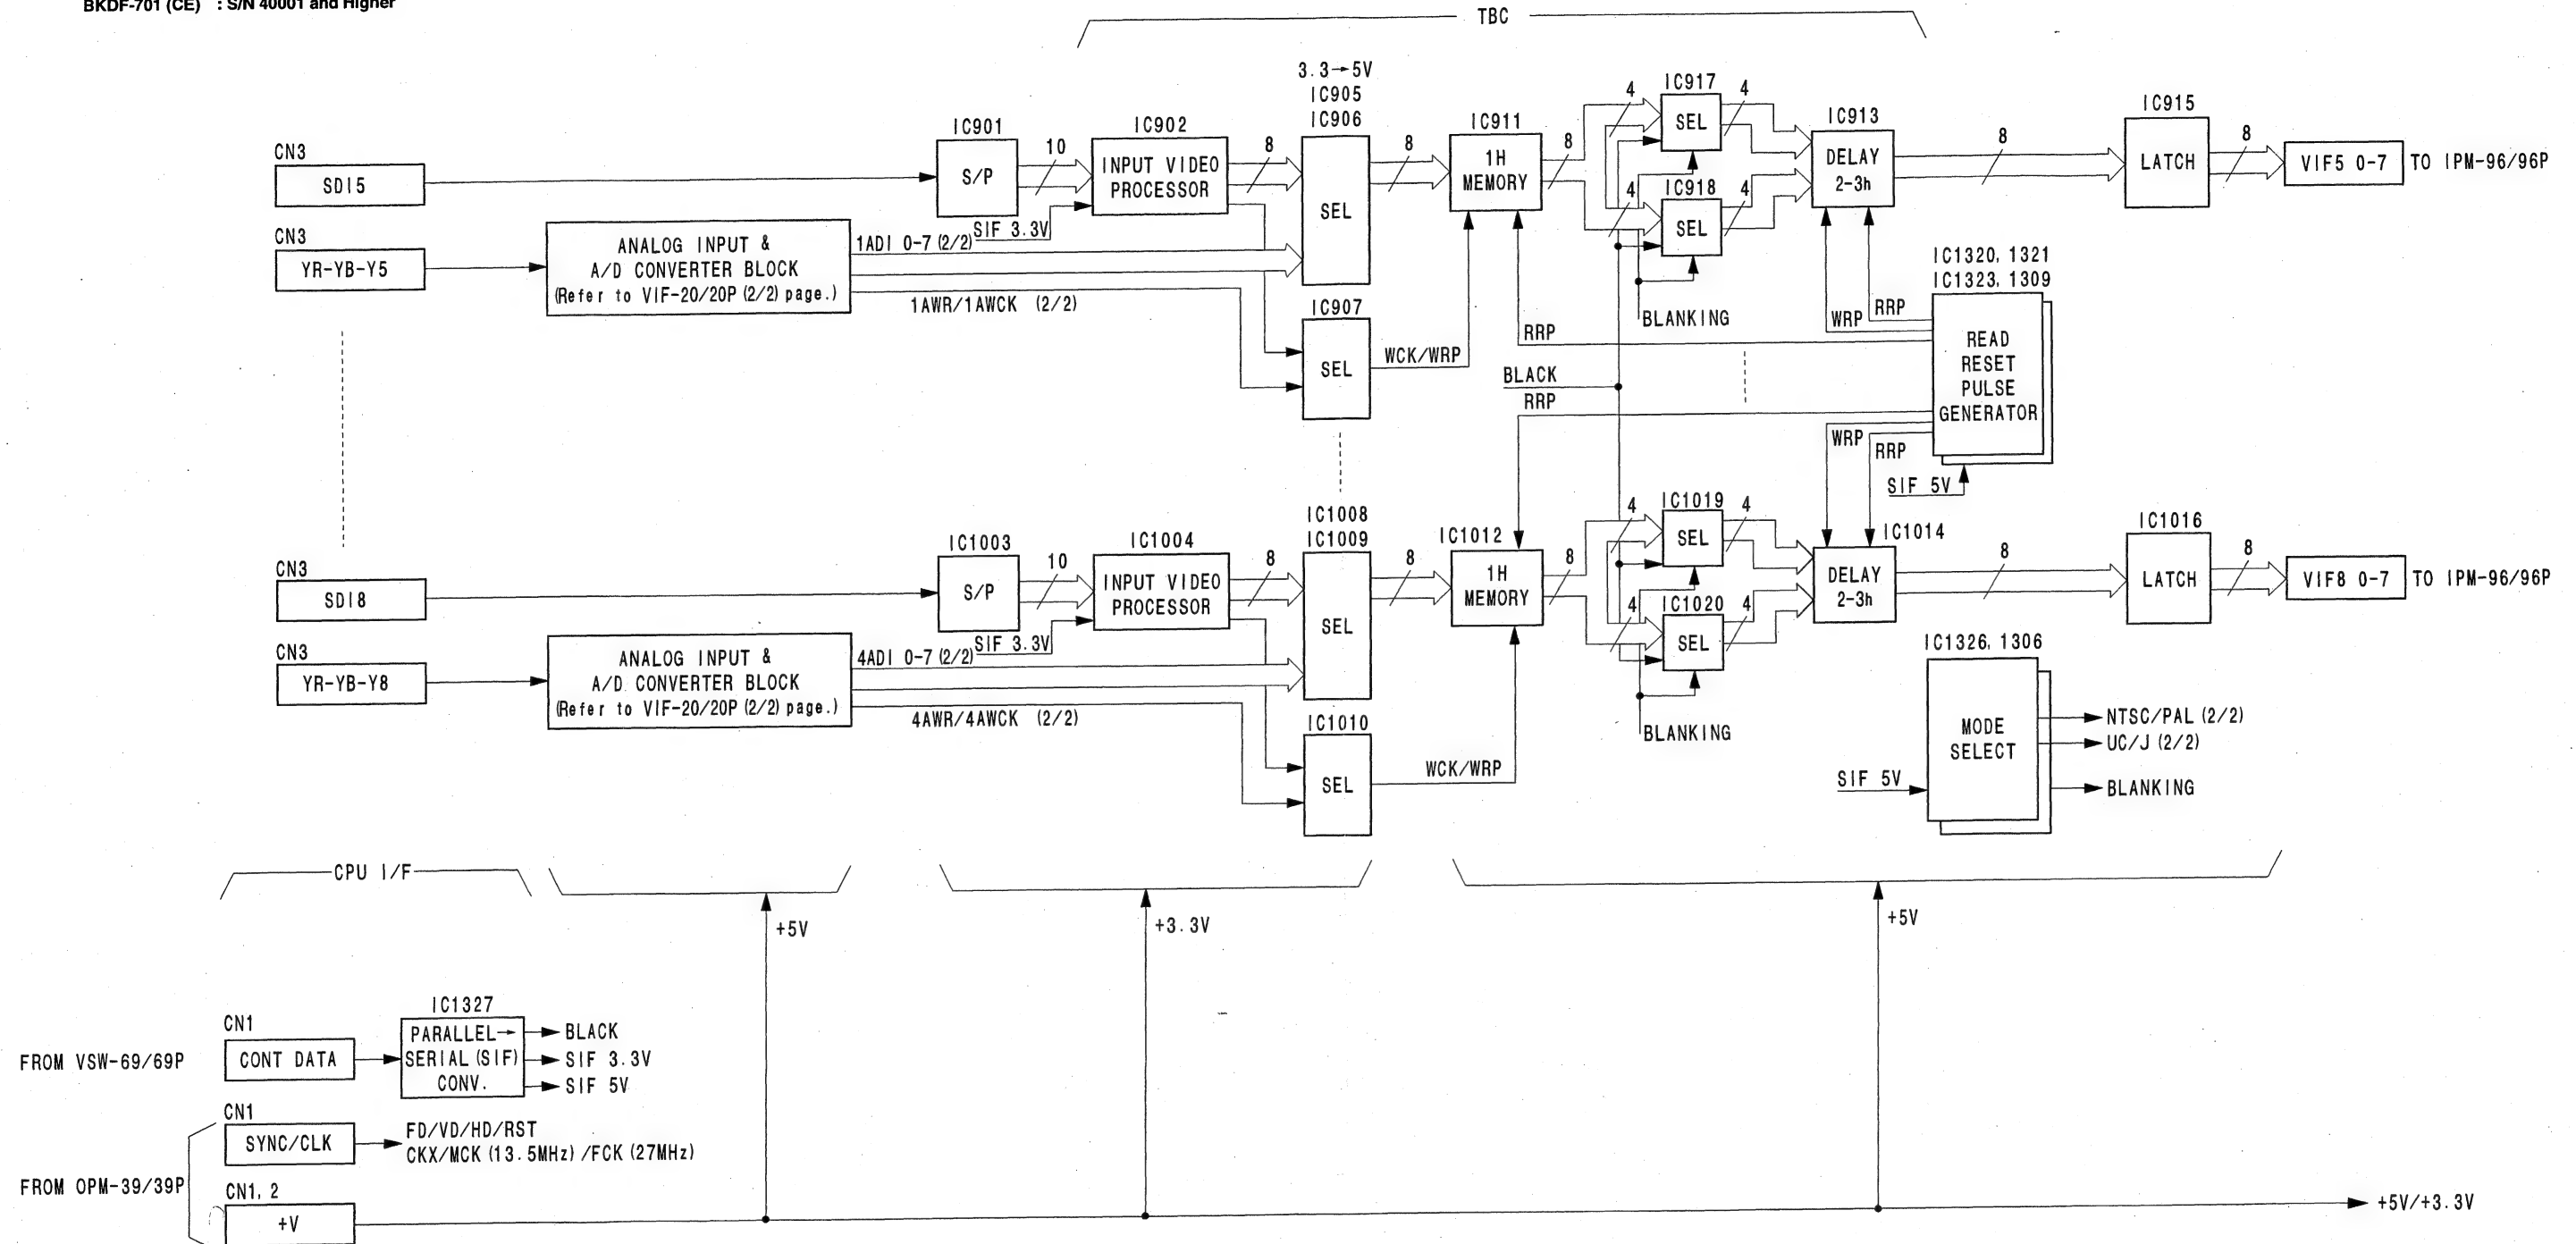


DIGITAL ANALOG INPUT BOARD
VIF-20/20P (1/2)
BKDF-701

DFS-700/700P


VIF-20/20P (2/2) VIF-20/20P (2/2)

BKDF-701 (J) : S/N 30001 and Higher
 BKDF-701 (UC) : S/N 10001 and Higher
 BKDF-701 (CE) : S/N 40001 and Higher

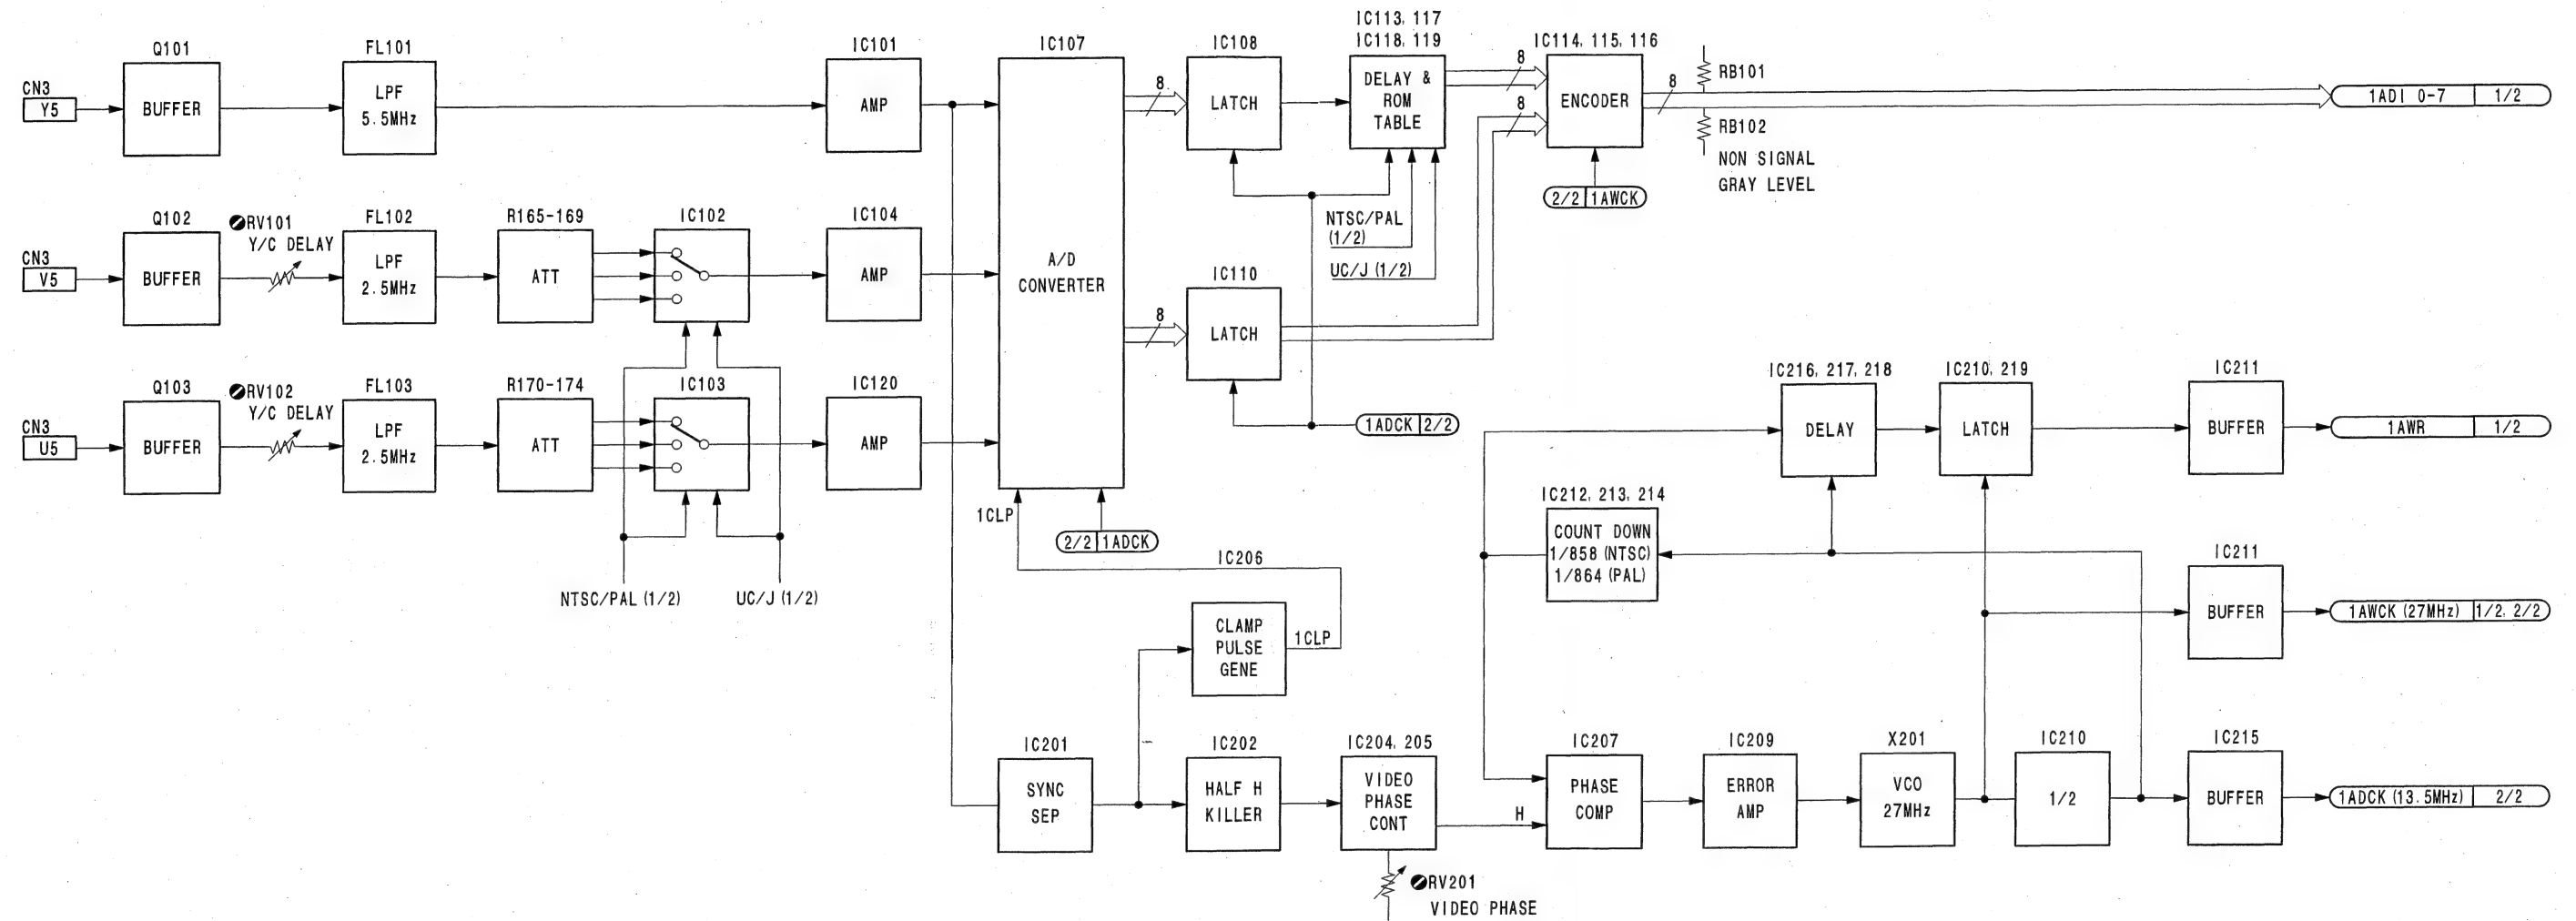

DIGITAL ANALOG INPUT BOARD
VIF-20/20P (2/2)
 BKDF-701

BKDF-712 (J) : S/N 30001 and Higher
 BKDF-712 (UC) : S/N 10001 and Higher
 BKDF-712 (CE) : S/N 40001 and Higher

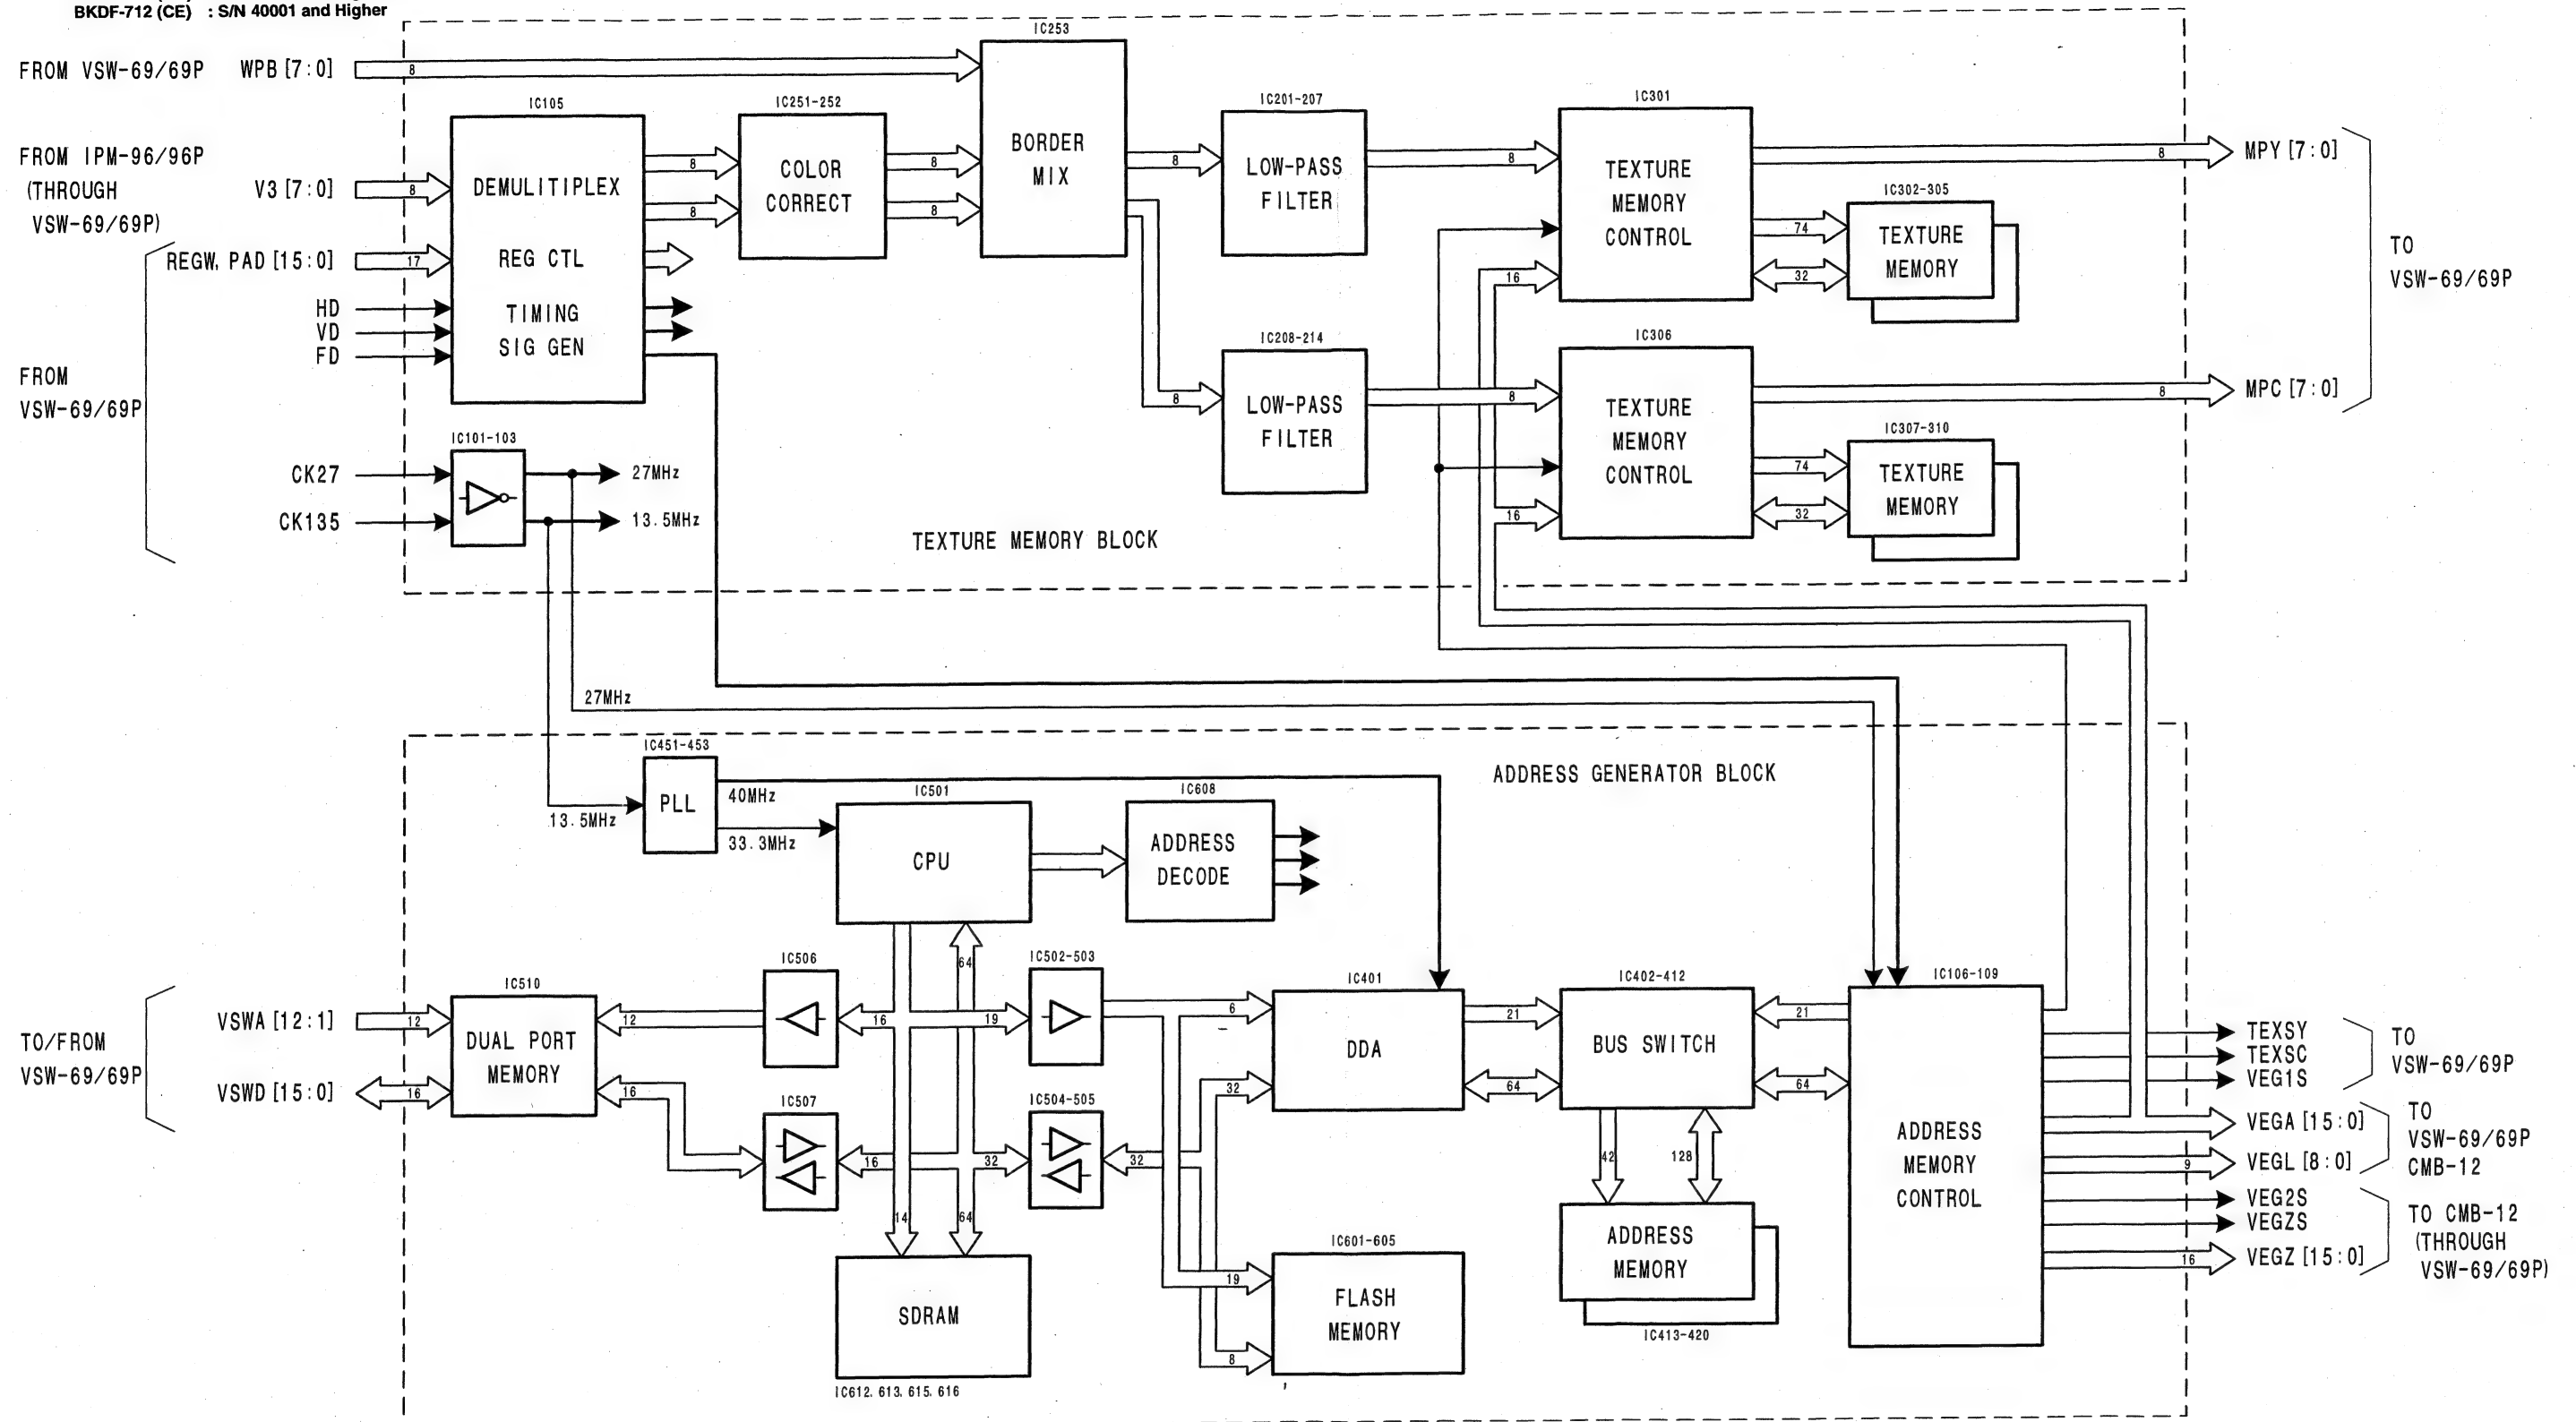


3D VIDEO MAPPING EFFECTS BOARD
VSE-36
 BKDF-712

DFS-700 (J) : S/N 30001 and Higher
DFS-700 (UC) : S/N 10001 and Higher
DFS-700P (CE) : S/N 40001 and Higher



VSW-69/69P (2/3) VSW-69/69P (2/3)


DFS-700 (J) : S/N 30001 and Higher
 DFS-700 (UC) : S/N 10001 and Higher
 DFS-700P (CE) : S/N 40001 and Higher

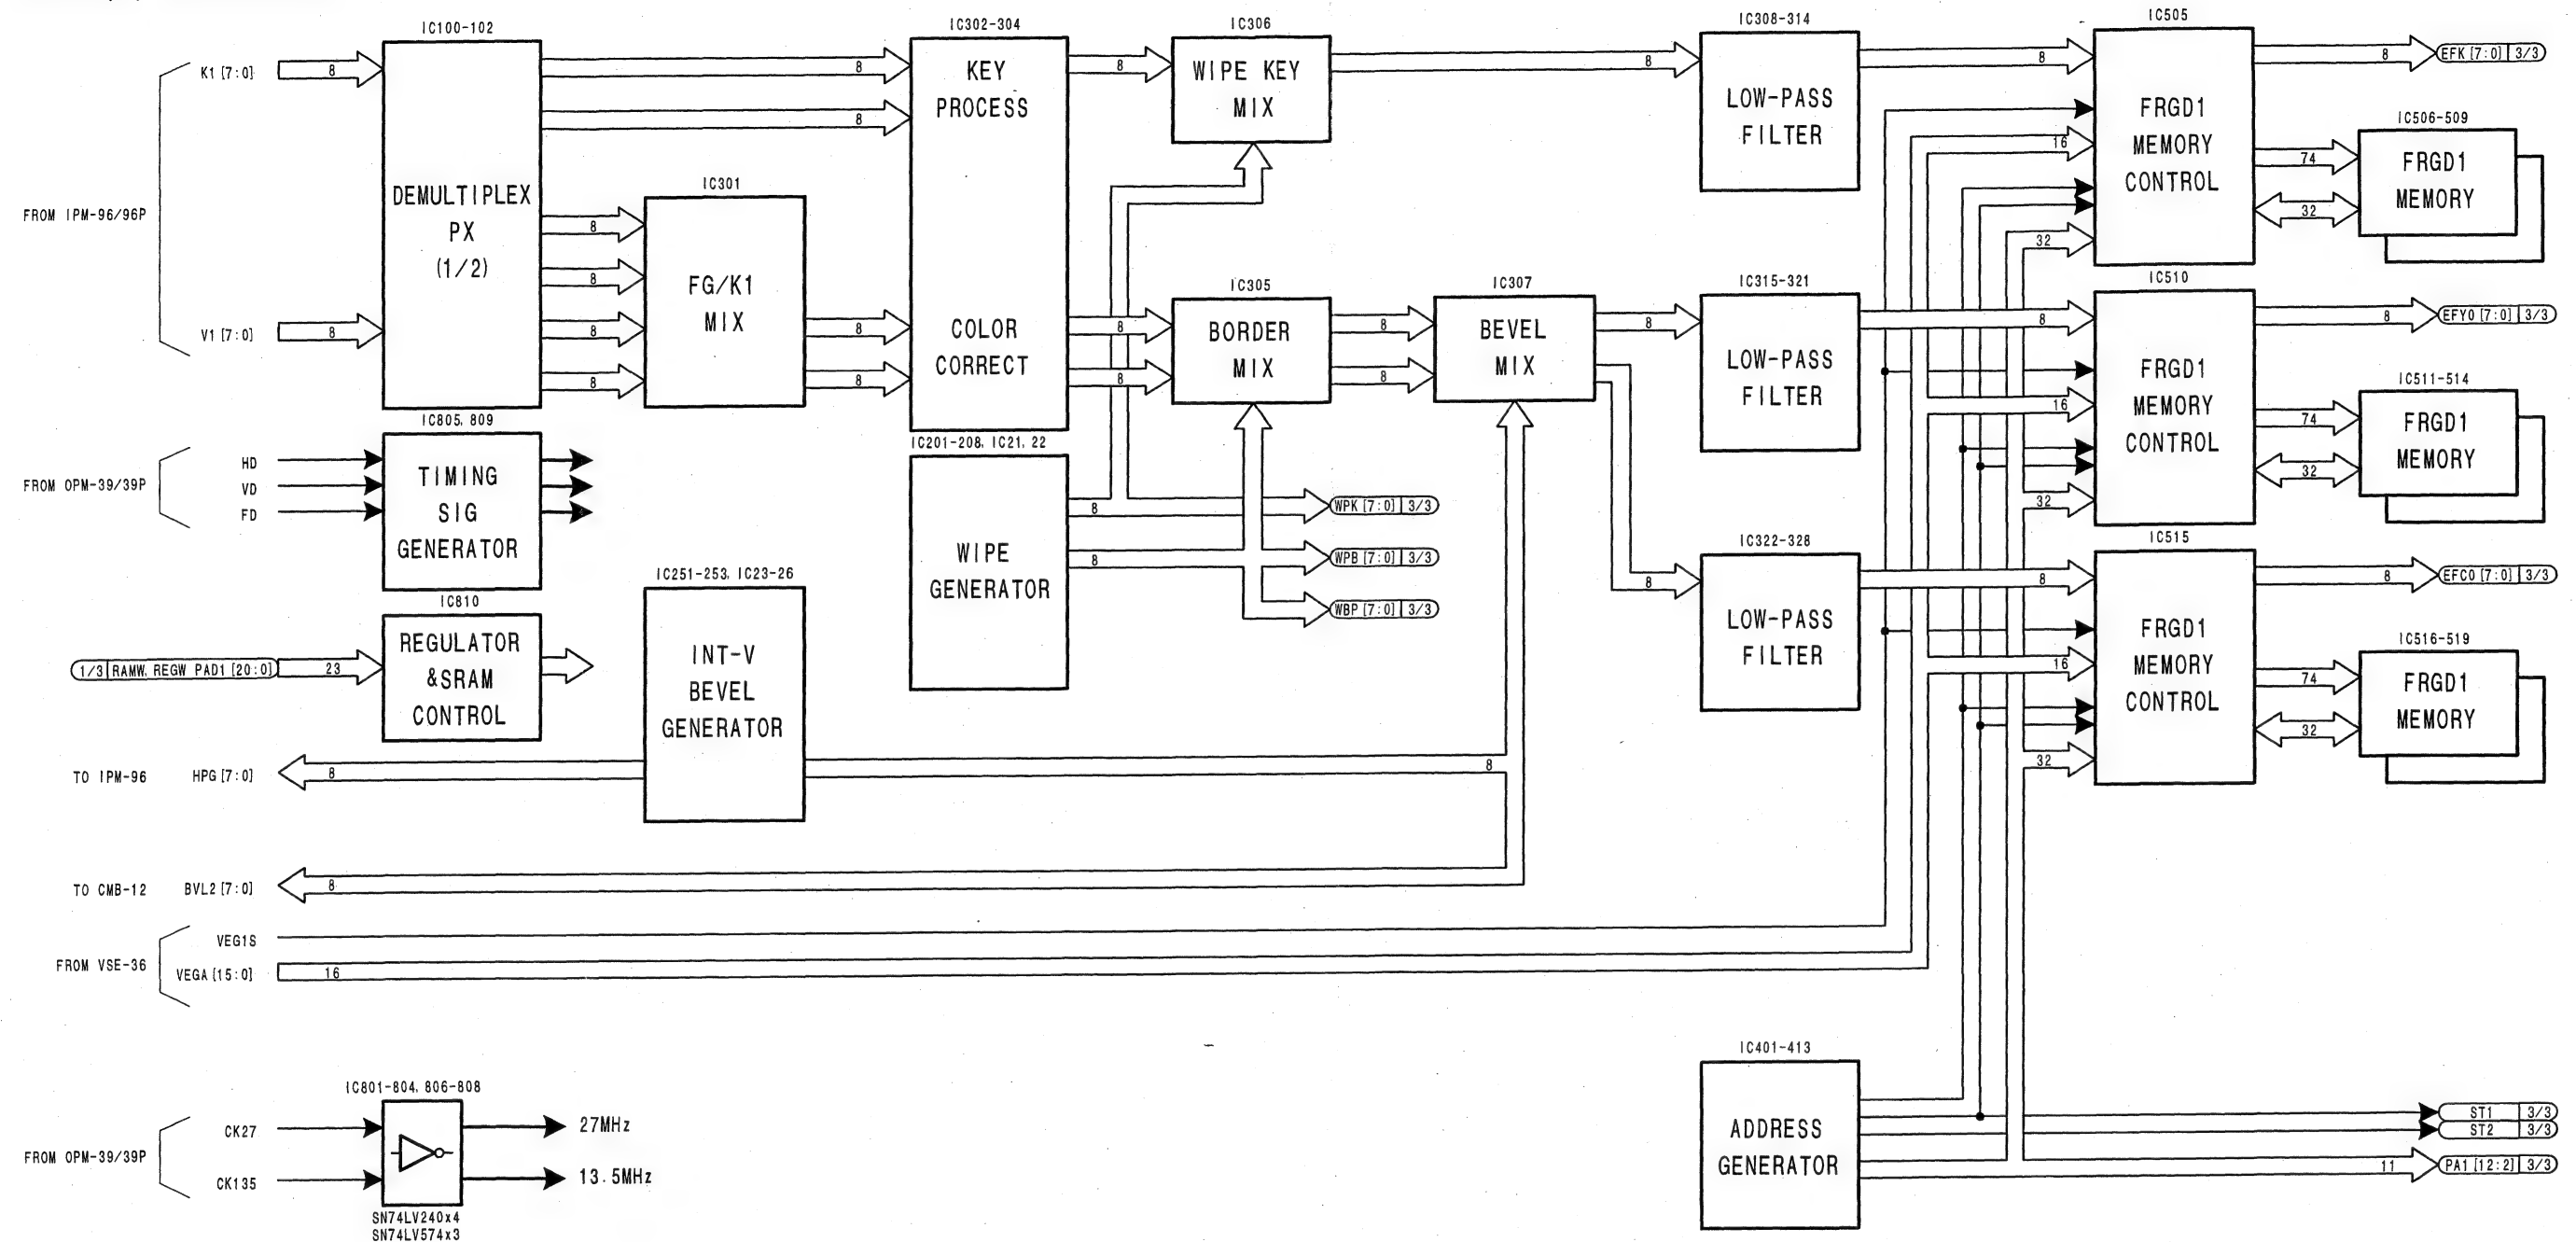

VIDEO PROCESSOR BOARD
VSW-69/69P (2/3)
 DFS-700/700P

VSW-69/69P (3/3) VSW-69/69P (3/3)

DFS-700 (J) : S/N 30001 and Higher
 DFS-700 (UC) : S/N 10001 and Higher
 DFS-700P (CE) : S/N 40001 and Higher

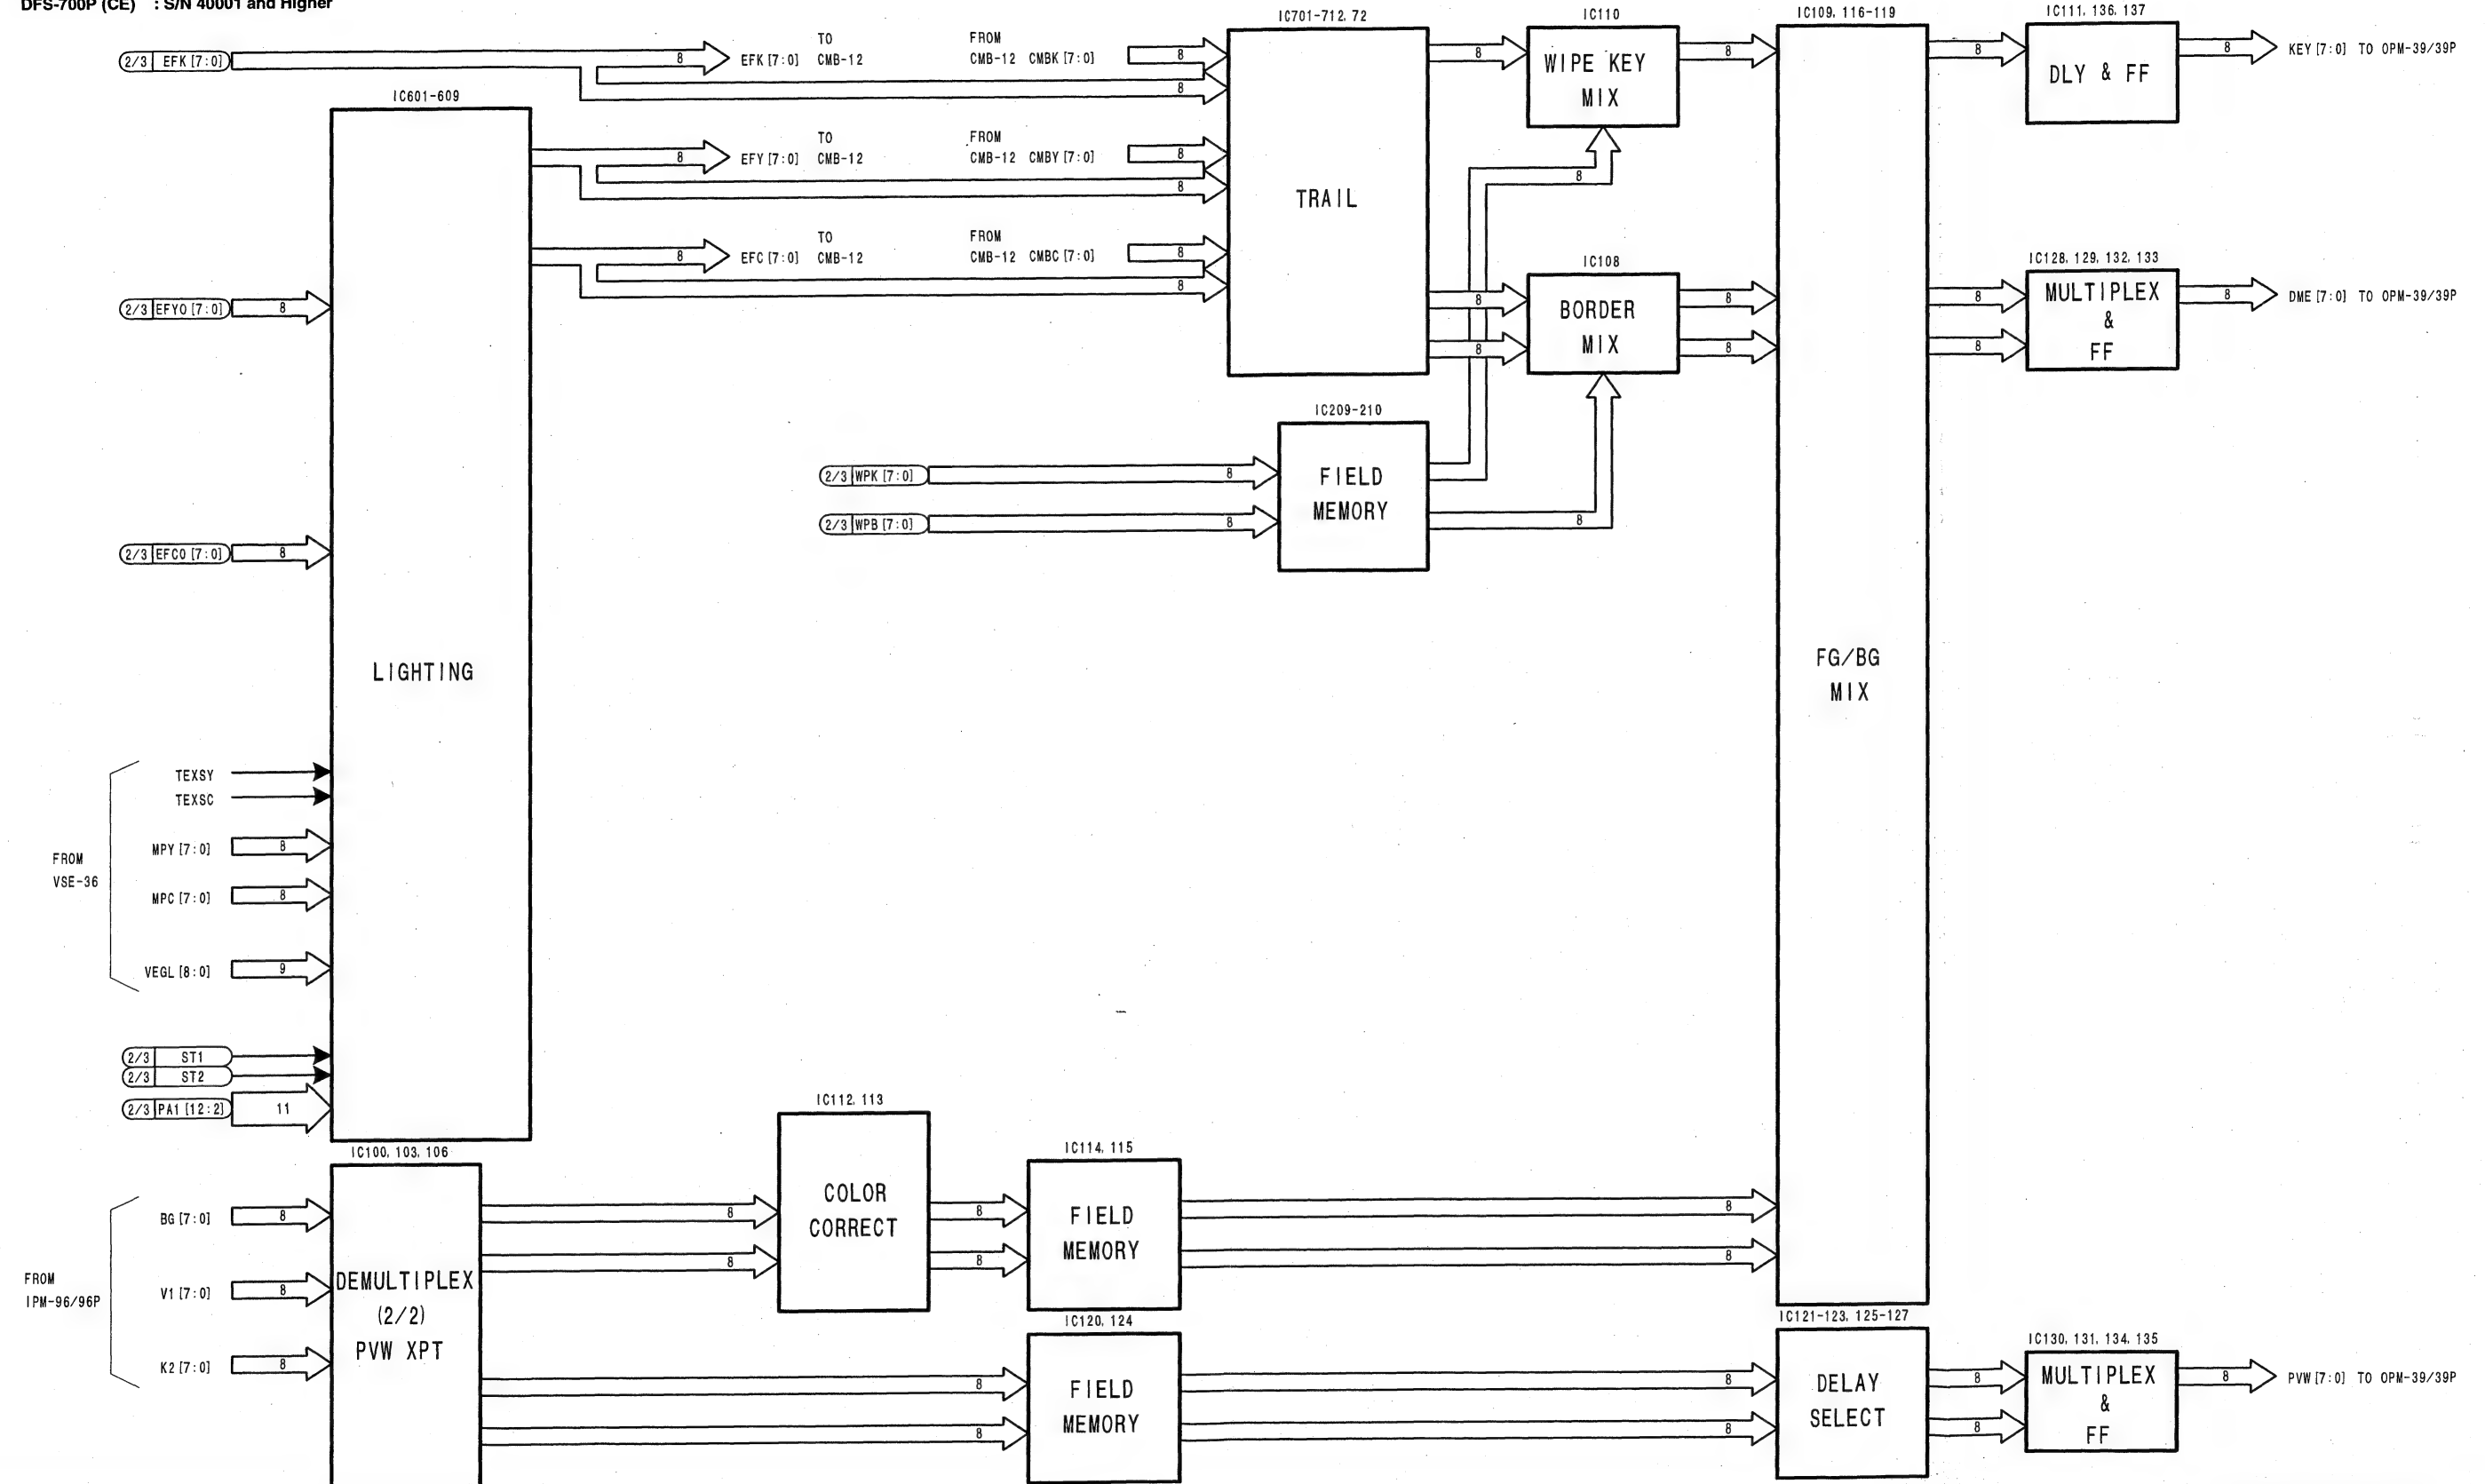

VIDEO PROCESSOR BOARD
VSW-69/69P (3/3)
 DFS-700/700P

Section 4
Schematic Diagrams

Index

DFS-700/700P (Processor)

Board Name	Function	Page
CN-1921	Connector Board	4-11
CN-1942	Connector Board	4-12
DD-37	DC-DC Conversion Board	4-17
IPM-96/96P	Input Processor Board	4-18
MB-874	Motherboard	4-58
OPM-39/39P	Output Processor Board	4-60
VSW-69/69P	Video Processor Board	4-175
FRAME WIRING (1/4) to (3/4)		4-196

DFS-700/700P (Control Panel)

Board Name	Function	Page
CPU-305	CPU Board	4-13
KY-466	Switch Board	4-42
KY-467	Switch Board	4-49
KY-468	Switch Board	4-50
LC-40	Joystick Board	4-52
LE-227	Display LED Board	4-53
LE-233	7-segment LED Board	4-54
LE-234	7-segment LED Board	4-55
LE-235	LED Board	4-56
VR-263	Volume Board	4-165
VR-264	Volume Board	4-165
FRAME WIRING (4/4)		4-202

BKDF-701

Board Name	Function	Page
VIF-20/20P	Digital Analog Input Board	4-146

BKDF-702/702P

Board Name	Function	Page
VIF-19/19P (Suffix -12)	Analog Composite Input Board	4-75
VIF-19 (Suffix -11)	Analog Composite Input Board	4-99
VIF-19P (Suffix -11)	Analog Composite Input Board	4-123

BKDF-711

Board Name	Function	Page
CMB-12	Digital Multi Effects Board	4-2


BKDF-712

Board Name	Function	Page
VSE-36	3D Video Mapping Effects Board	4-166


CMB-12 (1/8) CMB-12 (1/8)

BKDF-711 (J): S/N 30001 and Higher
BKDF-711 (UC): S/N 10001 and Higher
BKDF-711 (CE): S/N 40001 and Higher


1

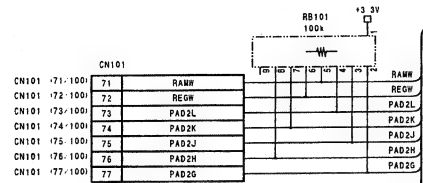


2

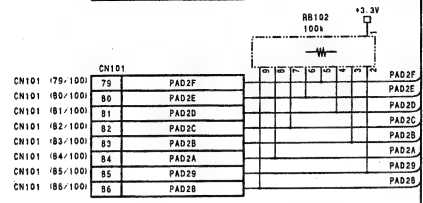
















































3

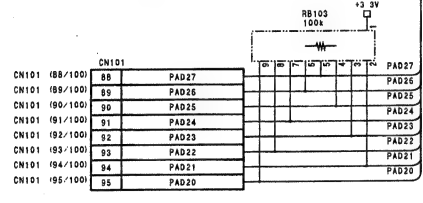

4

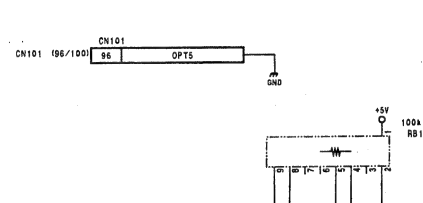

5

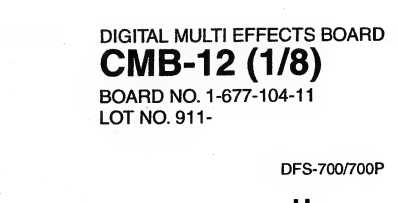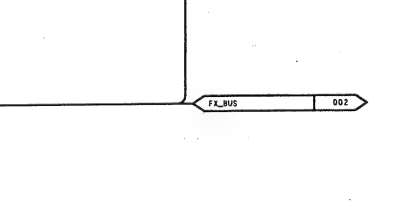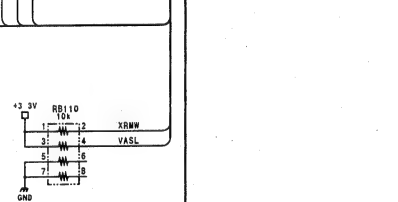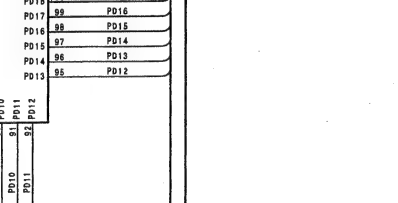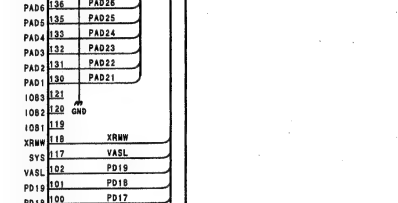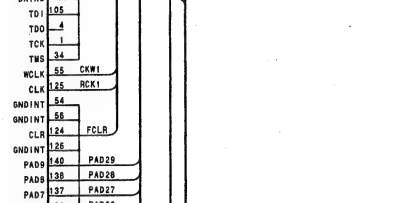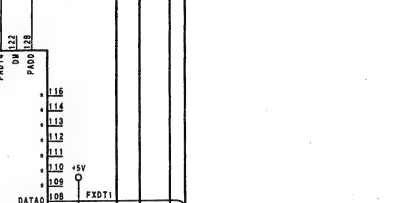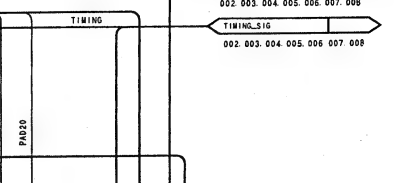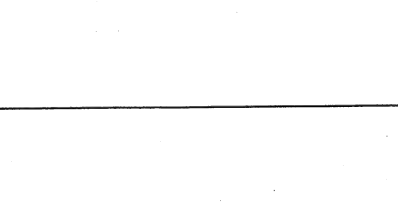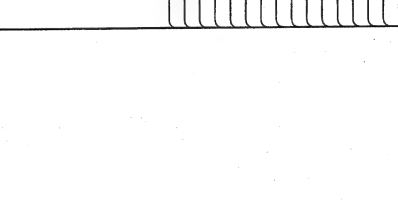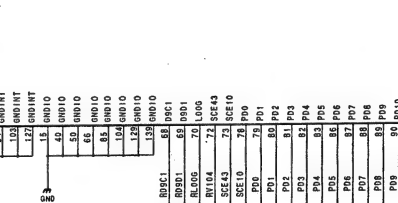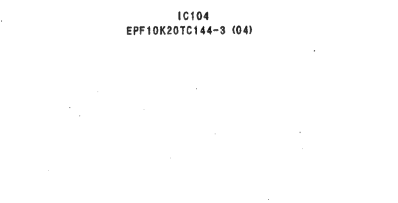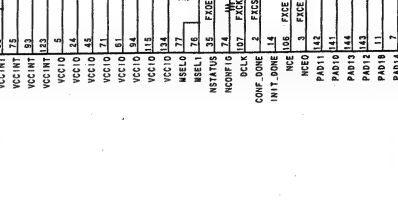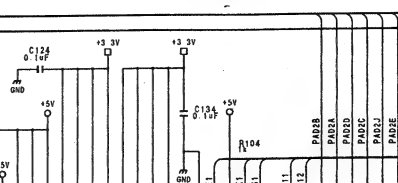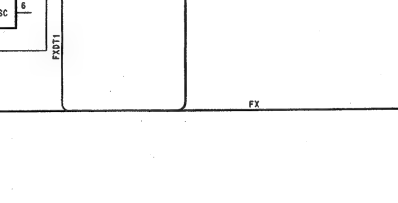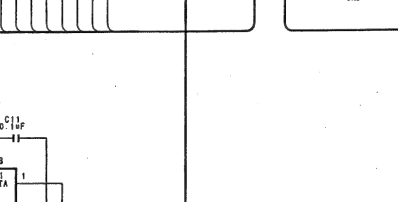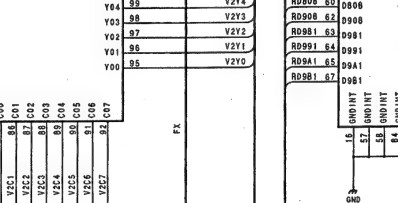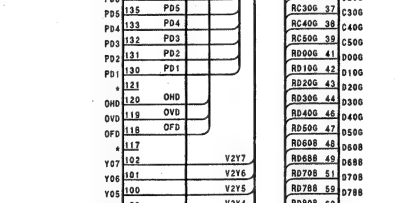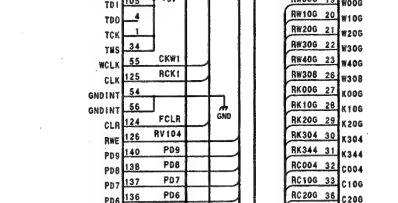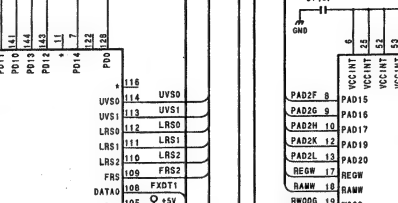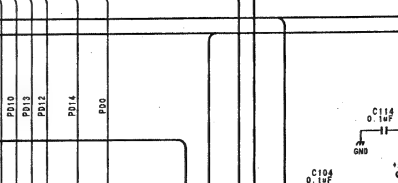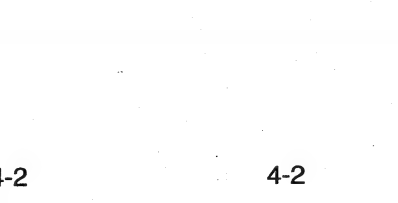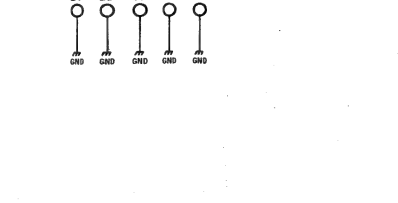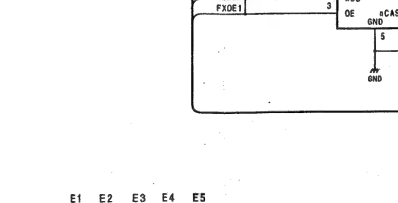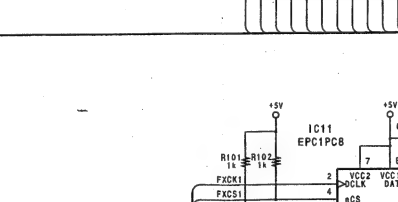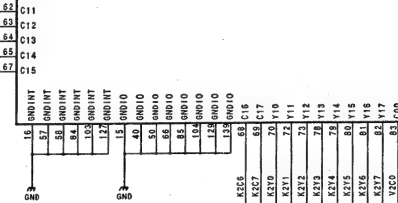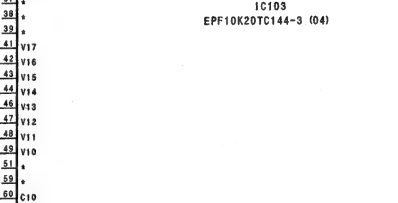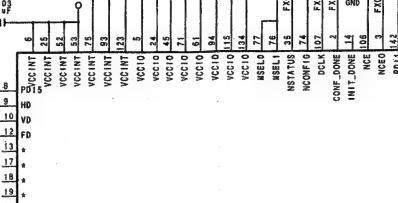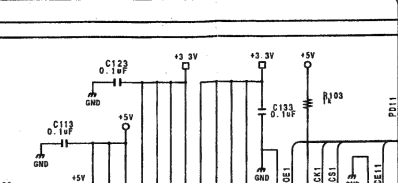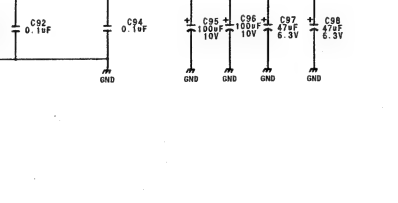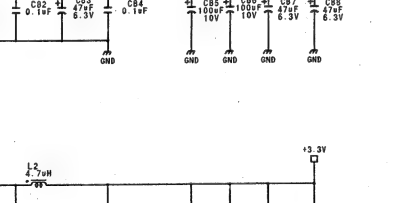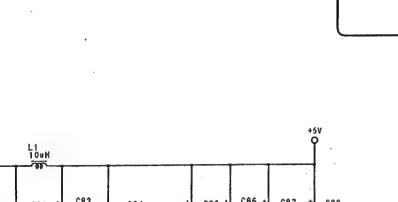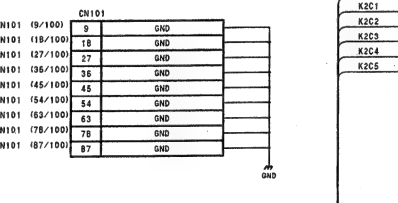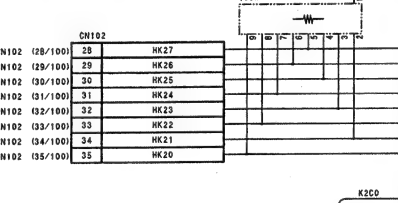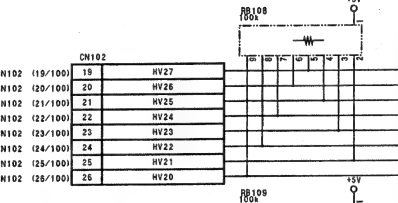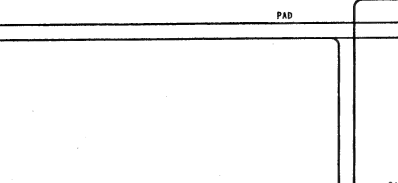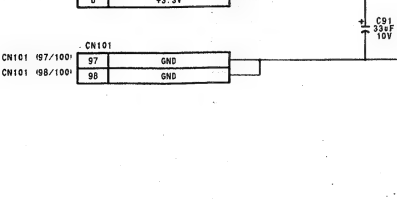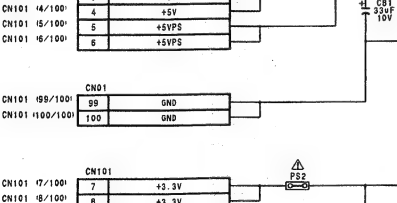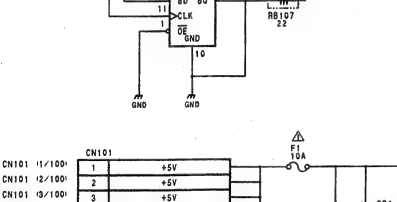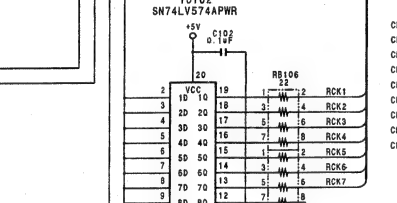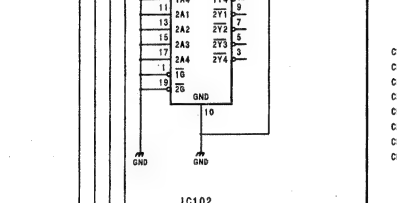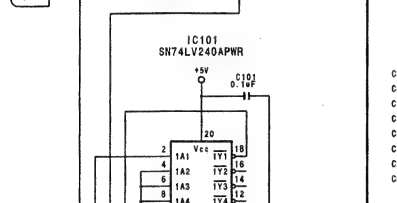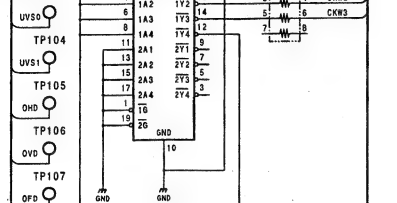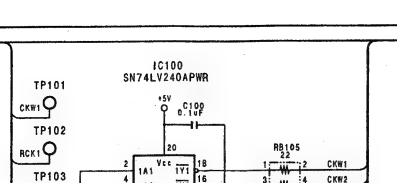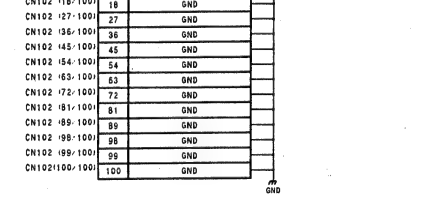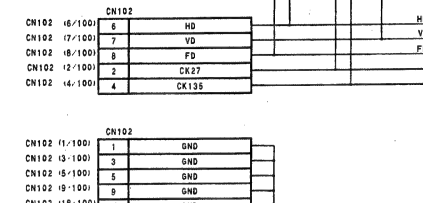

DIGITAL MULTI EFFECTS BOARD
CMB-12 (1/8)
BOARD NO. 1-677-104-11
LOT NO. 911-

4-2

4-2

DFS-700/700P

A

B

C

D


E

F

G

H

BKDF-711 (J): S/N 30001 and Higher
BKDF-711 (UC): S/N 10001 and Higher
BKDF-711 (CE): S/N 40001 and Higher

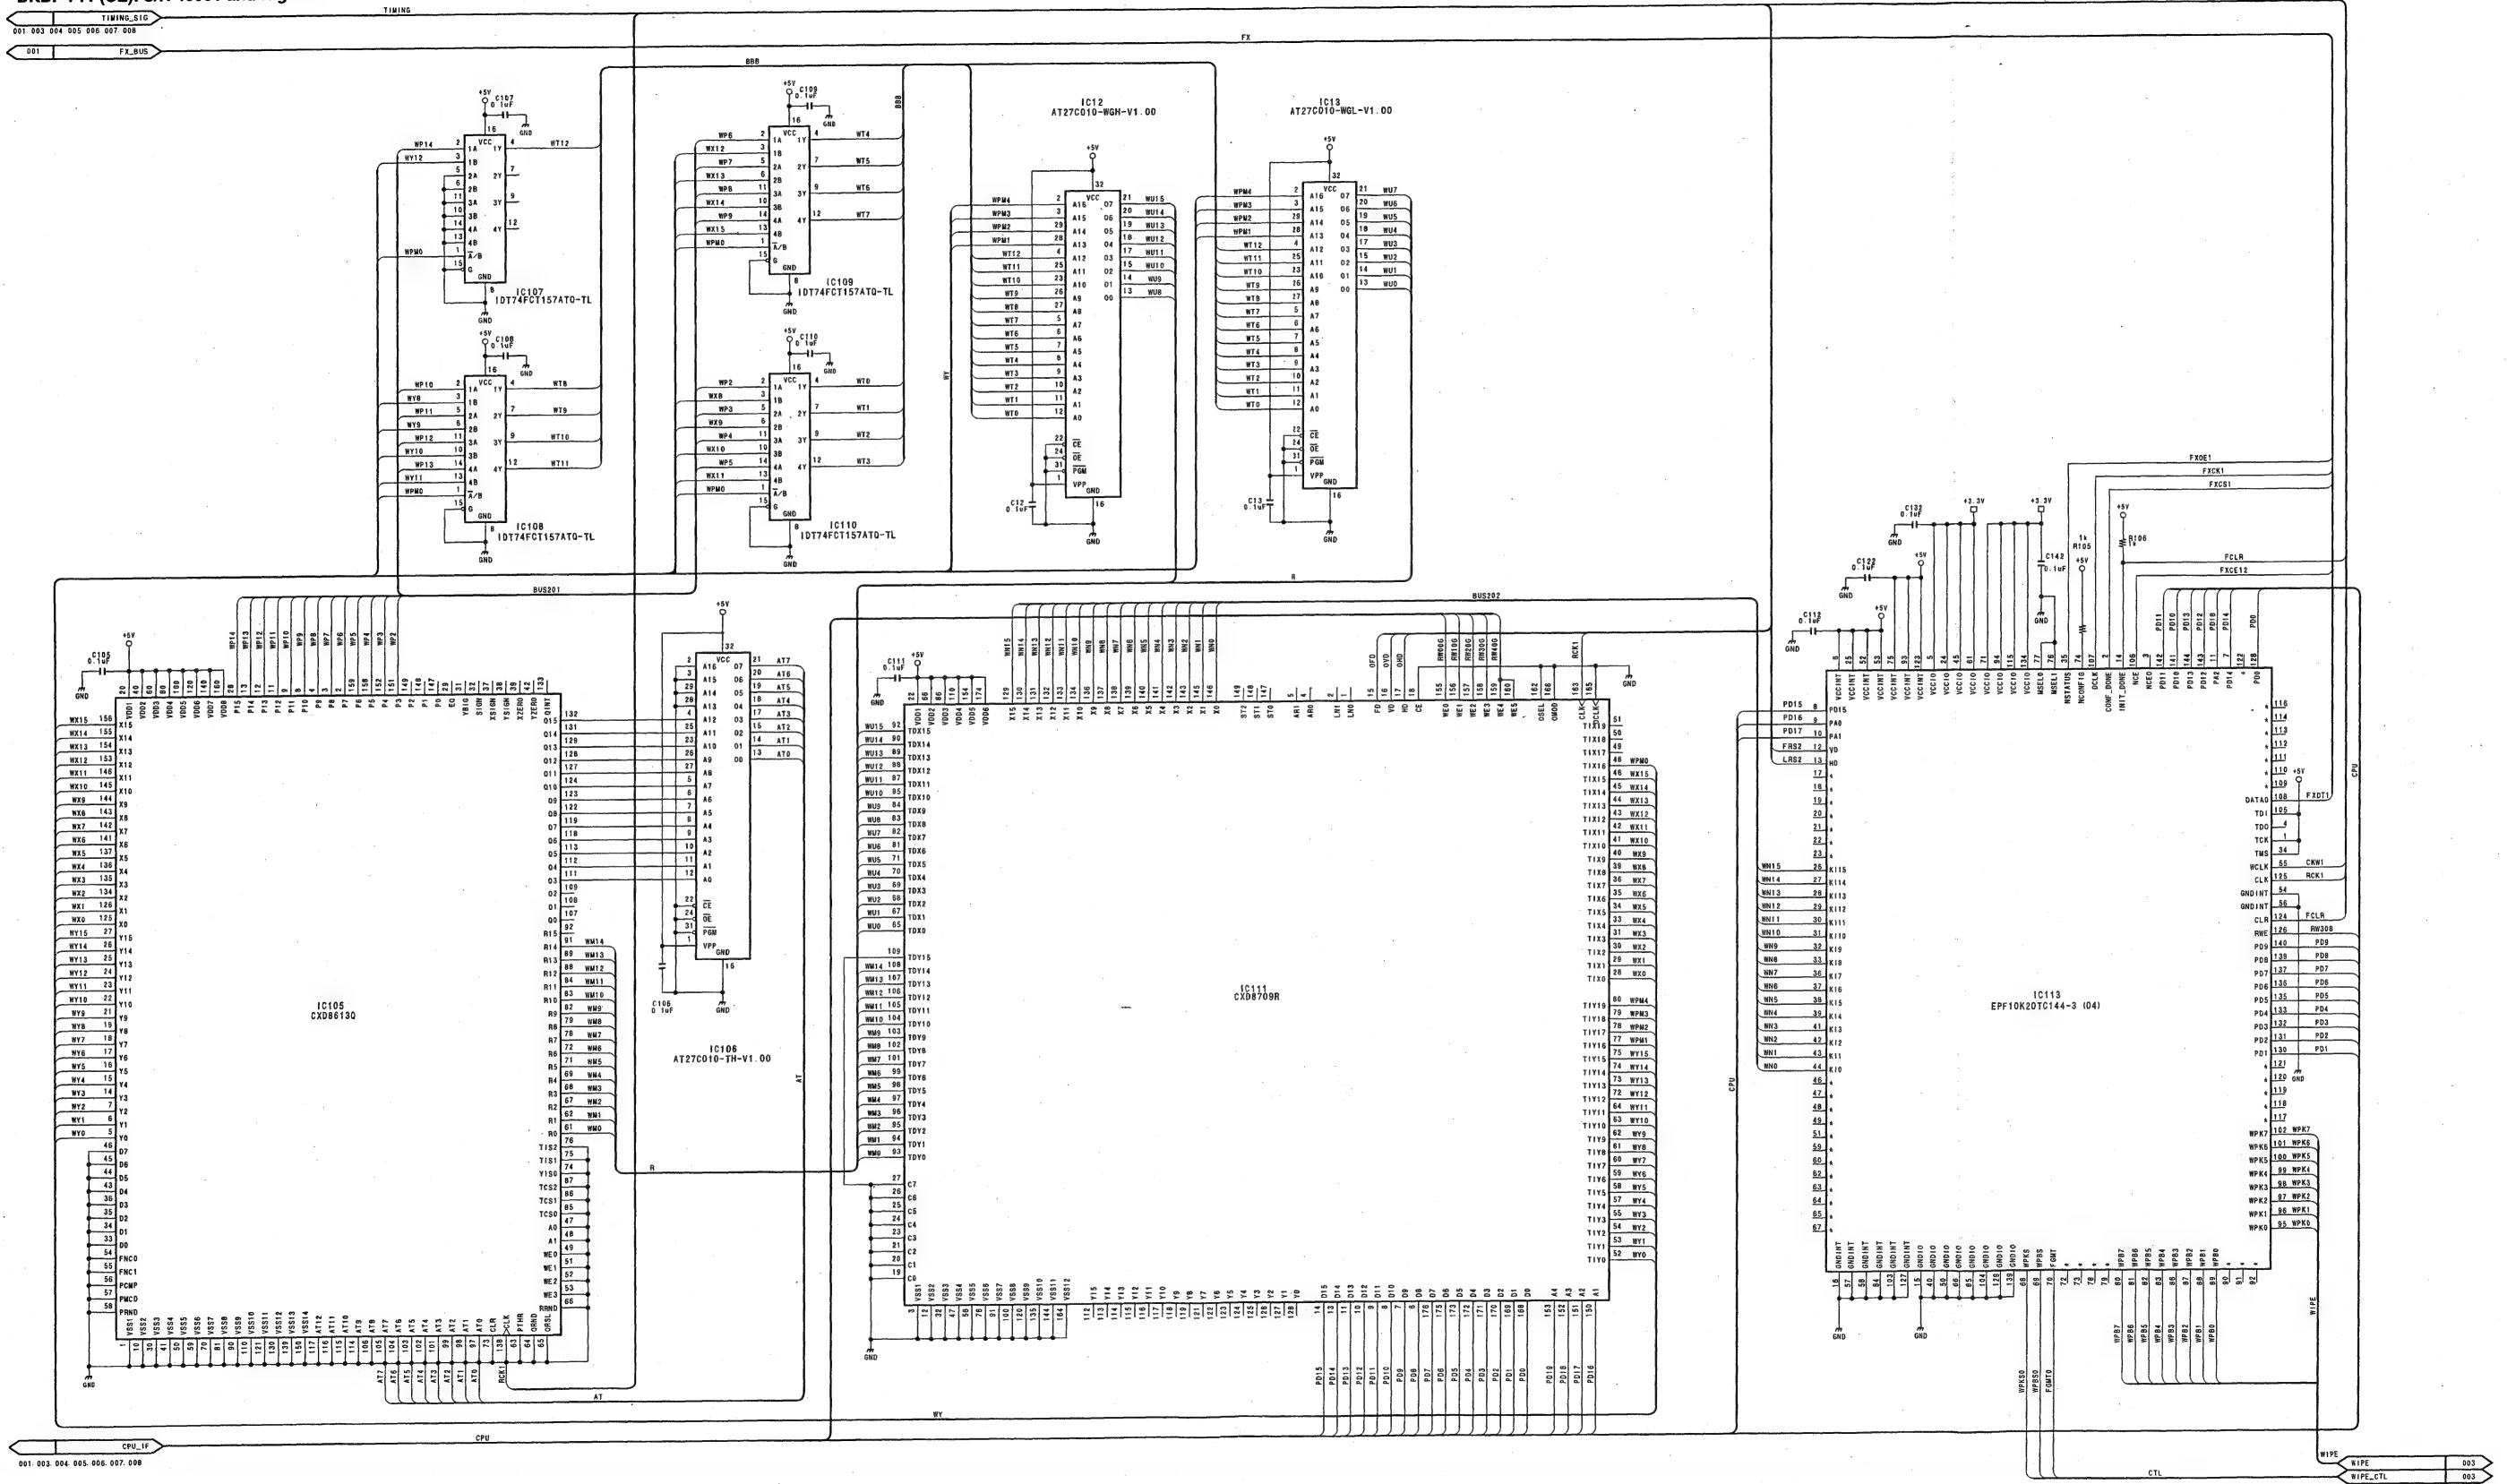


DIGITAL MULTI EFFECTS BOARD

CMB-12 (2/8)

BOARD NO. 1-677-104-11
LOT NO. 911-

CMB-12 (3/8) CMB-12 (3/8)


BKDF-711 (J): S/N 30001 and Higher
BKDF-711 (UC): S/N 10001 and Higher
BKDF-711 (CE): S/N 40001 and Higher

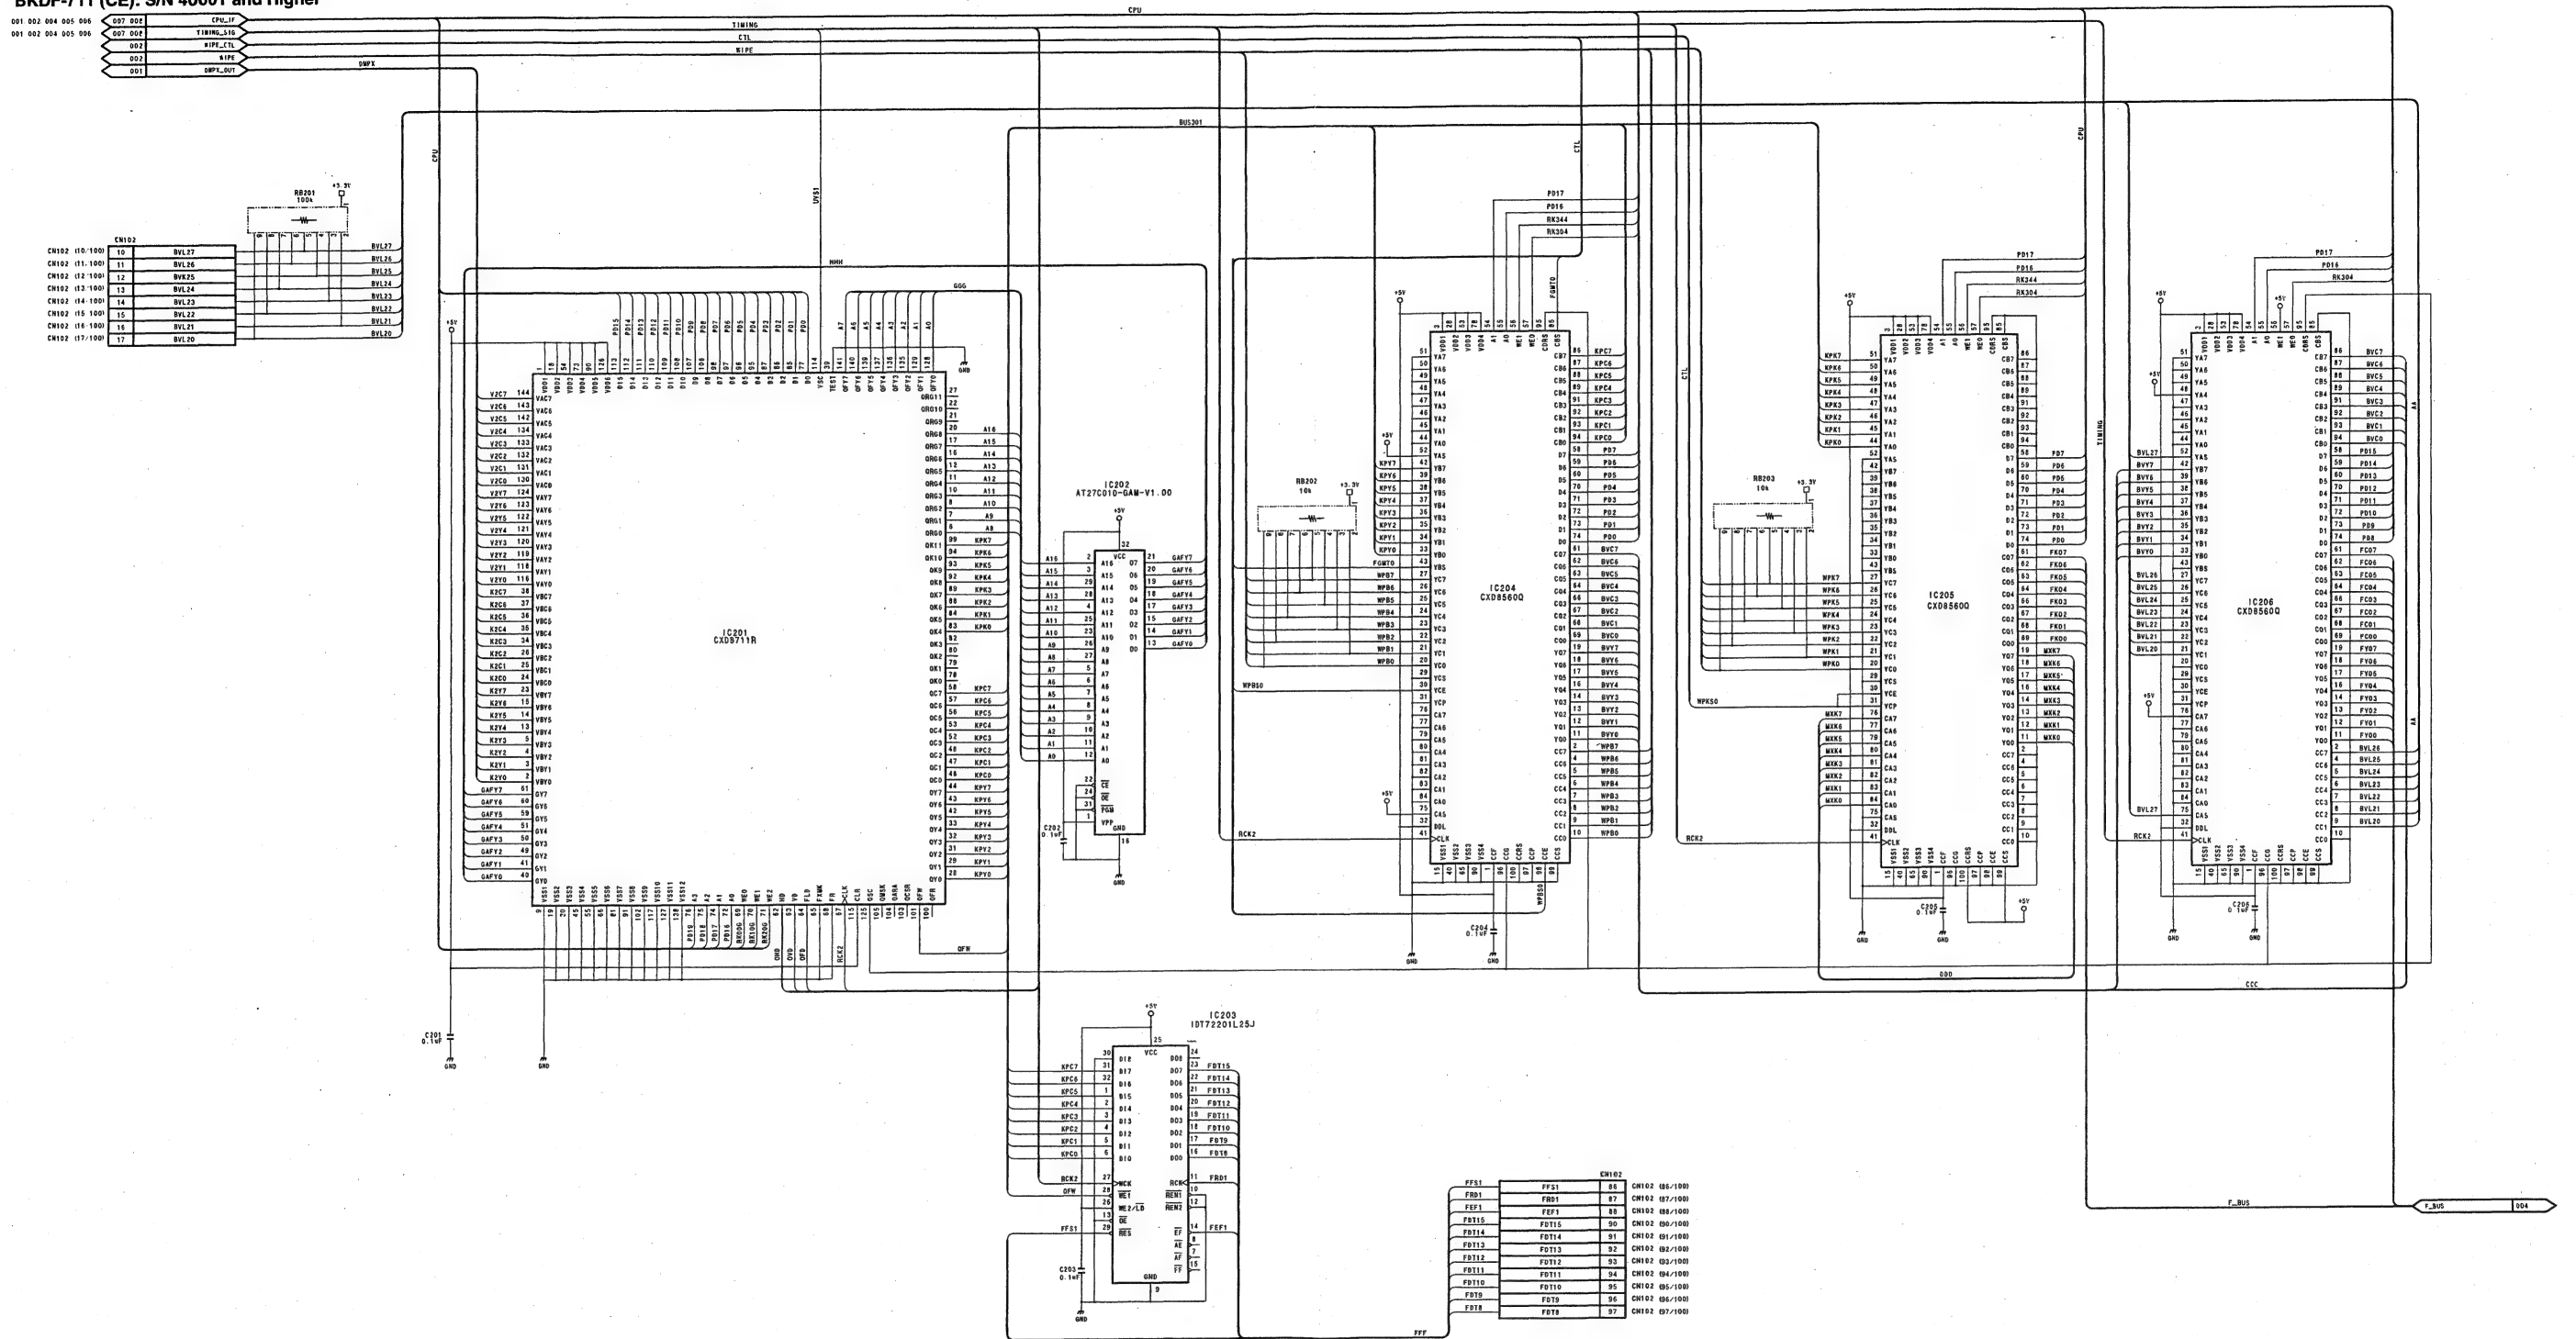


DIGITAL MULTI EFFECTS BOARD
CMB-12 (3/8)
BOARD NO. 1-677-104-11
LOT NO. 911-

DFS-700/700P

BKDF-711 (J): S/N 30001 and Higher
BKDF-711 (UC): S/N 10001 and Higher
BKDF-711 (CE): S/N 40001 and Higher

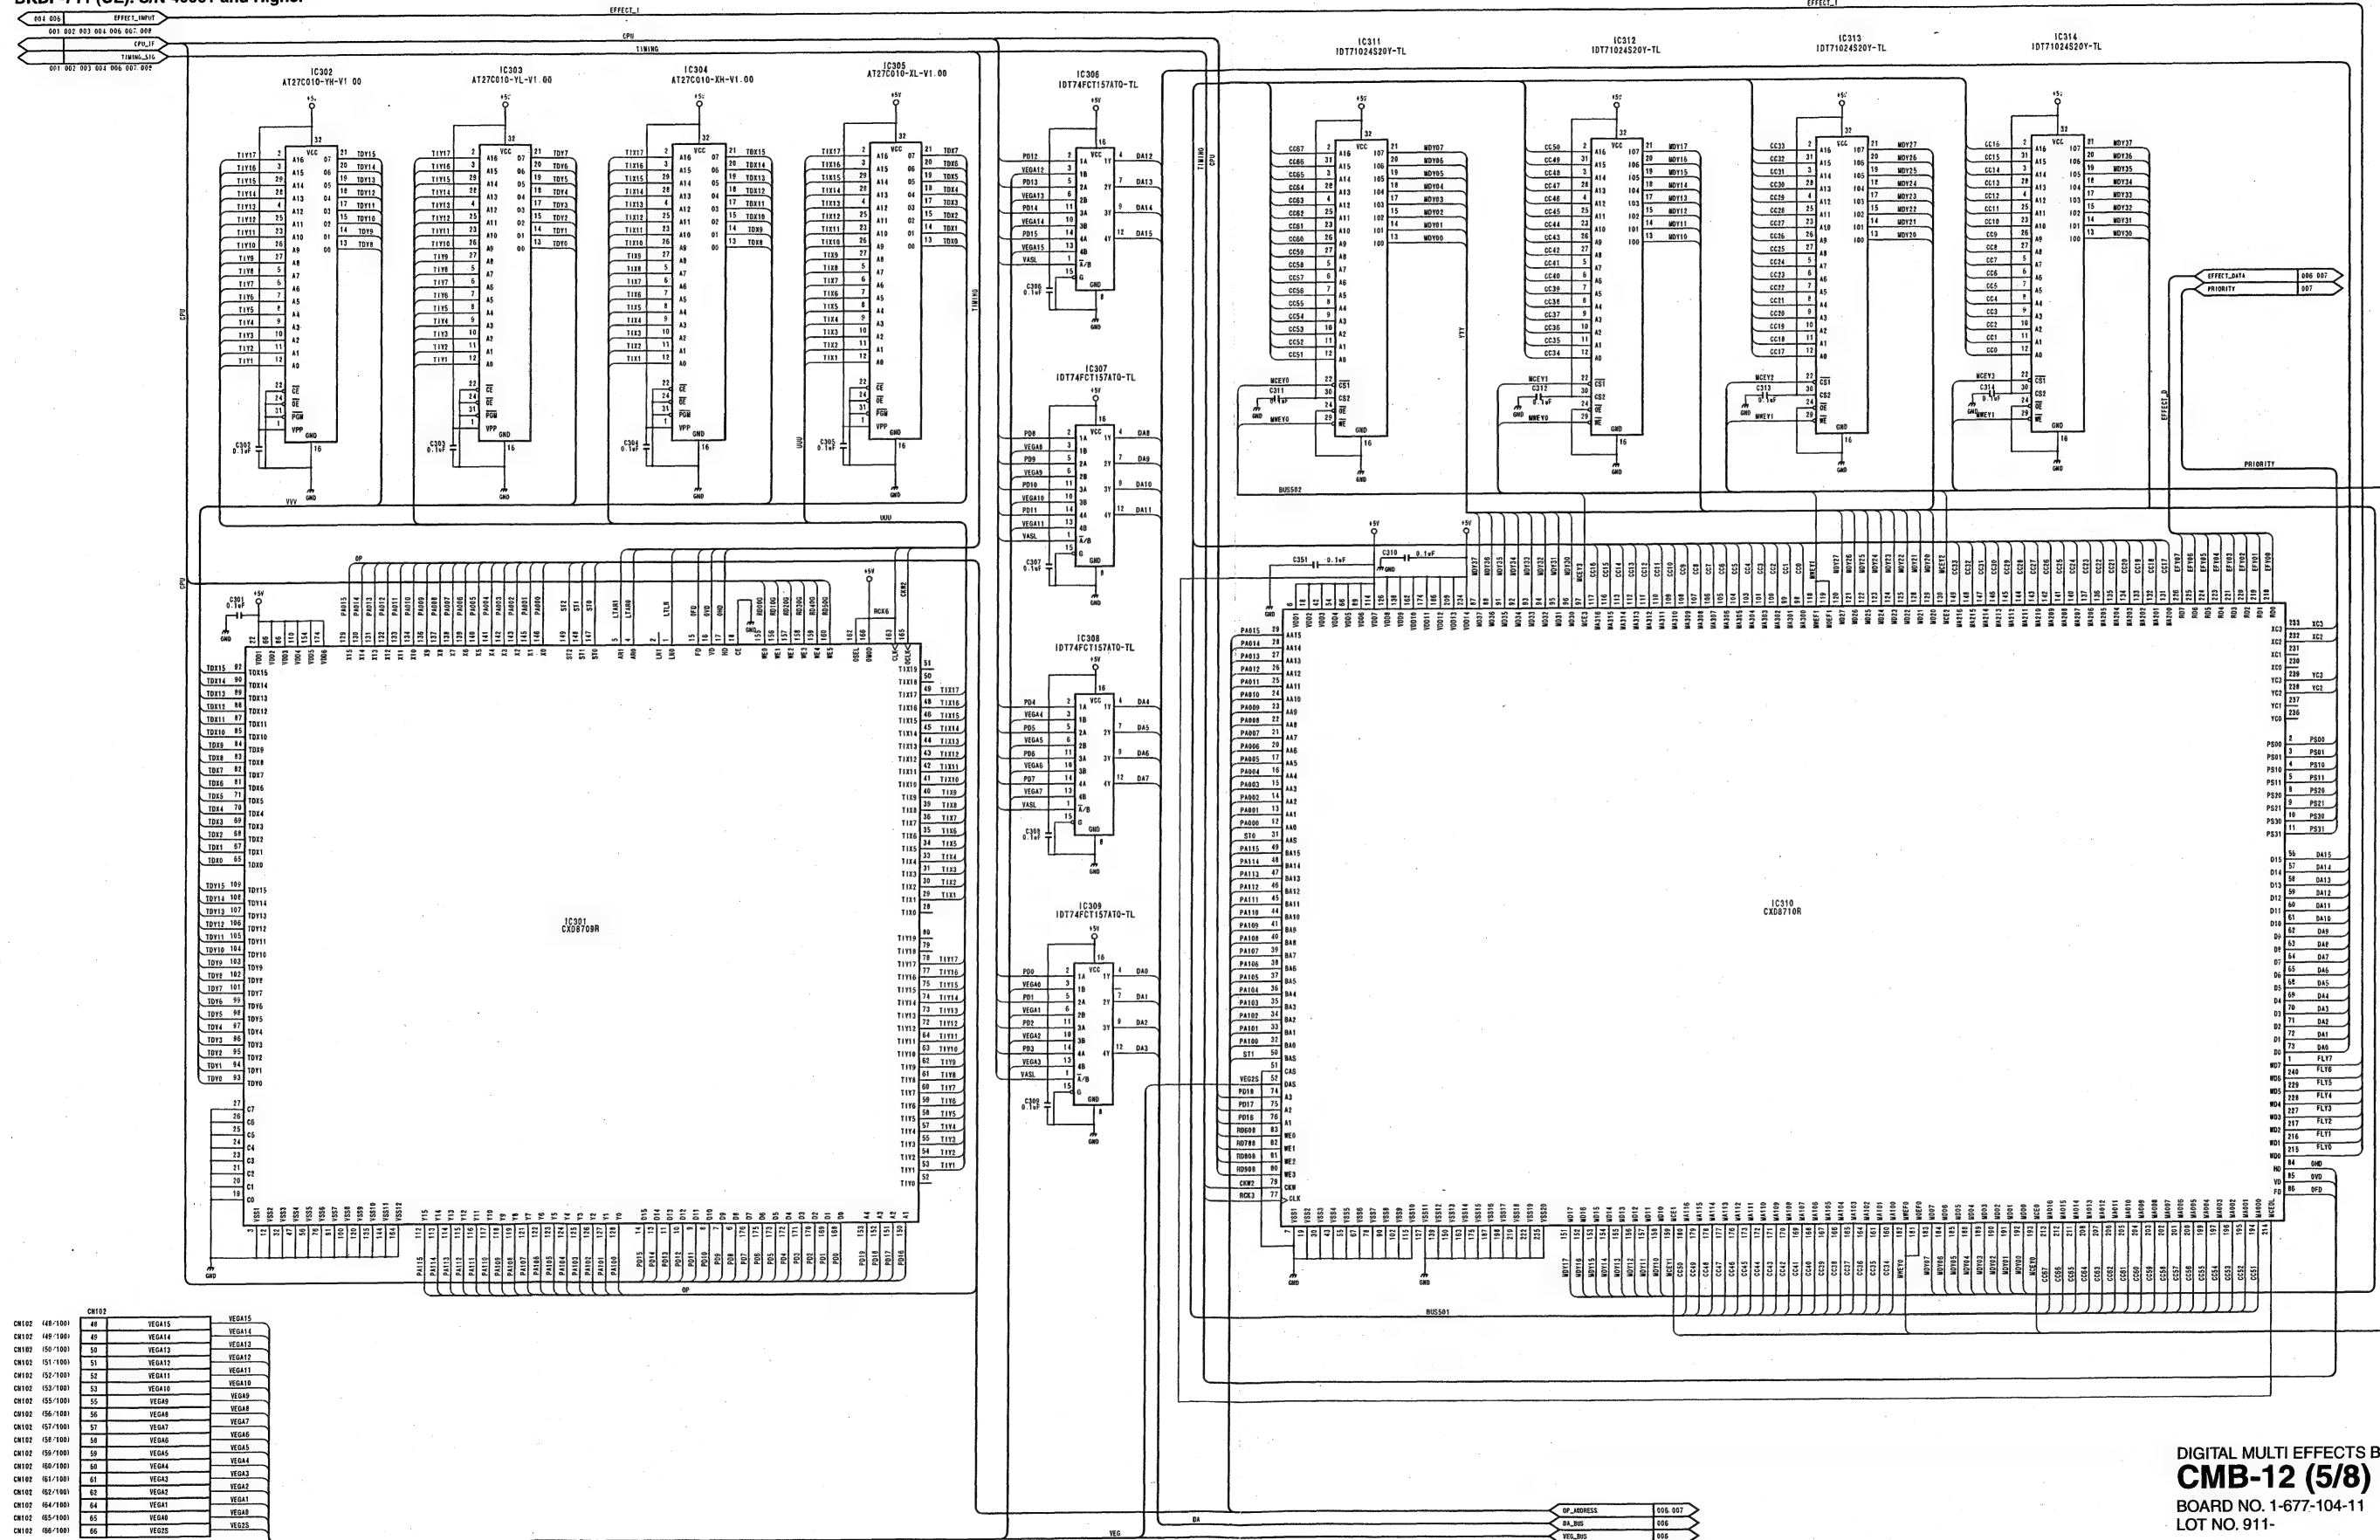

BKDF-711 (J): S/N 30001 and Higher
BKDF-711 (UC): S/N 10001 and Higher
BKDF-711 (CE): S/N 40001 and Higher

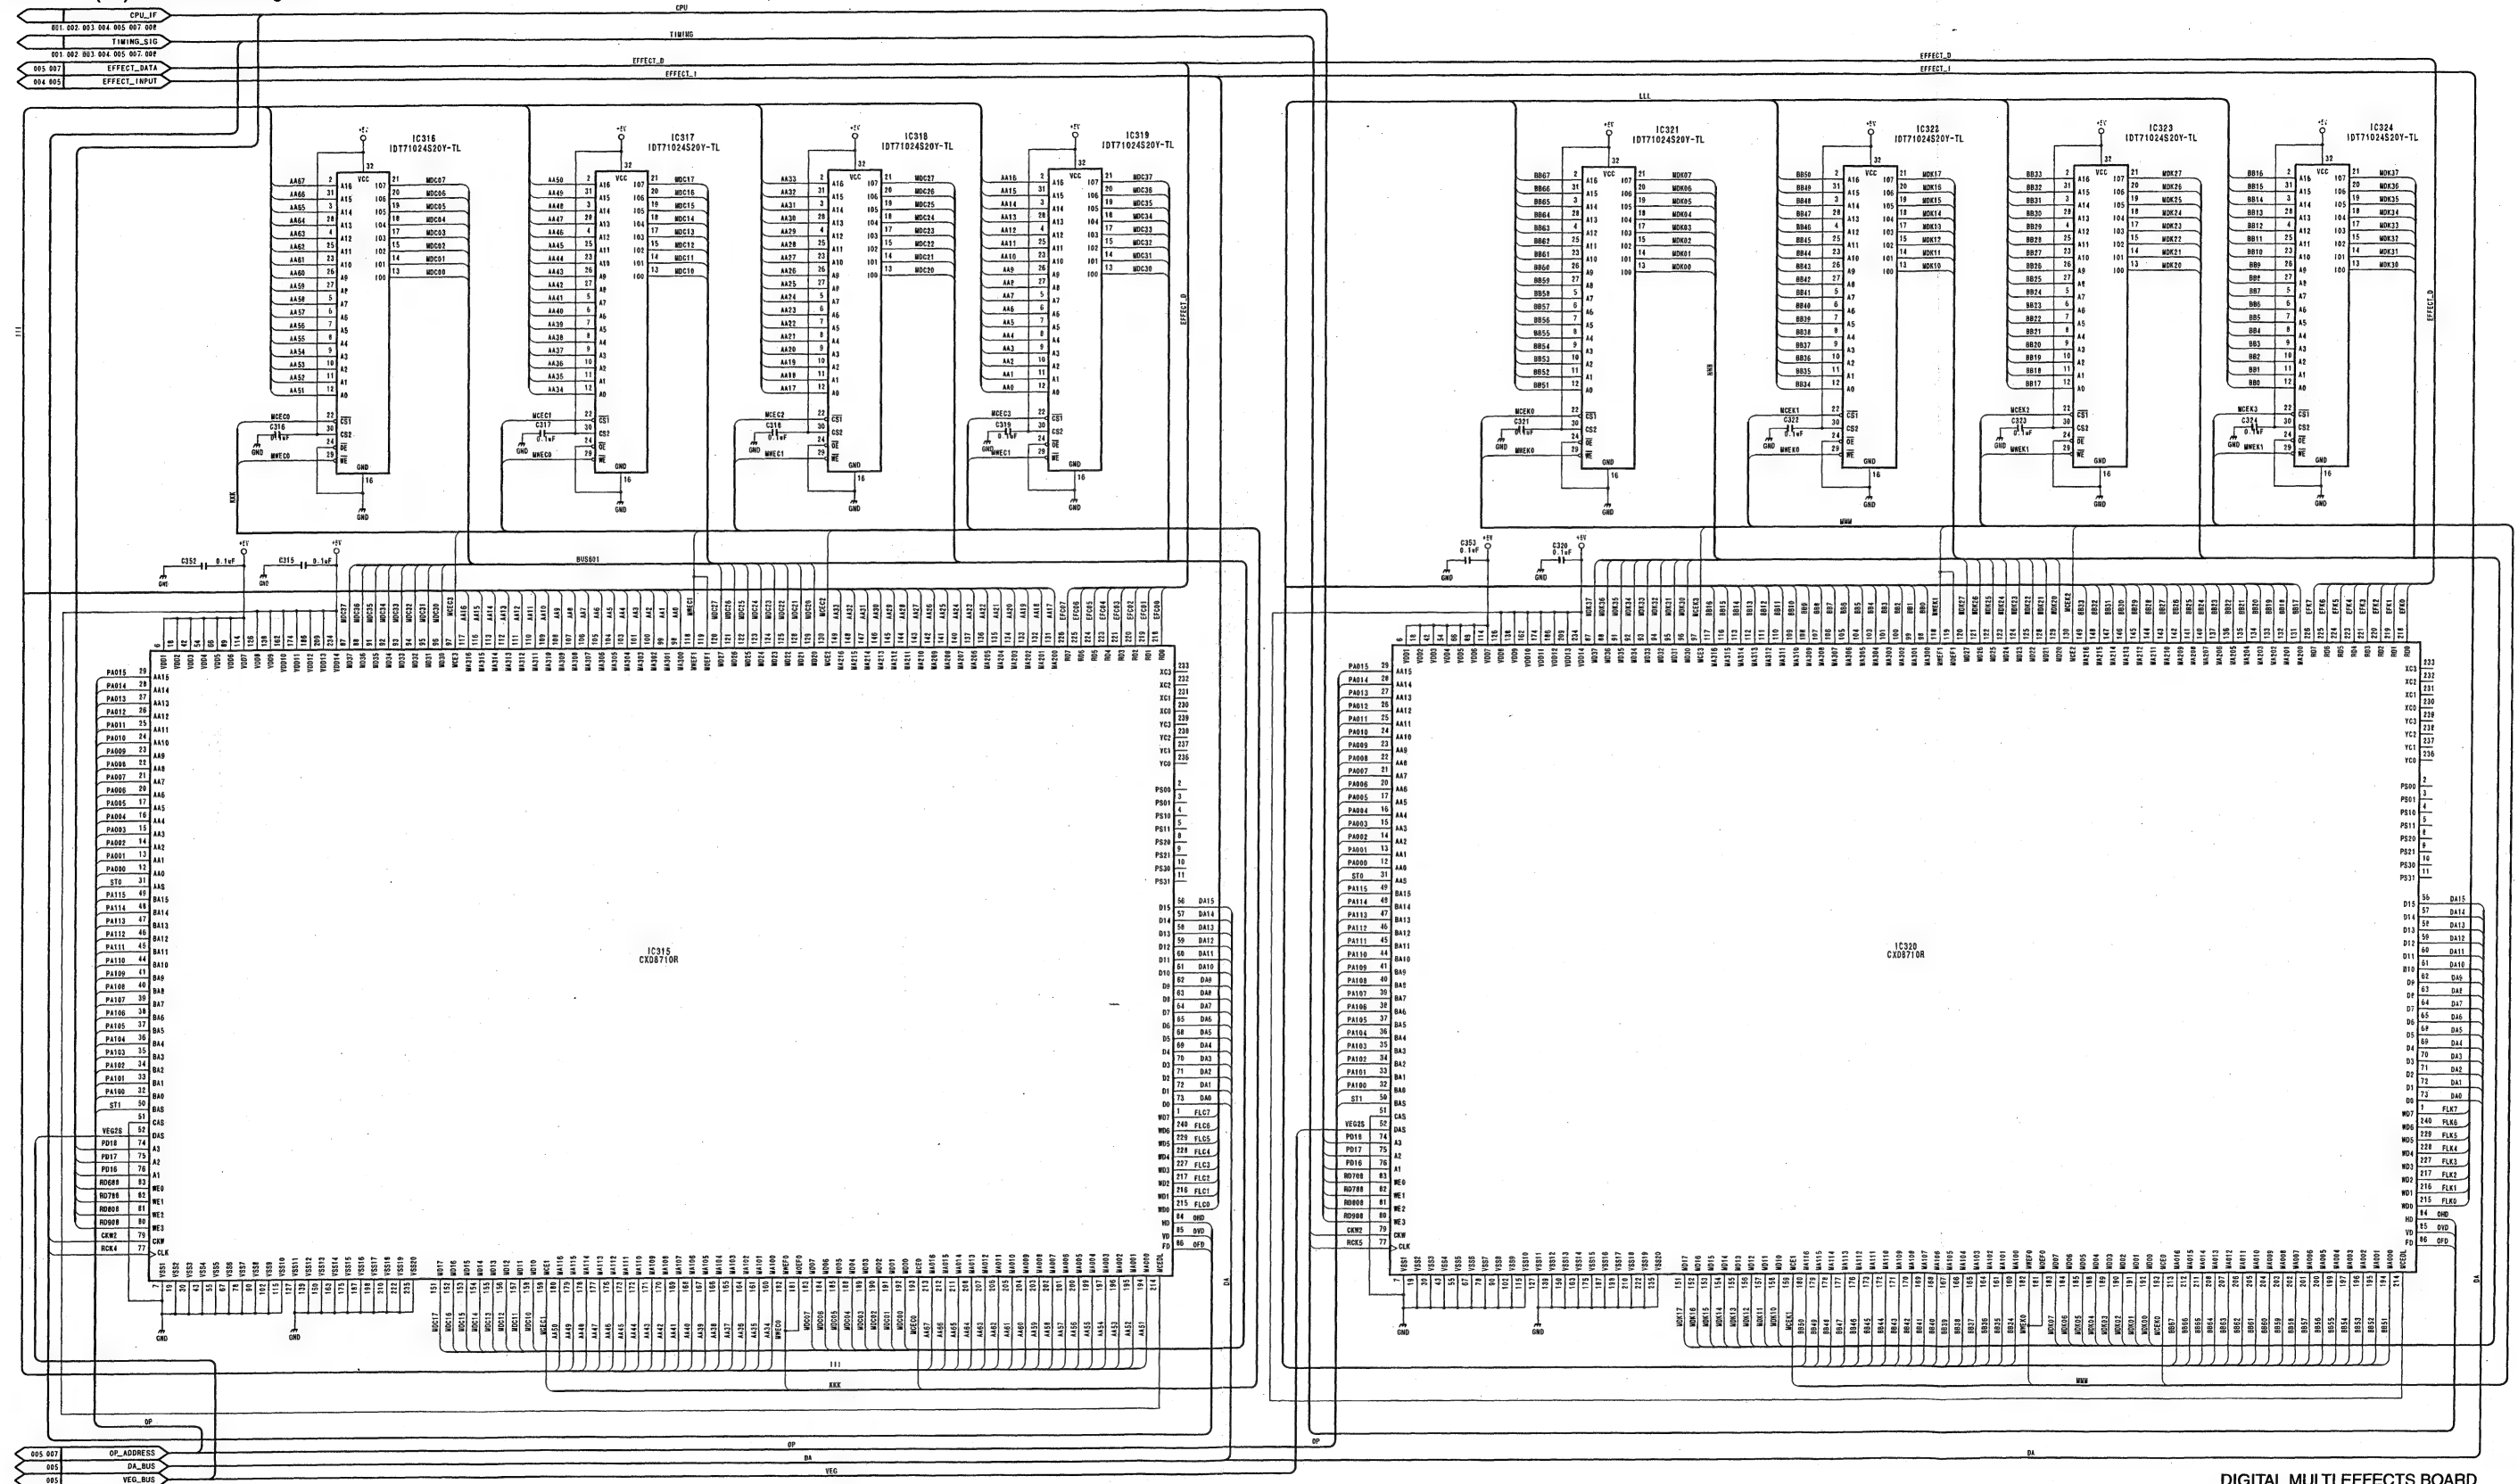

DIGITAL MULTI EFFECTS BOARD
CMB-12 (6/8)
BOARD NO. 1-677-104-11
LOT NO. 911-

CMB-12 (7/8) CMB-12 (7/8)

BKDF-711 (J): S/N 30001 and Higher
BKDF-711 (UC): S/N 10001 and Higher
BKDF-711 (CE): S/N 40001 and Higher


1

2

3

4

5

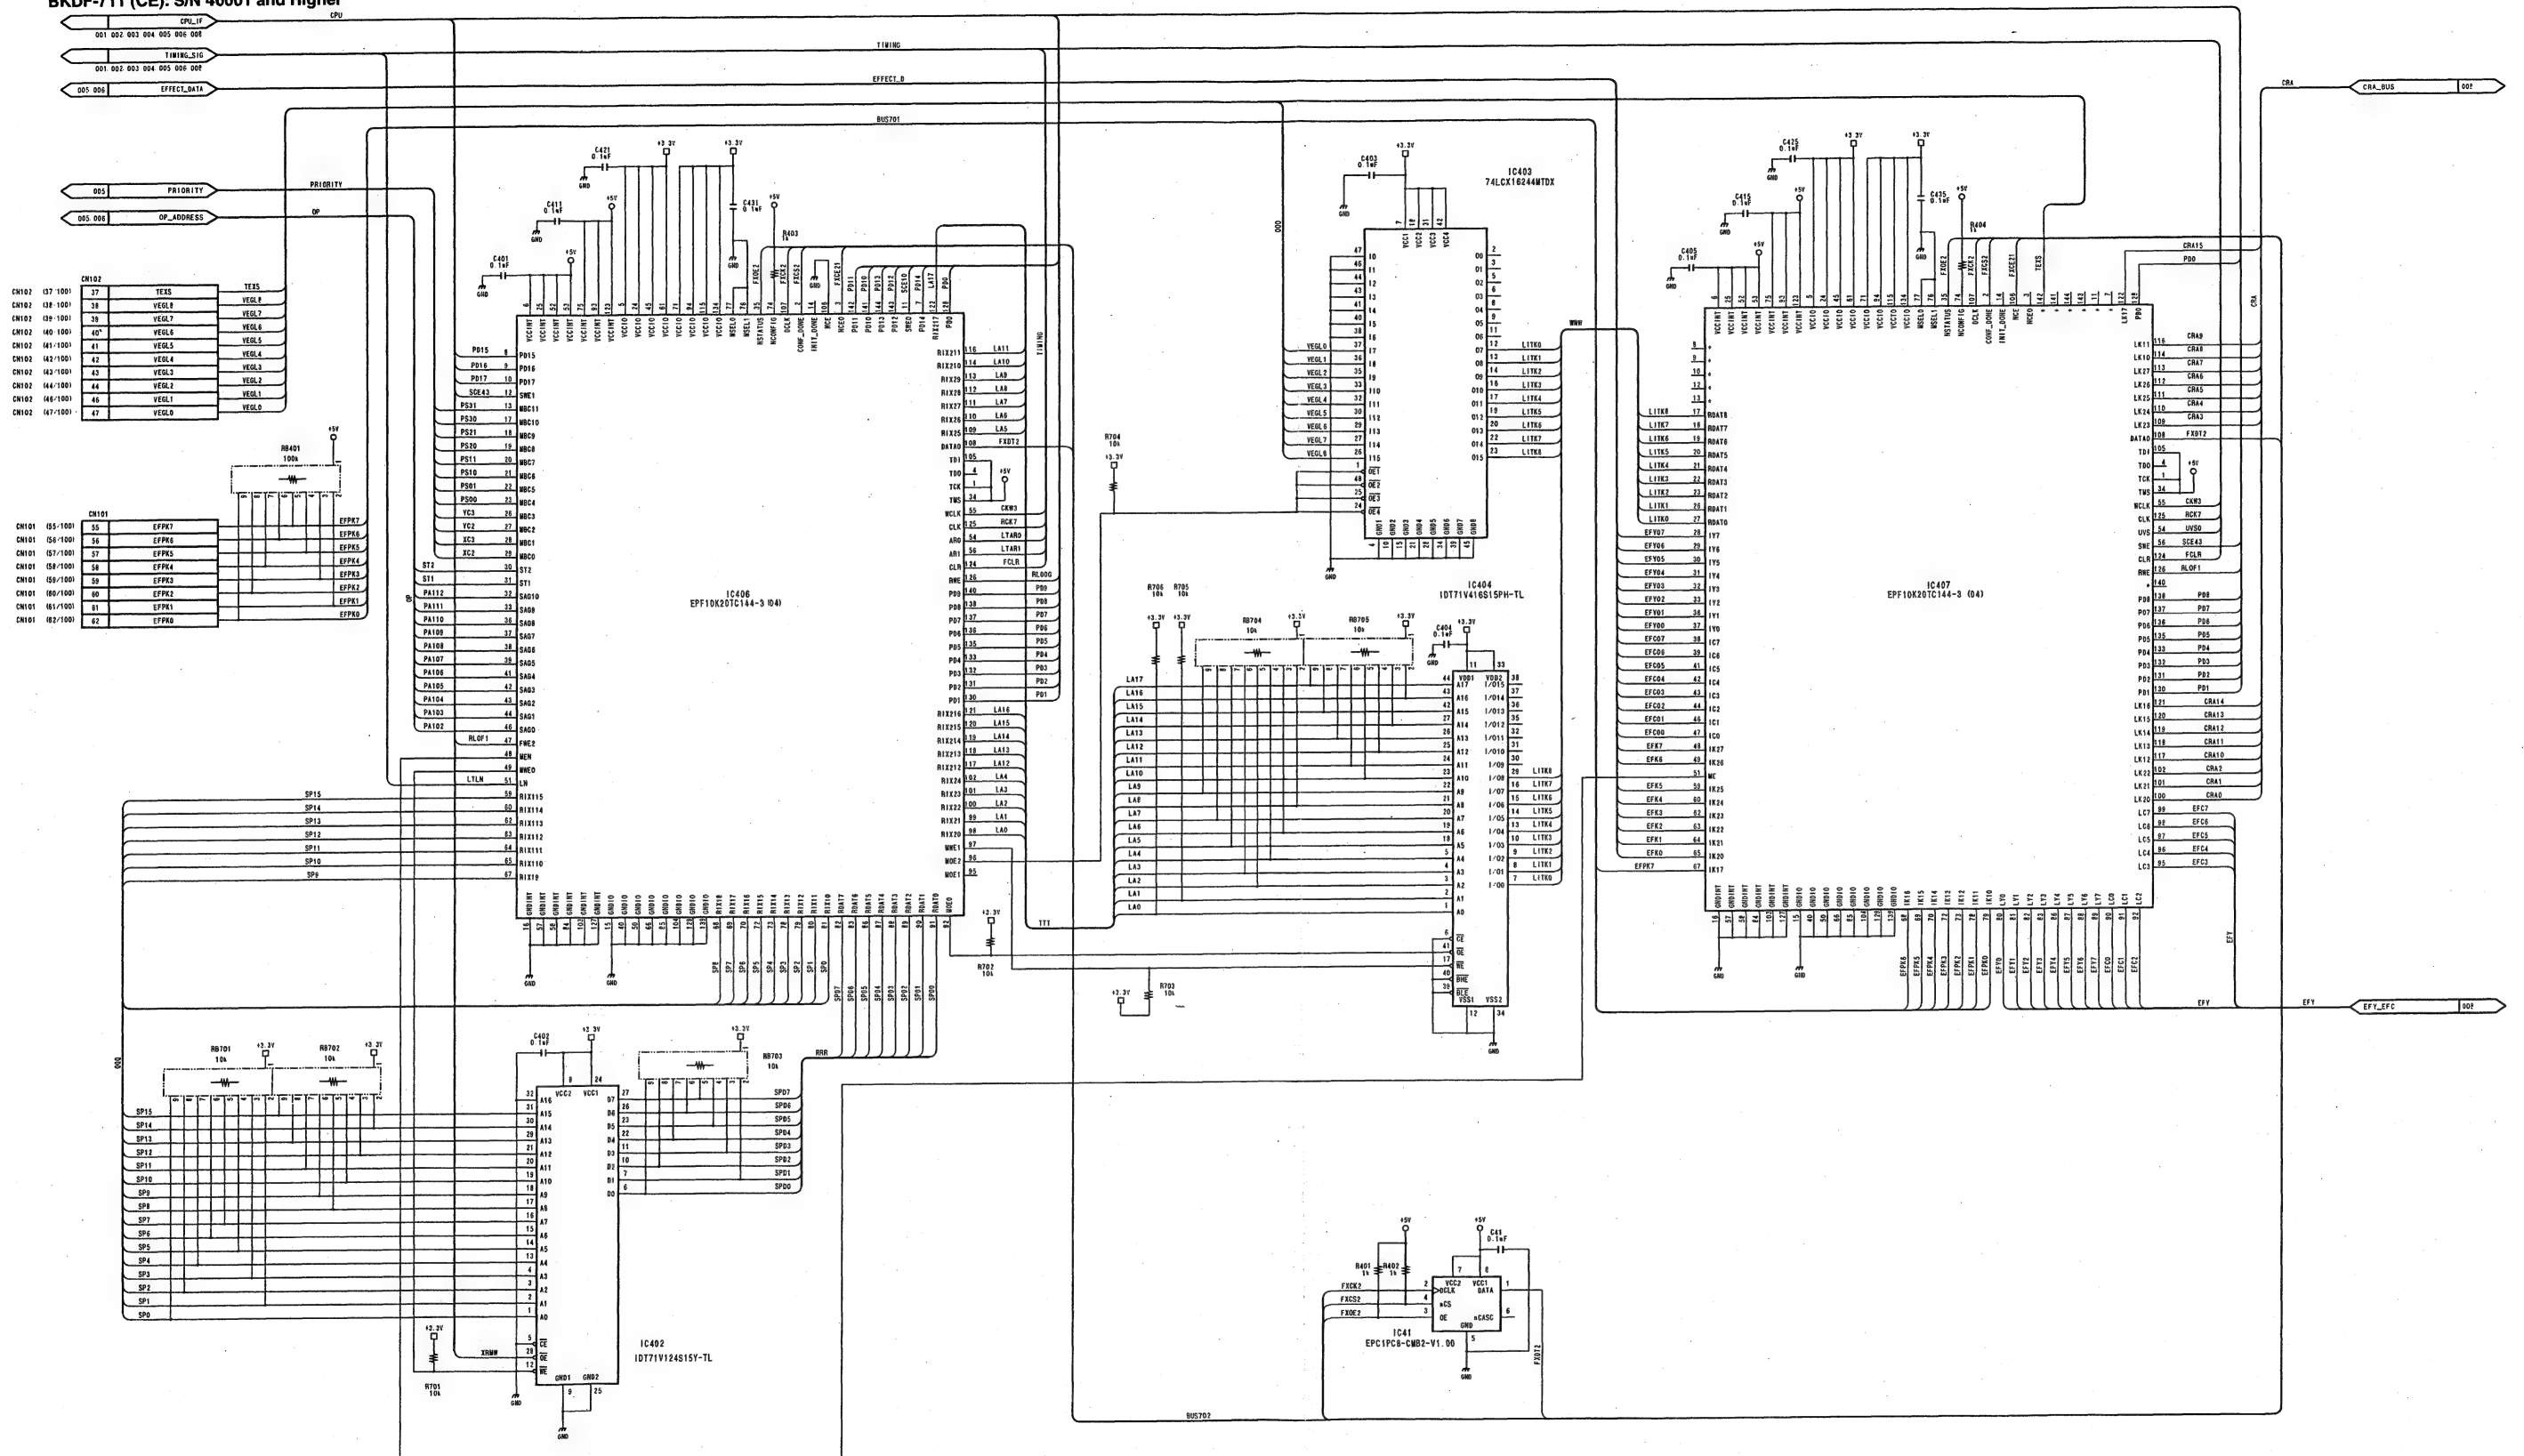

DIGITAL MULTI EFFECTS BOARD
CMB-12 (7/8)
BOARD NO. 1-677-104-11
LOT NO. 911-

DFS-700/700P

4-8

4-8


E

F

G

H




BKDF-711 (J): S/N 30001 and Higher
BKDF-711 (UC): S/N 10001 and Higher
BKDF-711 (CE): S/N 40001 and Higher

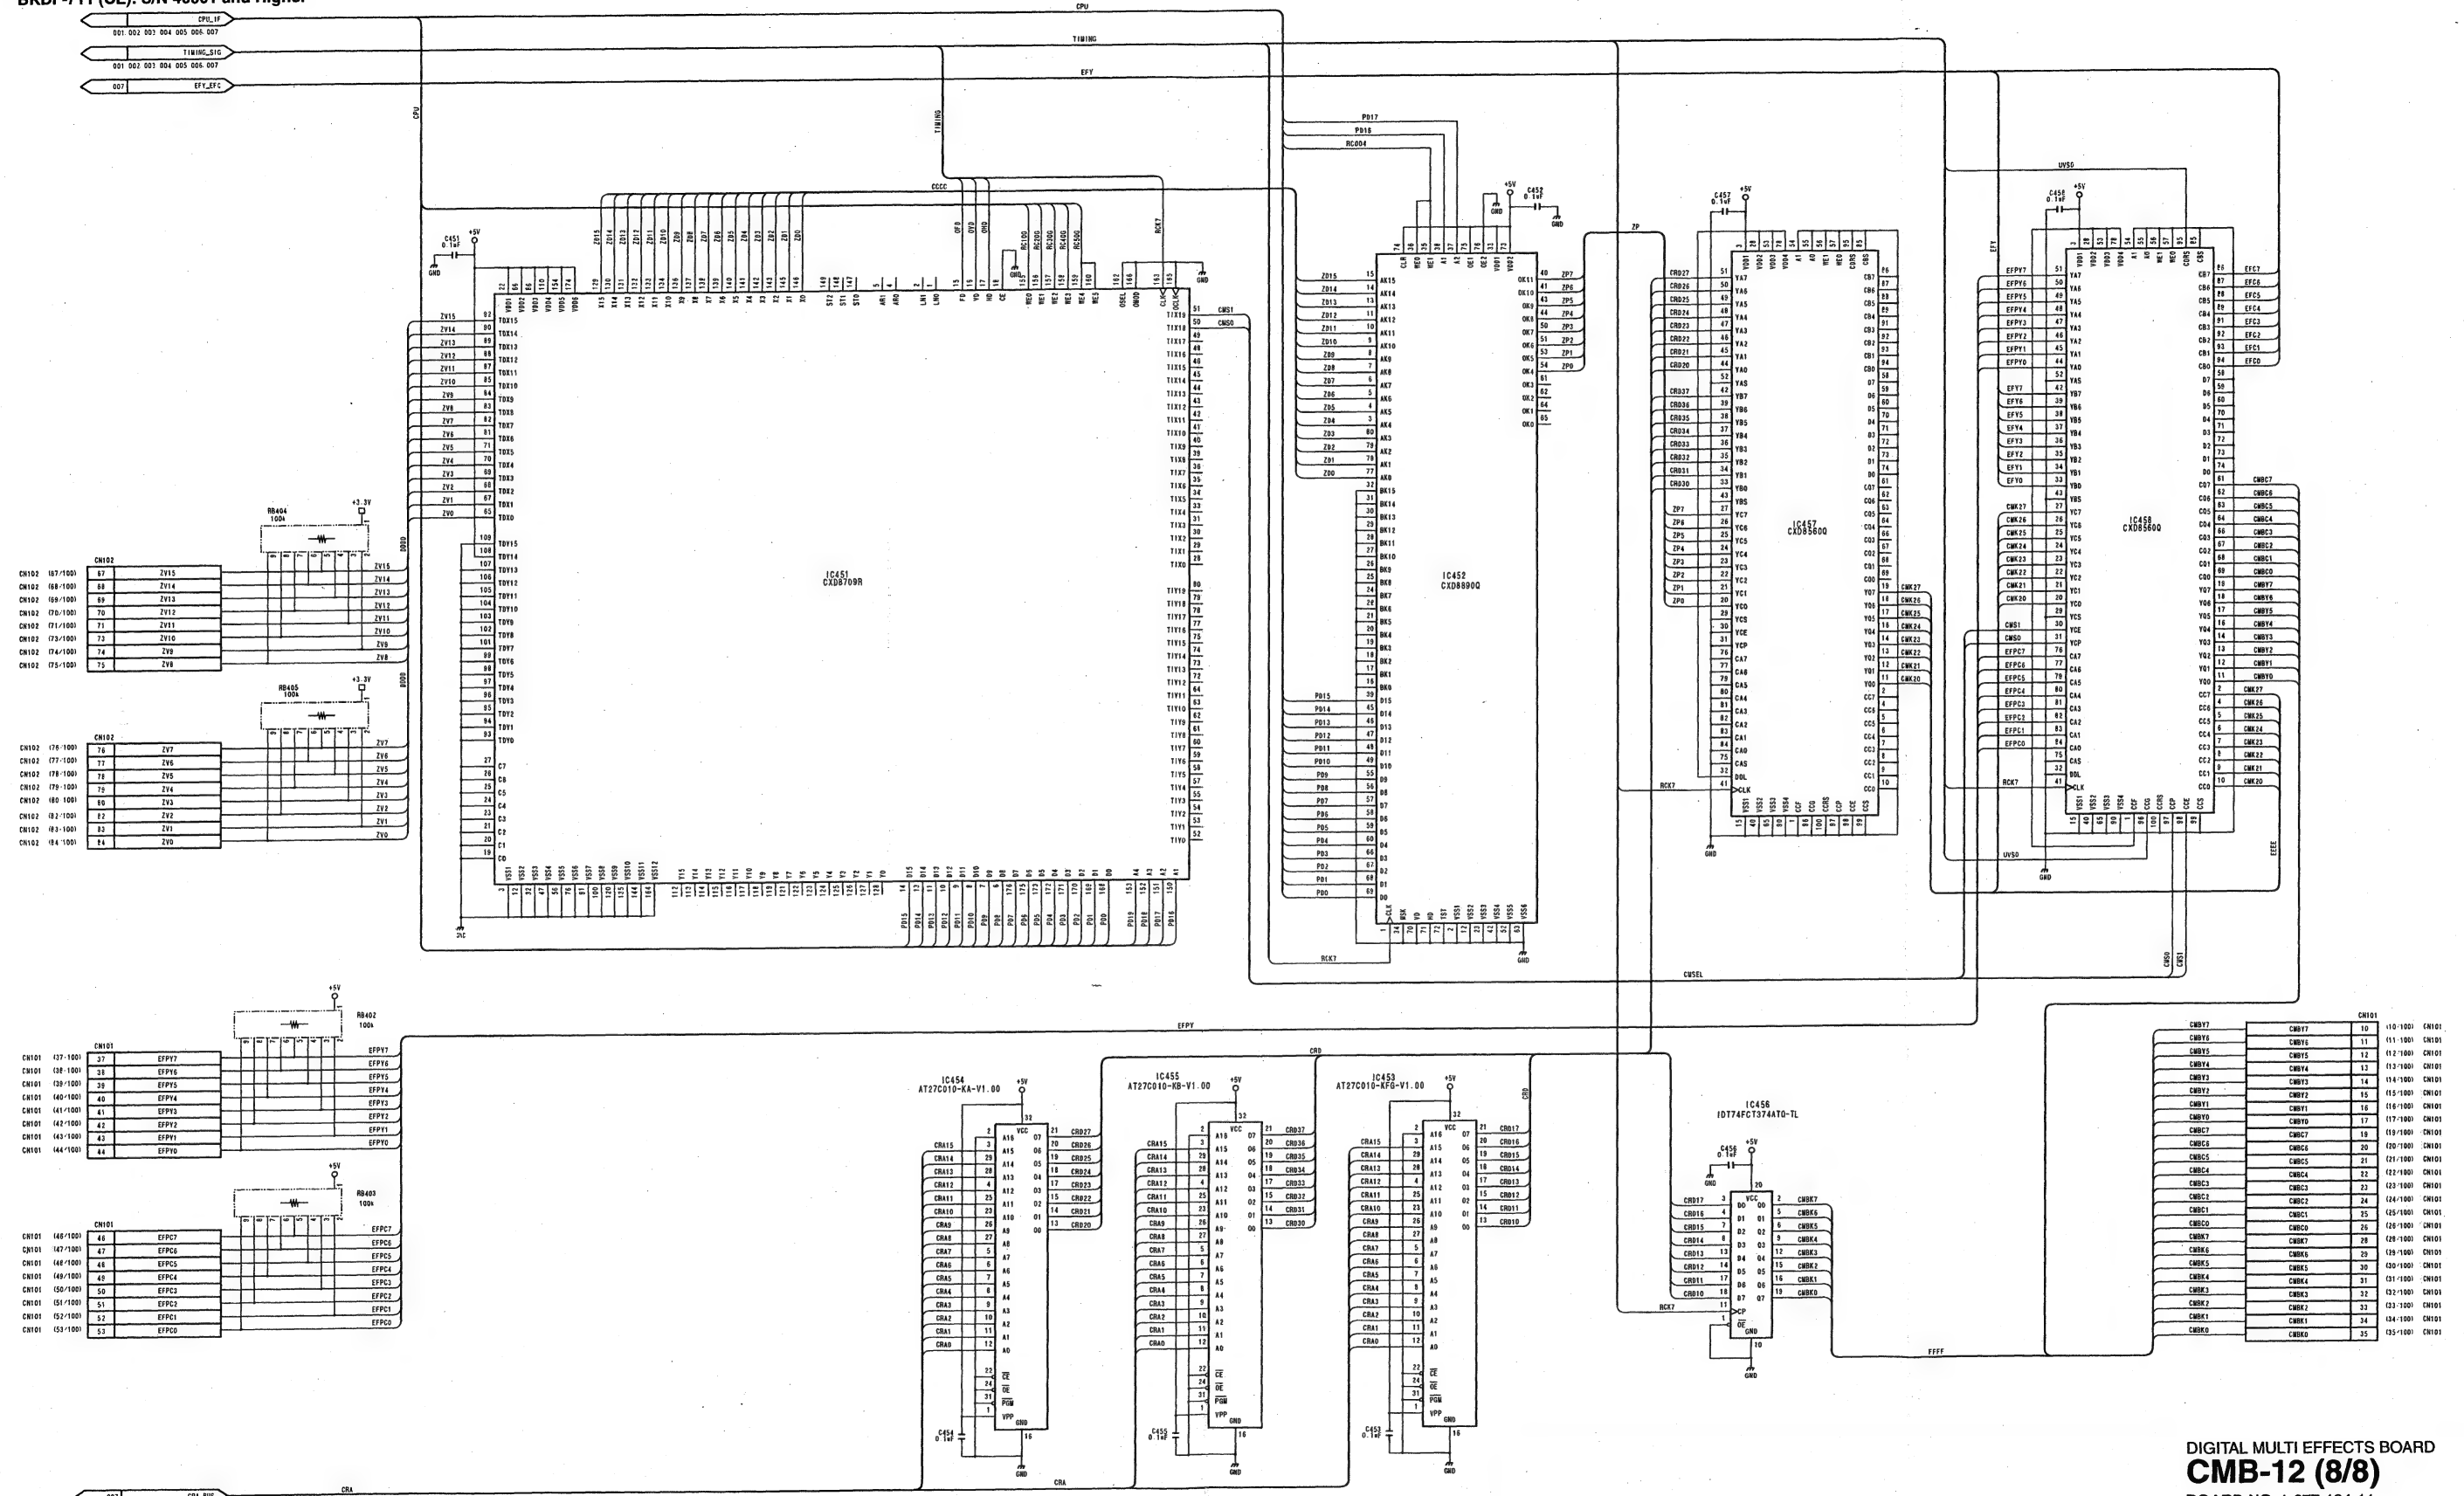





DIGITAL MULTI EFFECTS BOARD
CMB-12 (8/8)
BOARD NO. 1-677-104-11
LOT NO. 911-

DFS-700 (J): S/N 30001 and Higher
DFS-700 (UC): S/N 10001 and Higher
DFS-700P (CE): S/N 40001 and Higher



1



2











3






	Z	A	B	C	D	E	F
1	GND	GND	FANES	GND	+5V	+5V	GND
2	GND	GND	GND	GND	+5V	+5V	GND
3	GND	GND	GND	GND	GND	GND	GND
4	GND	GND	GND	GND	GND	GND	GND
5	GND	GND	GND	GND	GND	GND	GND
6	GND	USB_D-	USB_D+	GND	GND	GND	GND
7	GND	GND	GND	GND	ED_TD-	ED_TD+	GND
8	GND	GND	GND	GND	ED_RD-	ED_RD+	GND
9	GND	GND	GND	GND	GND	GND	GND
10	GND	GND	GND	GND	GND	GND	GND
11	GND	GND	GND	GND	KB_RD-	KB_RD+	GND
12	GND	GND	GND	GND	KB_VD-	KB_VD+	GND
13	GND	+12V	+12V	GND	KB_TD-	KB_TD+	GND
14	GND	+12V	+12V	GND	GND	GND	GND
15	GND	GP1_T1	GP1_T2	GND	GND	GND	GND
16	GND	GND	GND	GND	TLY1B	TLY1A	GND
17	GND	GND	GND	GND	TLY2B	TLY2A	GND
18	GND	GND	GND	GND	TLY3B	TLY3A	GND
19	GND	GND	GND	GND	TLY4B	TLY4A	GND
20	GND	GND	GND	GND	TLY5B	TLY5A	GND
21	GND	GND	GND	GND	TLY6B	TLY6A	GND
22	GND	GND	GND	GND	TLY7B	TLY7A	GND
23	GND	GND	GND	GND	TLY8B	TLY8A	GND
24	GND	GND	GND	GND	GND	GND	GND
25	GND	GND	GND	GND	GND	GND	GND

	Z	A	B	C	D	E	F
1	GND	GND	Y11	GND	V11	U11	GND
2	GND	Y12	GND	Y12	GND	U12	GND
3	GND	Y13	GND	Y13	GND	U13	GND
4	GND	Y14	GND	Y14	GND	U14	GND
5	GND	SY5	SC5	GND	GND	GND	GND
6	GND	GND	GND	GND	SY6	SC6	GND
7	GND	GND	GND	GND	SY7	SC7	GND
8	GND	SY8	SC8	GND	GND	GND	GND
9	GND	GND	Y15/CP55	GND	V15	U15	GND
10	GND	Y16/CP56	GND	Y16	GND	U16	GND
11	GND	GND	Y17/CP57	GND	V17	U17	GND
12	GND	Y18/CP58	GND	Y18	GND	U18	GND
13	GND	GND	GND	GND	GND	GND	GND
14	GND	GND	GND	DSK5	GND	REF1	GND
15	GND	GND	GND	GND	GND	GND	GND
16	GND	GND	GND	GND	GND	GND	GND
17	GND	GND	GND	GND	GND	GND	GND
18	GND	GND	GND	GND	GND	GND	GND
19	GND	SY01	SC01	GND	SY02	SC02	GND
20	GND	GND	GND	GND	GND	GND	GND
21	GND	Y01	GND	Y01	GND	U01	GND
22	GND	GND	Y02	GND	Y02	U02	GND
23	GND	PVW0T	GND	CP502	GND	CP501	GND
24	GND	GND	GND	GND	GND	GND	GND
25	GND	GND	GND	BB3	BB2	BB1	GND

	z	a	b	c	d	e	f
1	GND	GND	GND	GND	GND	SD11	GND
2	GND	GND	GND	SD12	GND	GND	GND
3	GND	SD13	GND	GND	GND	GND	GND
4	GND	GND	GND	GND	GND	GND	GND
5	GND	SD14	GND	GND	GND	GND	GND
6	GND	GND	GND	SD15	GND	GND	GND
7	GND	GND	GND	GND	GND	SD16	GND
8	GND	GND	GND	SD17	GND	GND	GND
9	GND	SD18	GND	GND	GND	GND	GND
10	GND	GND	GND	GND	GND	GND	GND
11	GND	SD01	GND	SD02	GND	SD0K	GND

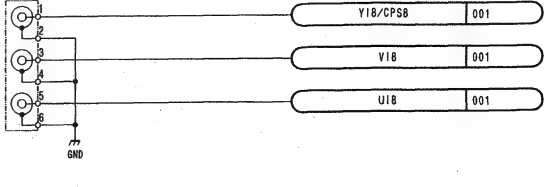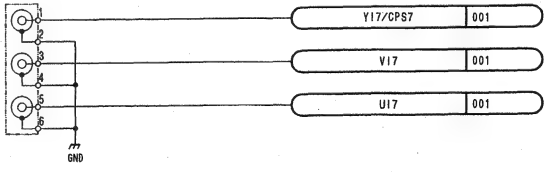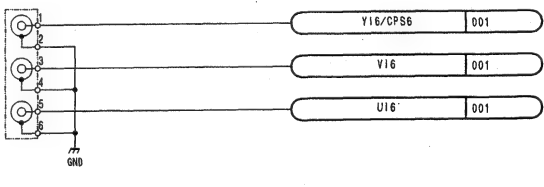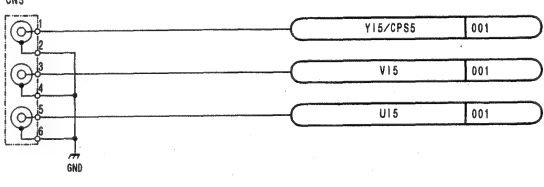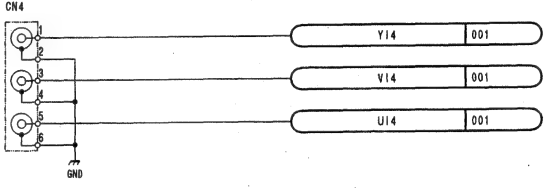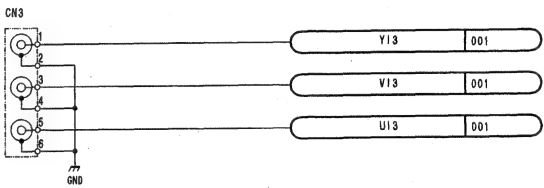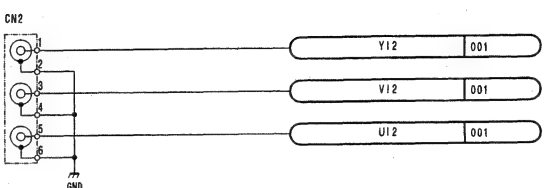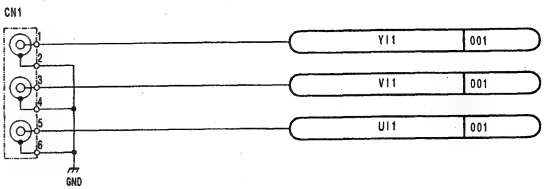

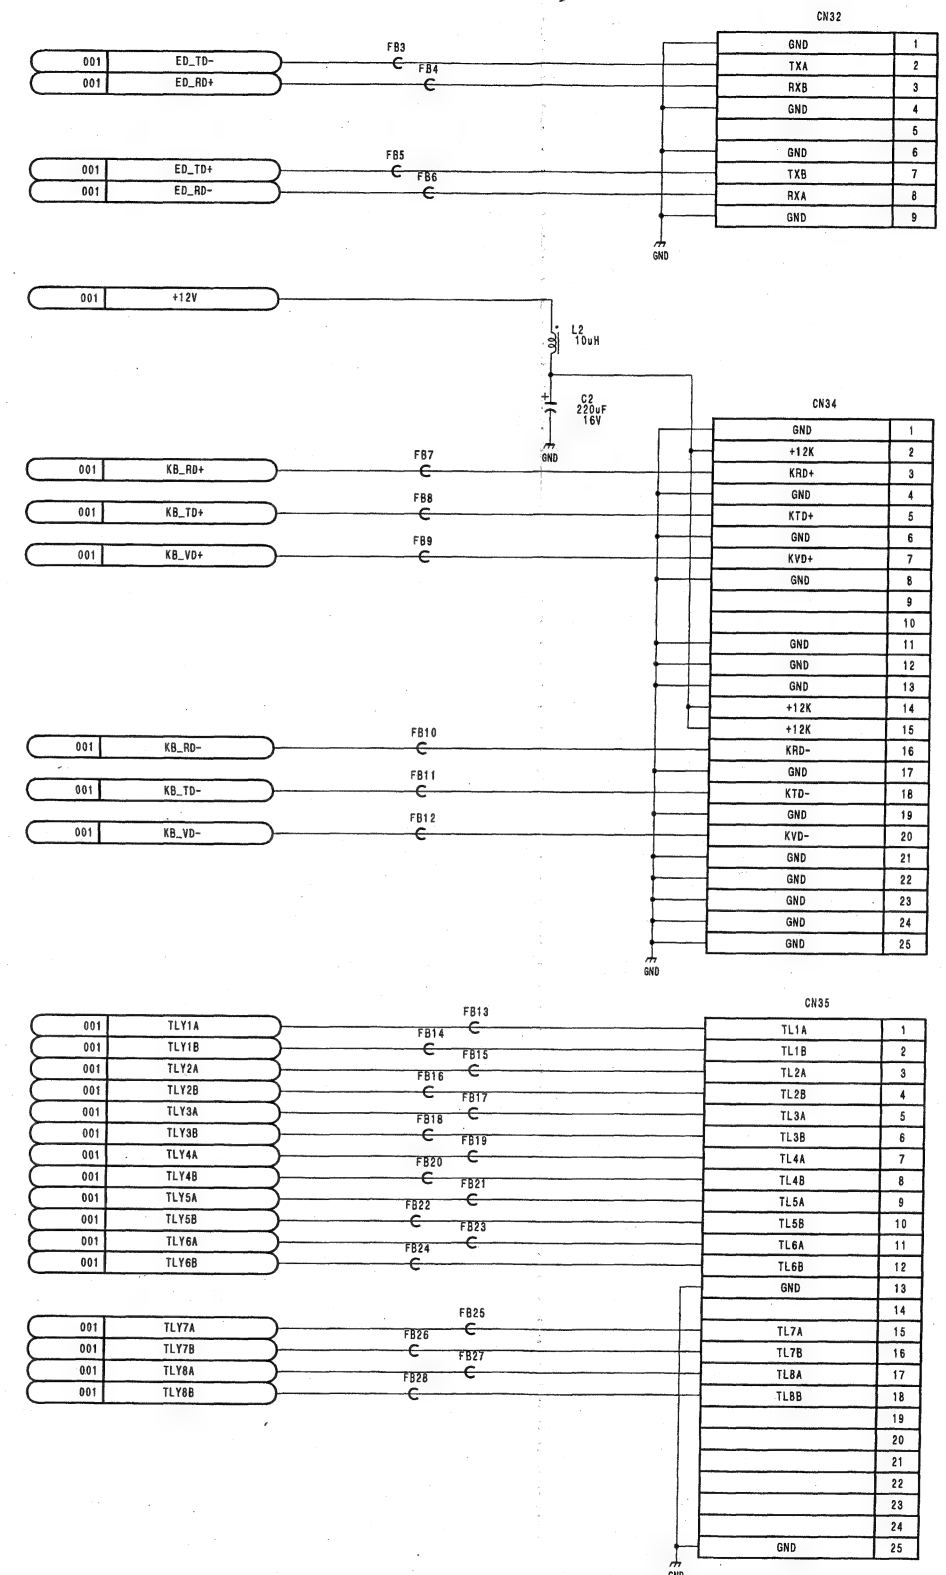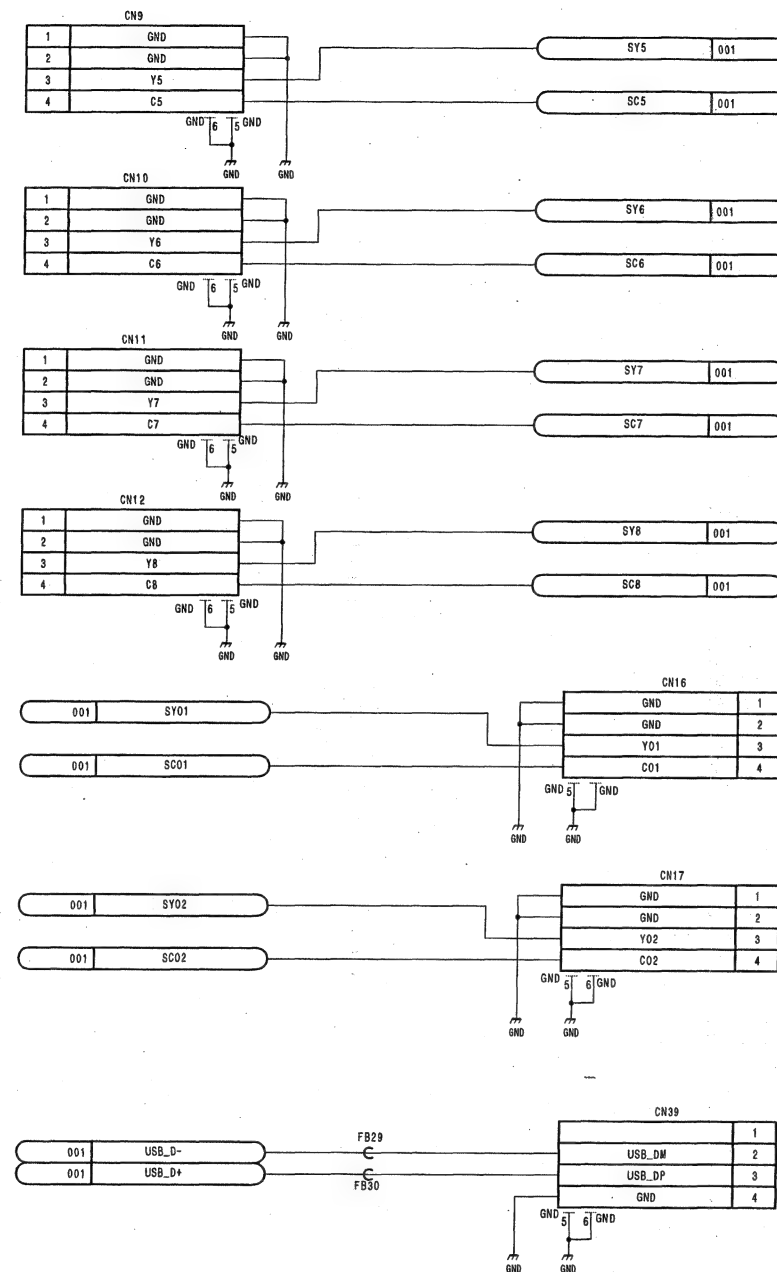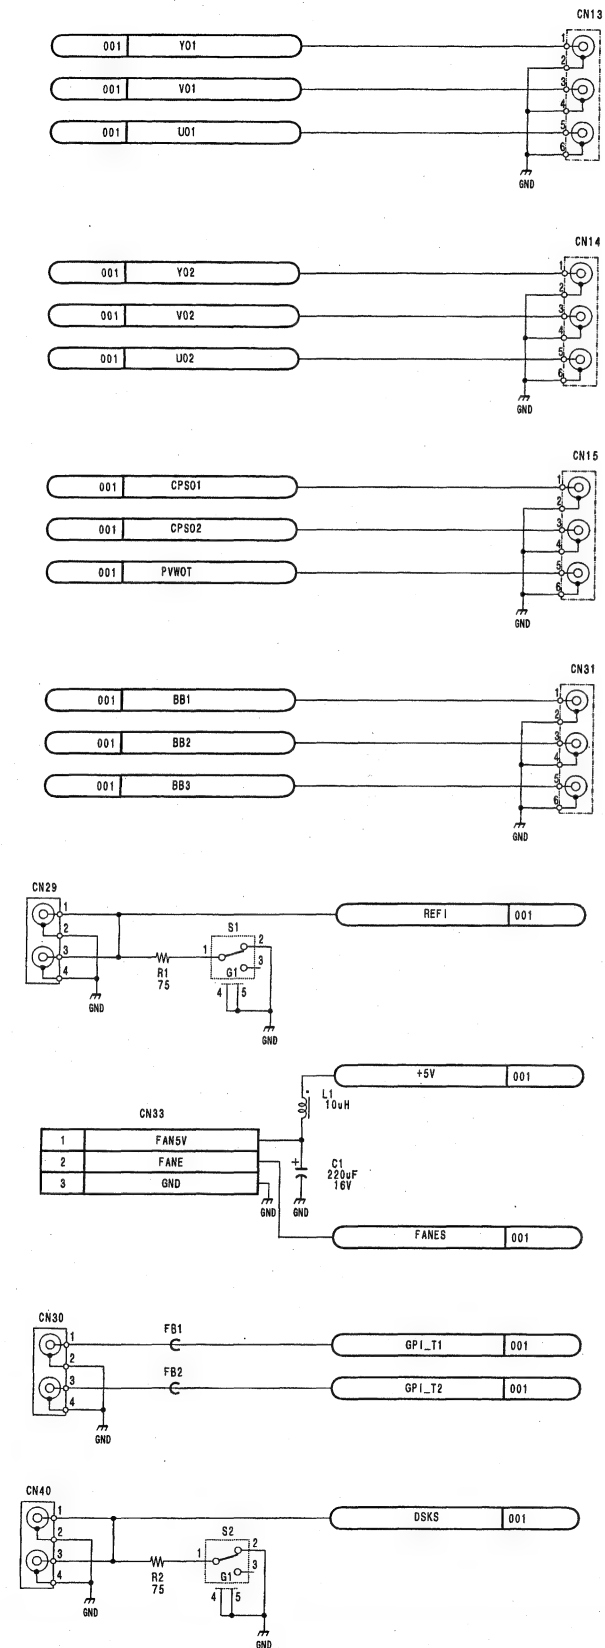

CONNECTOR BOARD
CN-1921
BOARD NO. 1-677-098-11
LOT NO. 911-

CN-1942 CN-1942

DFS-700 (J): S/N 30001 and Higher
DFS-700 (UC): S/N 10001 and Higher
DFS-700P (CE): S/N 40001 and Higher

CN1

	a	b	c	d	e	FG
1			GND	TLY6B	TLY8A	GND
2			GND	TLY7B	TLY7A	
3			GND	TLY6B	TLY6A	GND
4			GND	TLY5B	TLY5A	
5			GND	TLY4B	TLY4A	GND
6			GND	TLY3B	TLY3A	
7	GND	GND	GND	TLY2B	TLY2A	GND
8	GND	GND	GND	TLY1B	TLY1A	
9	GP1_T1	GP1_T2	GND	GND	GND	GND
10	+12V	+12V	GND	KB_TD-	KB_TD+	
11	+12V	+12V	GND	KB_VD-	KB_VD+	GND
12						
13						
14						
15	GND	GND	GND	KB_RD-	KB_RD+	GND
16	GND	GND	GND	GND	GND	
17	USB_D-	USB_D+	GND	GND	GND	GND
18	GND	GND	GND	ED_RD-	ED_RD+	
19	GND	GND	GND	ED_TD-	ED_TD+	GND
20	GND	GND	GND	GND	GND	
21	GND	GND	GND	GND	GND	GND
22	GND	GND	GND	GND	GND	
23	GND	GND	GND	GND	GND	GND
24	GND	GND	GND	+5V	+5V	
25	GND	FANES	GND	+5V	+5V	GND

CN5

	a	b	c	d	e	FG
1	GND	FANES	GND	+5V	+5V	GND
2	GND	GND	GND	+5V	+5V	
3	GND	GND	GND	GND	GND	GND
4	GND	GND	GND	GND	GND	
5	GND	GND	GND	GND	GND	GND
6	USB_D-	USB_D+	GND	GND	GND	
7	GND	GND	GND	ED_TD-	ED_TD+	GND
8	GND	GND	GND	ED_RD-	ED_RD+	
9	GND	GND	GND	GND	GND	GND
10	GND	GND	GND	GND	GND	
11	GND	GND	GND	KB_RD-	KB_RD+	GND
12						
13						
14						
15	+12V	+12V	GND	KB_VD-	KB_VD+	GND
16	+12V	+12V	GND	KB_TD-	KB_TD+	
17	GP1_T1	GP1_T2	GND	GND	GND	GND
18	GND	GND	GND	TLY1B	TLY1A	
19	GND	GND	GND	TLY2B	TLY2A	GND
20			GND	TLY3B	TLY3A	
21			GND	TLY4B	TLY4A	GND
22			GND	TLY5B	TLY5A	
23			GND	TLY6B	TLY6A	GND
24			GND	TLY7B	TLY7A	
25			GND	TLY8B	TLY8A	GND

CN2

	a	b	c	d	e	f
1	GND	Y17/CPS7	GND	V17	U17	GND
2	Y16/CPS6	GND	V16	GND	U16	GND
3	GND	Y15/CPS5	GND	V15	U15	GND
4	SY8	SC8	GND	GND	GND	GND
5	GND	GND	GND	SY7	SC7	GND
6	GND	GND	GND	SY6	SC6	GND
7	SY5	SC5	GND	GND	GND	GND
8	Y14/CPS4	GND	V14	GND	U14	GND
9	GND	Y13/CPS3	GND	V13	U13	GND
10	Y12/CPS2	GND	V12	GND	U12	GND
11	GND	Y11/CPS1	GND	V11	U11	GND

CN6

	a	b	c	d	e	FG
1	GND	Y11/CPS1	GND	V11	U11	GND
2	Y12/CPS2	GND	V12	GND	U12	
3	GND	Y13/CPS3	GND	V13	U13	GND
4	Y14/CPS4	GND	V14	GND	U14	
5	SY5	SC5	GND	GND	GND	GND
6	GND	GND	GND	SY6	SC6	
7	GND	GND	GND	SY7	SC7	GND
8	SY8	SC8	GND	GND	GND	
9	GND	Y15/CPS5	GND	V15	U15	GND
10	Y16/CPS6	GND	V16	GND	U16	
11	GND	Y17/CPS7	GND	V17	U17	GND
12						
13						
14						
15	Y18/CPS8	GND	V18	GND	U18	GND
16	GND	GND	GND	GND	GND	
17	GND	GND	DSK5	GND	REF1	GND
18	GND	GND	GND	GND	GND	
19	SY01	SC01	GND	SY02	SC02	GND
20	GND	GND	GND	GND	GND	
21	YO1	GND	VO1	GND	UO1	GND
22	GND	YO2	GND	VO2	UO2	
23	PVW0T	GND	CPS02	GND	CPS01	GND
24	GND	GND	GND	GND	GND	
25	GND	GND	BB3	BB2	BB1	GND

CN3

	a	b	c	d	e	FG
1	SD18	GND	GND	GND	GND	GND
2	GND	GND	SD17	GND	GND	
3	GND	GND	GND	GND	SD16	GND
4	GND	GND	SD15	GND	GND	
5	SD14	GND	GND	GND	GND	GND
6	GND	GND	GND	GND	GND	
7	SD13	GND	GND	GND	GND	GND
8	GND	GND	SD12	GND	GND	
9	GND	GND	GND	GND	SD11	GND
10	GND	GND	GND	GND	GND	
11	SD0K	GND	SD02	GND	SD01	GND
12						
13						
14						
15	GND	GND	BB3	BB2	BB1	GND
16	GND	GND	GND	GND	GND	
17	PVW0T	GND	CPS02	GND	CPS01	GND
18	GND	YO2	GND	VO2	GND	
19	YO1	GND	VO1	GND	UO1	GND
20	GND	GND	GND	GND	GND	
21	SY01	SC01	GND	SY02	SC02	GND
22	GND	GND	GND	GND	GND	
23	GND	GND	DSK5	GND	REF1	GND
24	GND	GND	GND	GND	GND	
25	Y18/CPS8	GND	V18	GND	U18	GND

CN7

	a	b	c	d	e	f
1	GND	GND	GND	GND	SD11	GND
2	GND	GND	SD12	GND	GND	GND
3	SD13	GND	GND	GND	GND	GND
4	GND	GND	GND	GND	GND	GND
5	SD14	GND	GND	GND	GND	GND
6	GND	GND	SD15	GND	GND	GND
7	GND	GND	GND	GND	SD16	GND
8	GND	GND	SD17	GND	GND	GND
9	SD18	GND	GND	GND	GND	GND
10	GND	GND	GND	GND	GND	GND
11	SD01	GND	SD02	GND	SD0K	GND

CONNECTOR BOARD
CN-1942
BOARD NO. 1-677-099-11
LOT NO. 911-

DFS-700/700P

The diagram illustrates the internal circuitry of a CPU board, specifically the CPU-305 (1/3) model. It features a central processing unit (CPU) area with several integrated circuits (ICs) and their associated components. The layout includes a power supply section, various control and status signal lines, and a detailed pinout for the CPU. The board is labeled "CPU BOARD" and "CPU-305 (1/3)".

Key Components and Connections:


- IC29 (LTC1628CG#TR):** A precision centesimal divider, configured as a 100 divider. It is connected to the CPU's internal clock and output signals.
- IC24 (SN75C1167NS-E05):** A 16-bit parallel-to-serial converter, used for data transfer between the CPU and external devices.
- IC27 (74VHC540FT IEL):** A 16-bit parallel-to-serial converter, used for data transfer between the CPU and external devices.
- IC28 (74VHC74FT IEL):** A 16-bit parallel-to-serial converter, used for data transfer between the CPU and external devices.
- IC26 (EPW7032SLC44-CPU305ADRV1.0):** The main CPU chip, which is the central processing unit of the board.
- IC25 (MAX202CSE-T):** A 16-bit parallel-to-serial converter, used for data transfer between the CPU and external devices.
- IC23 (SN74LV24APWR):** A 16-bit parallel-to-serial converter, used for data transfer between the CPU and external devices.
- IC22 (TL7705GFS-B-E20):** A 16-bit parallel-to-serial converter, used for data transfer between the CPU and external devices.
- IC21 (TMP68301AFR-16):** A 16-bit parallel-to-serial converter, used for data transfer between the CPU and external devices.
- IC20 (MAX202CSE-T):** A 16-bit parallel-to-serial converter, used for data transfer between the CPU and external devices.
- IC19 (LTC1628CG#TR):** A precision centesimal divider, configured as a 100 divider. It is connected to the CPU's internal clock and output signals.
- IC18 (74VHC540FT IEL):** A 16-bit parallel-to-serial converter, used for data transfer between the CPU and external devices.
- IC17 (74VHC540FT IEL):** A 16-bit parallel-to-serial converter, used for data transfer between the CPU and external devices.
- IC16 (74VHC540FT IEL):** A 16-bit parallel-to-serial converter, used for data transfer between the CPU and external devices.
- IC15 (74VHC540FT IEL):** A 16-bit parallel-to-serial converter, used for data transfer between the CPU and external devices.
- IC14 (74VHC540FT IEL):** A 16-bit parallel-to-serial converter, used for data transfer between the CPU and external devices.
- IC13 (74VHC540FT IEL):** A 16-bit parallel-to-serial converter, used for data transfer between the CPU and external devices.
- IC12 (74VHC540FT IEL):** A 16-bit parallel-to-serial converter, used for data transfer between the CPU and external devices.
- IC11 (74VHC540FT IEL):** A 16-bit parallel-to-serial converter, used for data transfer between the CPU and external devices.
- IC10 (74VHC540FT IEL):** A 16-bit parallel-to-serial converter, used for data transfer between the CPU and external devices.
- IC9 (74VHC540FT IEL):** A 16-bit parallel-to-serial converter, used for data transfer between the CPU and external devices.
- IC8 (74VHC540FT IEL):** A 16-bit parallel-to-serial converter, used for data transfer between the CPU and external devices.
- IC7 (74VHC540FT IEL):** A 16-bit parallel-to-serial converter, used for data transfer between the CPU and external devices.
- IC6 (74VHC540FT IEL):** A 16-bit parallel-to-serial converter, used for data transfer between the CPU and external devices.
- IC5 (74VHC540FT IEL):** A 16-bit parallel-to-serial converter, used for data transfer between the CPU and external devices.
- IC4 (74VHC540FT IEL):** A 16-bit parallel-to-serial converter, used for data transfer between the CPU and external devices.
- IC3 (74VHC540FT IEL):** A 16-bit parallel-to-serial converter, used for data transfer between the CPU and external devices.
- IC2 (74VHC540FT IEL):** A 16-bit parallel-to-serial converter, used for data transfer between the CPU and external devices.
- IC1 (74VHC540FT IEL):** A 16-bit parallel-to-serial converter, used for data transfer between the CPU and external devices.

The diagram also shows various other components, including resistors, capacitors, and a detailed pinout for the CPU. The board is labeled "CPU BOARD" and "CPU-305 (1/3)".

CPU BOARD
CPU-305 (1/3)
BOARD NO. 1-675-958-11
LOT NO. 911-

CPU-305 (2/3)


DFS-700 (J): S/N 30001 and Higher
DFS-700 (UC): S/N 10001 and Higher
DFS-700P (CE): S/N 40001 and Higher

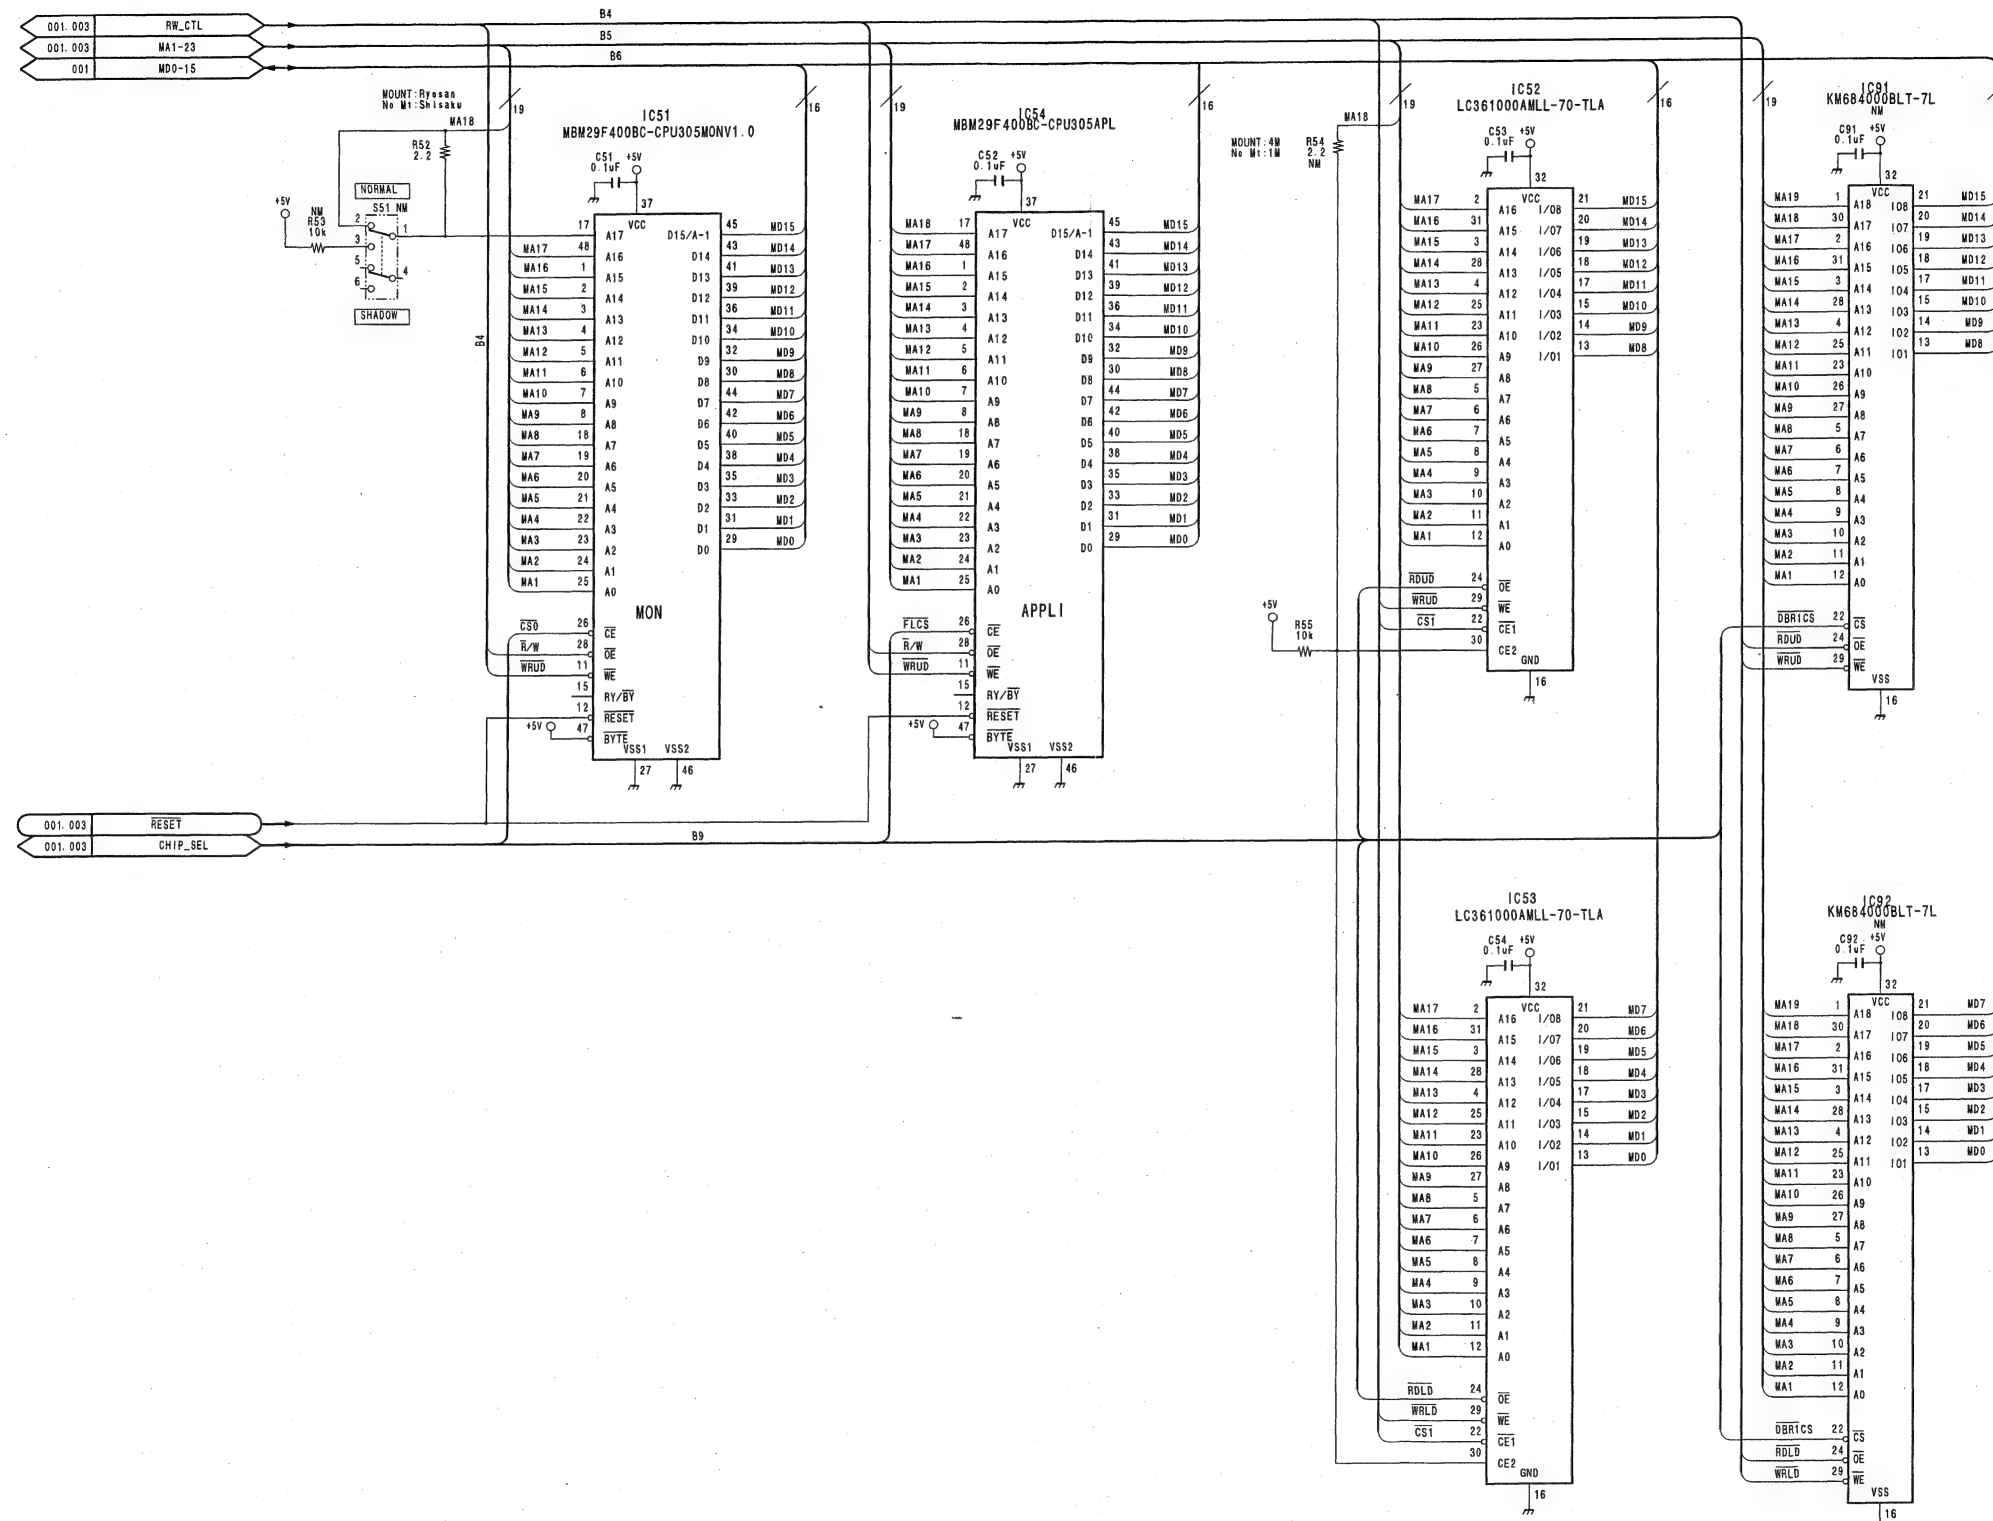

CPU BOARD
CPU-305 (2/3)
BOARD NO. 1-675-958-11
LOT NO. 911-


DFS-700/700P

DFS-700 (J): S/N 30001 and Higher
 DFS-700 (UC): S/N 10001 and Higher
 DFS-700P (CE): S/N 40001 and Higher

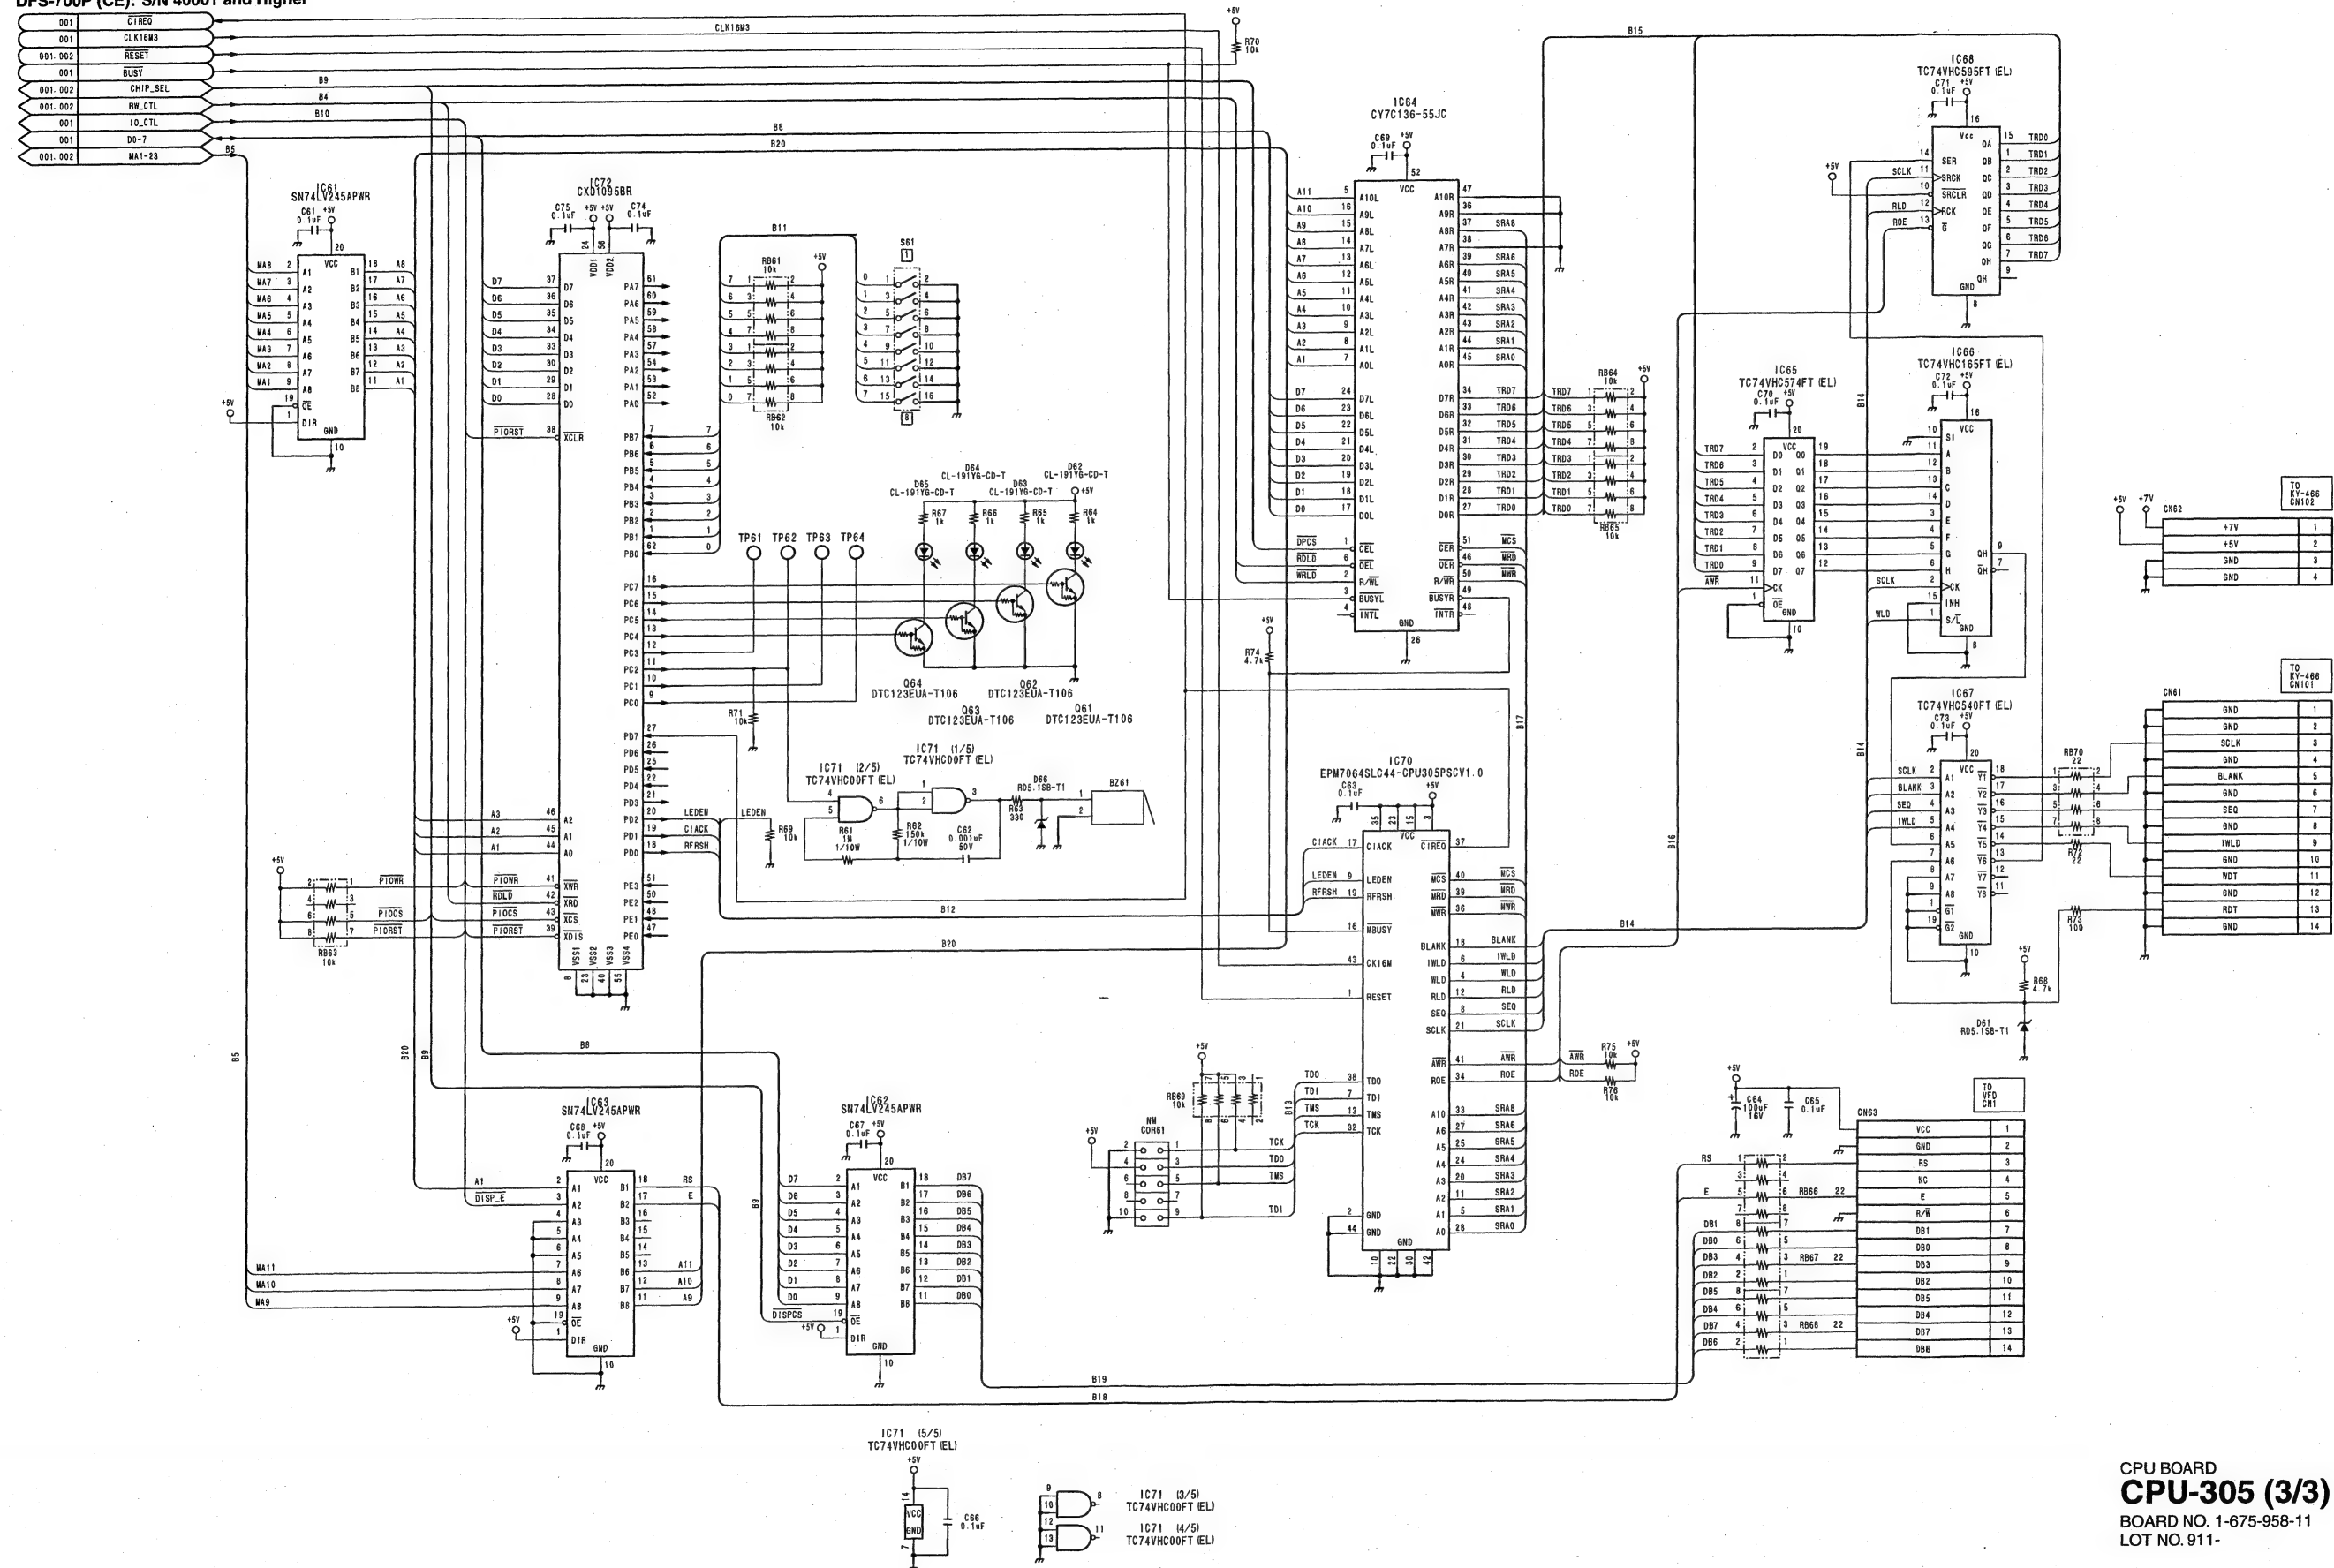


CPU BOARD
CPU-305 (3/3)
 BOARD NO. 1-675-958-11
 LOT NO. 911-

DFS-700 (J): S/N 30001 and Higher
 DFS-700 (UC): S/N 10001 and Higher
 DFS-700P (CE): S/N 40001 and Higher

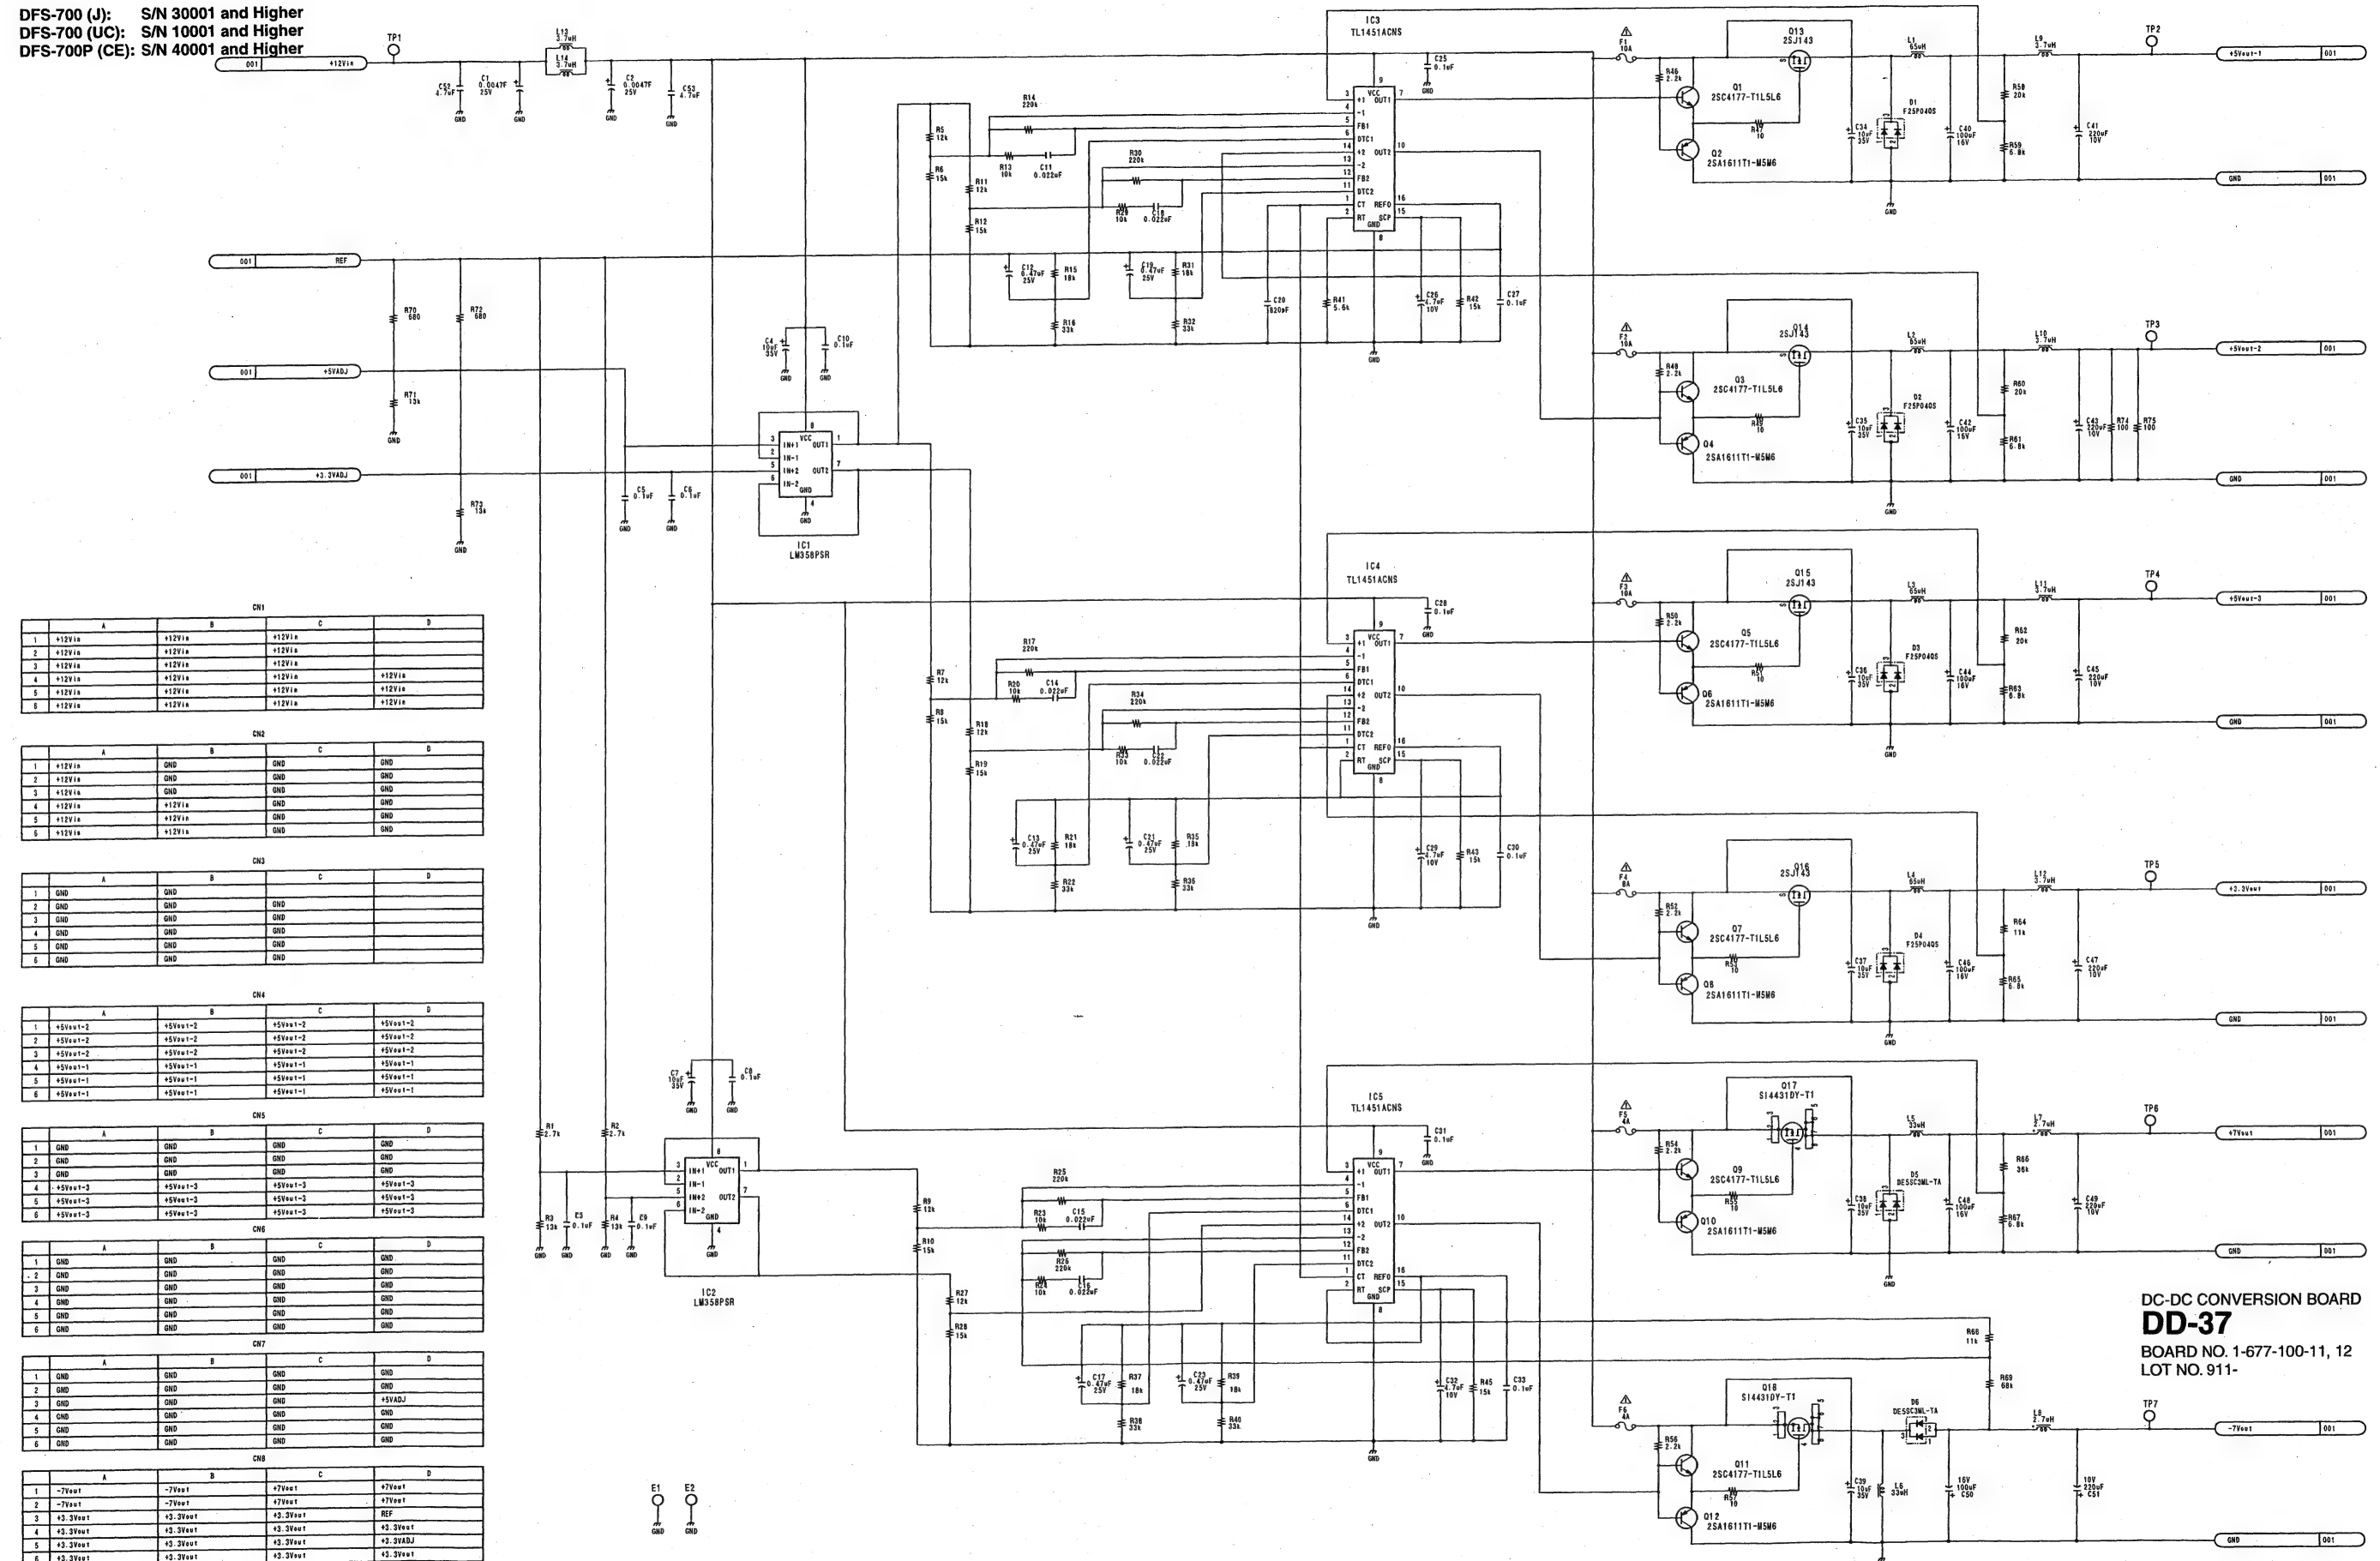

DC-DC CONVERSION BOARD
DD-37
 BOARD NO. 1-677-100-11, 12
 LOT NO. 911-

DFS-700 (J): S/N 30001 and Higher
DFS-700 (UC): S/N 10001 and Higher
DFS-700P (CE): S/N 40001 and Higher

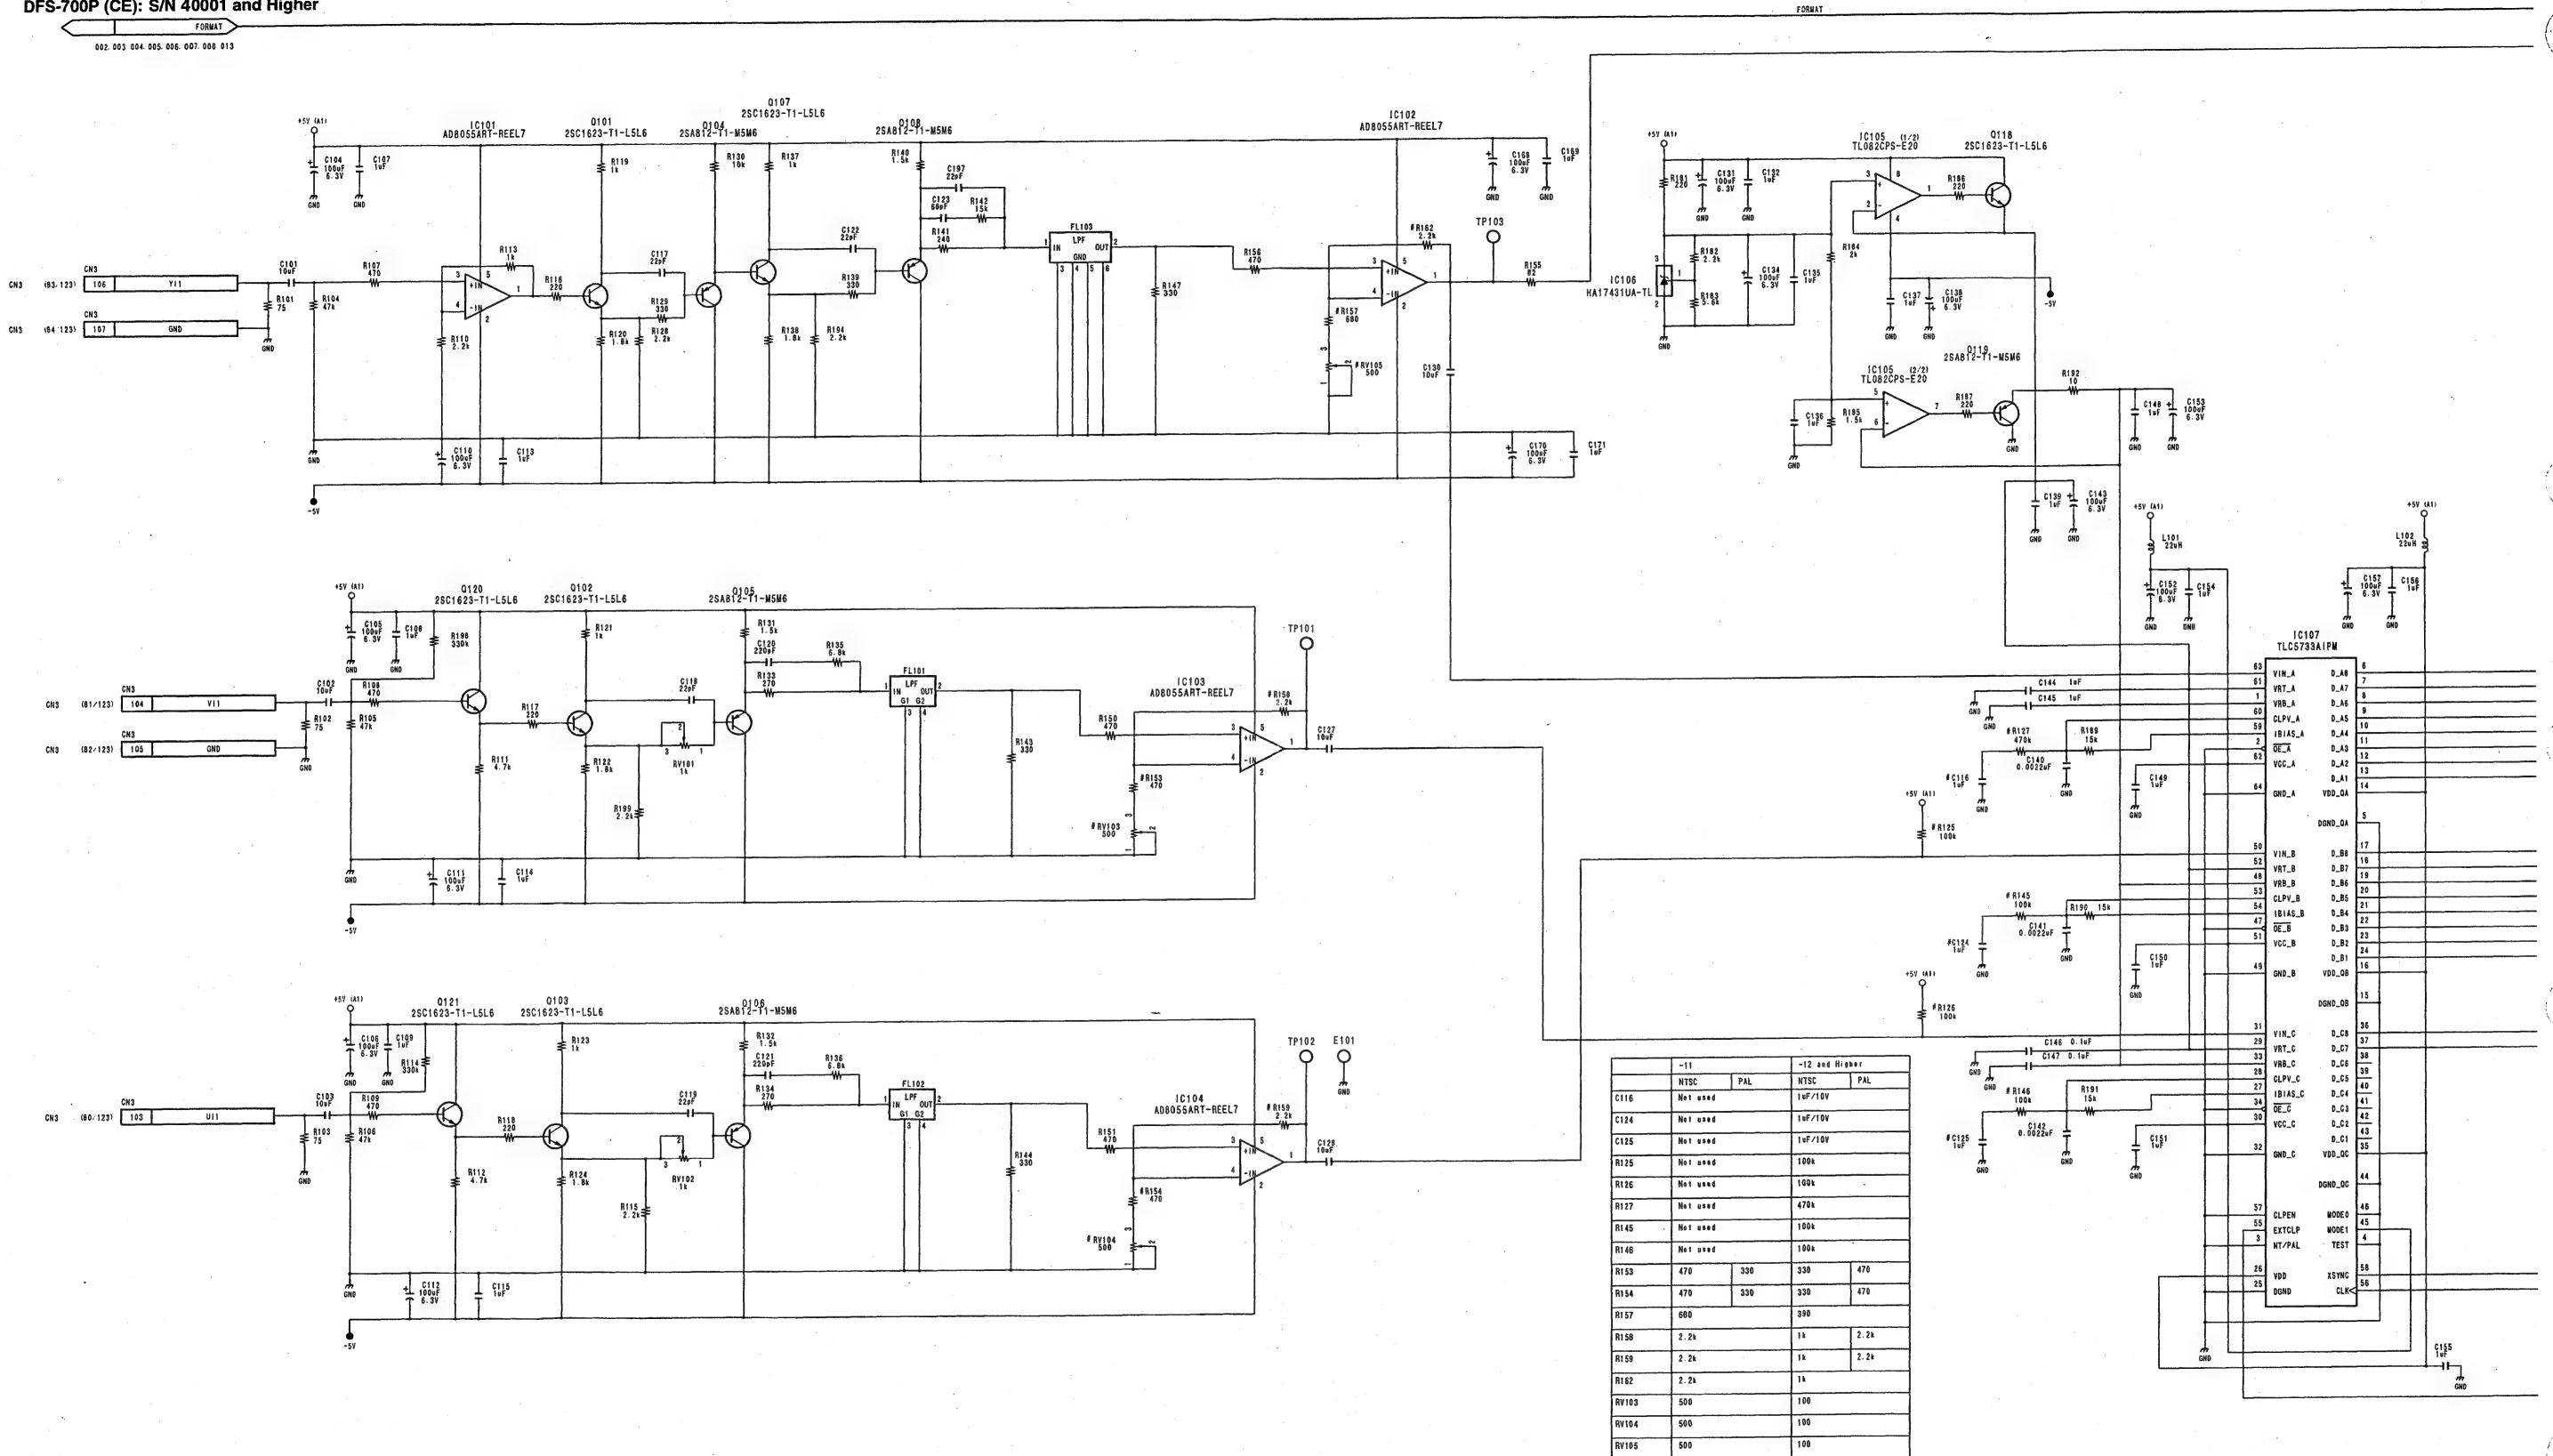

4-18


4-18

DFS-700/700P



IPM-96/96P (2/14)

DFS-700 (J): S/N 30001 and Higher
DFS-700 (UC): S/N 10001 and Higher
DFS-700P (CE): S/N 40001 and Higher

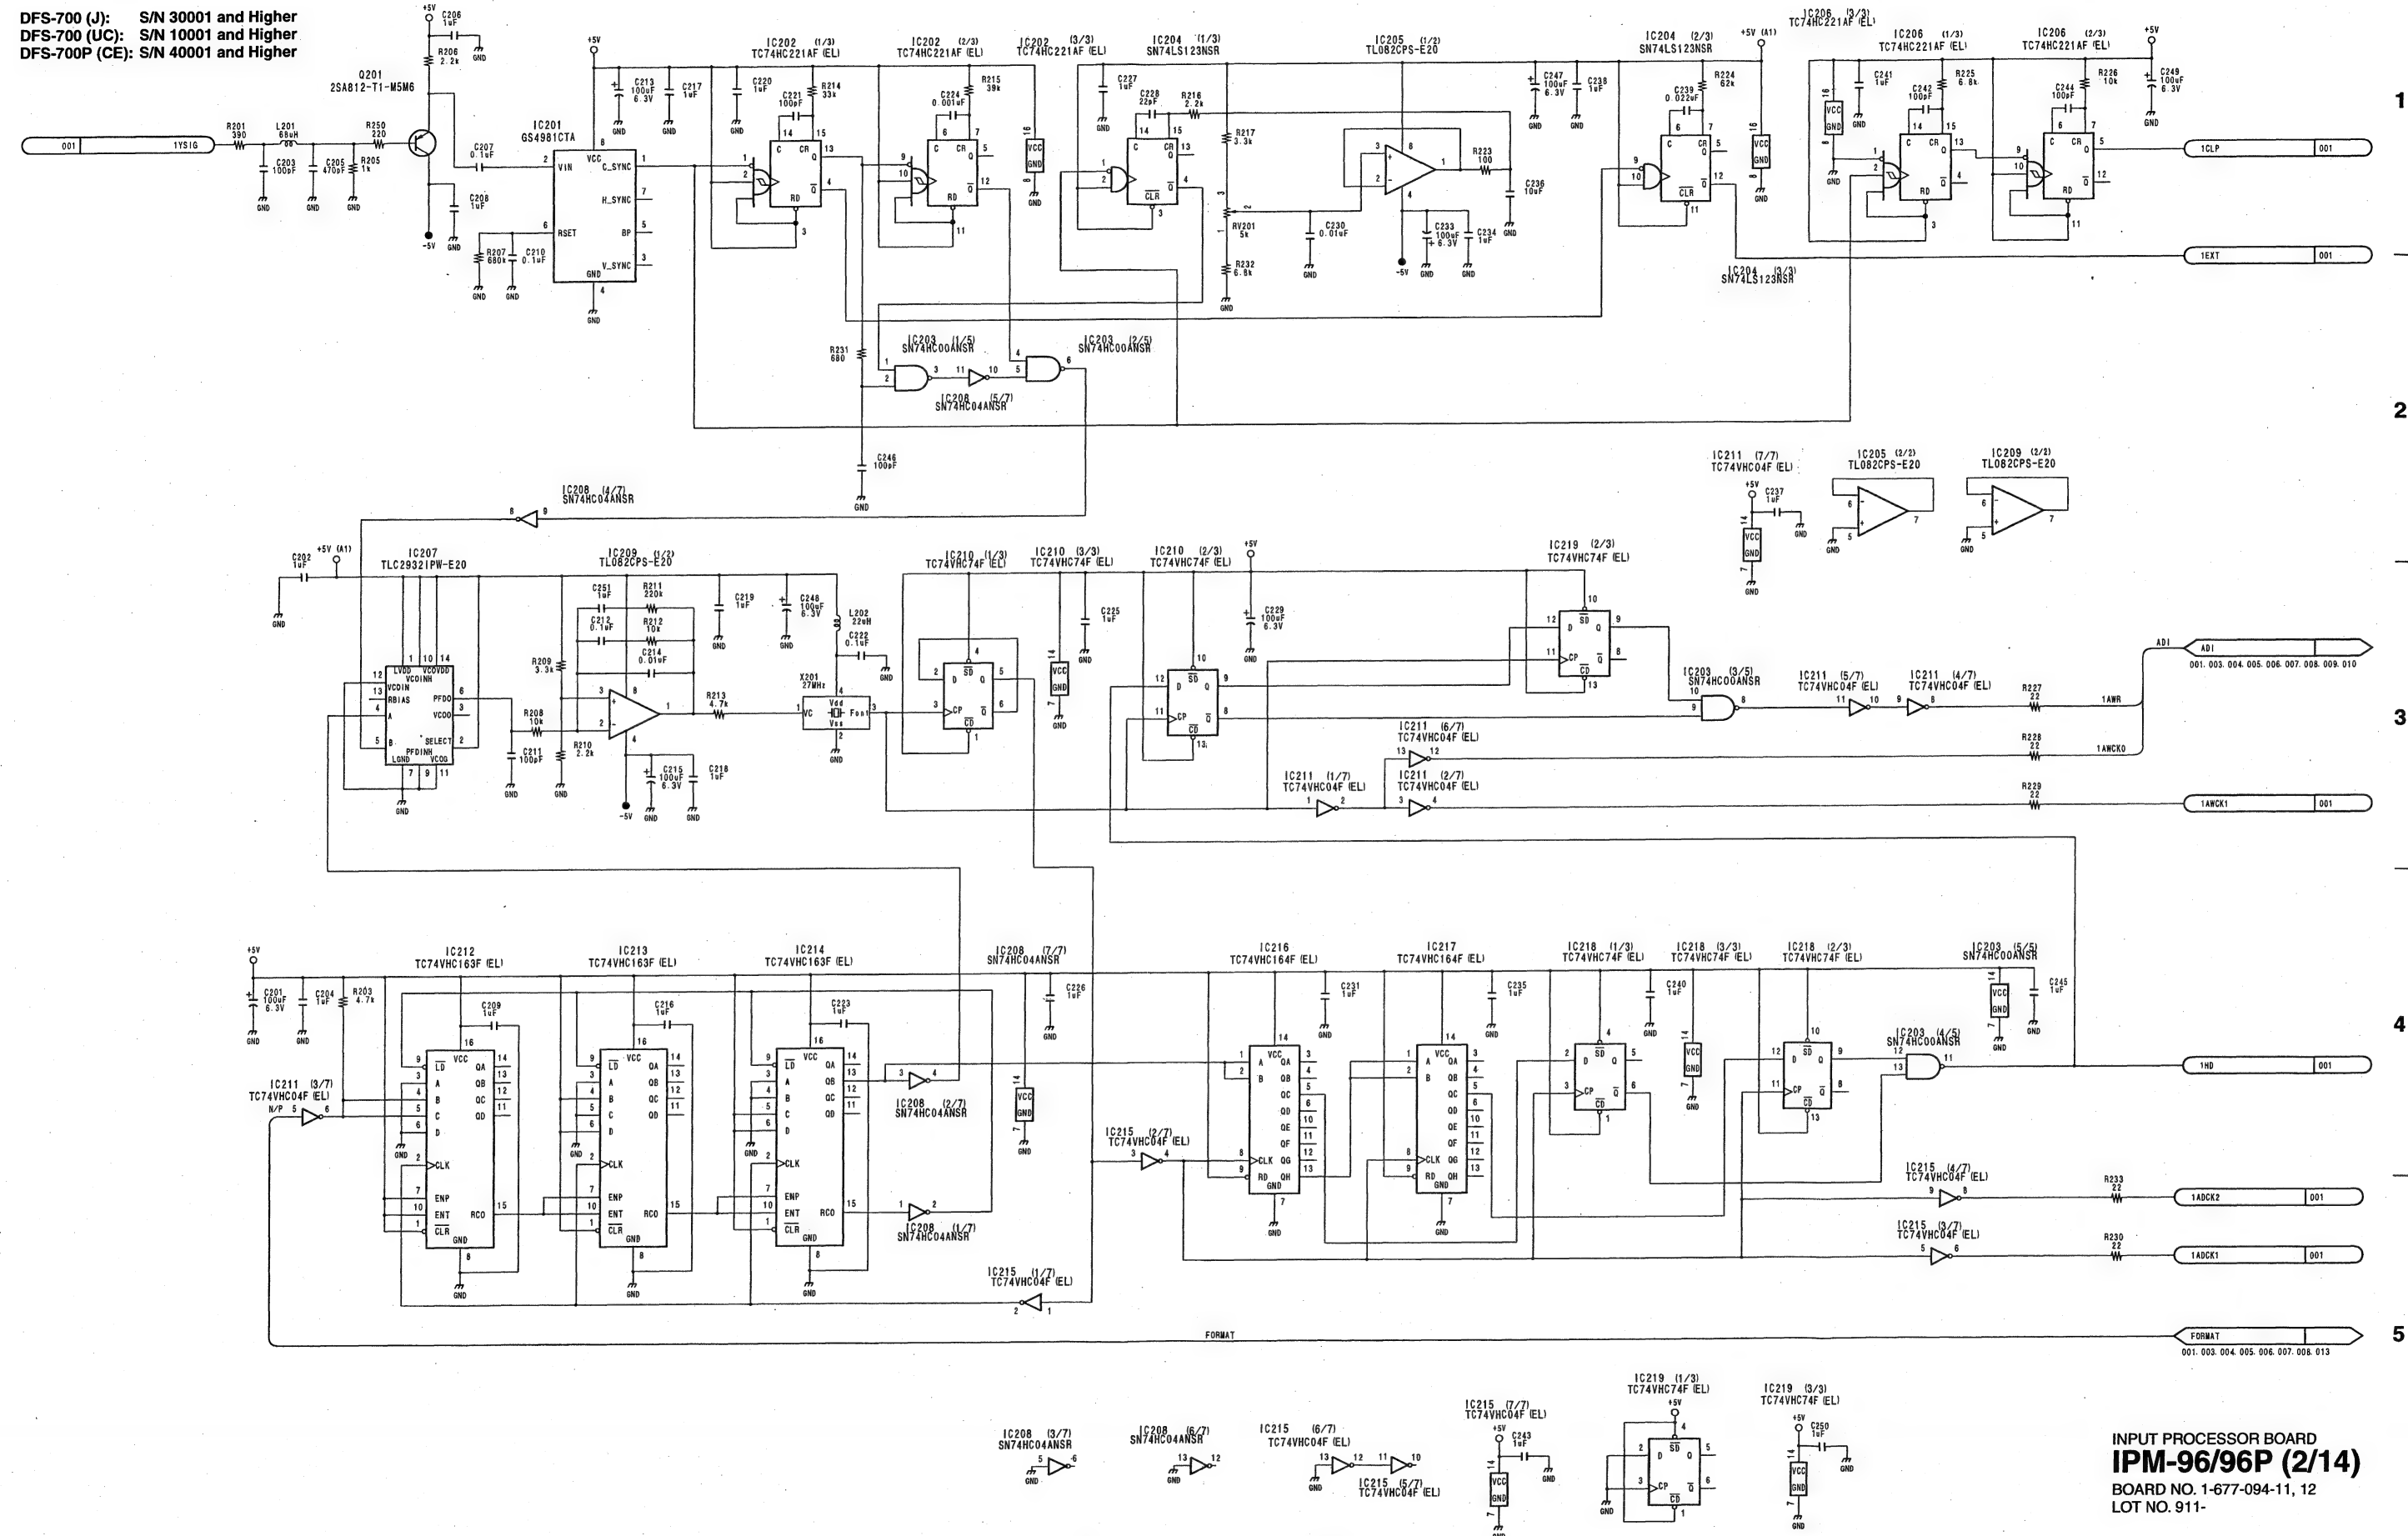



INPUT PROCESSOR BOARD
IPM-96/96P (2/14)
BOARD NO. 1-677-094-11, 12
LOT NO. 911-

DFS-700 (J): S/N 30001 and Higher
DFS-700 (UC): S/N 10001 and Higher
DFS-700P (CE): S/N 40001 and Higher

FORMAT
001.002.004.005.006.007.008.013


FORMAT

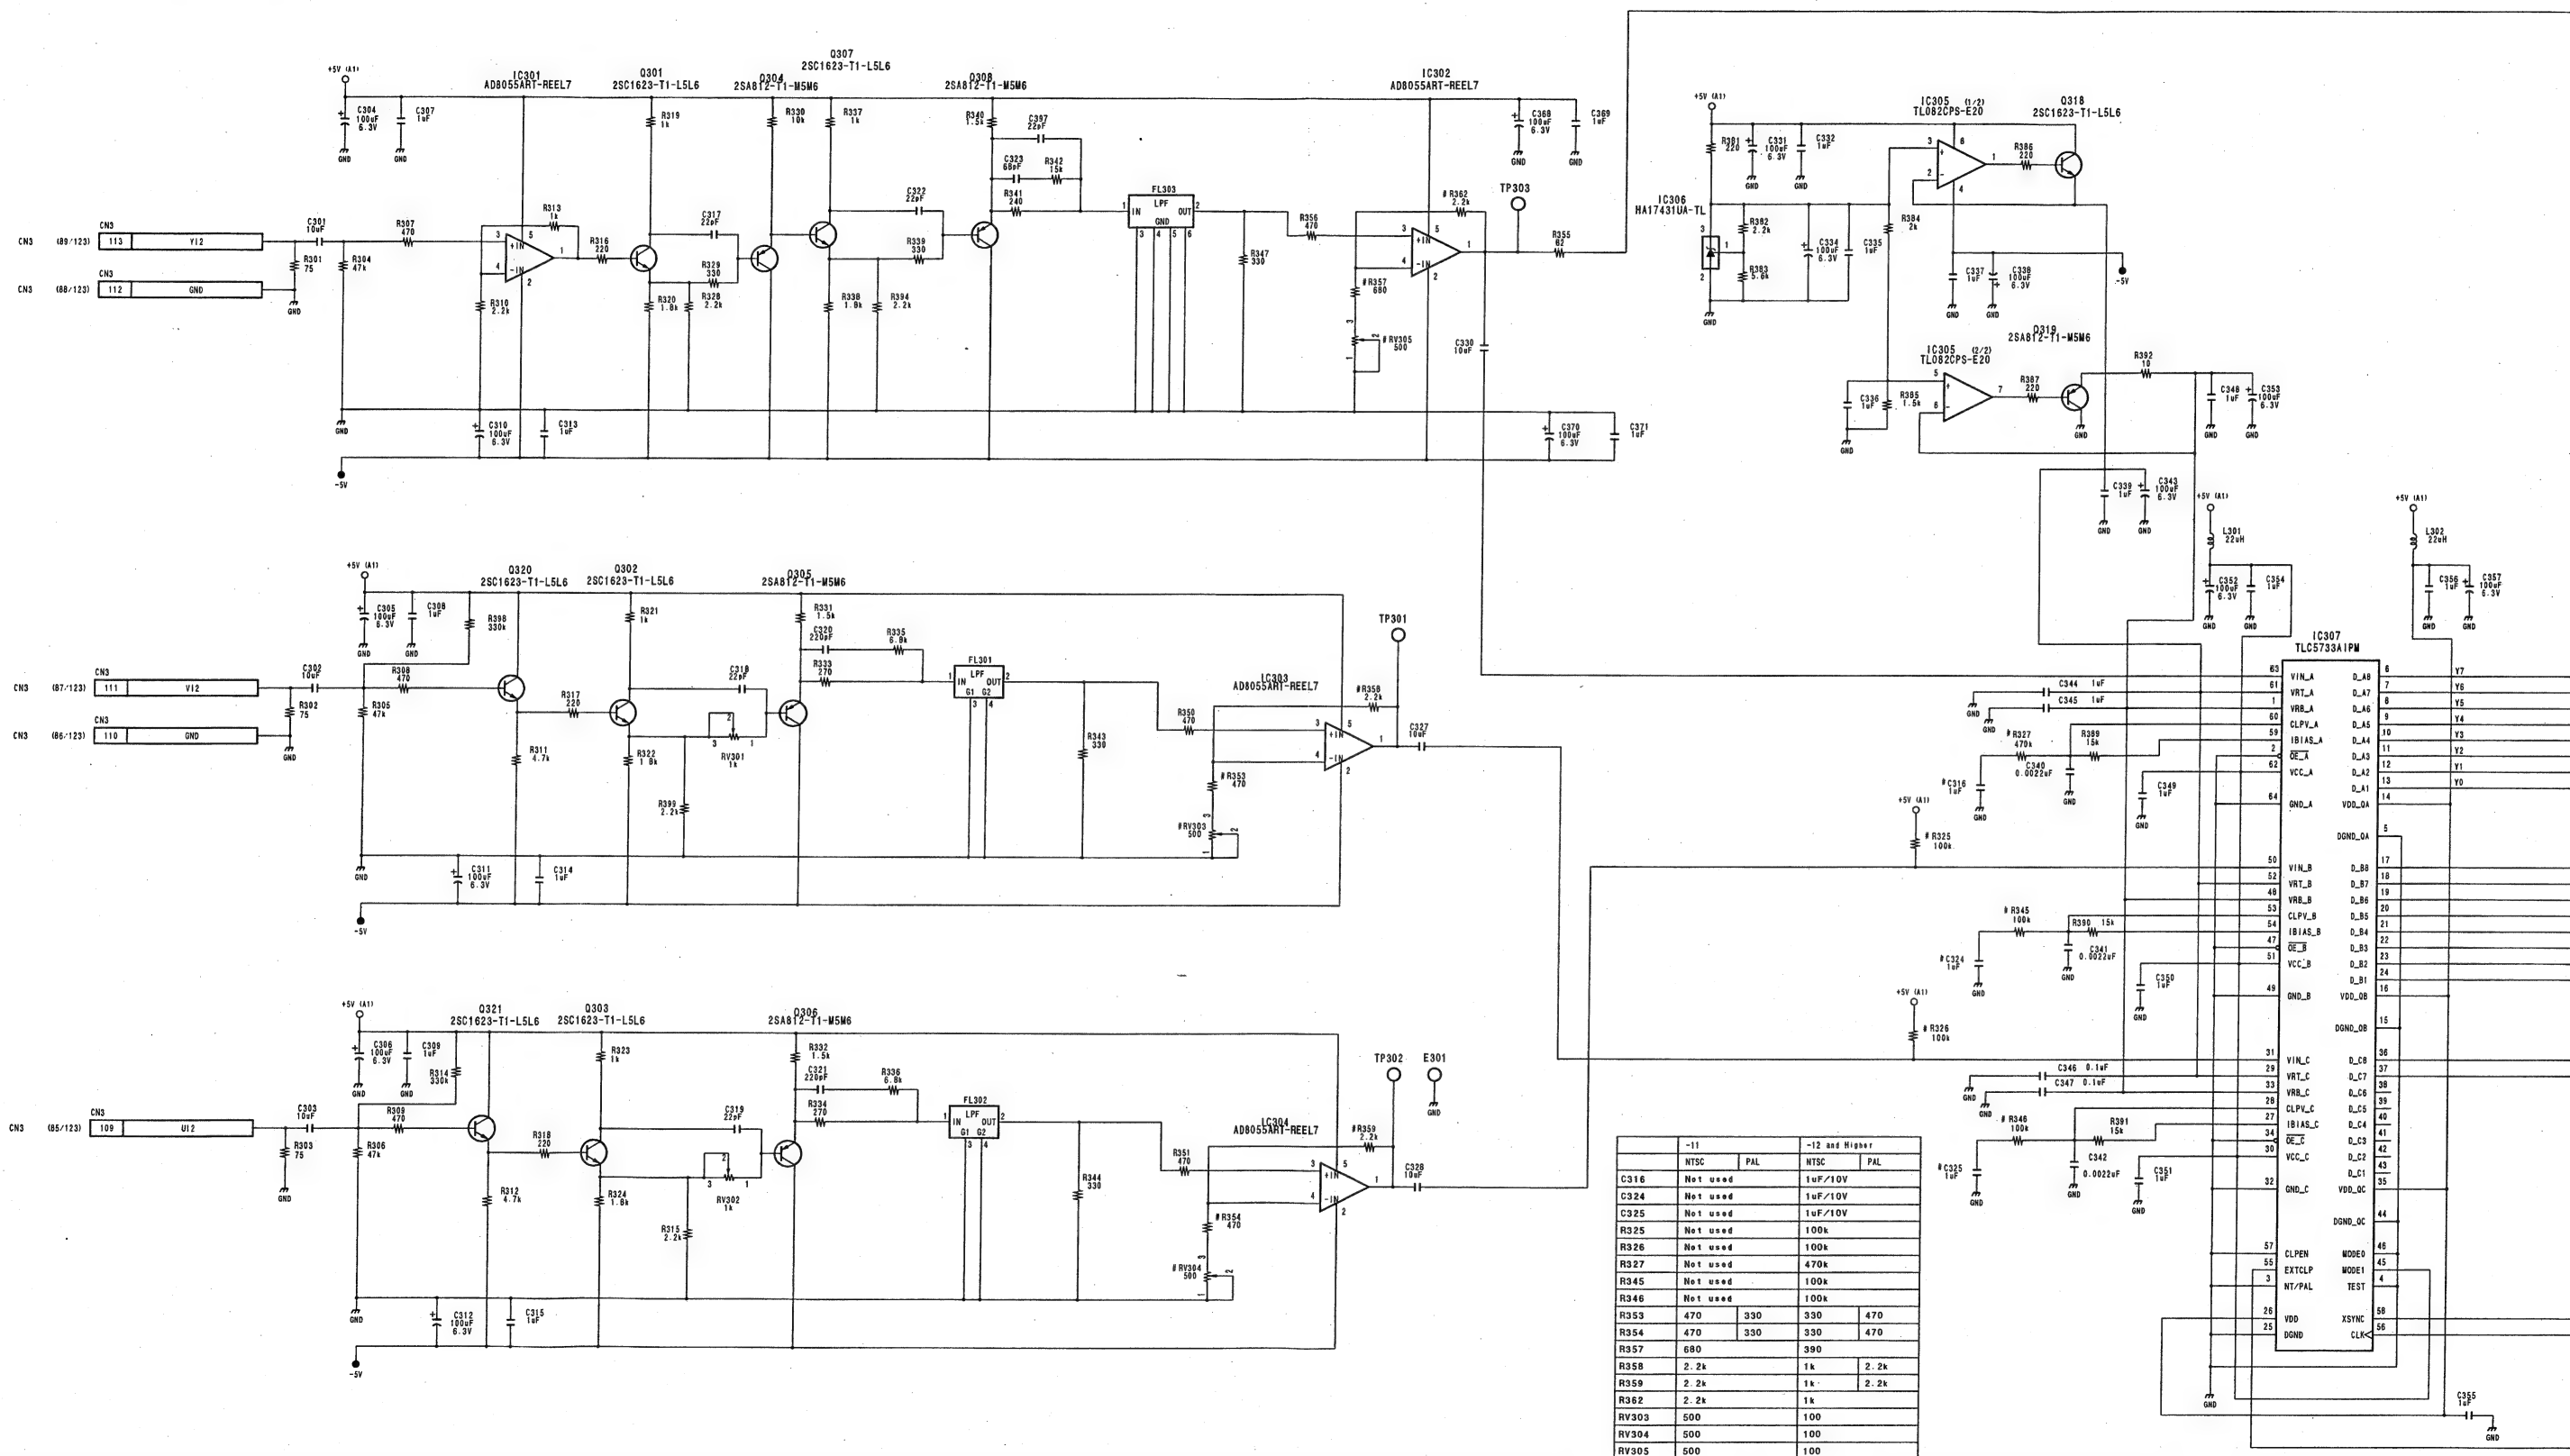

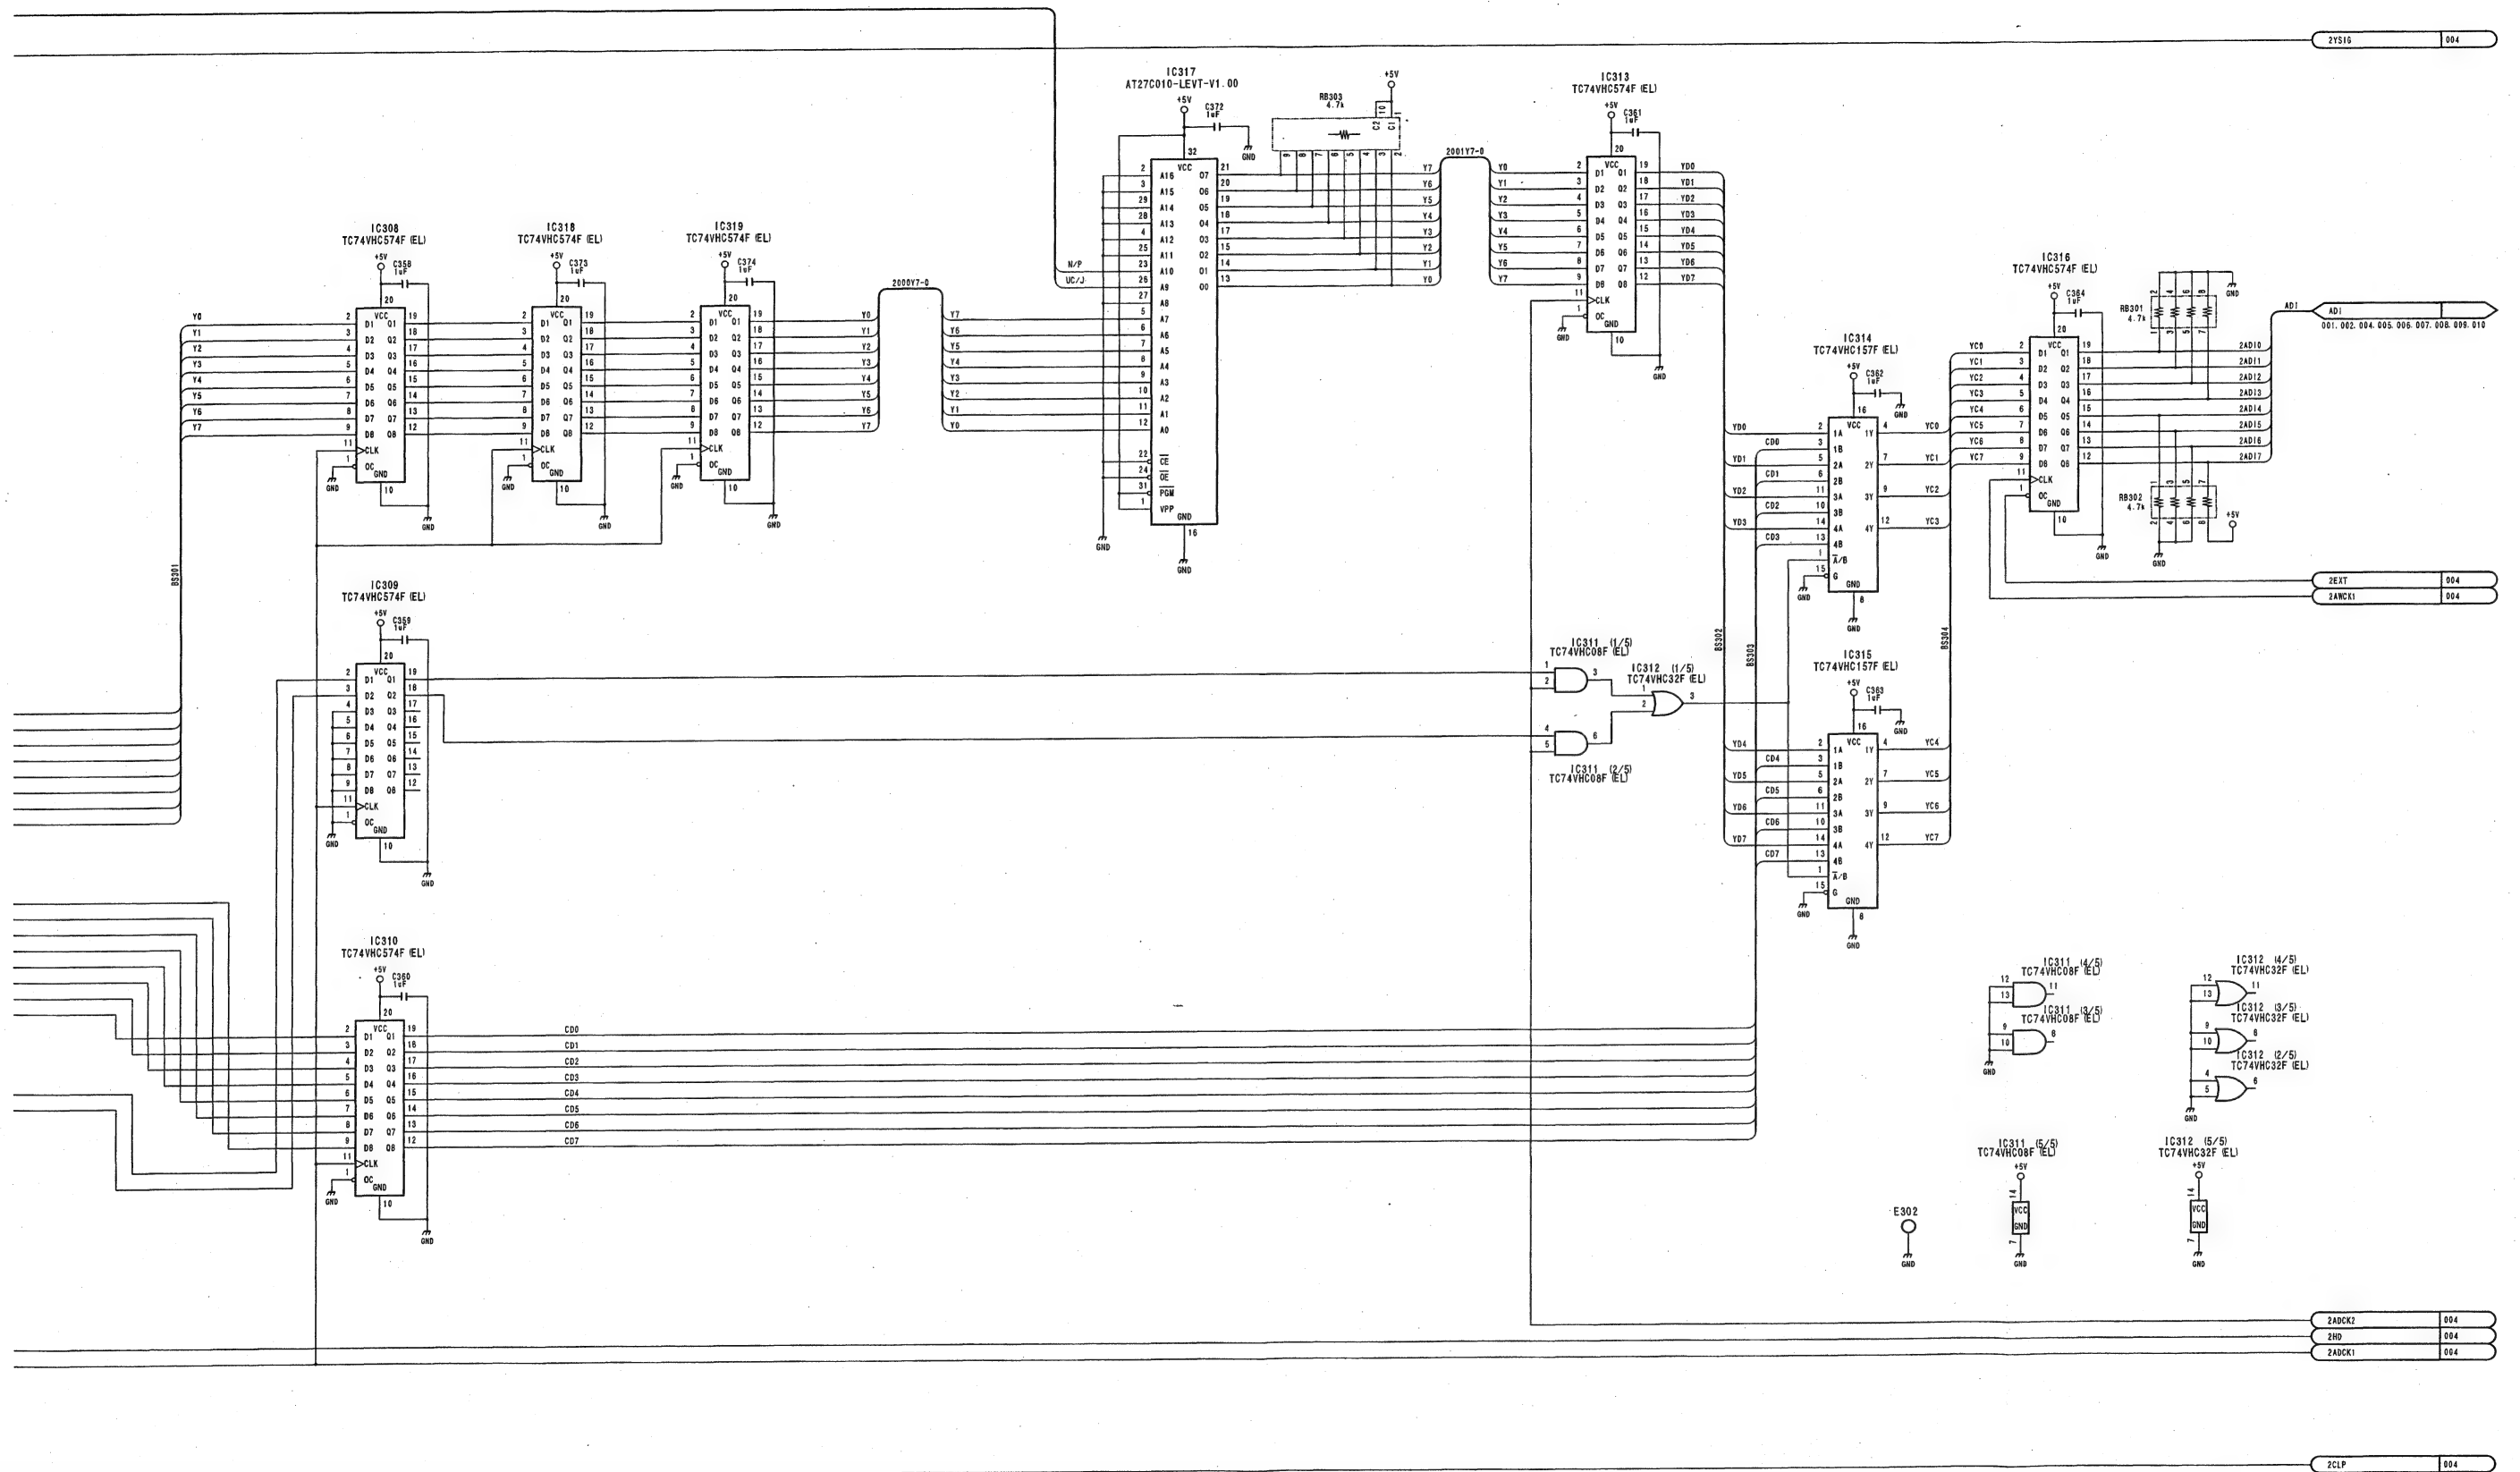



INPUT PROCESSOR BOARD
IPM-96/96P (3/14)
BOARD NO. 1-677-094-11, 12
LOT NO. 911-

DFS-700 (J): S/N 30001 and Higher
 DFS-700 (UC): S/N 10001 and Higher
 DFS-700P (CE): S/N 40001 and Higher

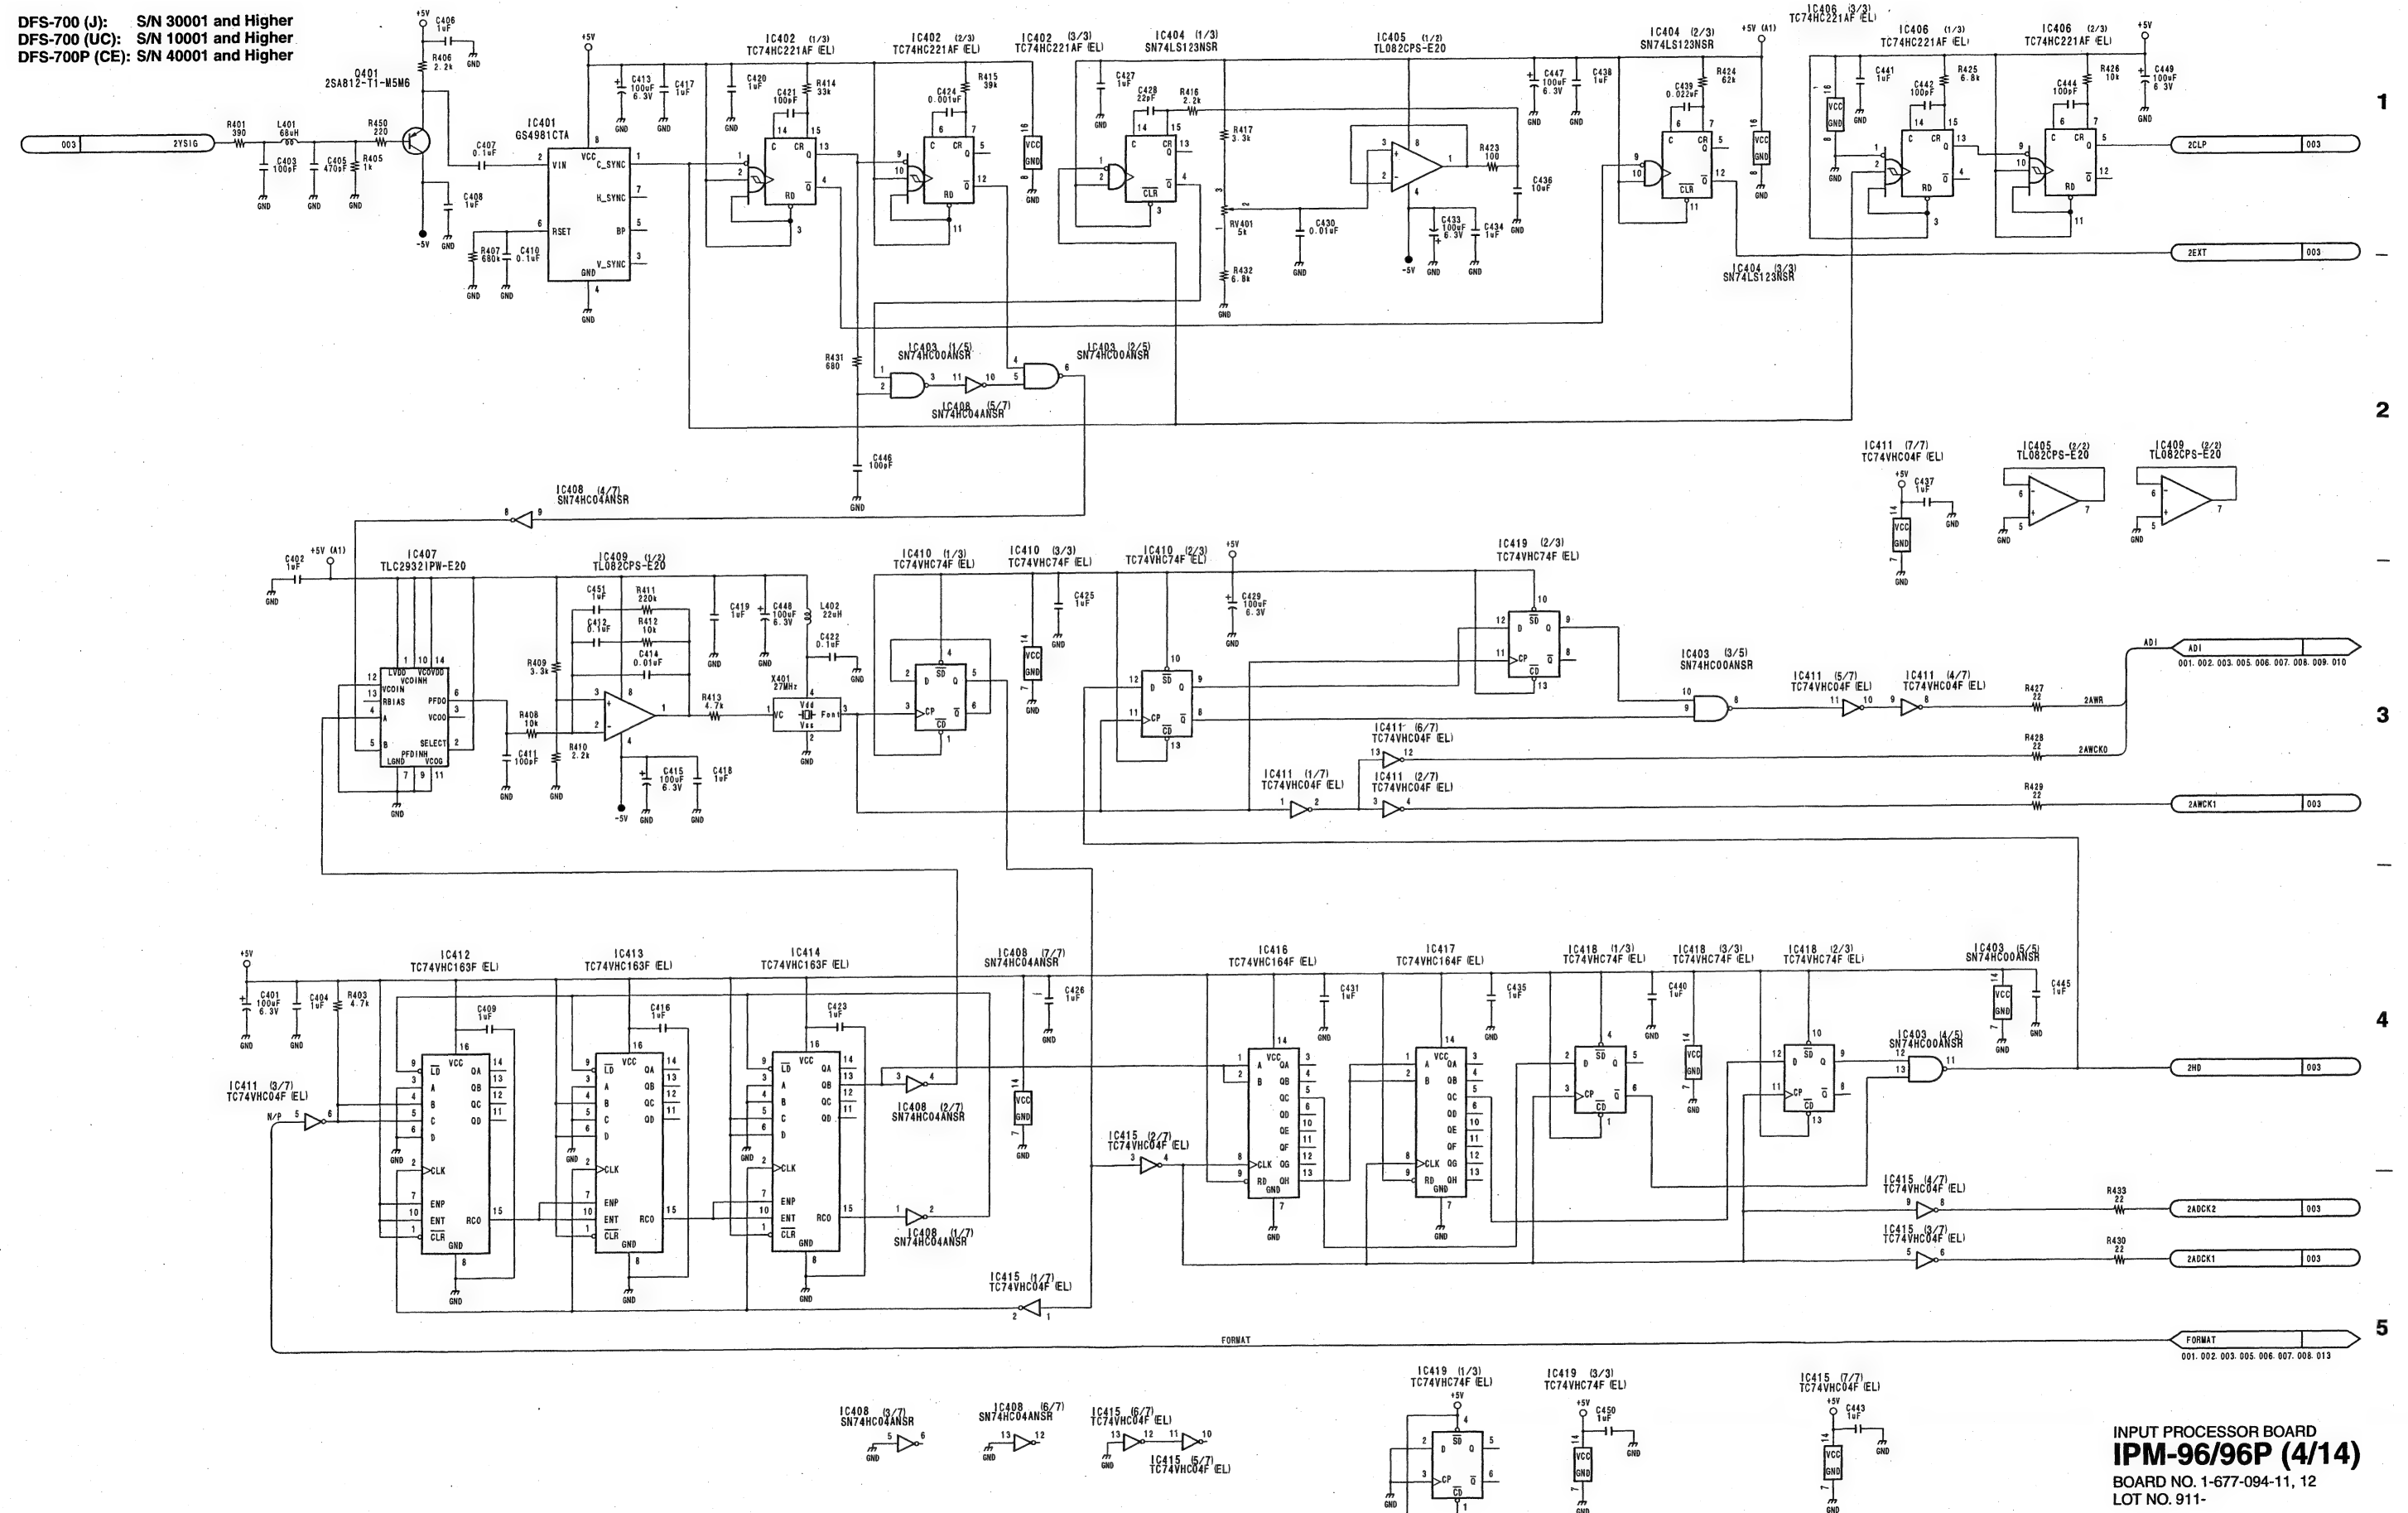


DFS-700 (J): S/N 30001 and Higher
DFS-700 (UC): S/N 10001 and Higher
DFS-700P (CE): S/N 40001 and Higher

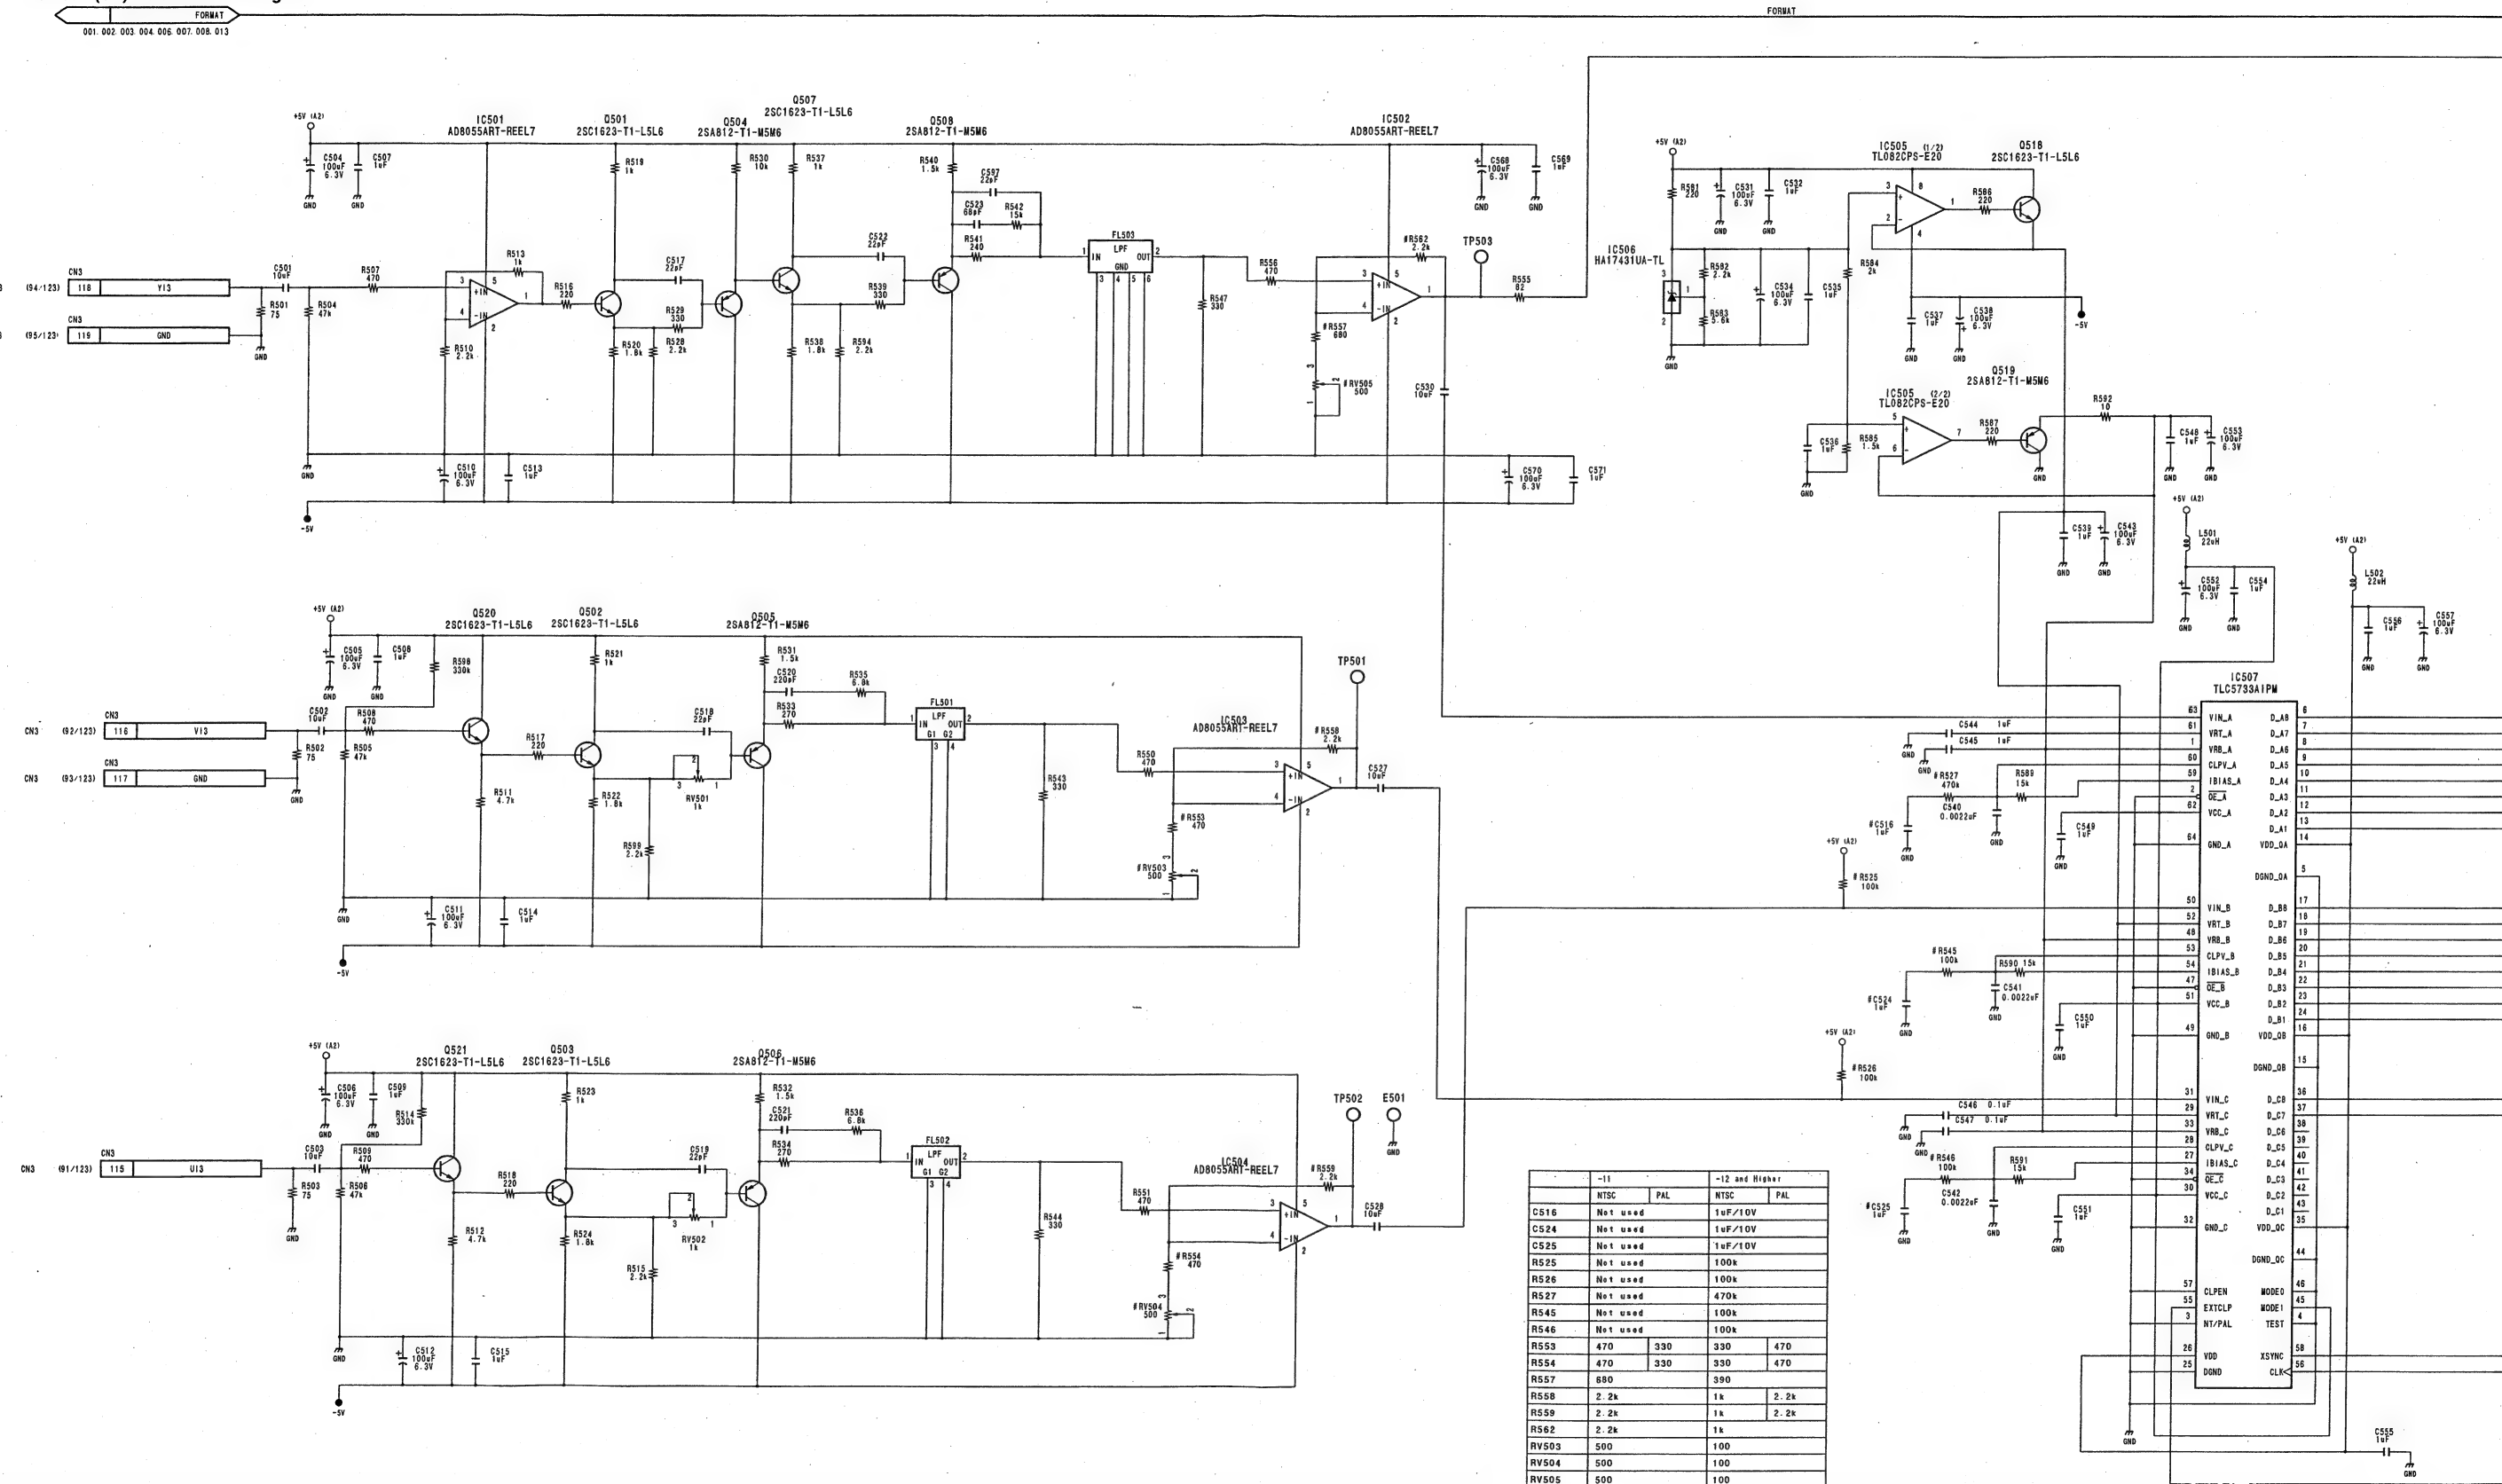

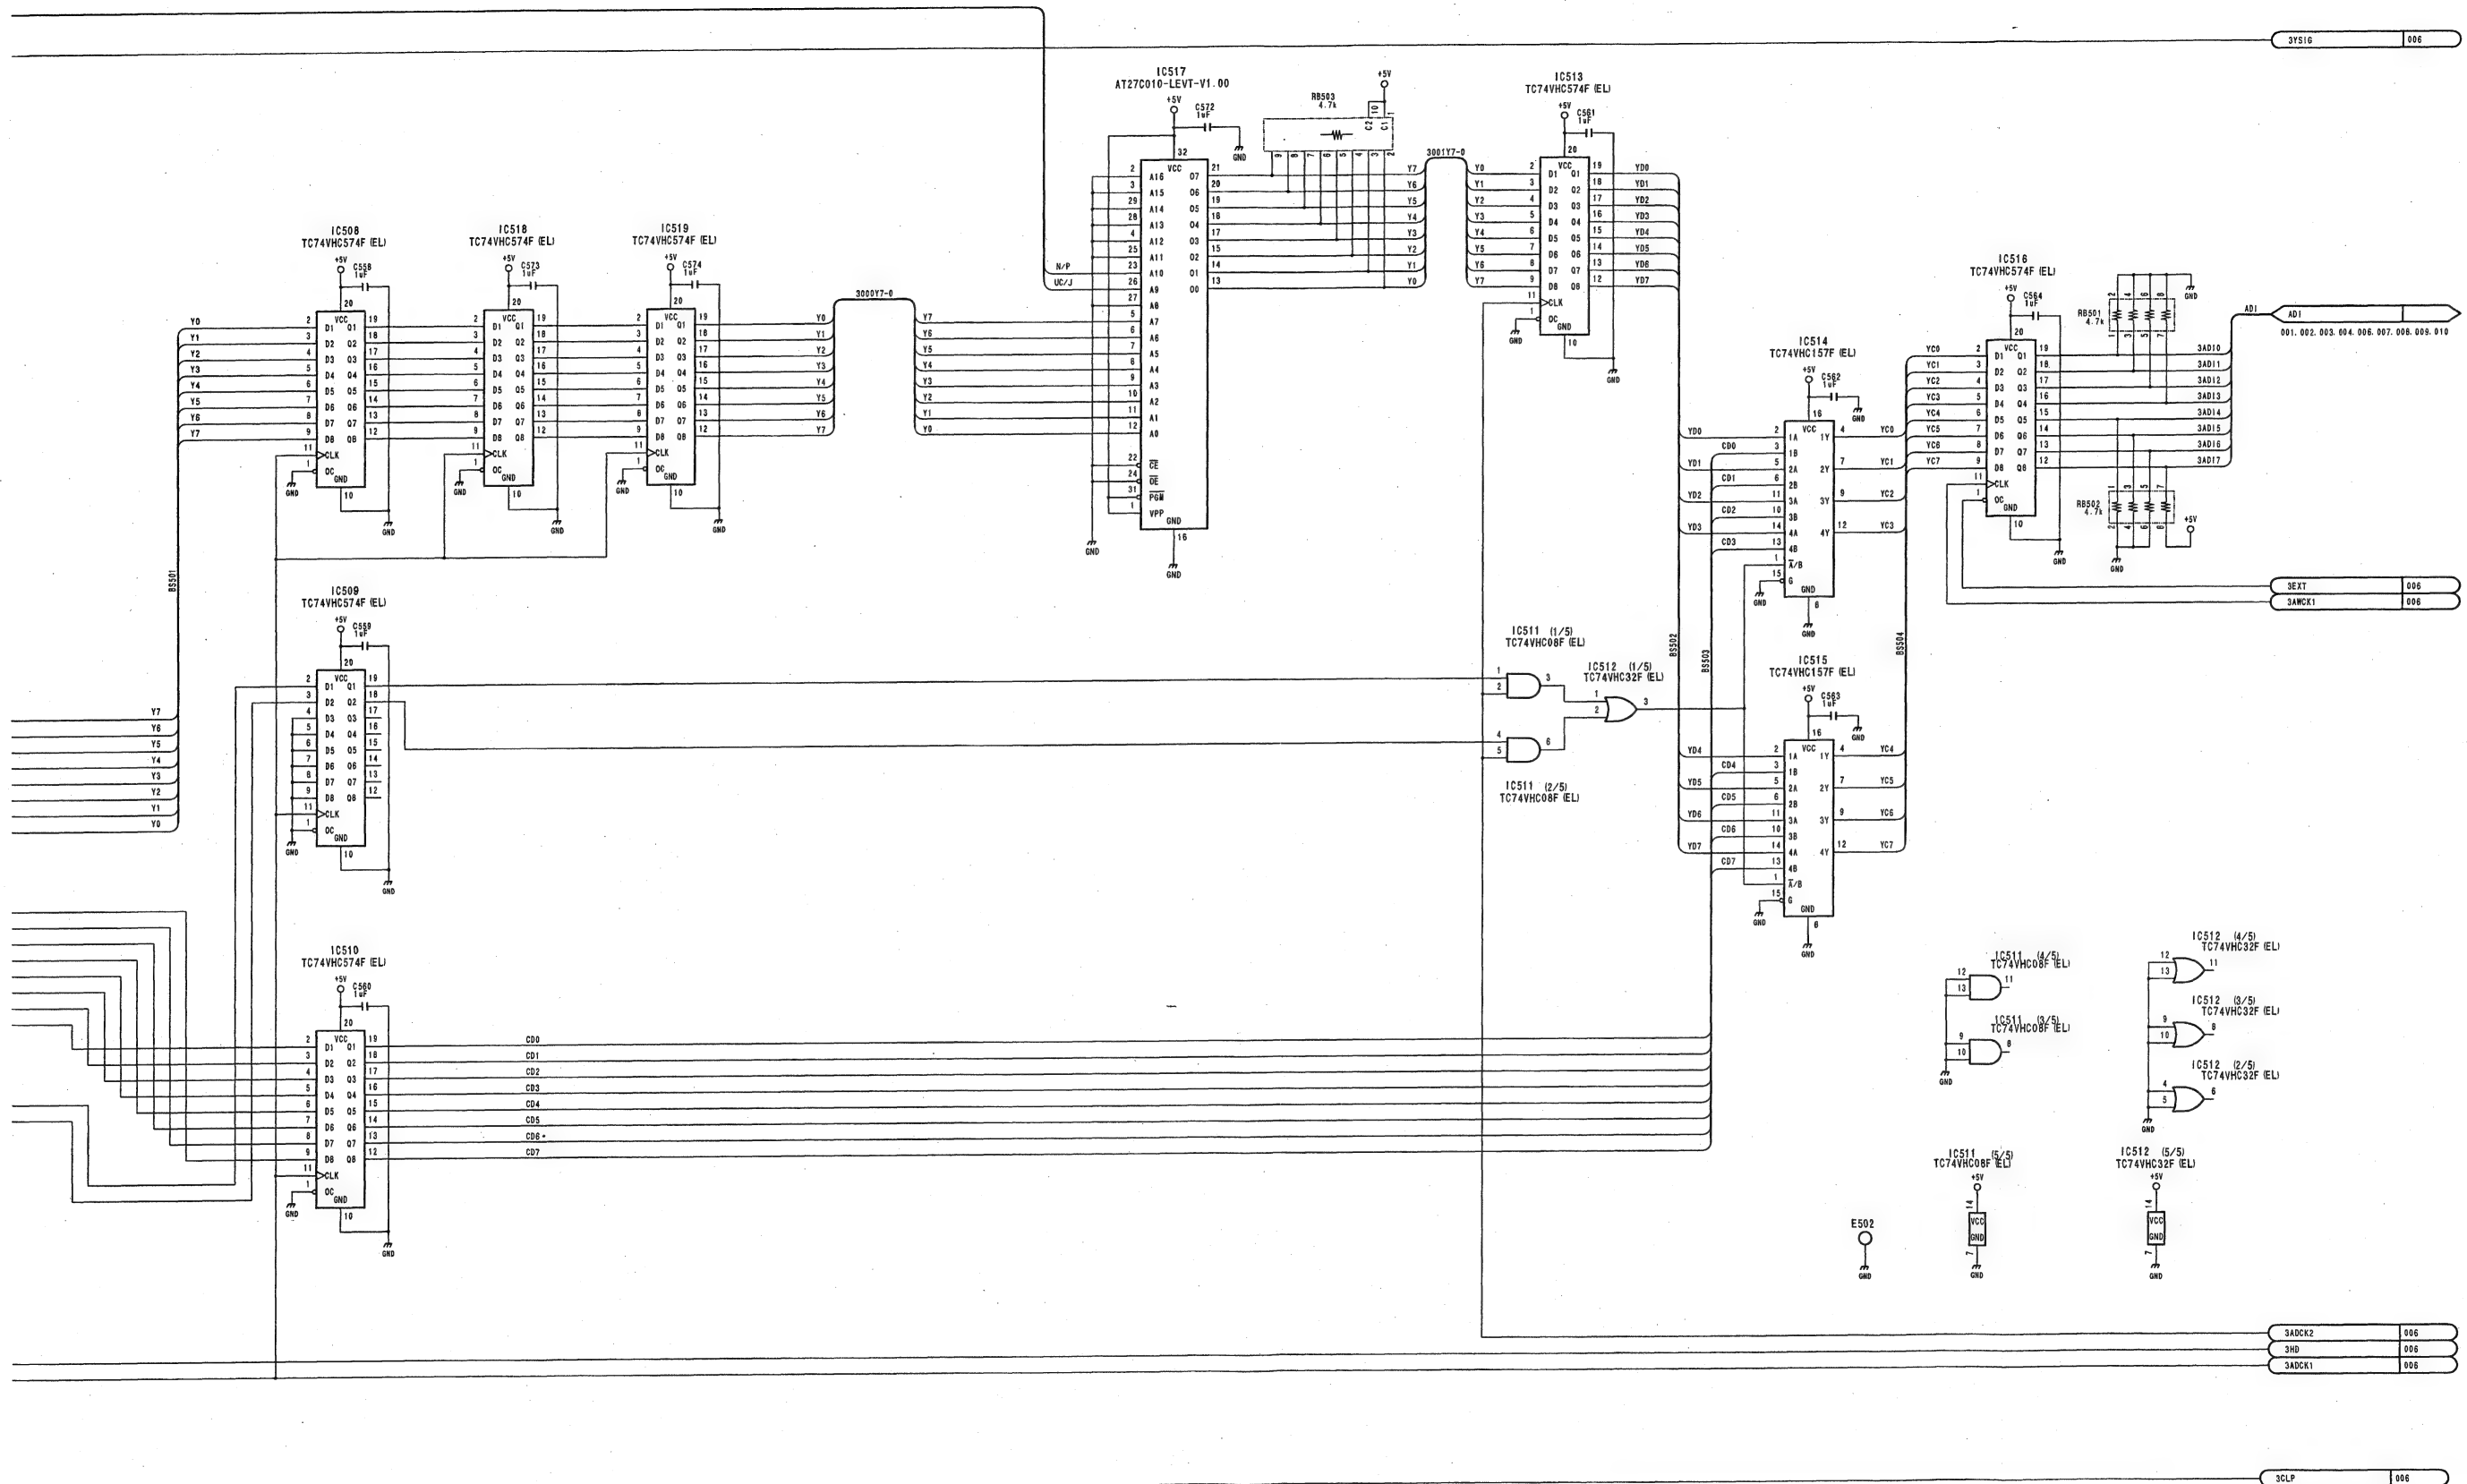


DFS-700 (J): S/N 30001 and Higher
DFS-700 (UC): S/N 10001 and Higher
DFS-700P (CE): S/N 40001 and Higher

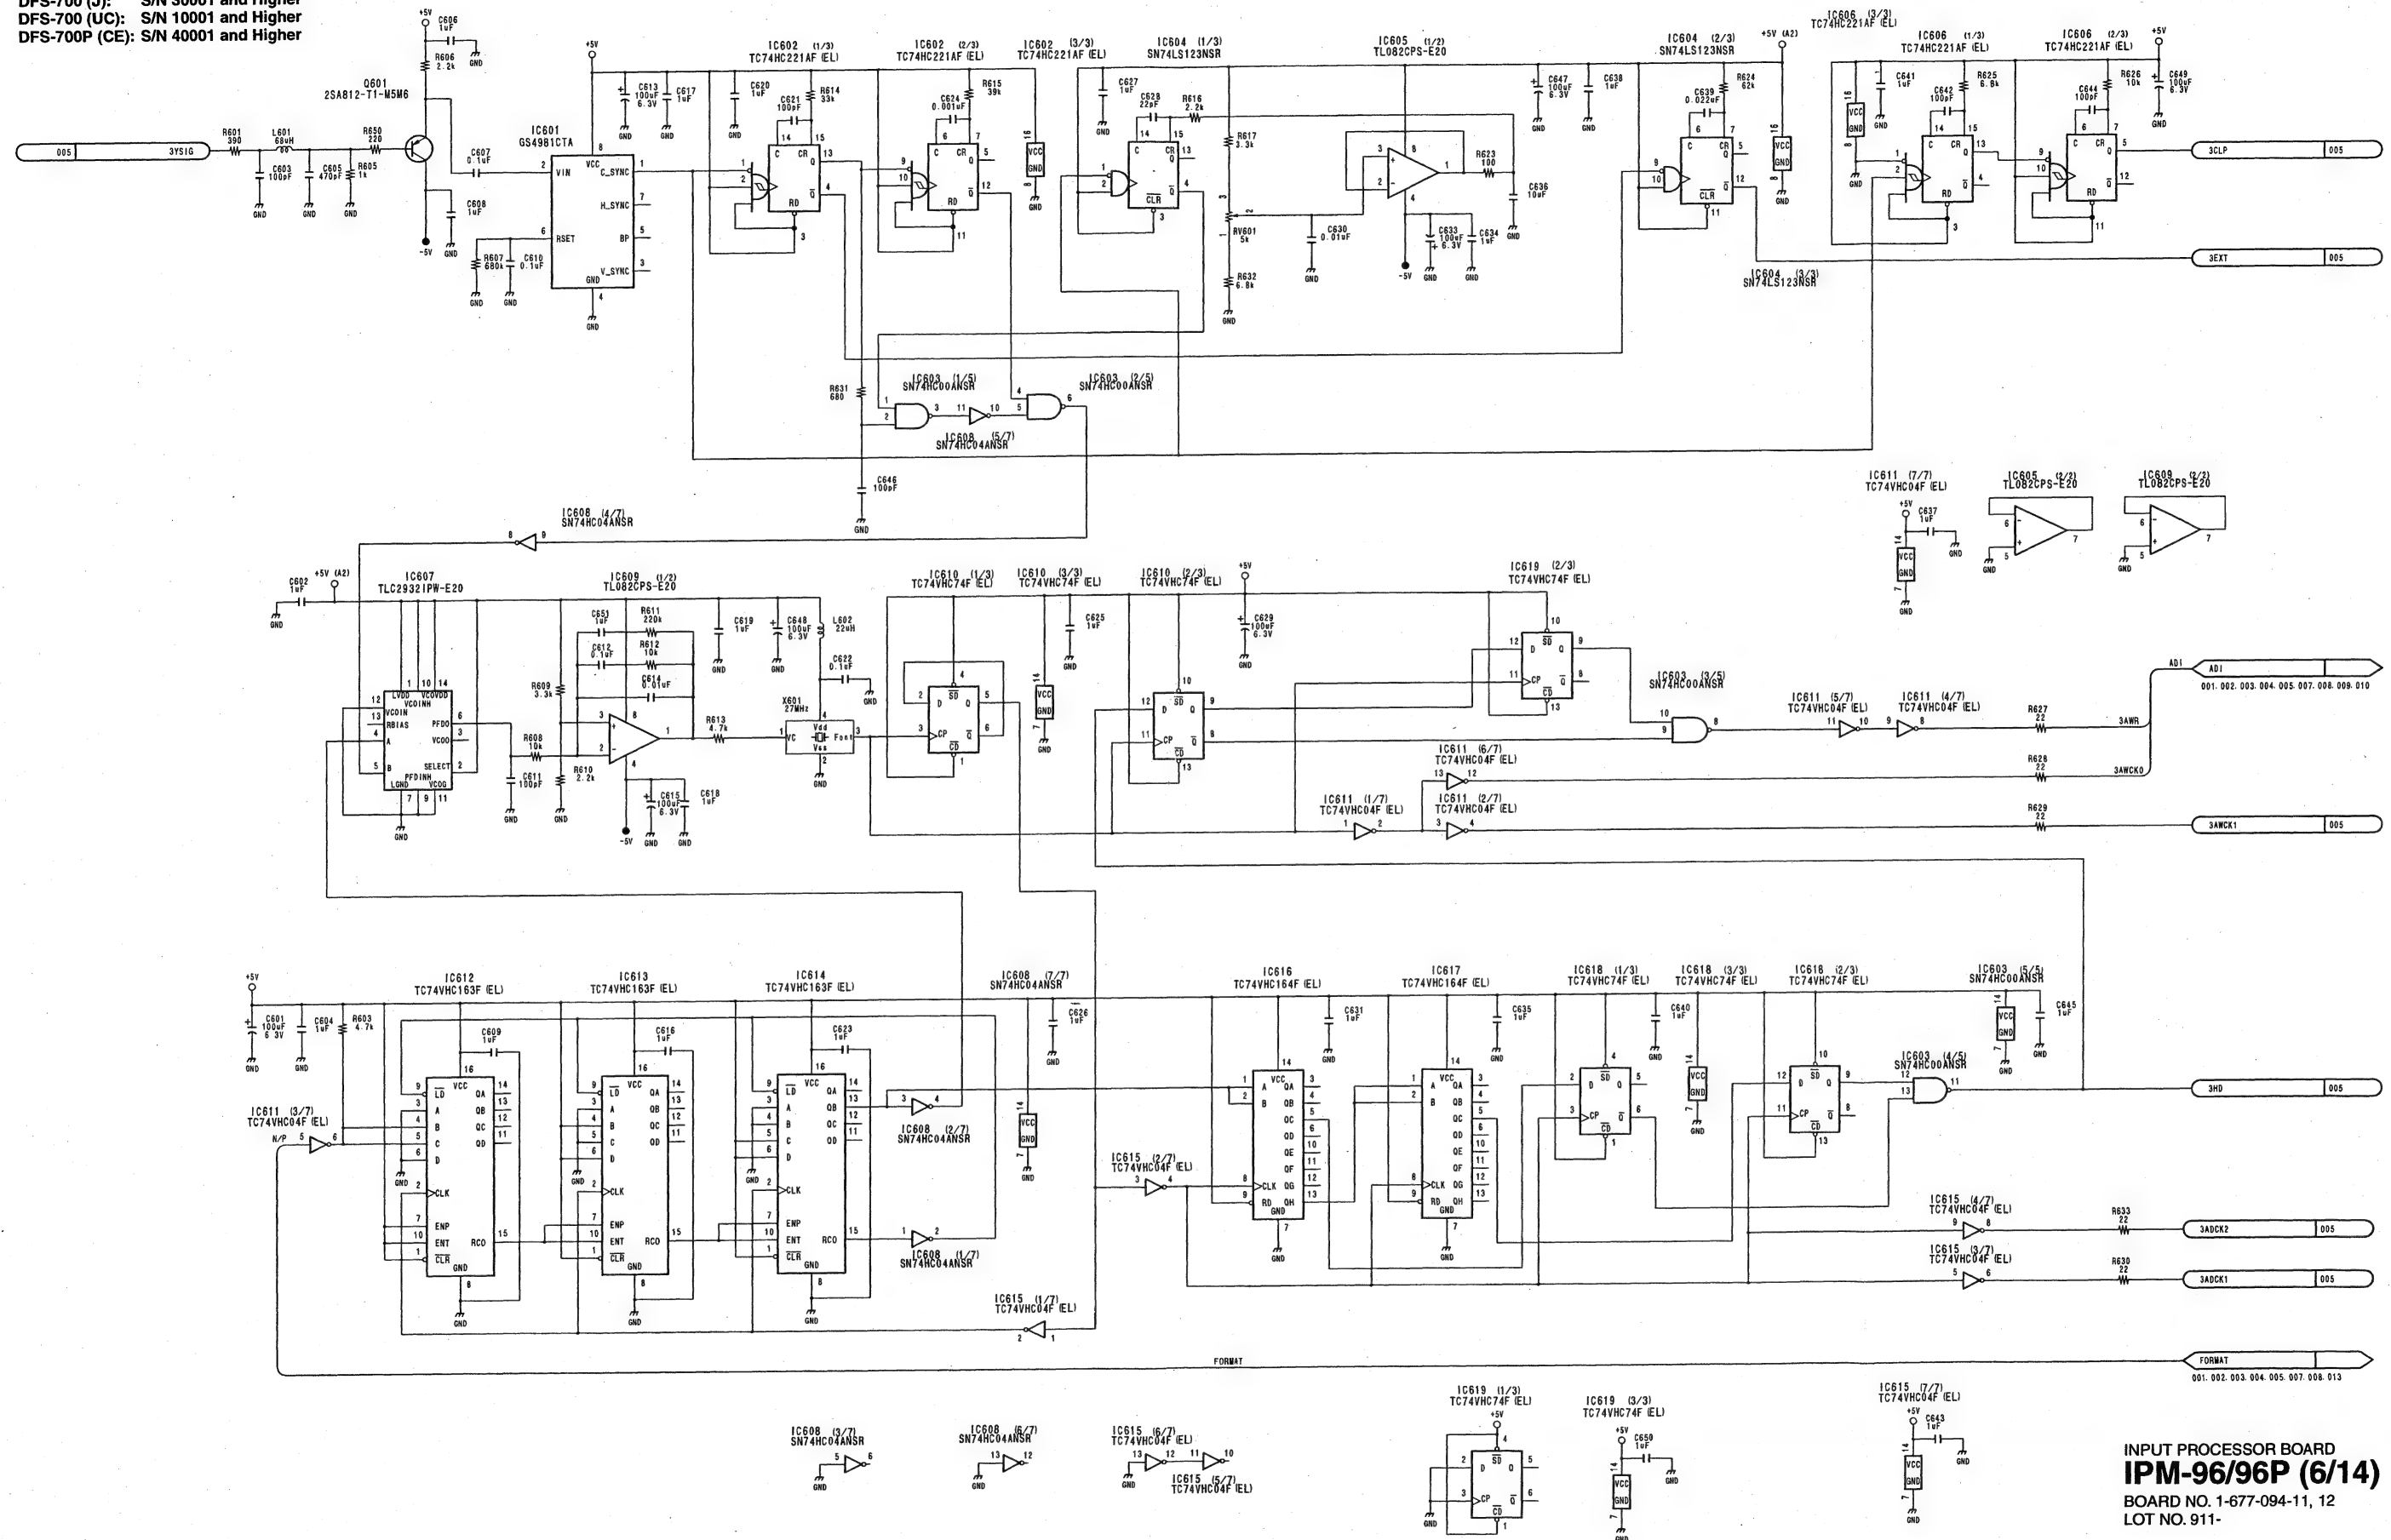

DFS-700 (J): S/N 30001 and Higher
DFS-700 (UC): S/N 10001 and Higher
DFS-700P (CE): S/N 40001 and Higher


1

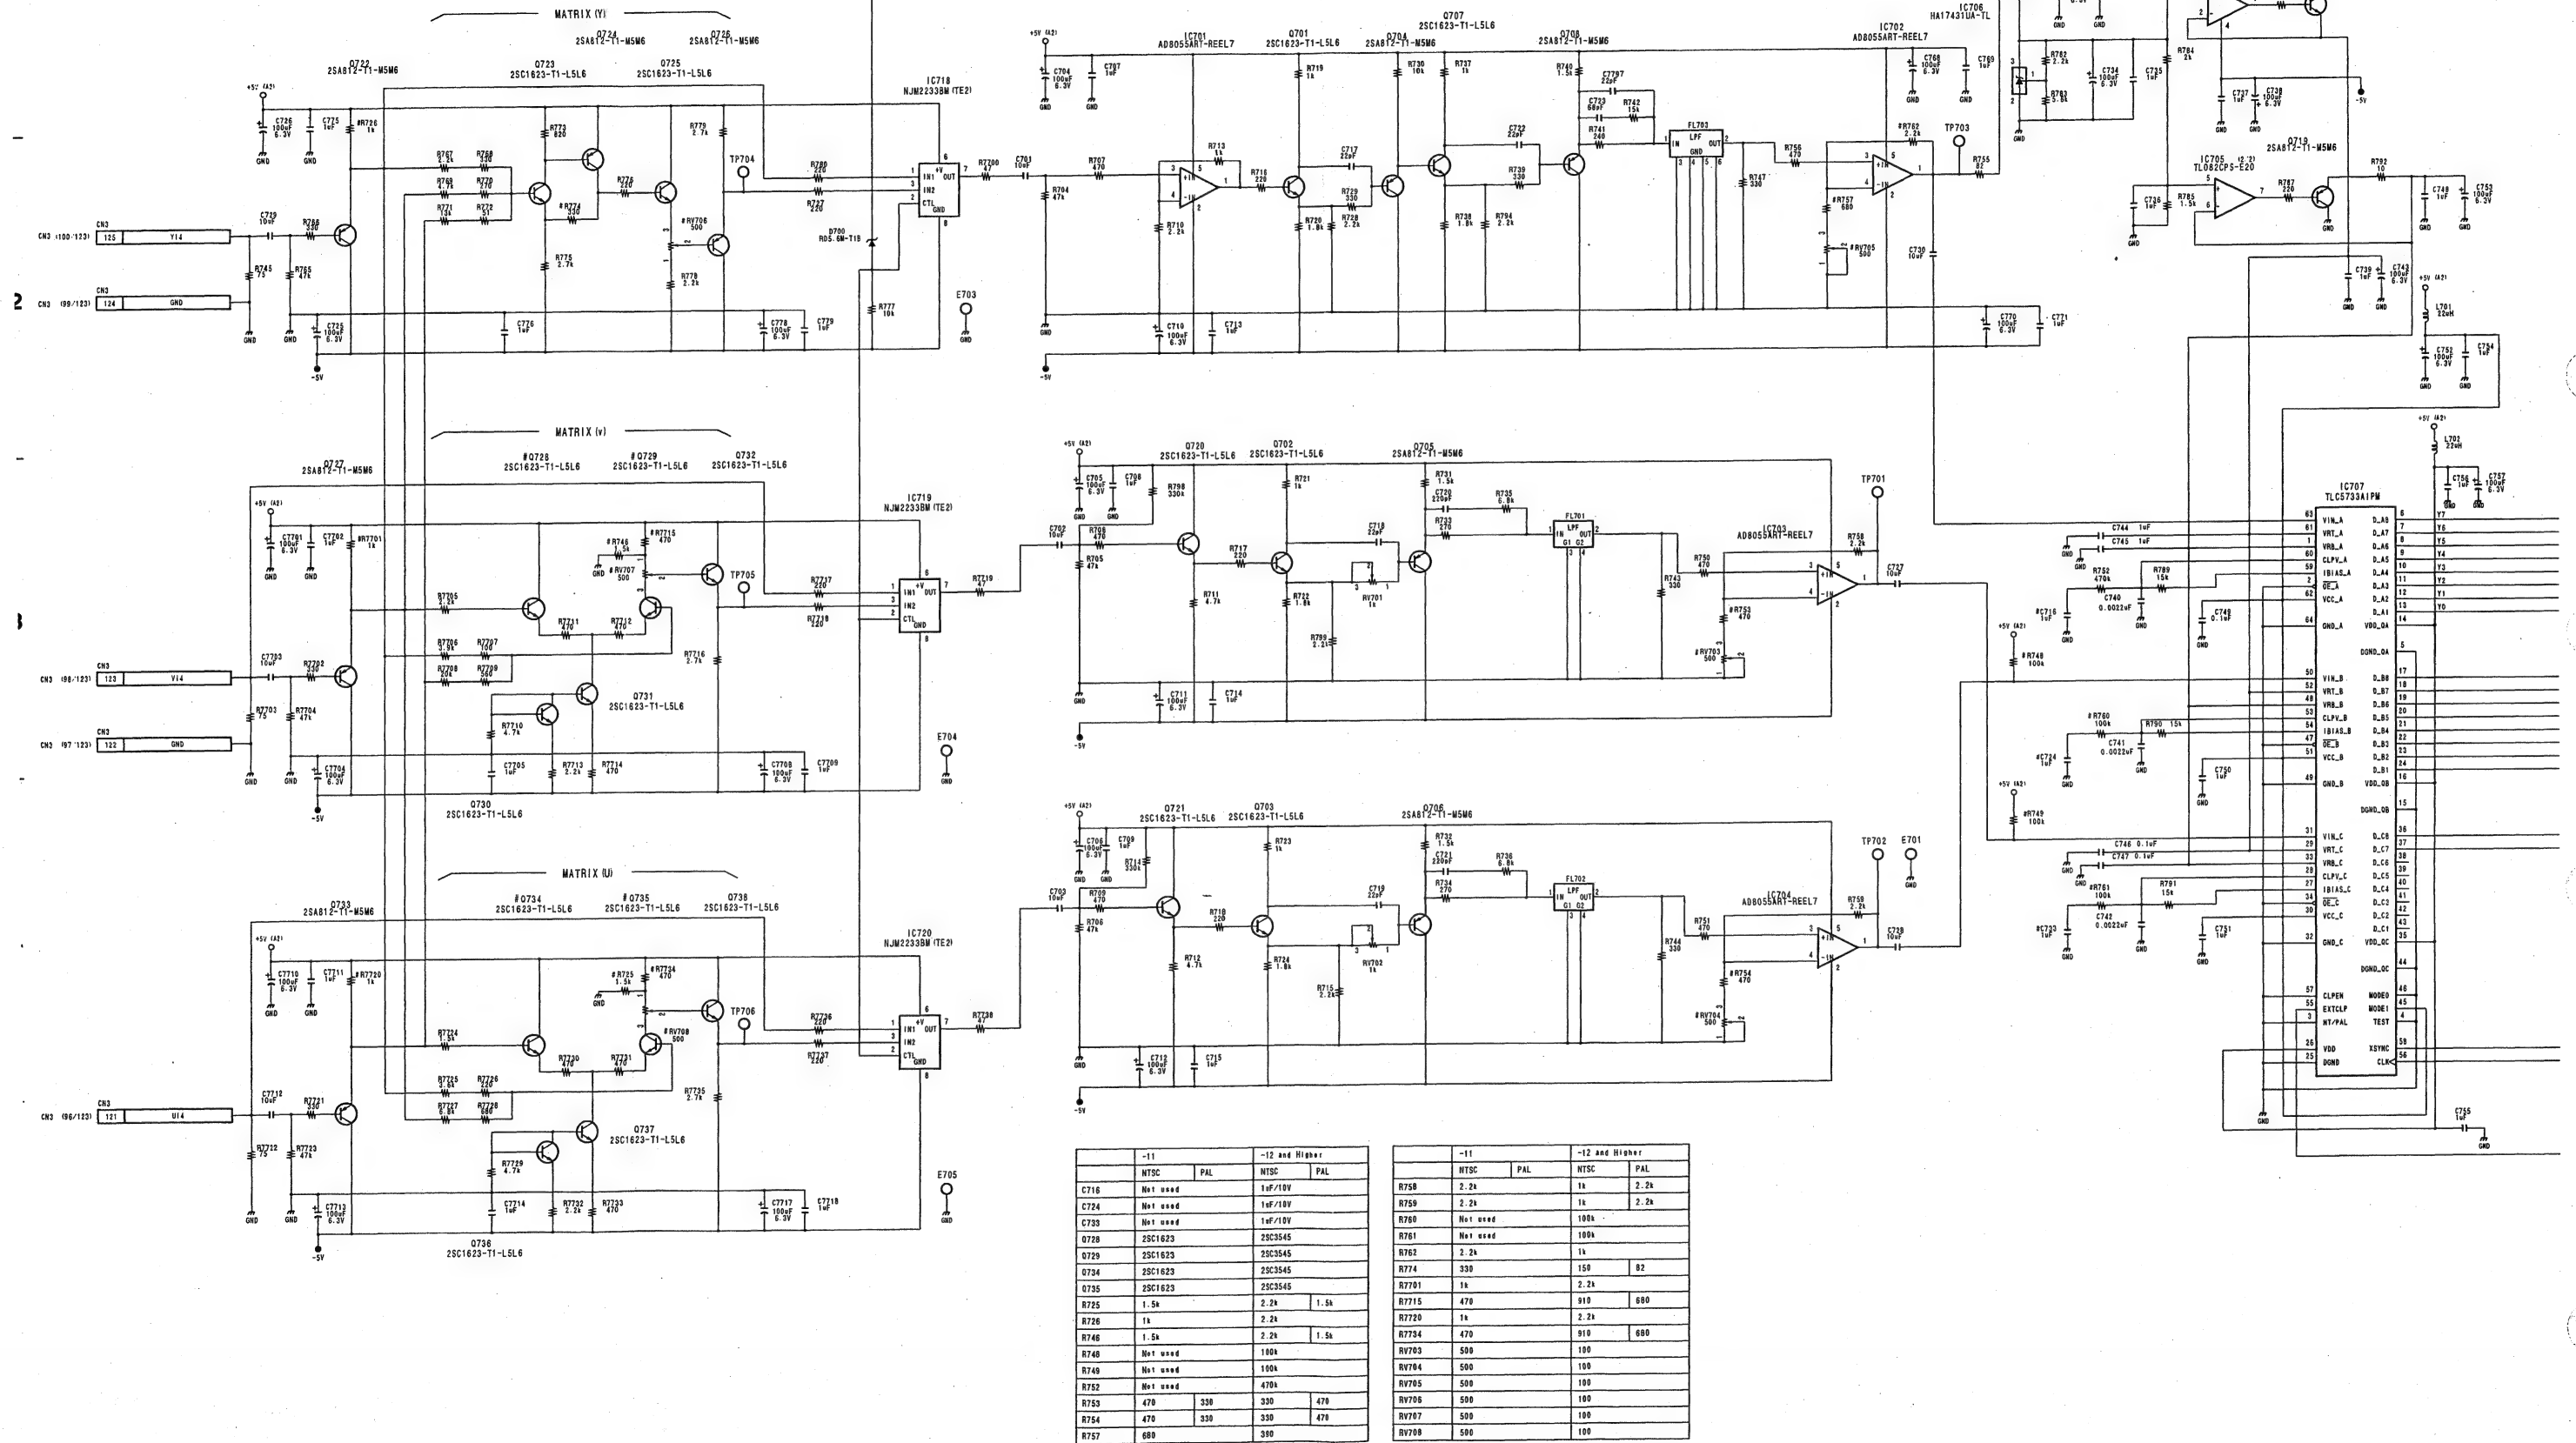

4-30

4-30


DFS-700/700P

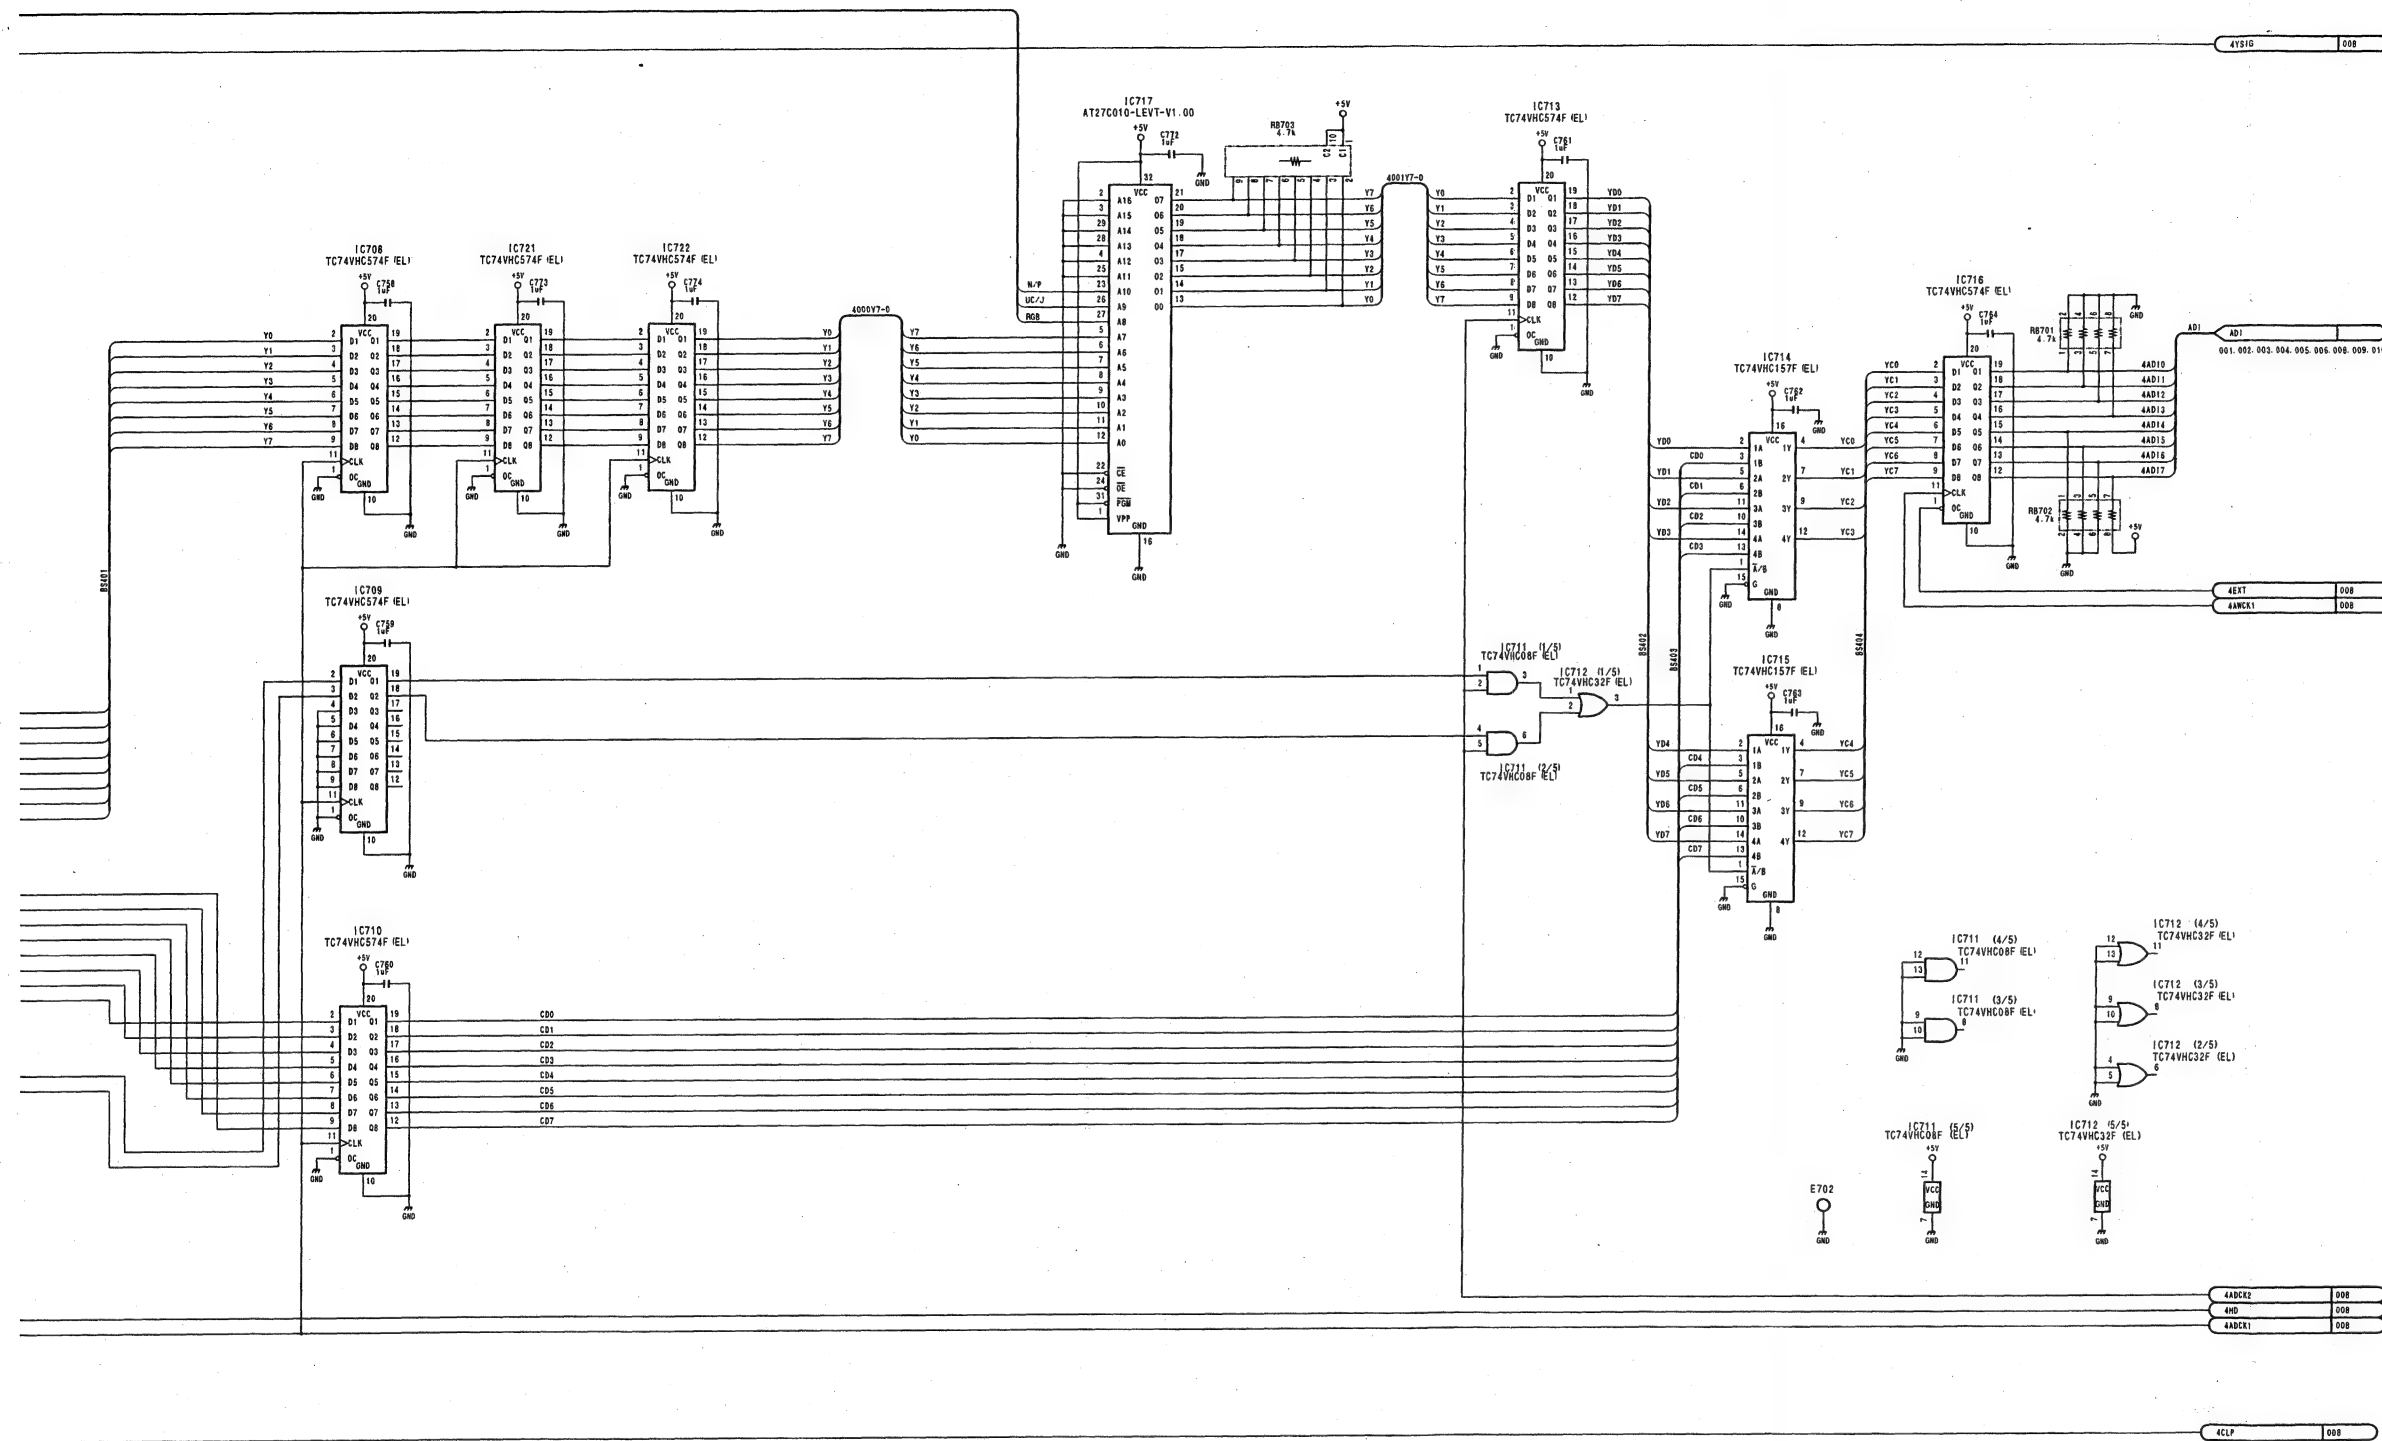

INPUT PROCESSOR BOARD
IPM-96/96P (7/14)
BOARD NO. 1-677-094-11, 12
LOT NO. 911-

IPM-96/96P (8/14) IPM-96/96P (8/14)


DFS-700 (J): S/N 30001 and Higher
DFS-700 (UC): S/N 10001 and Higher
DFS-700P (CE): S/N 40001 and Higher

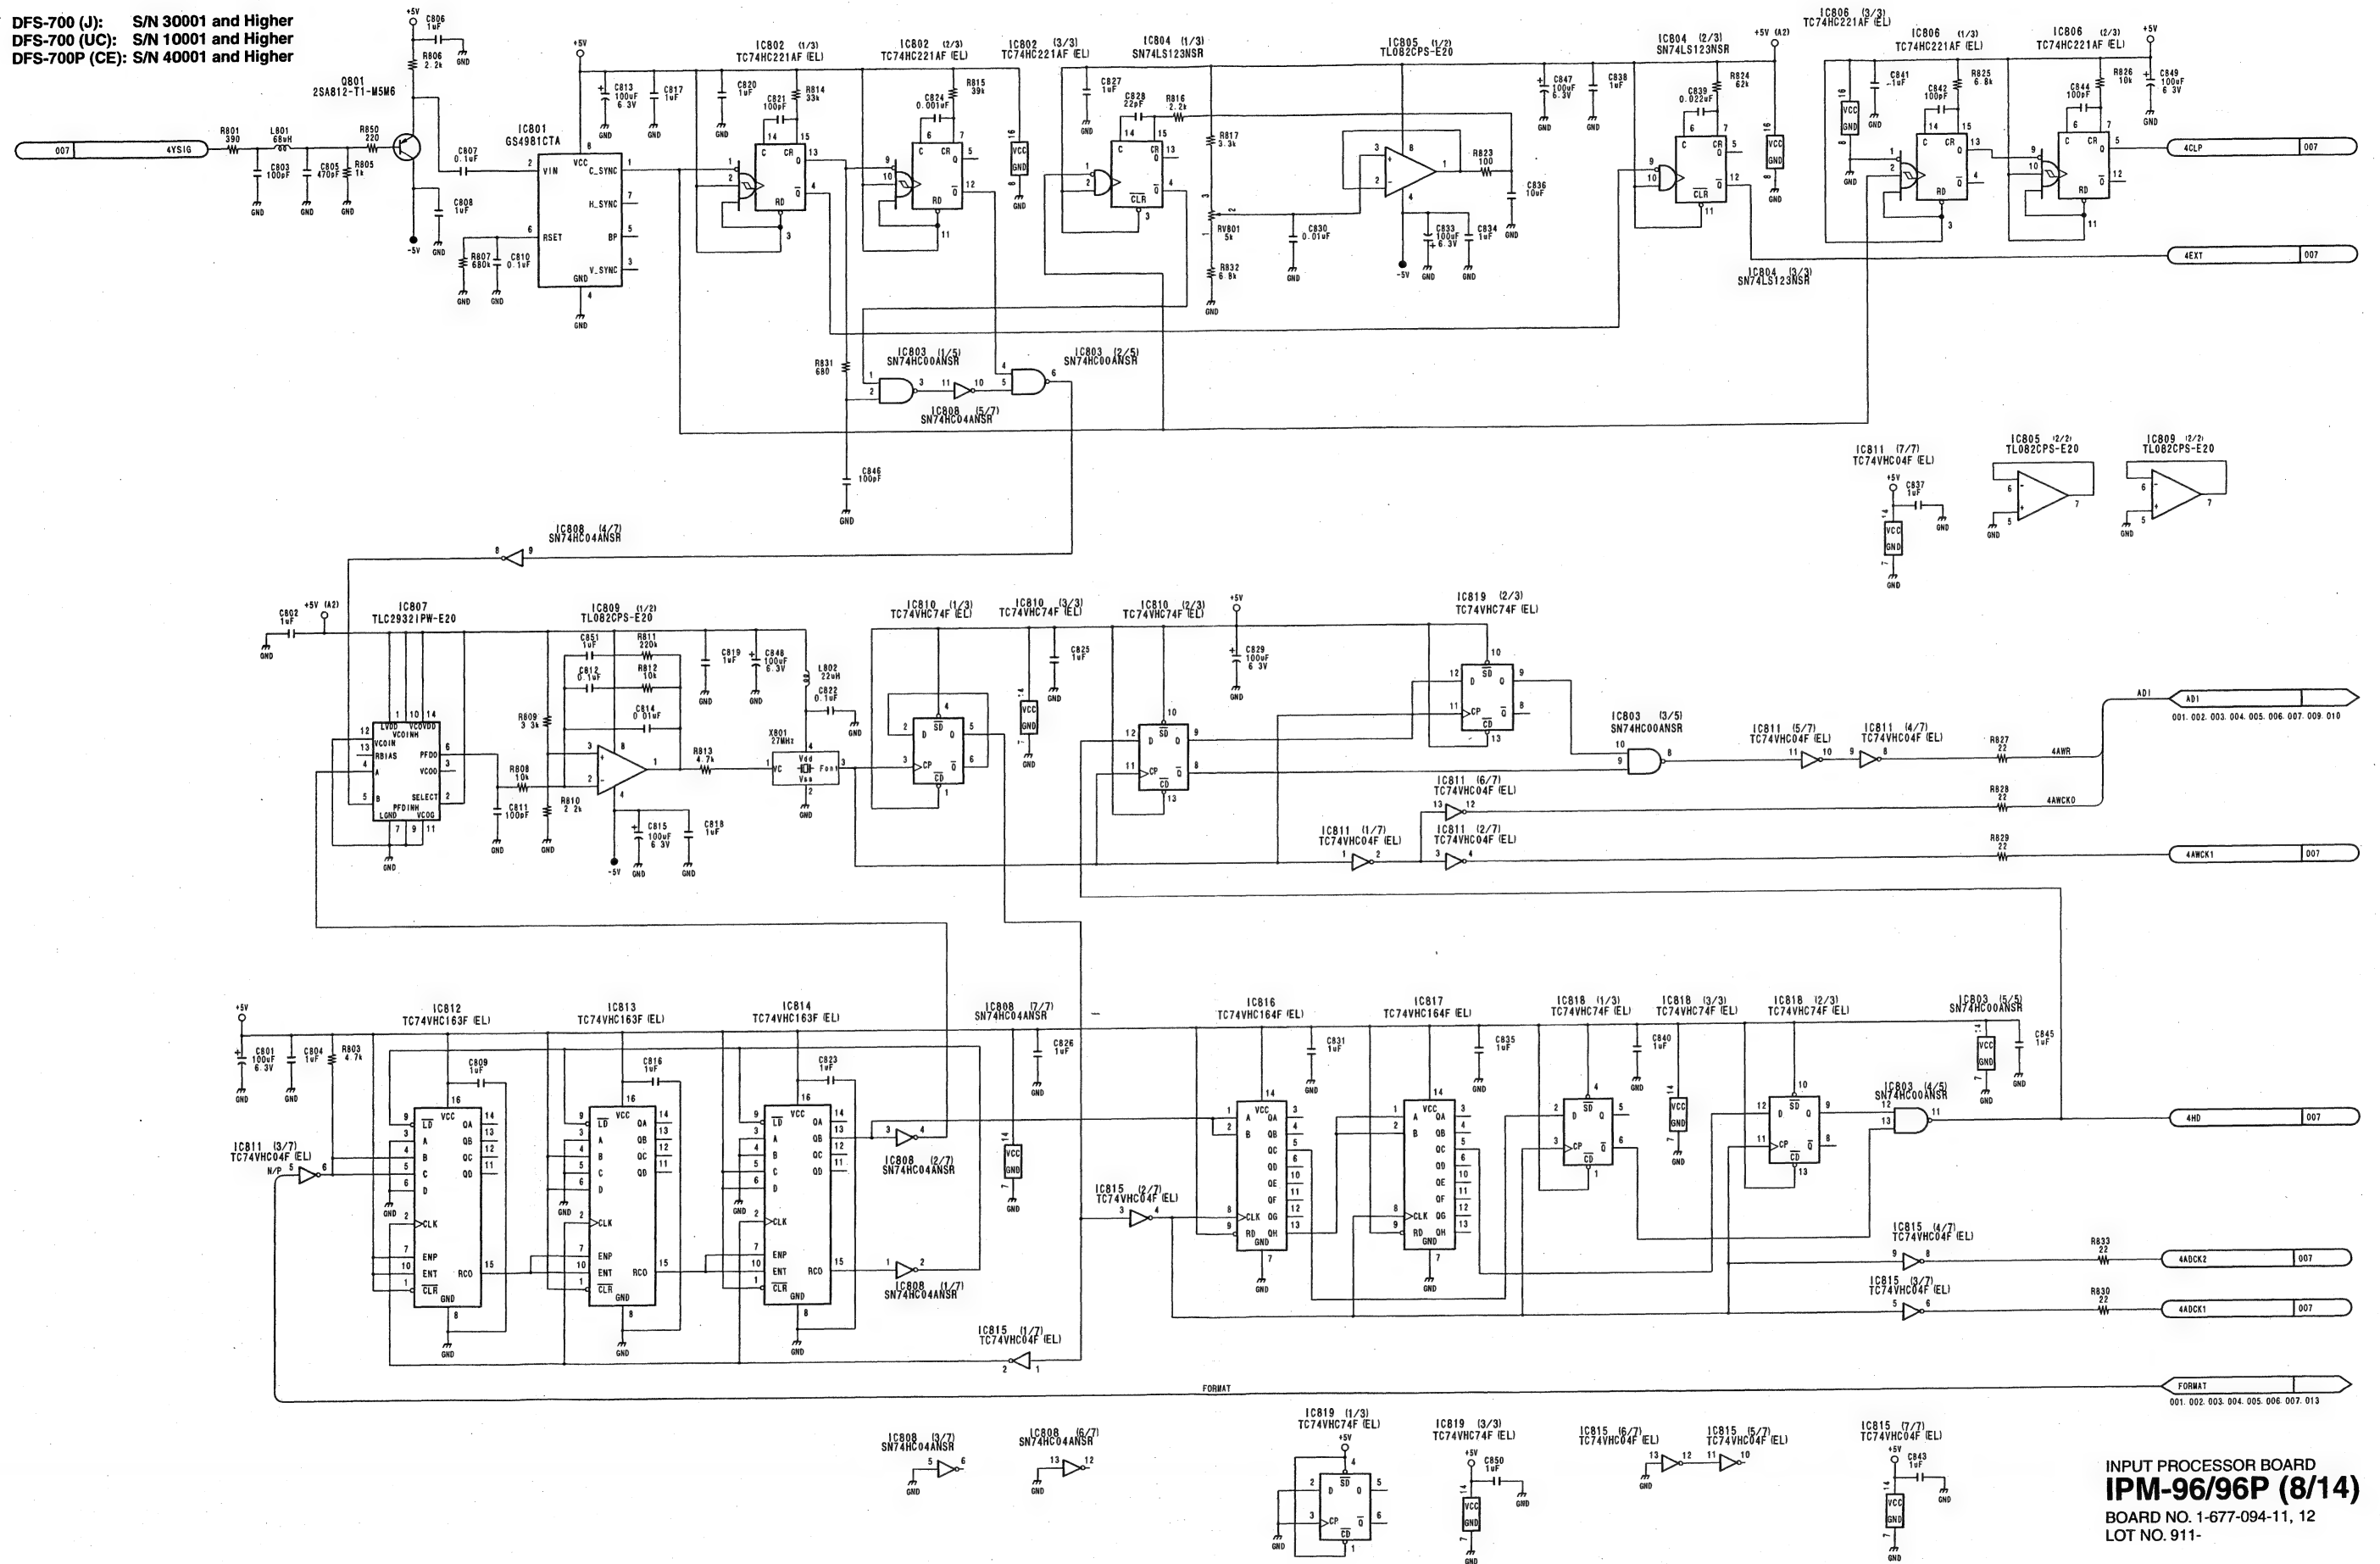

INPUT PROCESSOR BOARD
IPM-96/96P (8/14)
BOARD NO. 1-677-094-11, 12
LOT NO. 911-


DFS-700/700P

DFS-700 (J): S/N 30001 and Higher
 DFS-700 (UC): S/N 10001 and Higher
 DFS-700P (CE): S/N 40001 and Higher

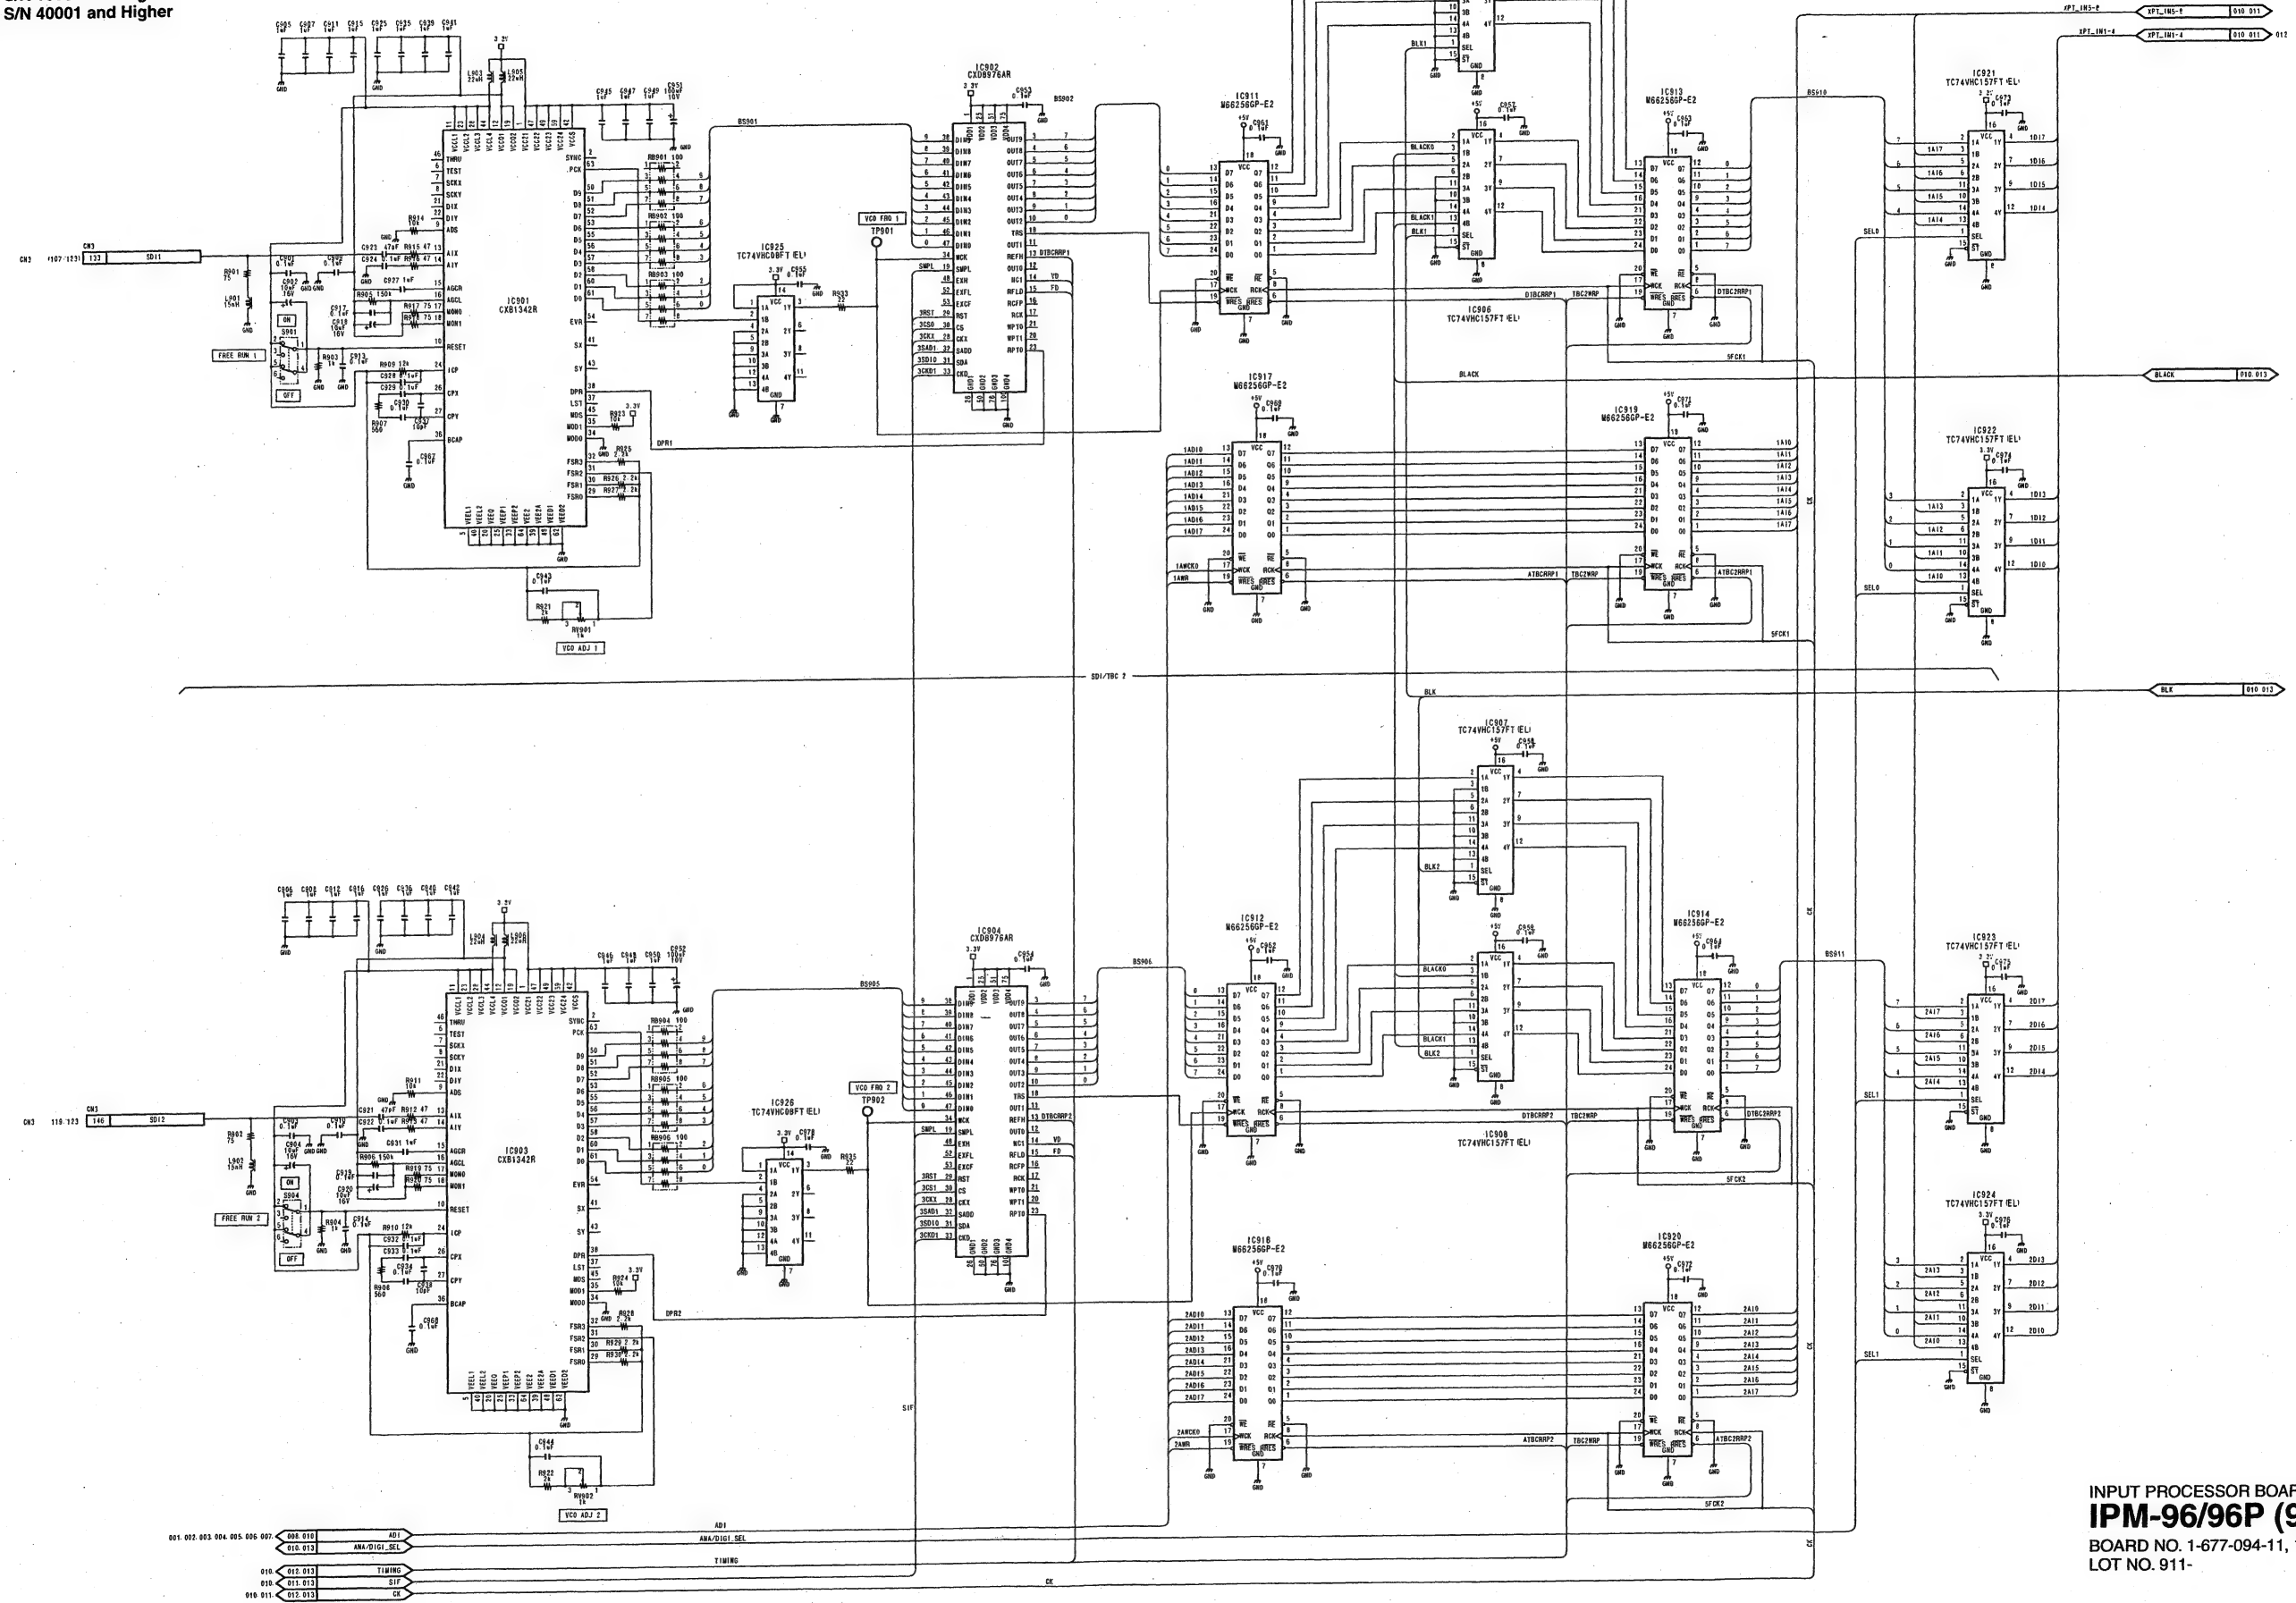


INPUT PROCESSOR BOARD
IPM-96/96P (9/14)
 BOARD NO. 1-677-094-11, 12
 LOT NO. 911-


DFS-700 (J): S/N 30001 and Higher
 DFS-700 (UC): S/N 10001 and Higher
 DFS-700P (CE): S/N 40001 and Higher

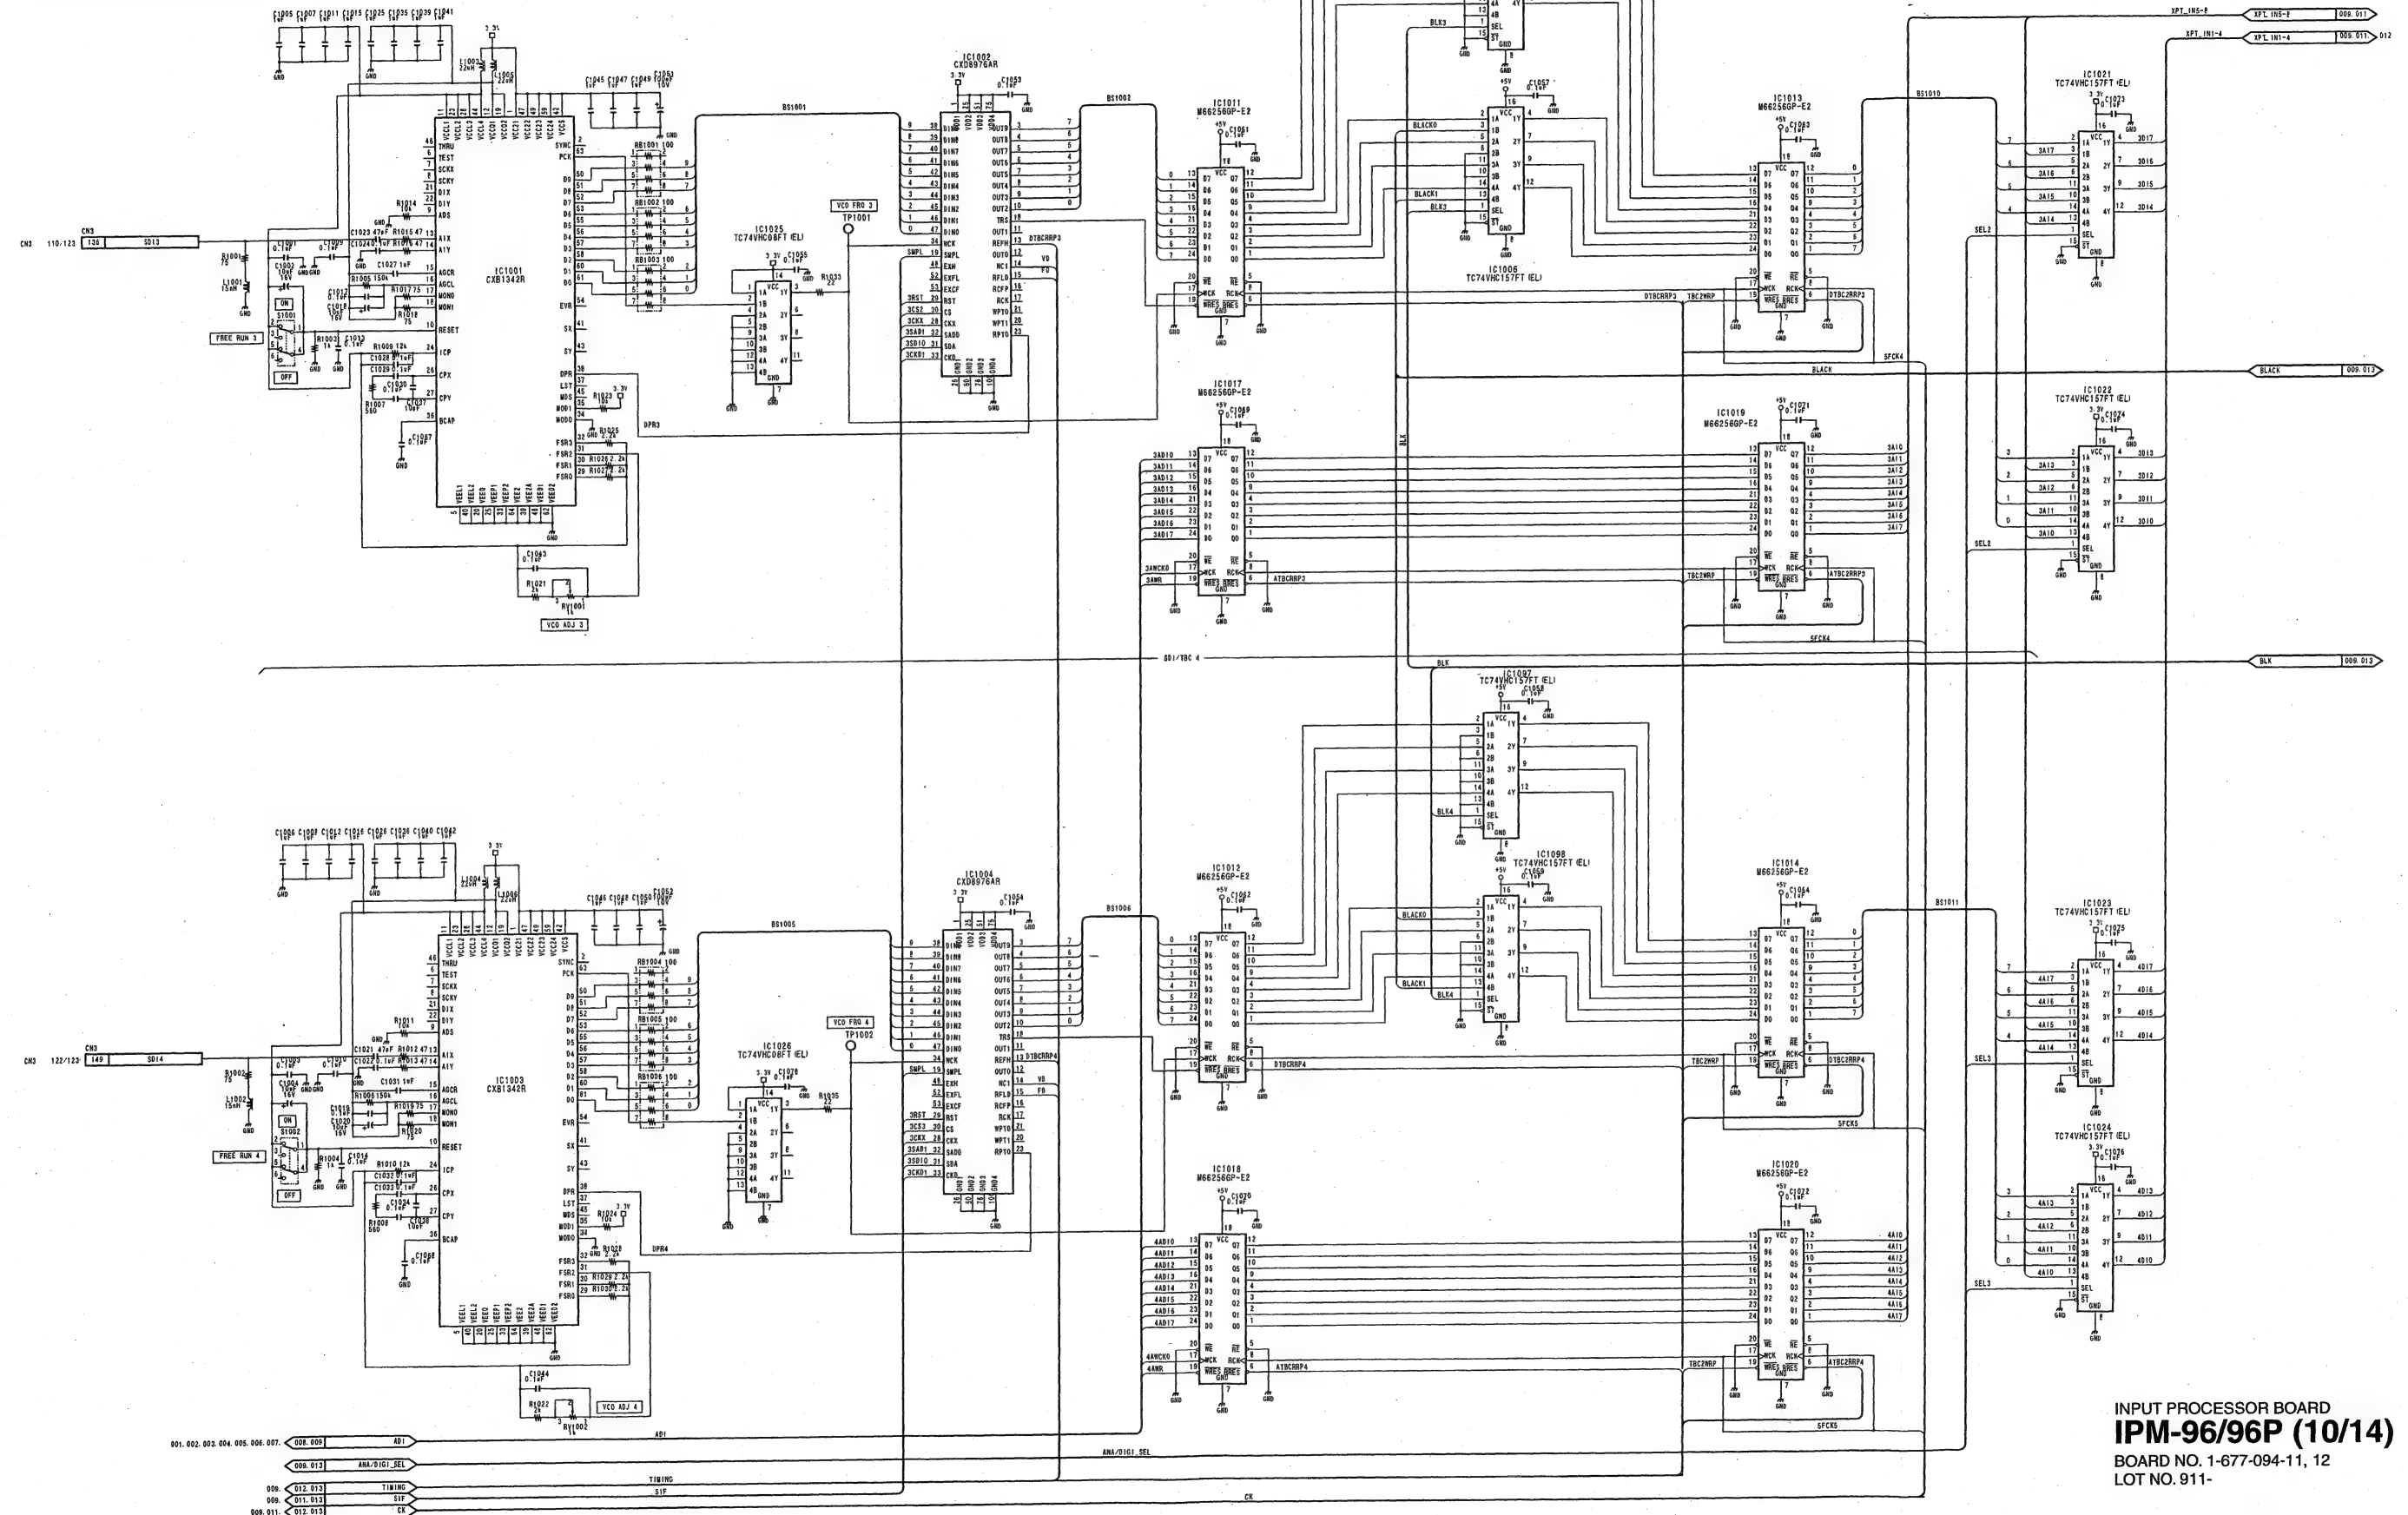


DFS-700 (J): S/N 30001 and Higher
DFS-700 (UC): S/N 10001 and Higher
DFS-700P (CE): S/N 40001 and Higher

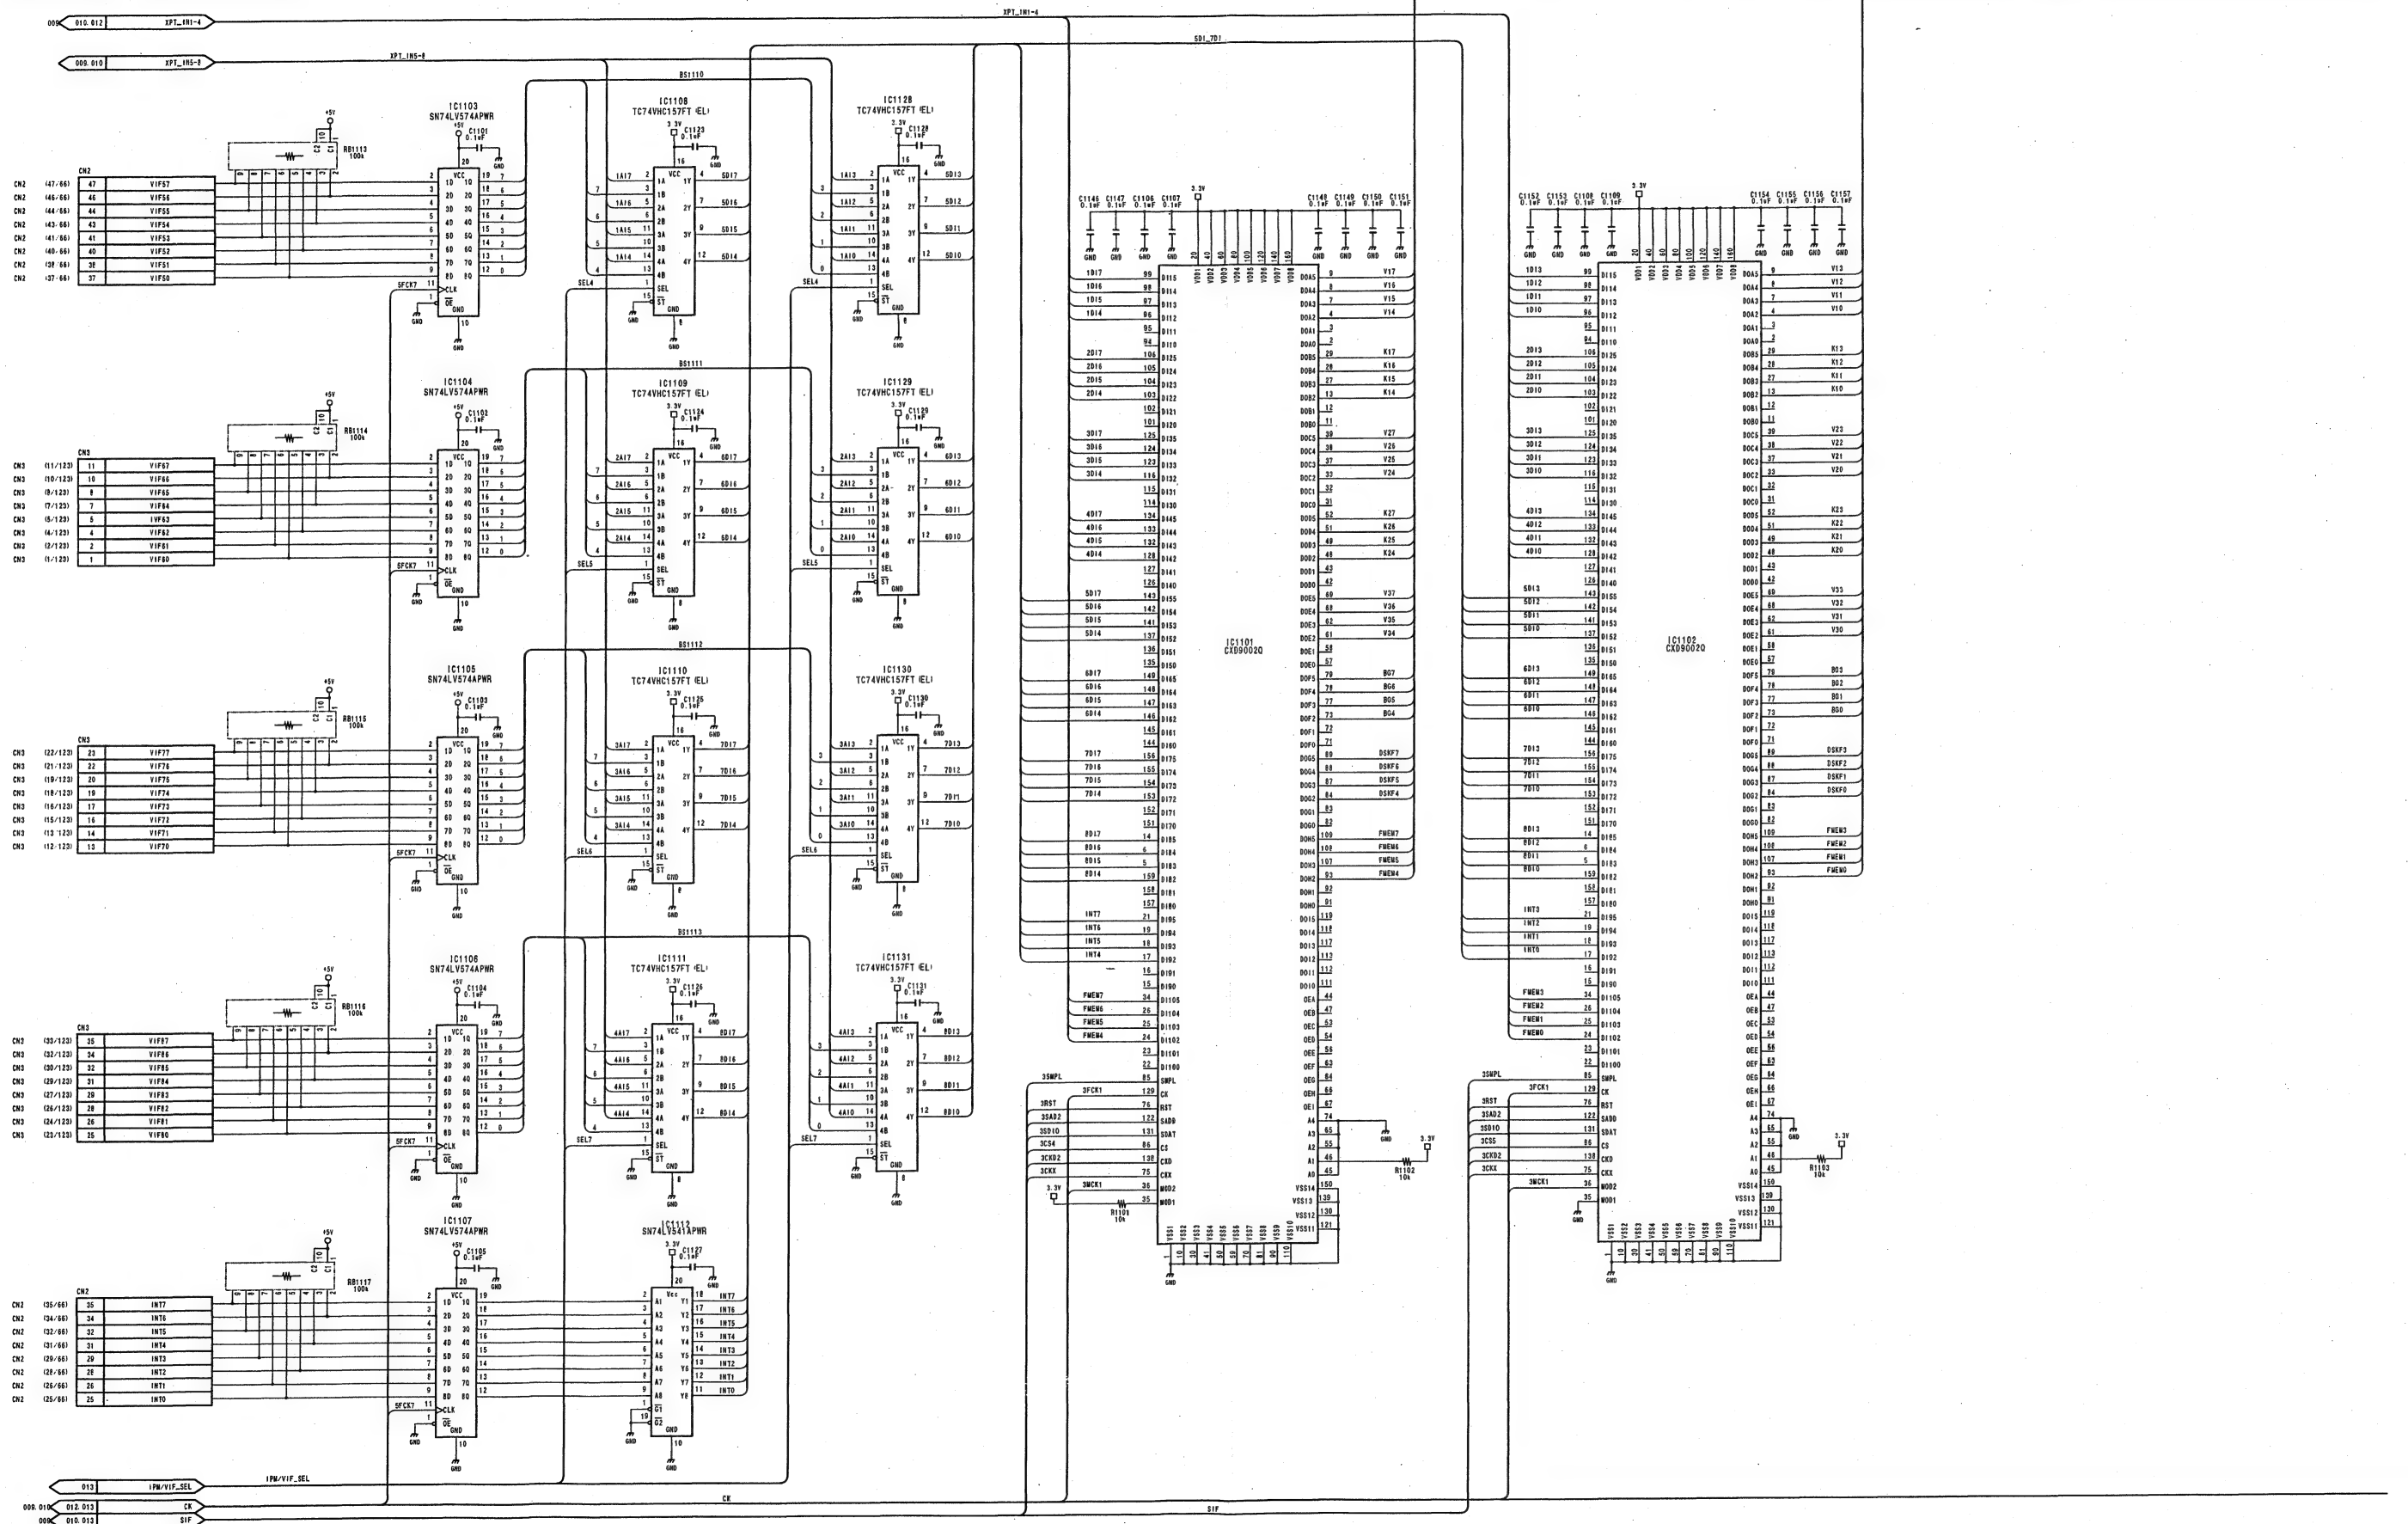

IPM-96/96P (11/14)

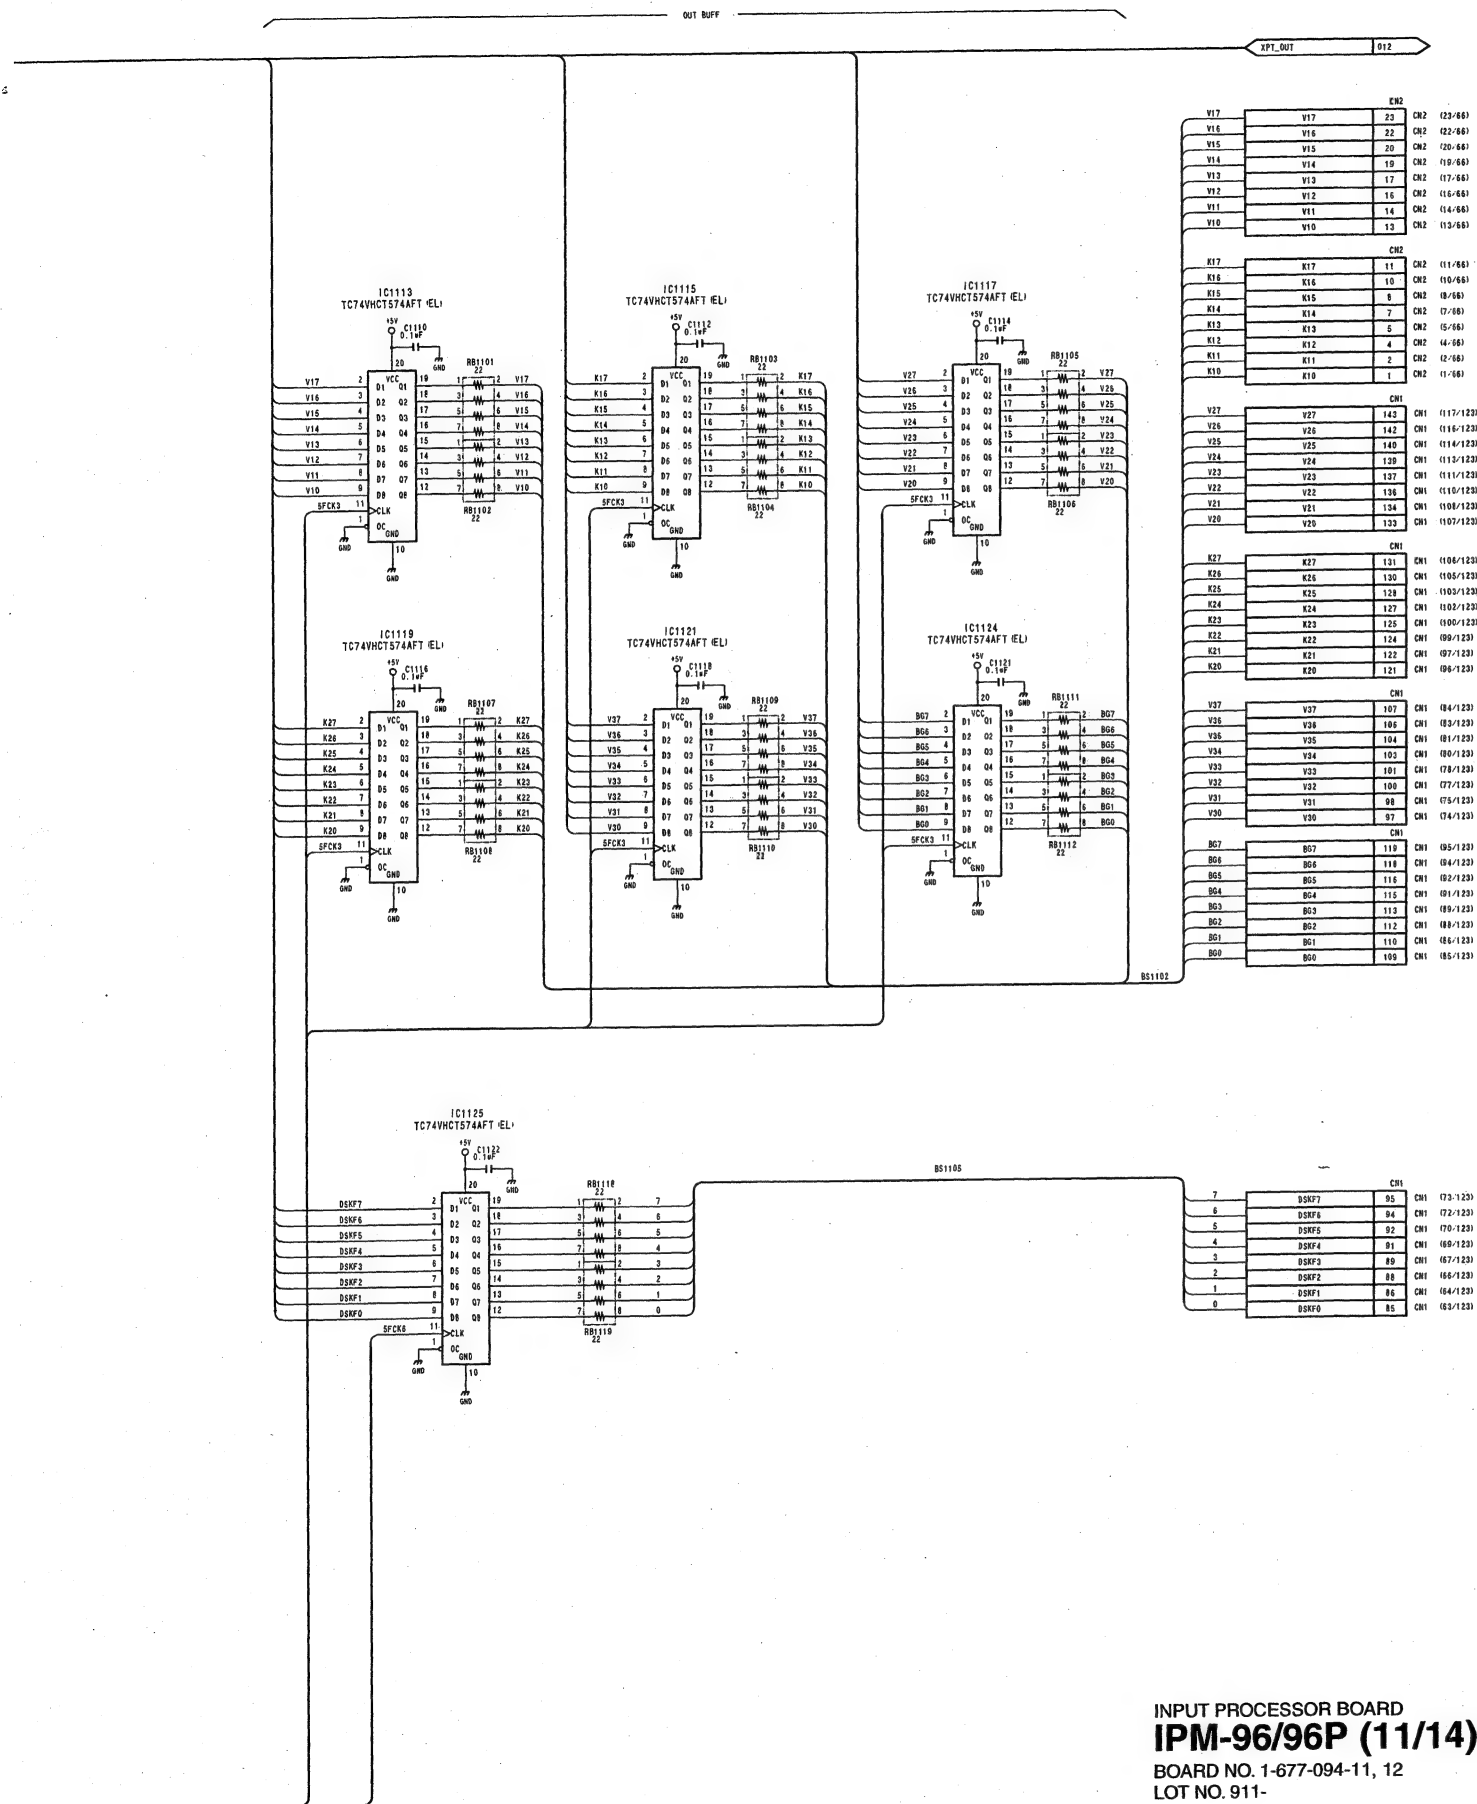

DFS-700 (J): S/N 3000 1 and Higher
 DFS-700 (UC): S/N 1000 1 and Higher
 DFS-700P (CE): S/N 4000 1 and Higher

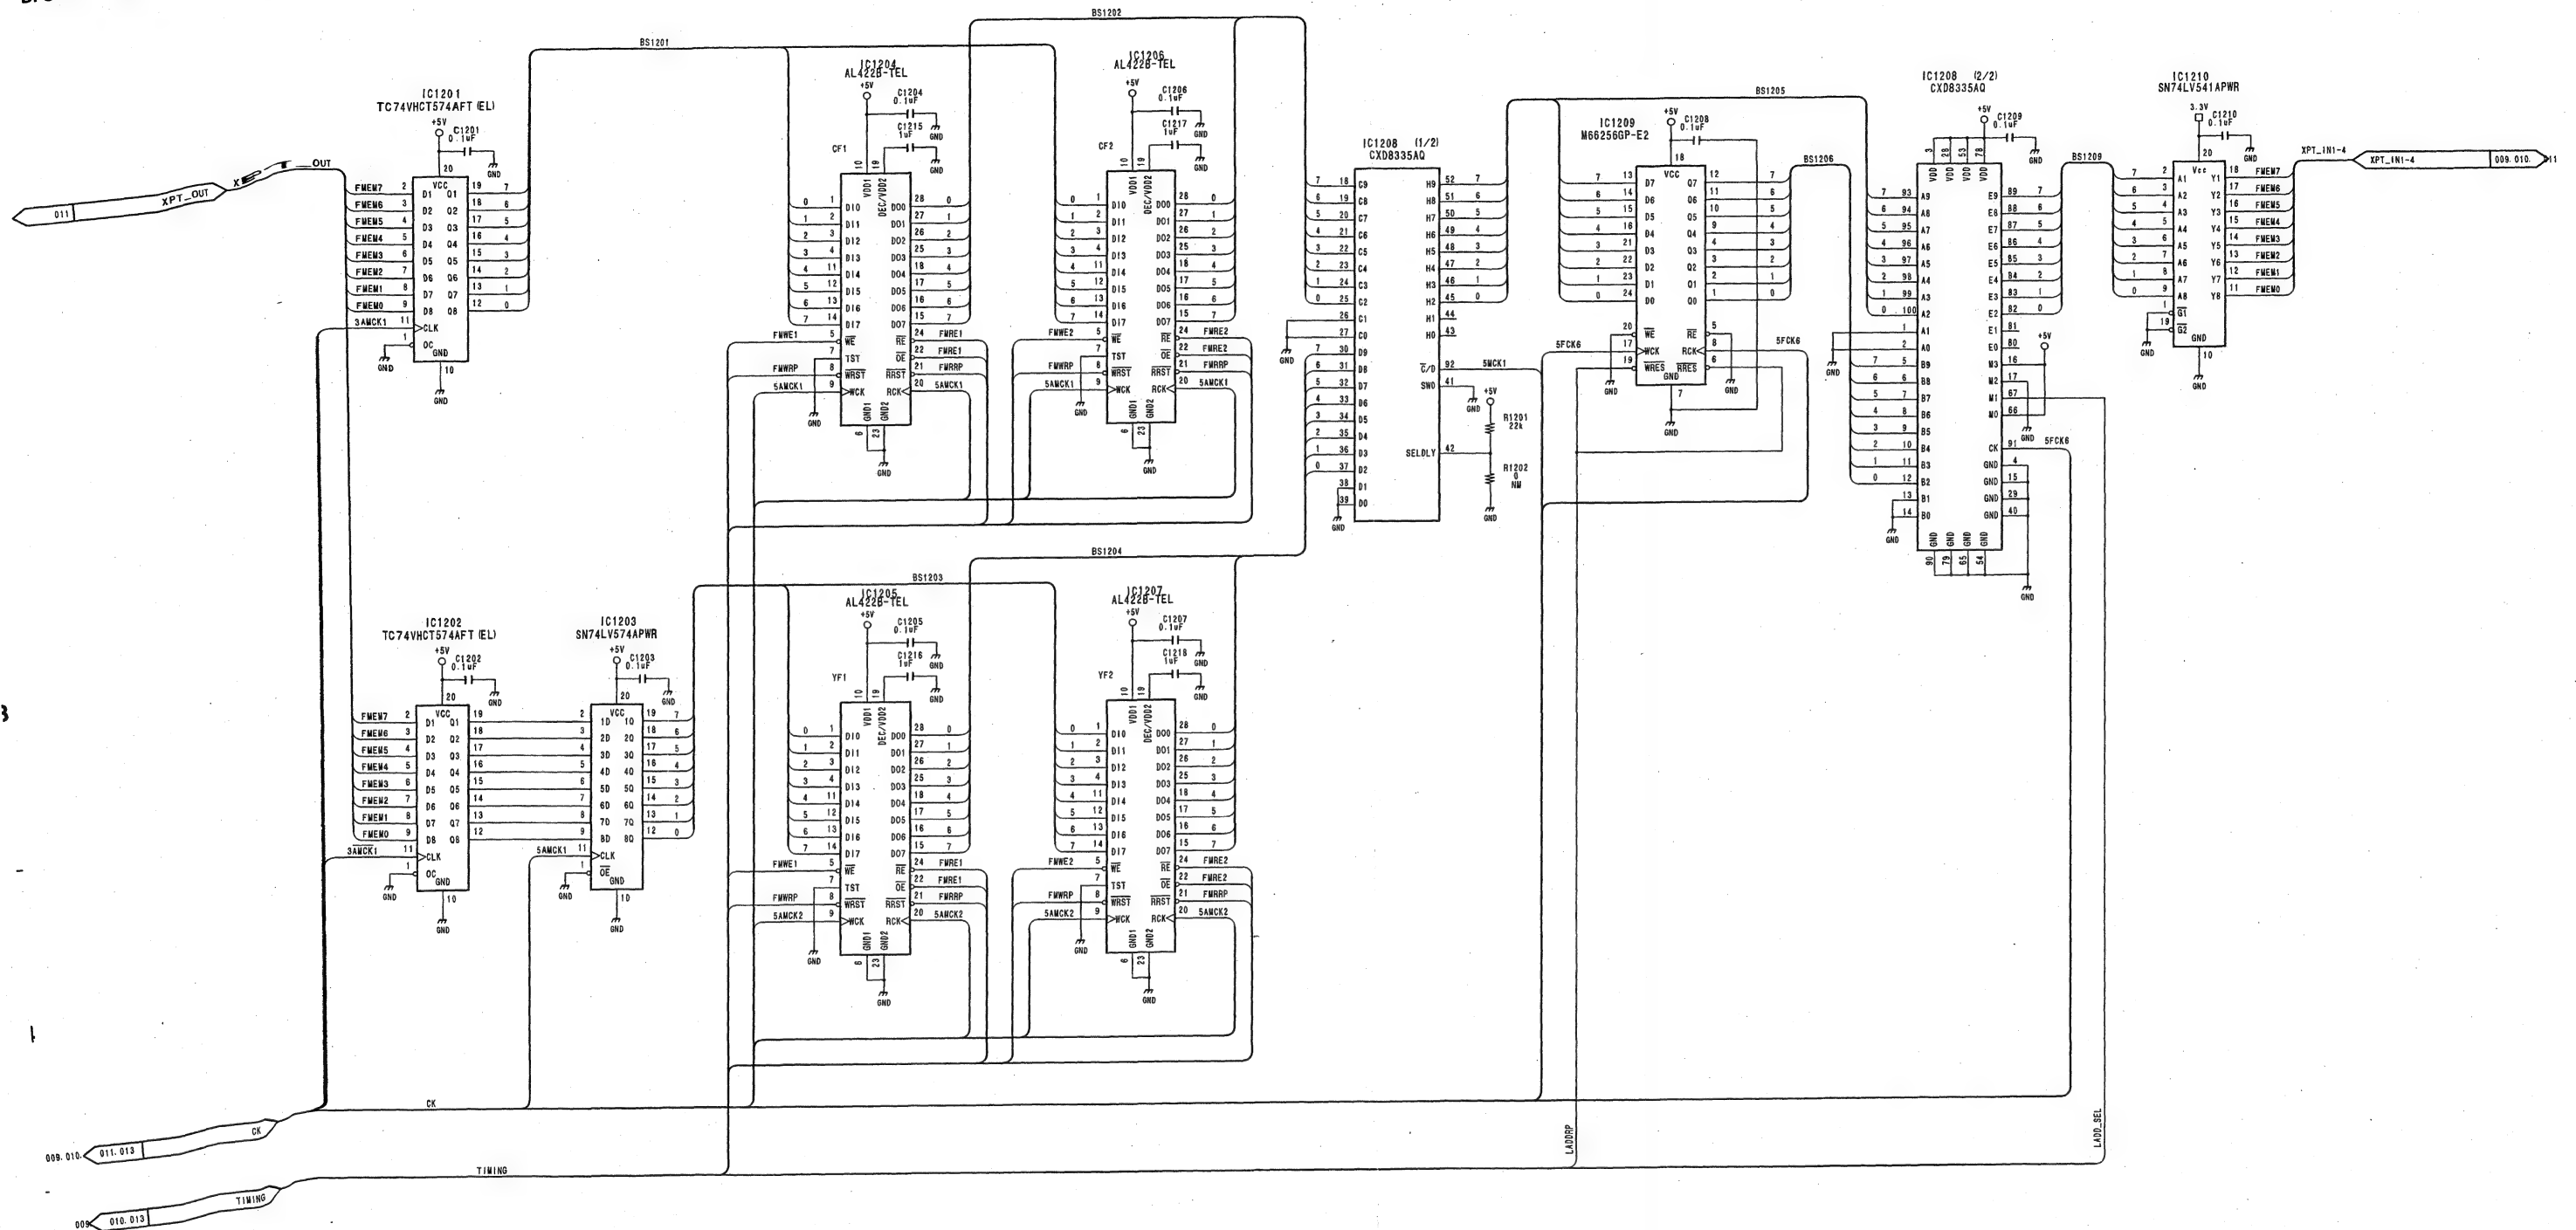


INPUT PROCESSOR BOARD
IPM-96/96P (12/14)
 BOARD NO. 1-677-094-11, 12
 LOT NO. 911-

DFS-700/700P


IPM-96/96P (13/14)

Diagram of the SN74ALS414P Schmitt trigger circuit. The circuit includes a 5V supply, a 10k pull-up resistor, and a 100k resistor. The input is connected to a 10k resistor and a 100k resistor. The output is connected to a 10k resistor and a 100k resistor. The circuit is labeled with component values and pin numbers.





DFS-700/700P

DFS-700 (J): S/N 30001 and Higher
 DFS-700 (UC): S/N 10001 and Higher
 DFS-700P (CE): S/N 40001 and Higher

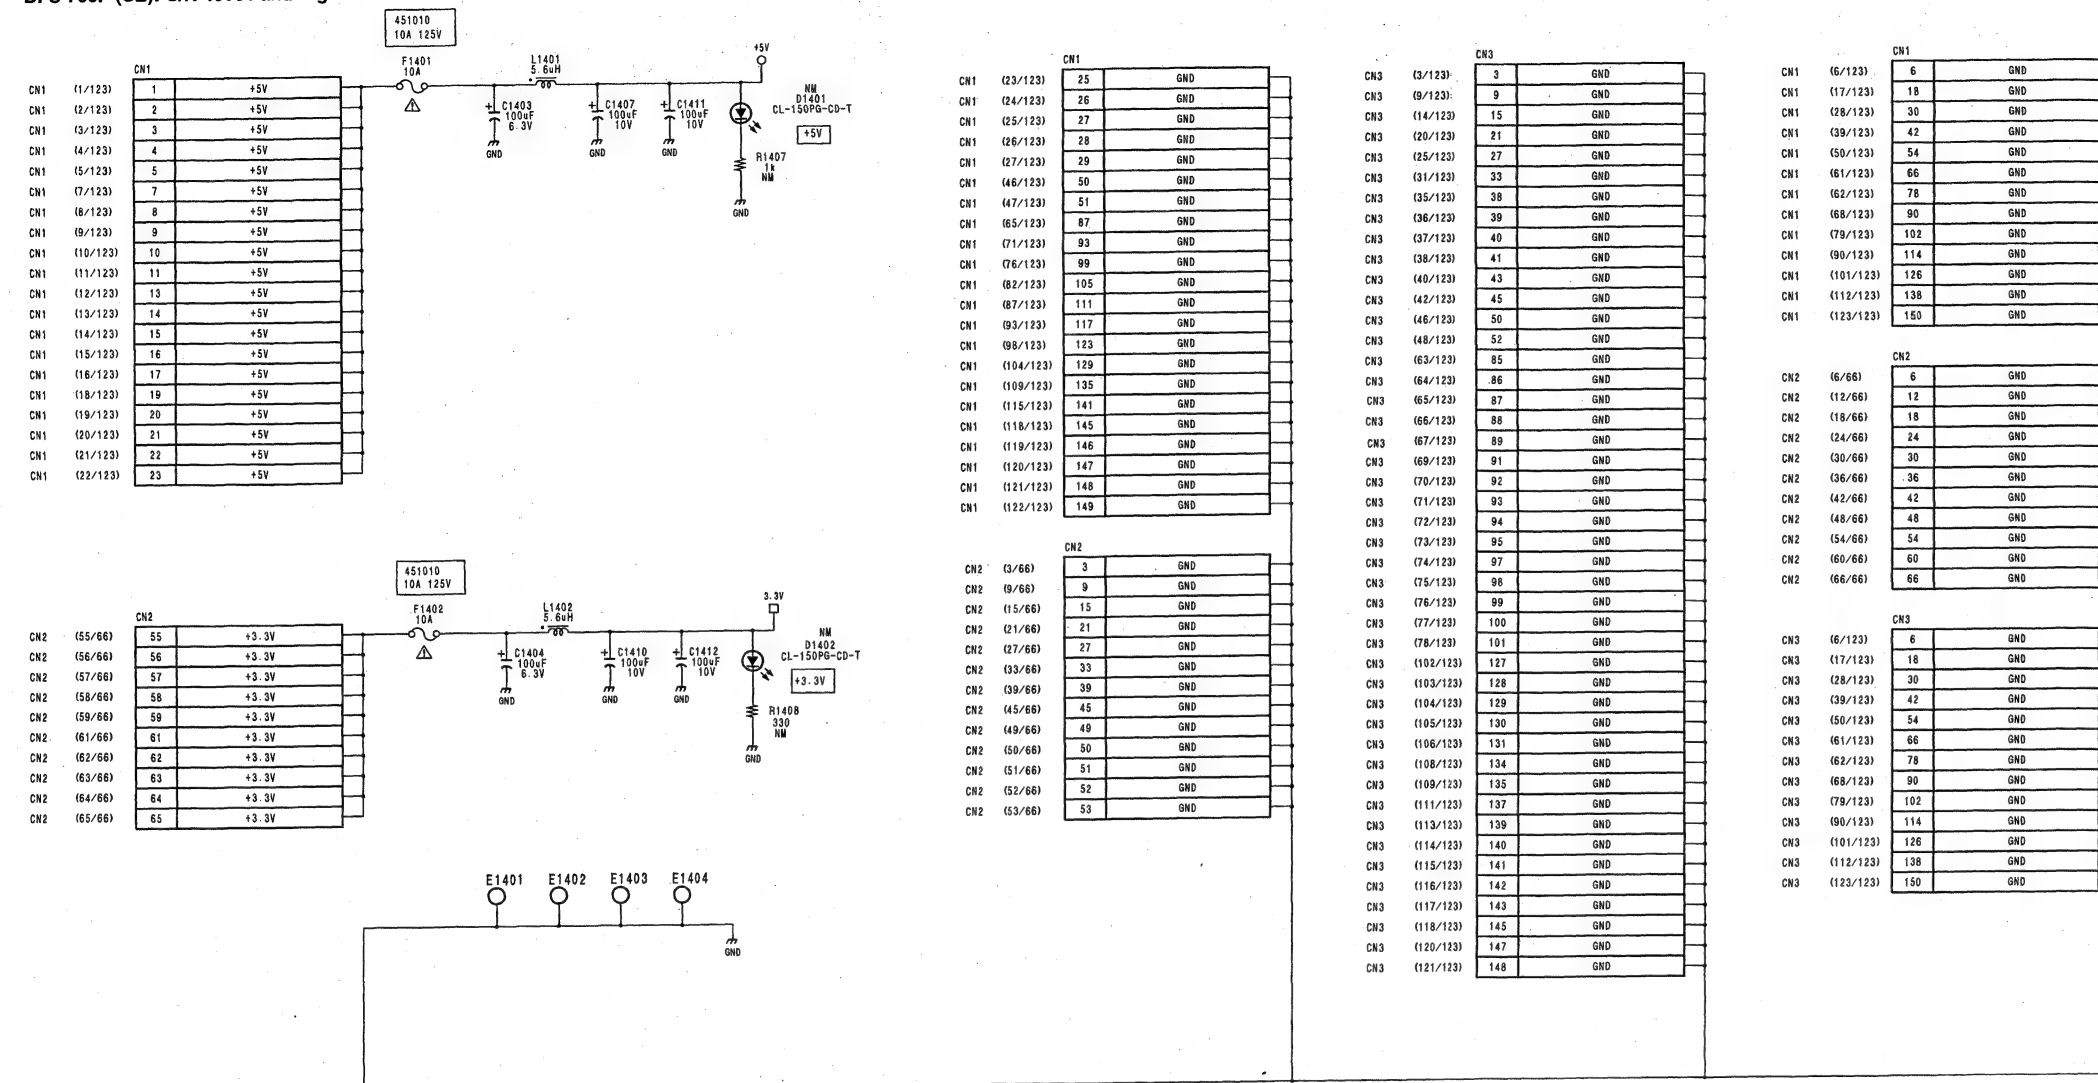



DFS-700 (J): S/N 30001 and Higher
DFS-700 (UC): S/N 10001 and Higher
DFS-700P (CE): S/N 40001 and Higher

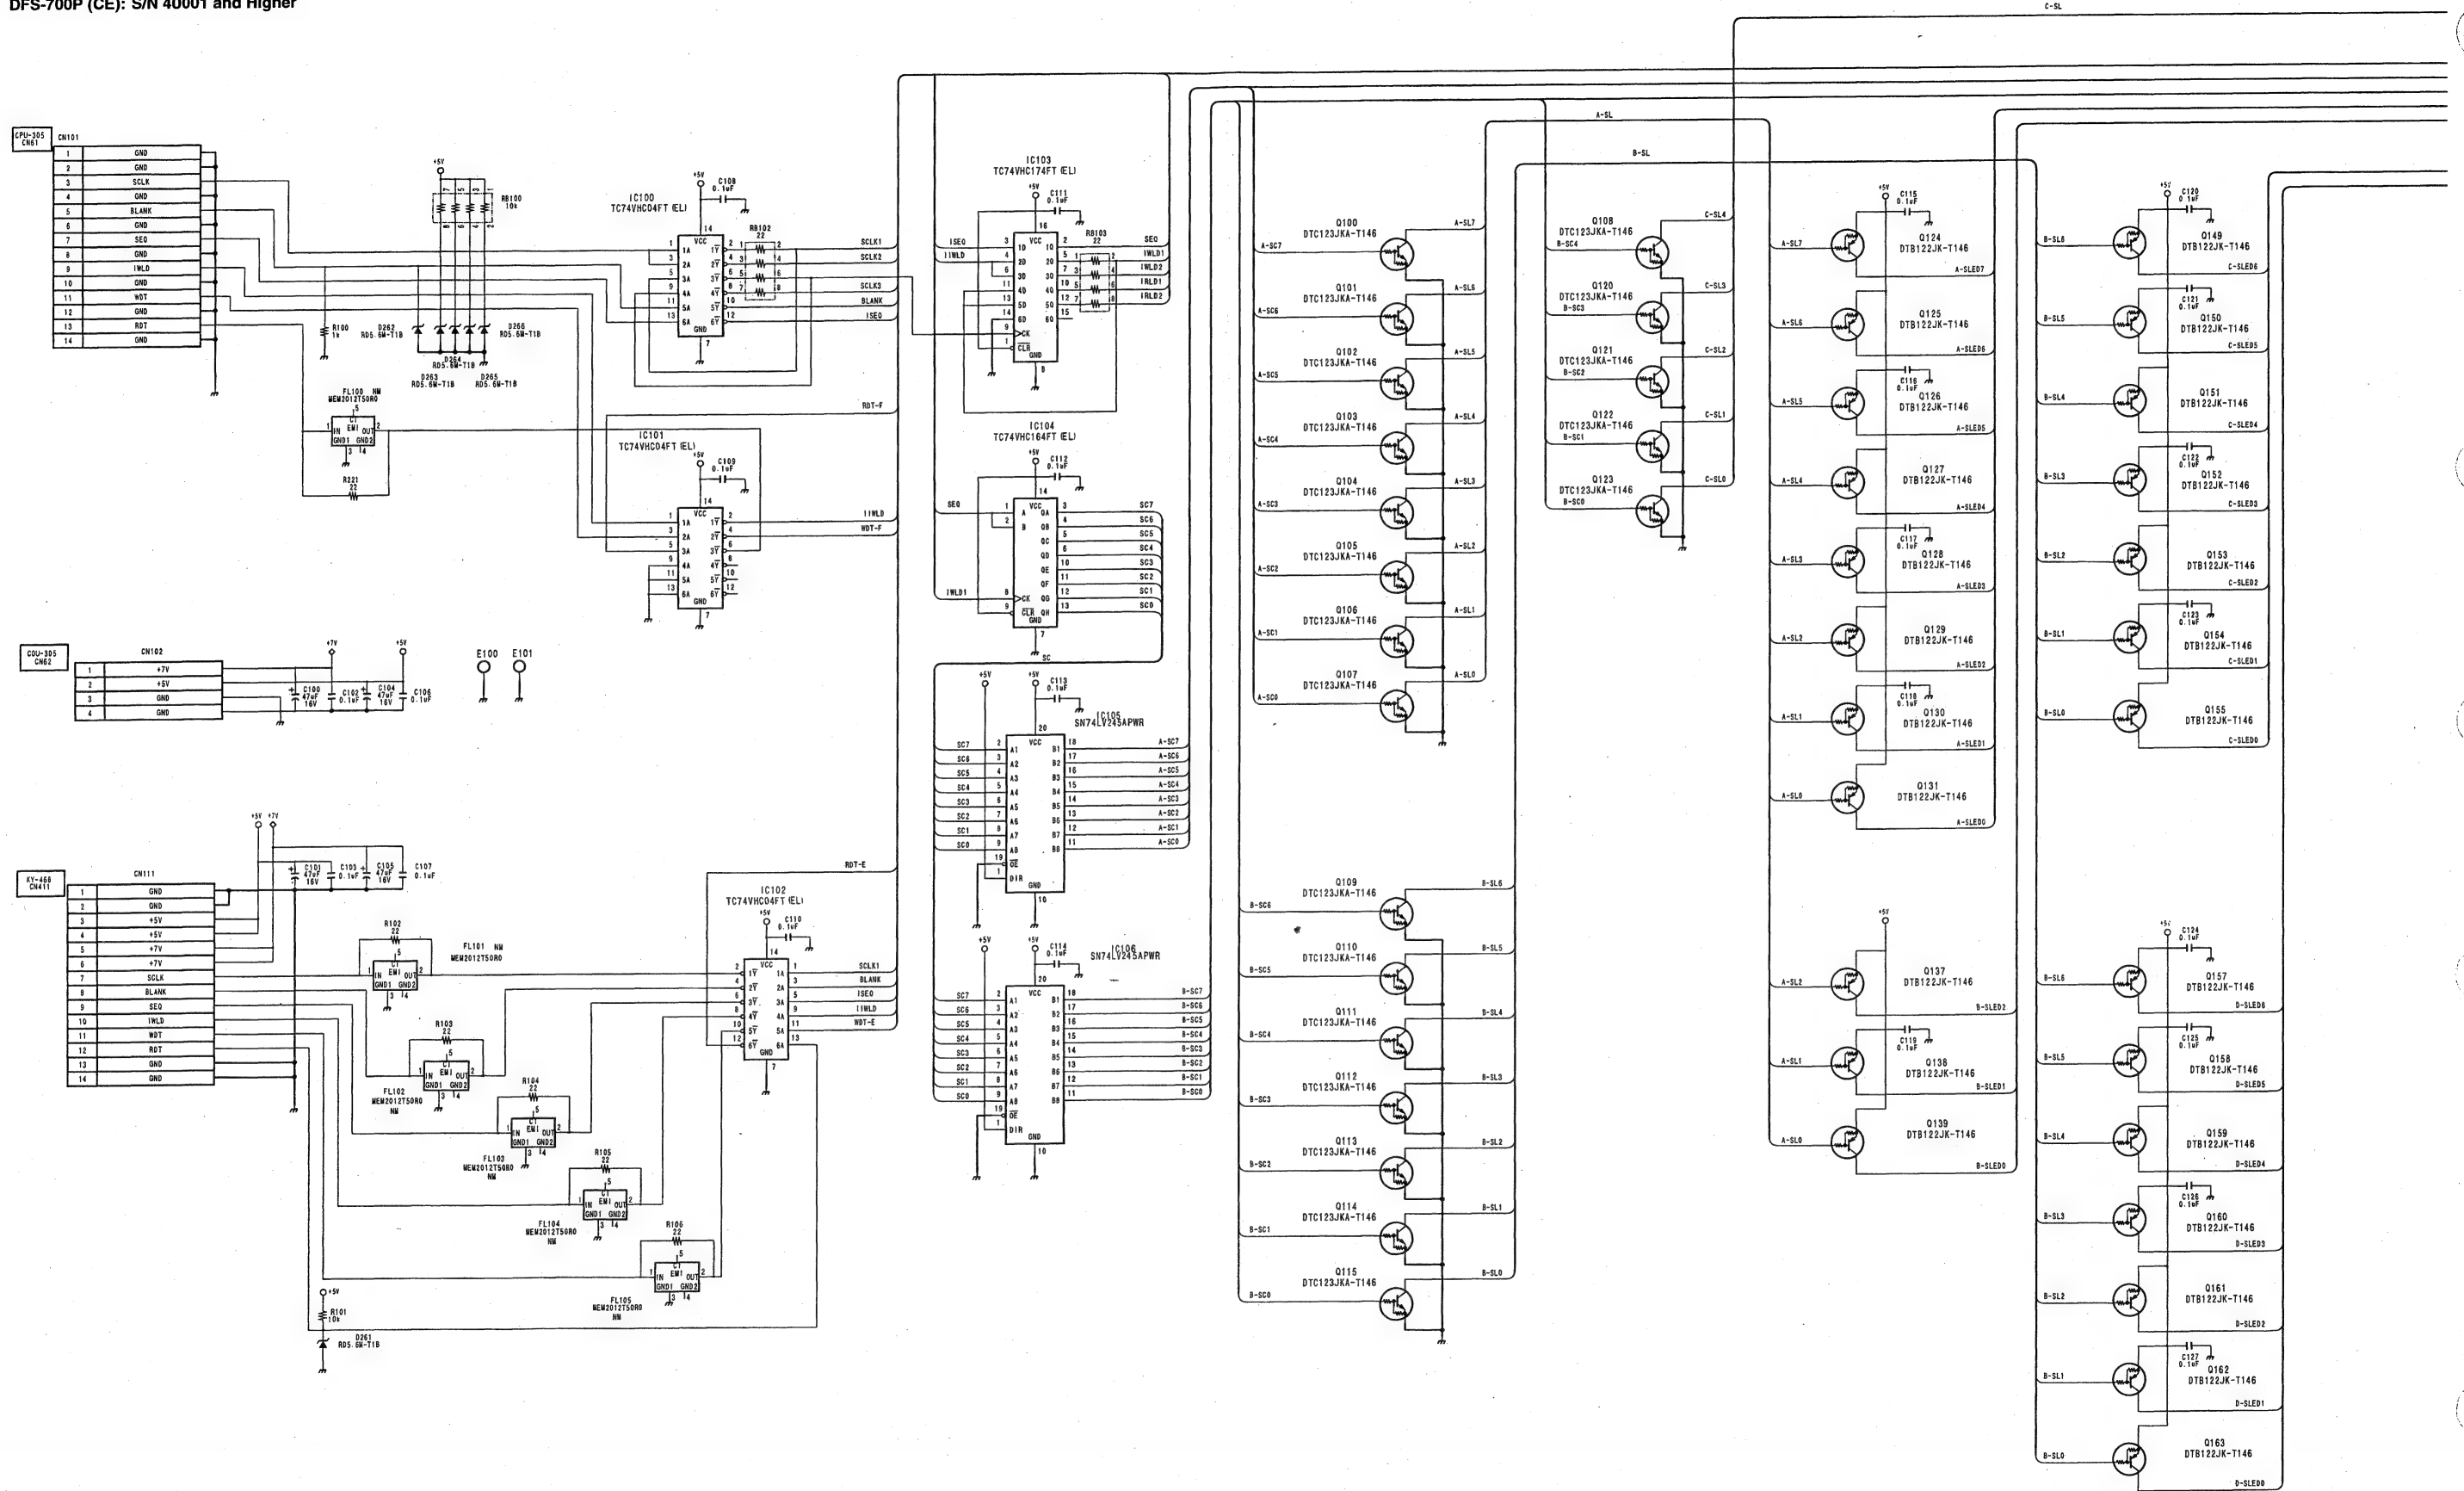

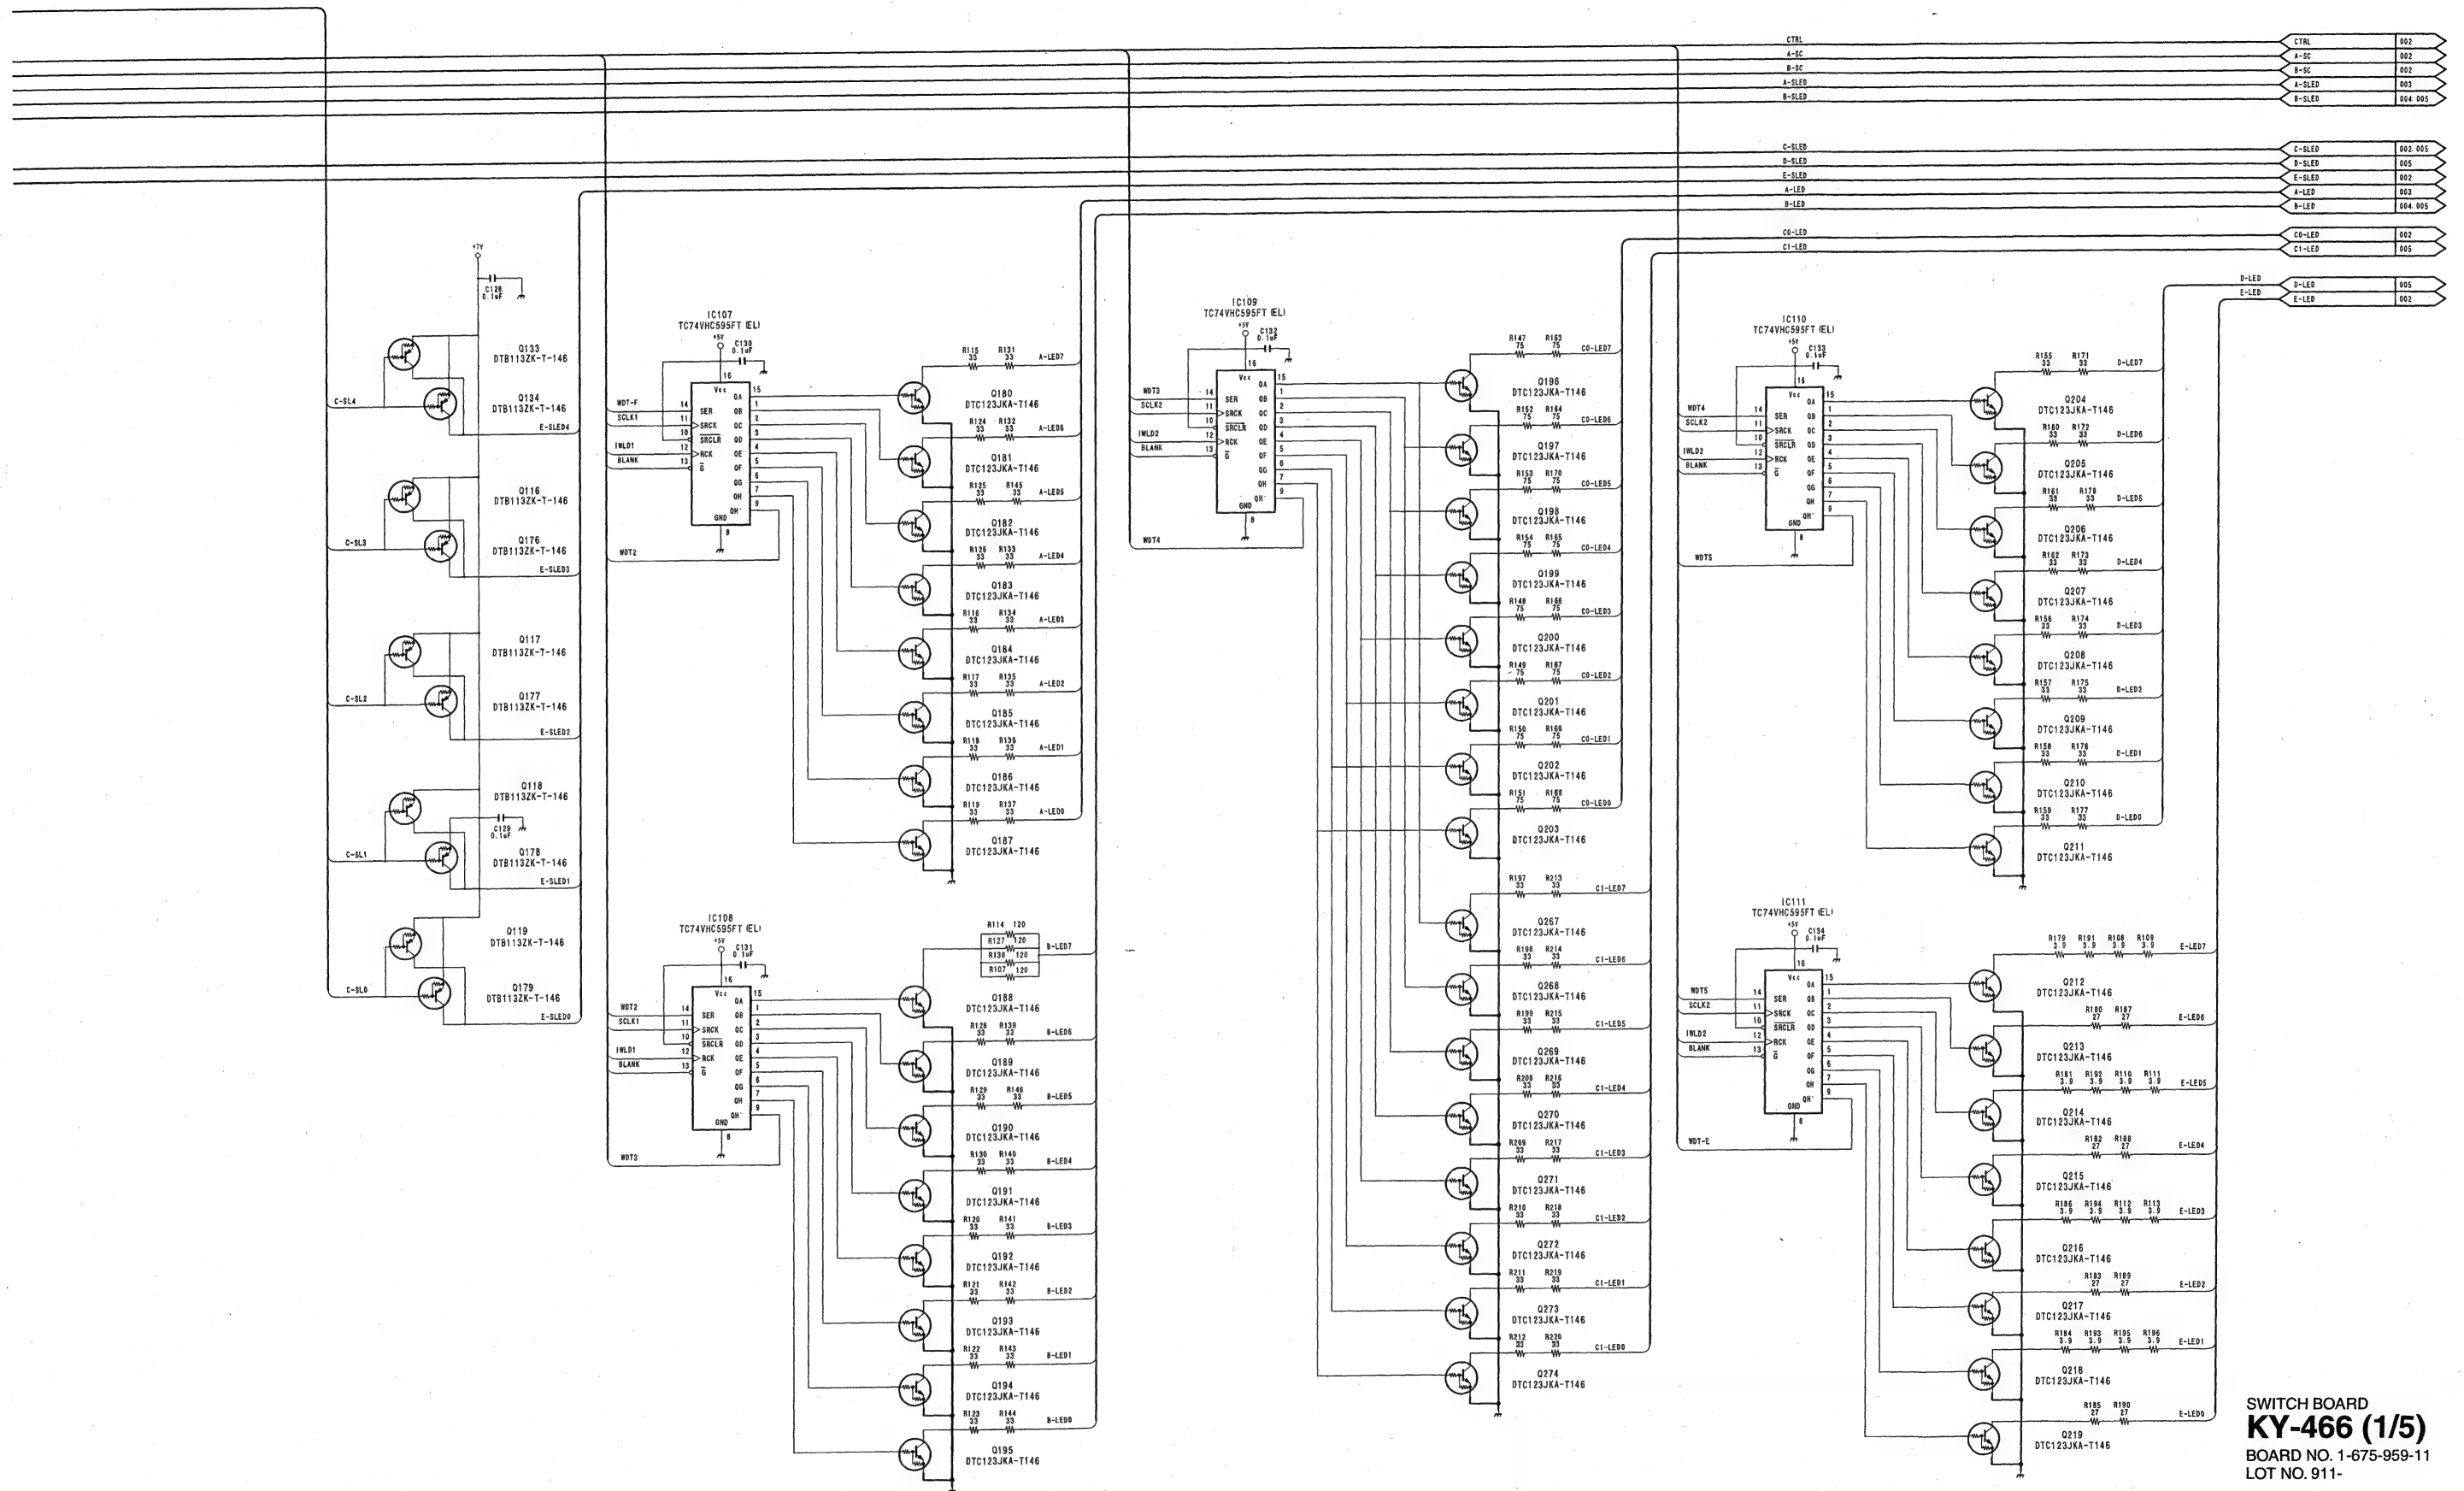

DFS-700 (J): S/N 30001 and Higher
DFS-700 (UC): S/N 10001 and Higher
DFS-700P (CE): S/N 40001 and Higher

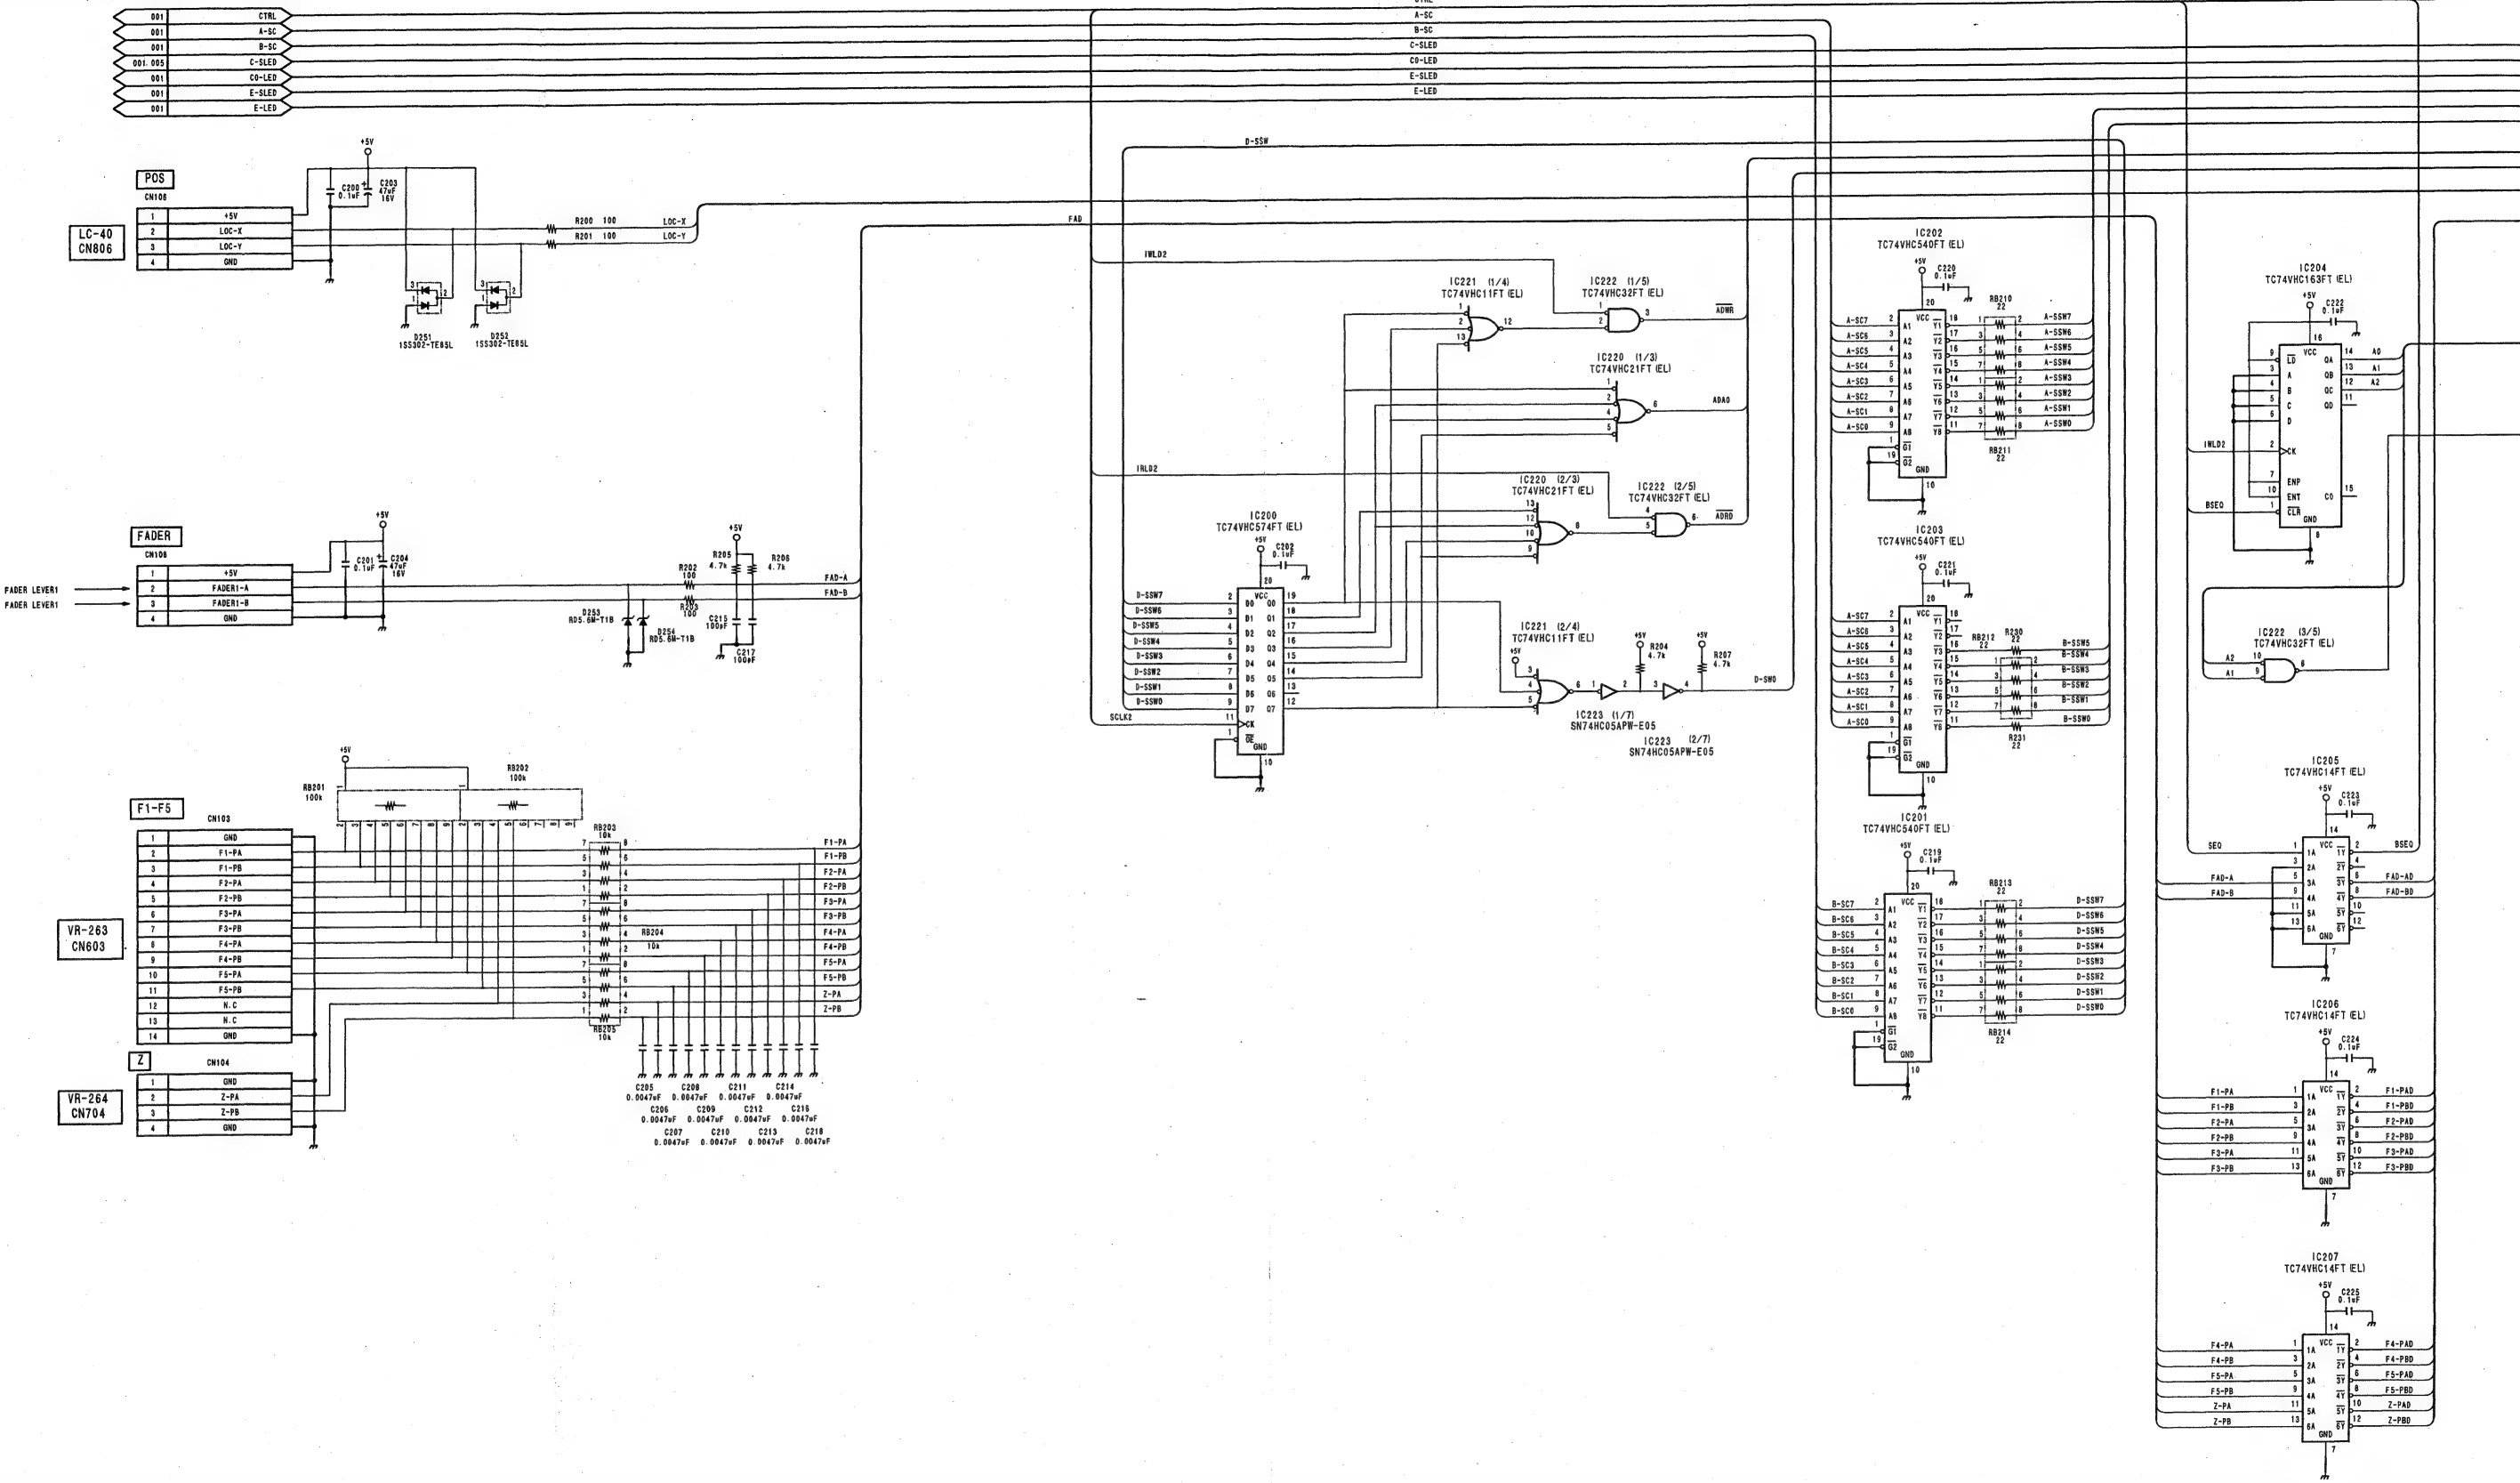


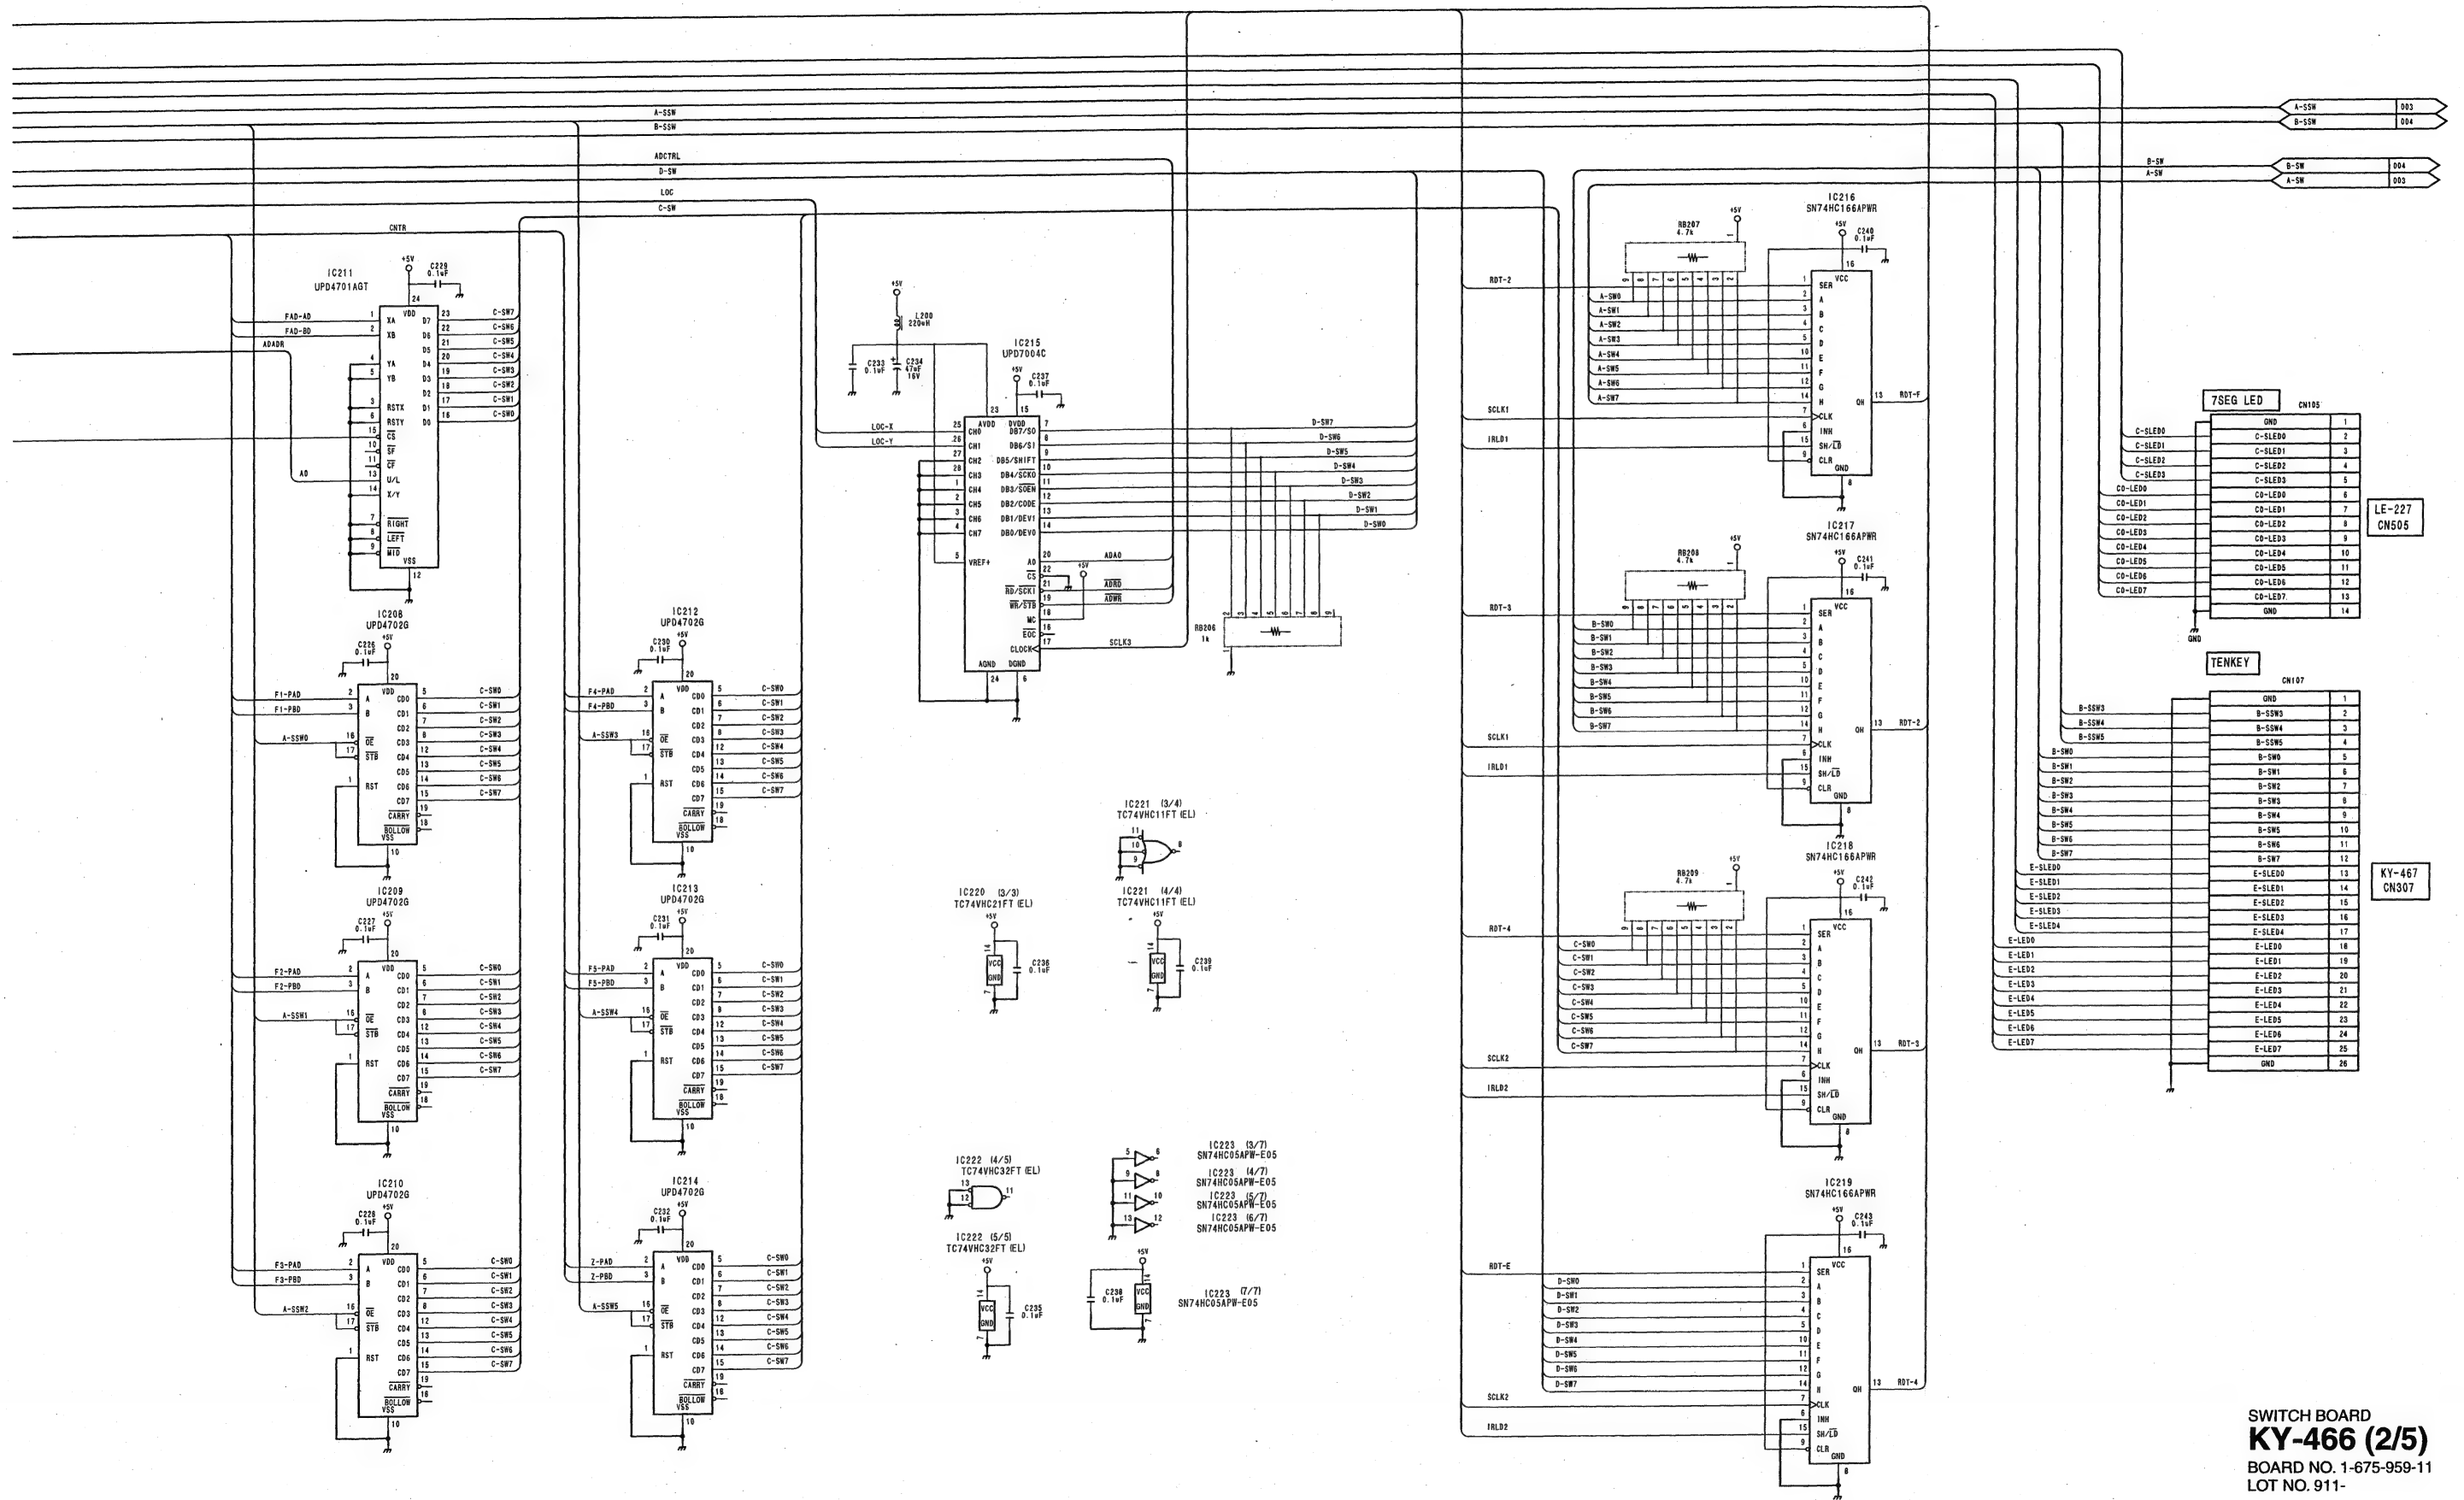

SWITCH BOARD
KY-466 (2/5)
BOARD NO. 1-675-959-11
LOT NO. 911-


DFS-700/700P

DFS-700 (J): S/N 30001 and Higher
DFS-700 (UC): S/N 10001 and Higher
DFS-700P (CE): S/N 40001 and Higher

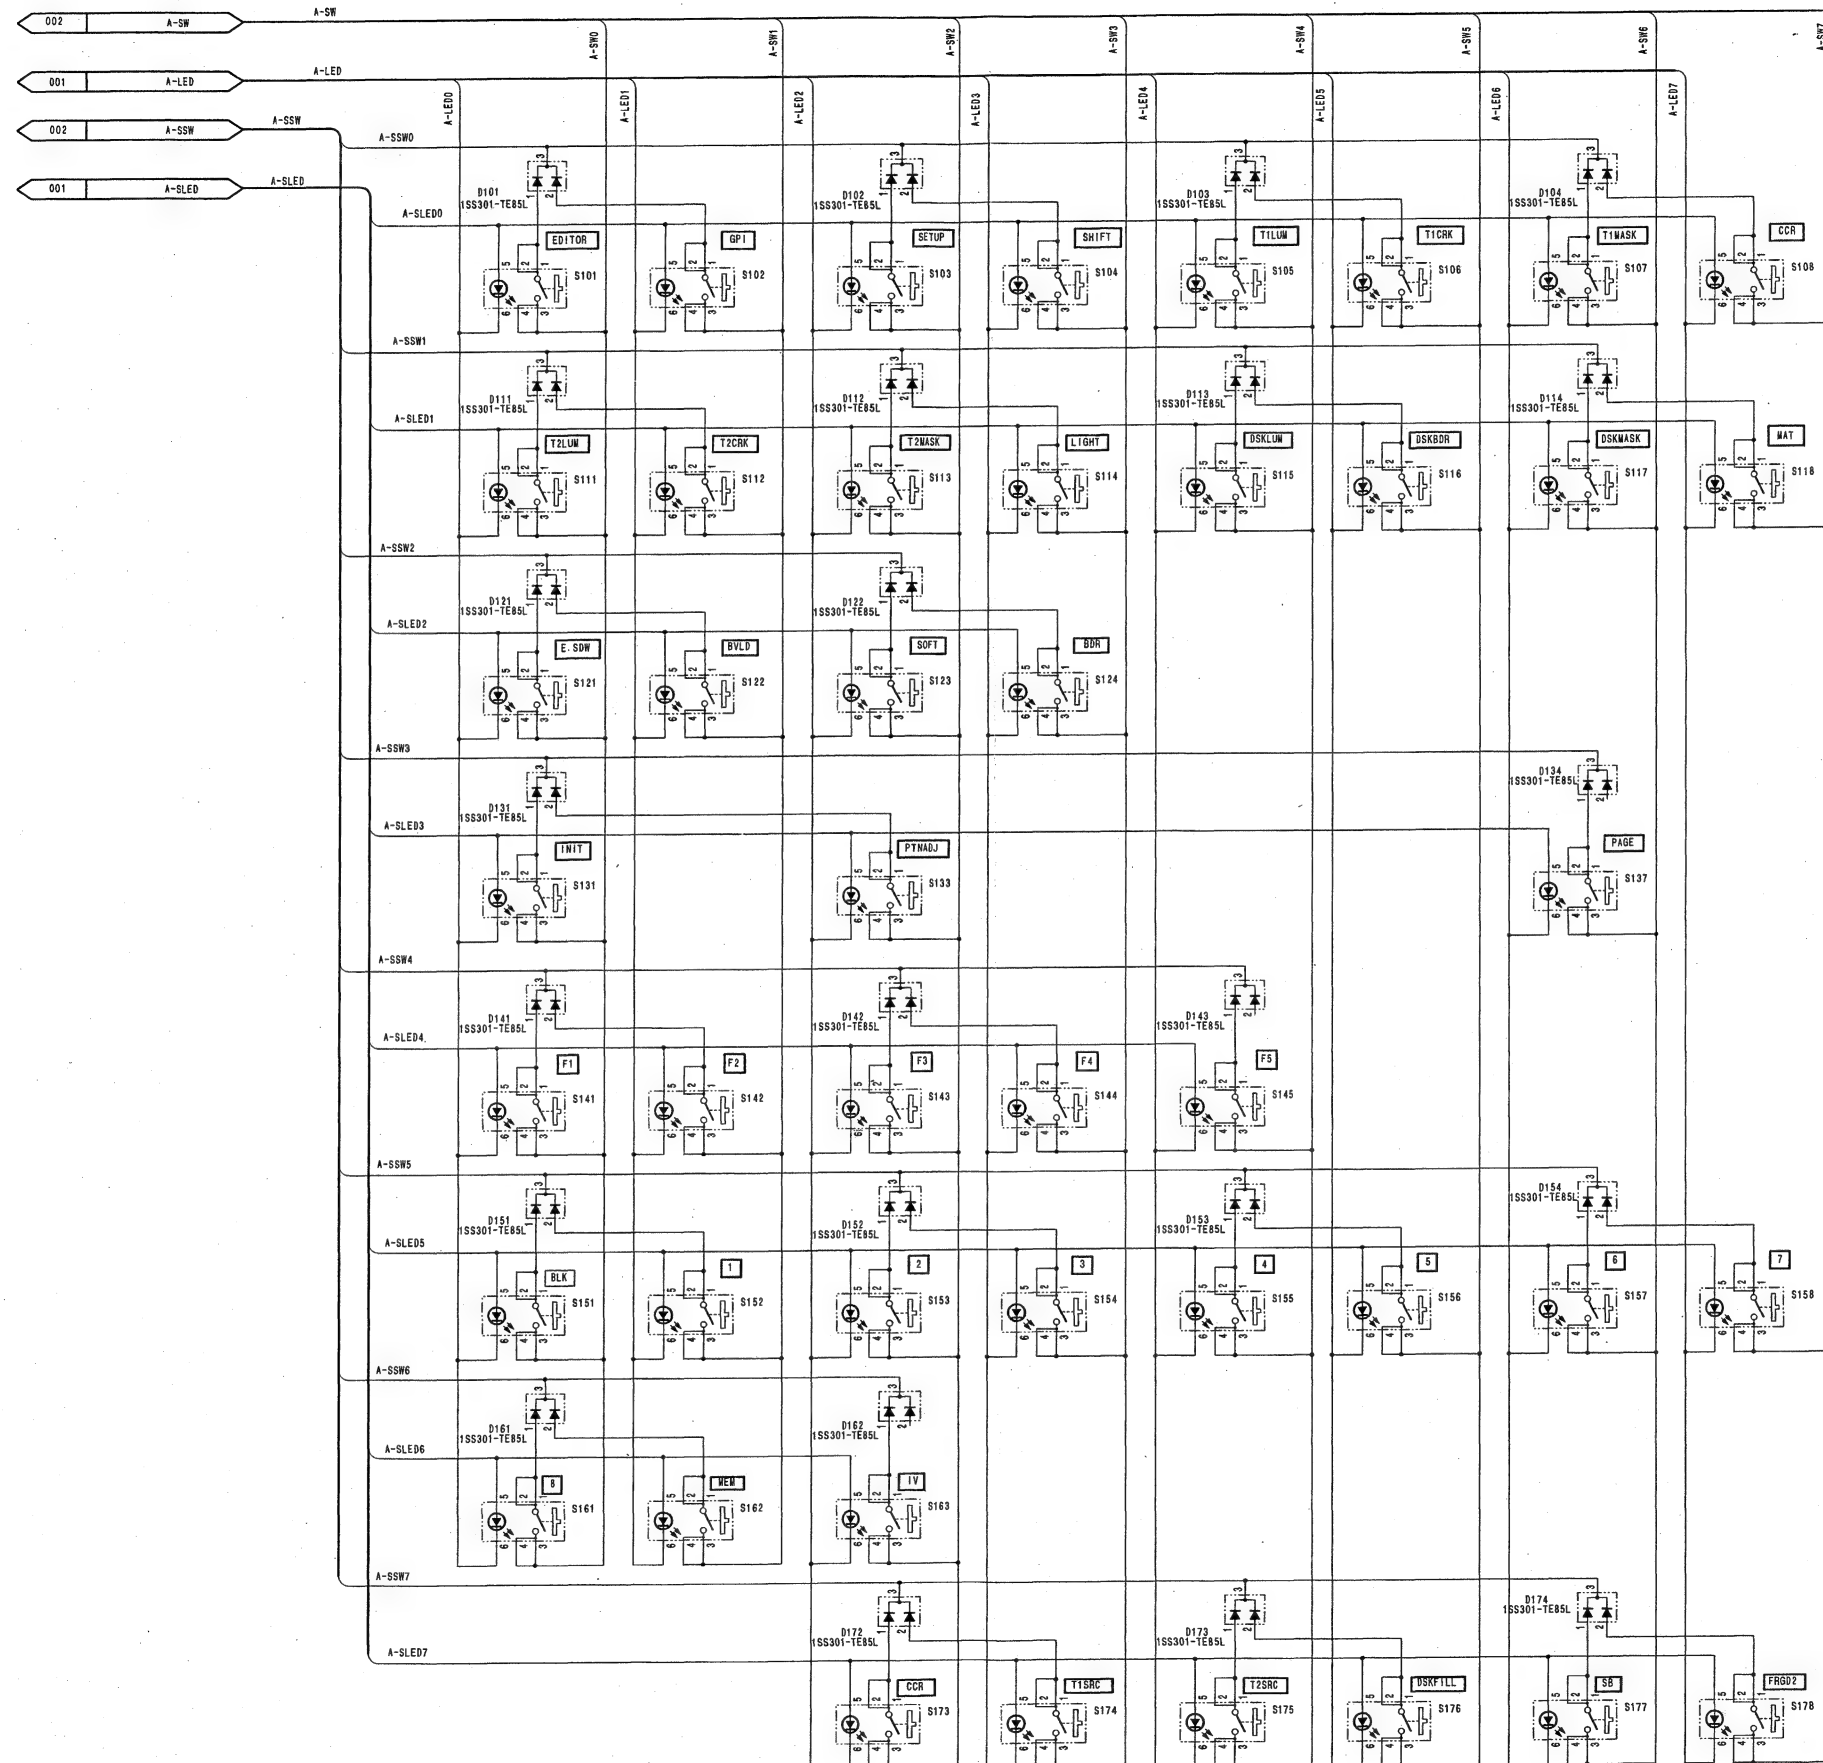


SWITCH BOARD
KY-466 (3/5)
BOARD NO. 1-675-959-11
LOT NO. 911-

DFS-700 (J): S/N 30001 and Higher
DFS-700 (UC): S/N 10001 and Higher
DFS-700P (CE): S/N 40001 and Higher

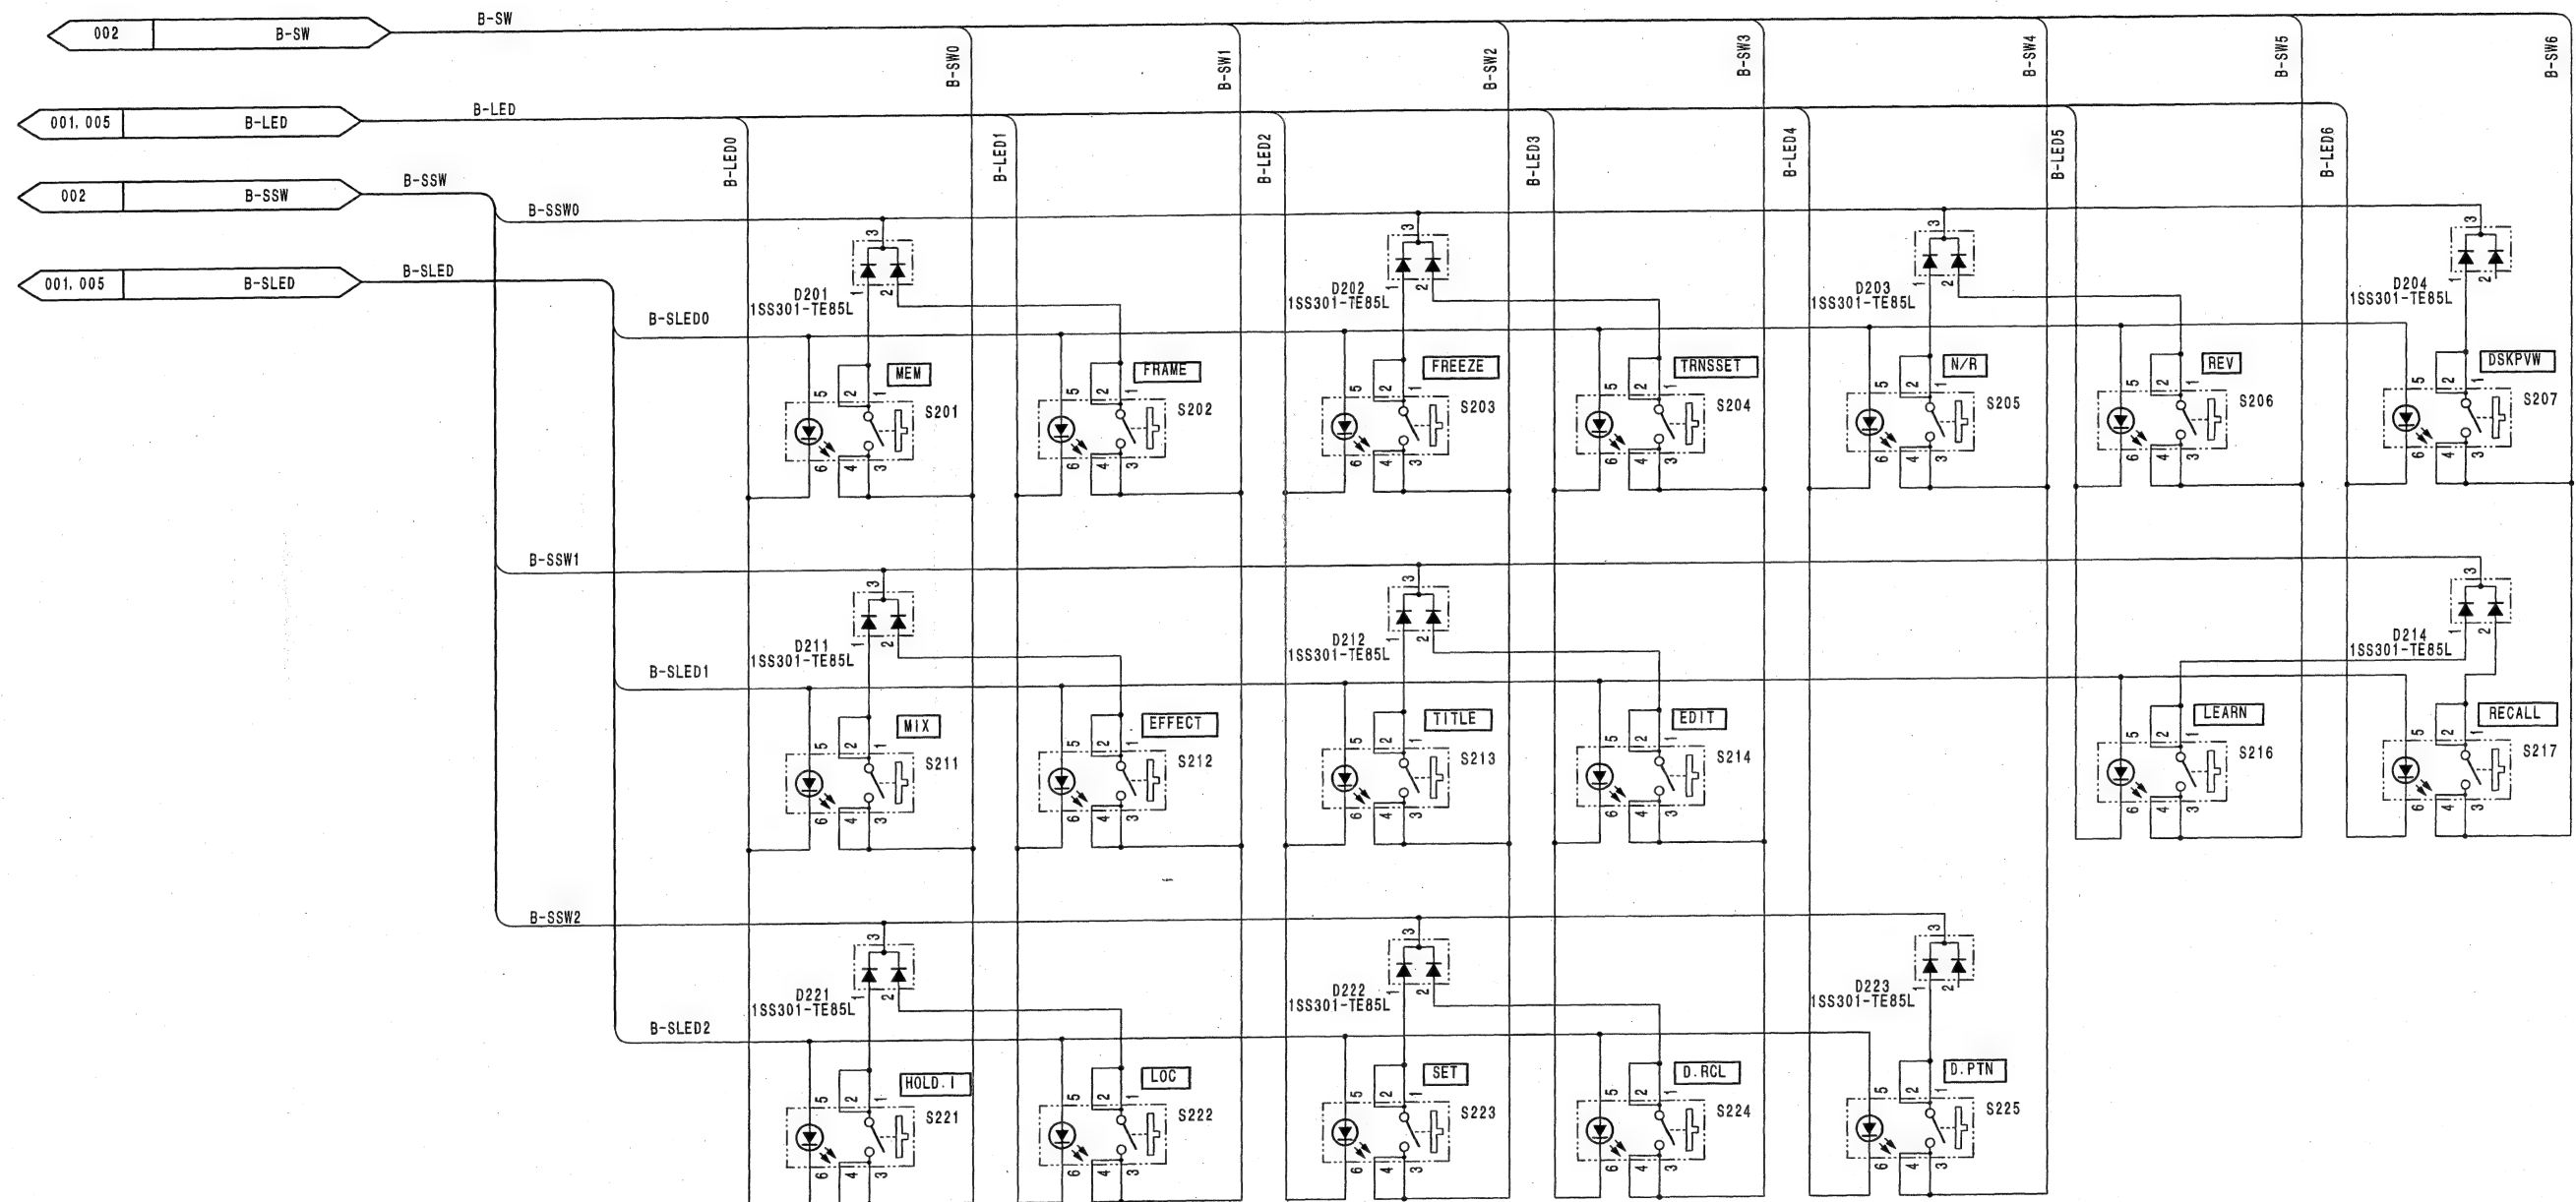

SWITCH BOARD
KY-466 (4/5)
BOARD NO. 1-675-959-11
LOT NO. 911-

DFS-700 (J): S/N 30001 and Higher
DFS-700 (UC): S/N 10001 and Higher
DFS-700P (CE): S/N 40001 and Higher


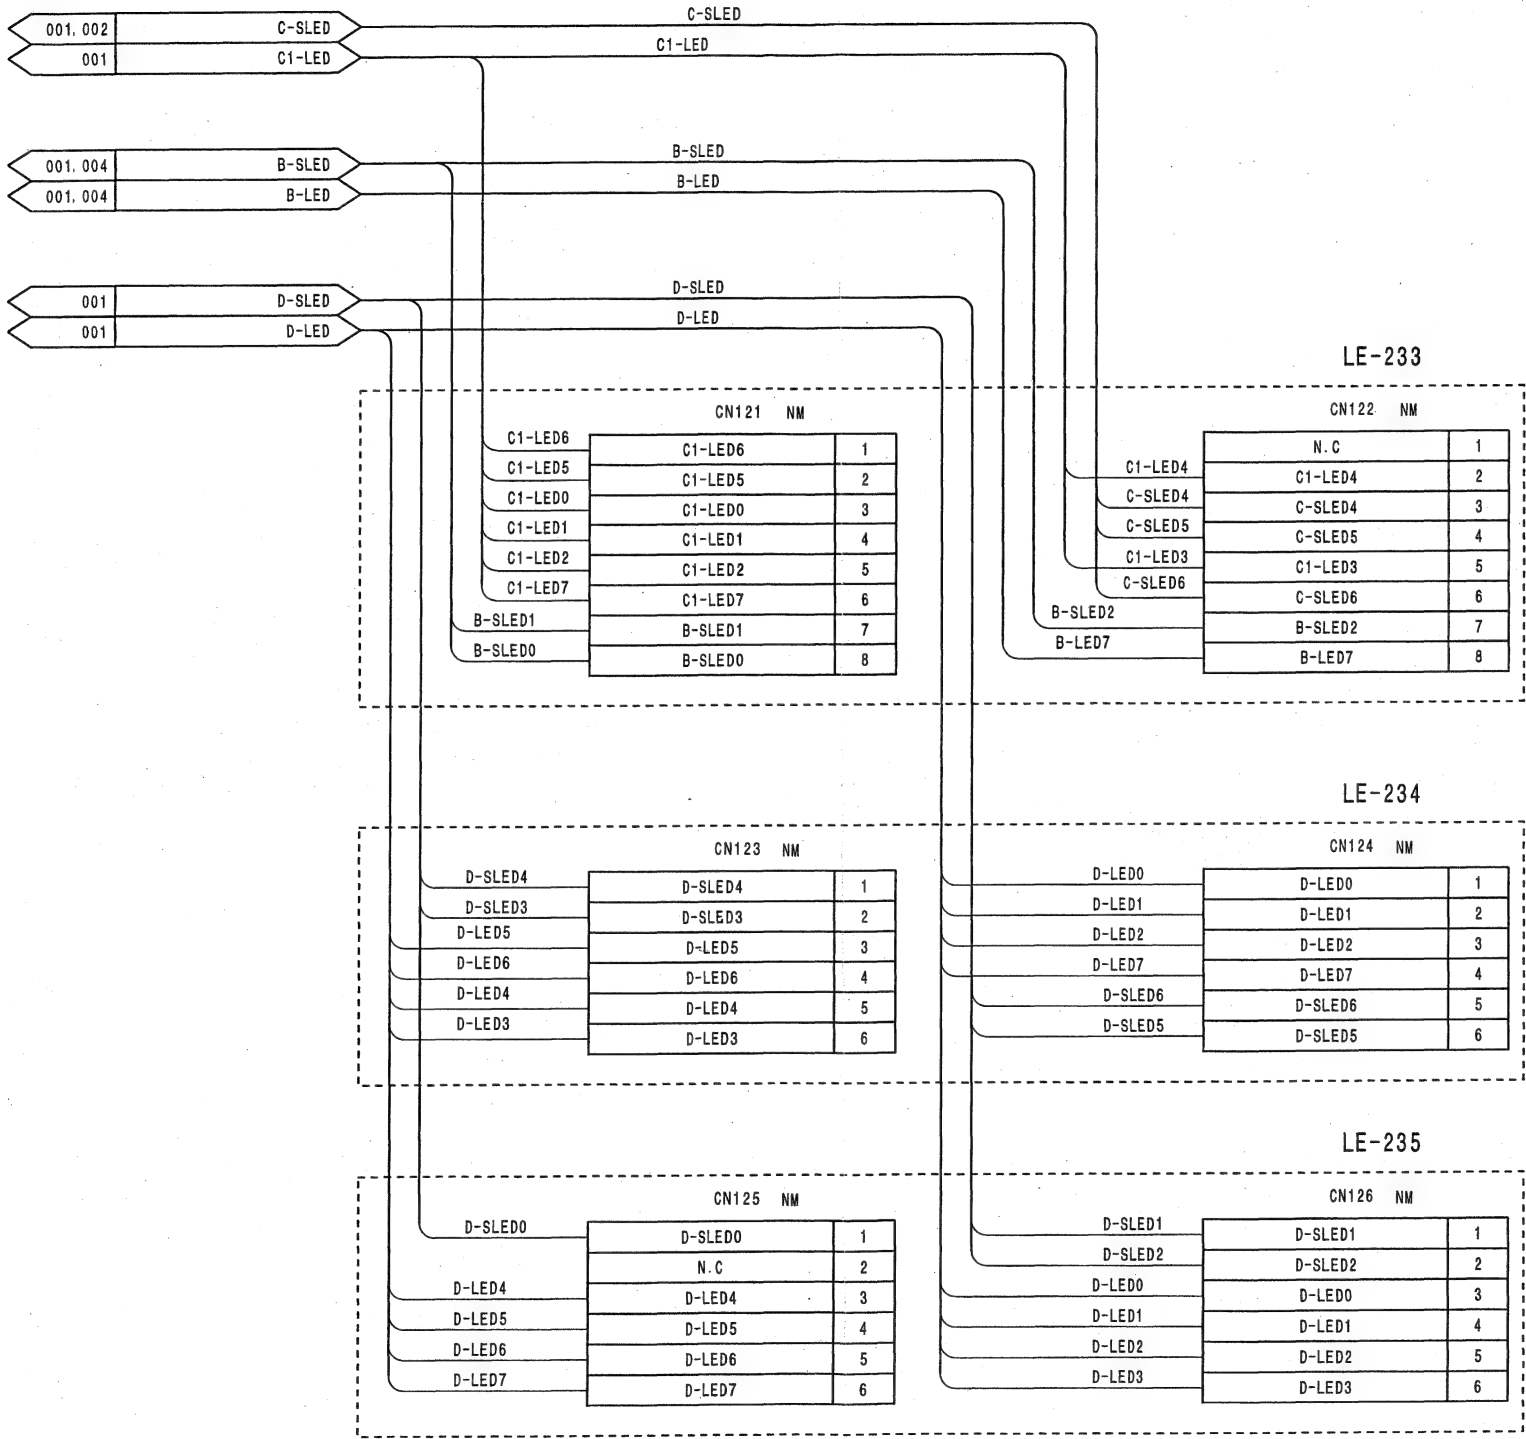


SWITCH BOARD
KY-466 (5/5)
BOARD NO. 1-675-959-11
LOT NO. 911-

DFS-700 (J): S/N 30001 and Higher
 DFS-700 (UC): S/N 10001 and Higher
 DFS-700P (CE): S/N 40001 and Higher


KY-466
 CN107

CN307

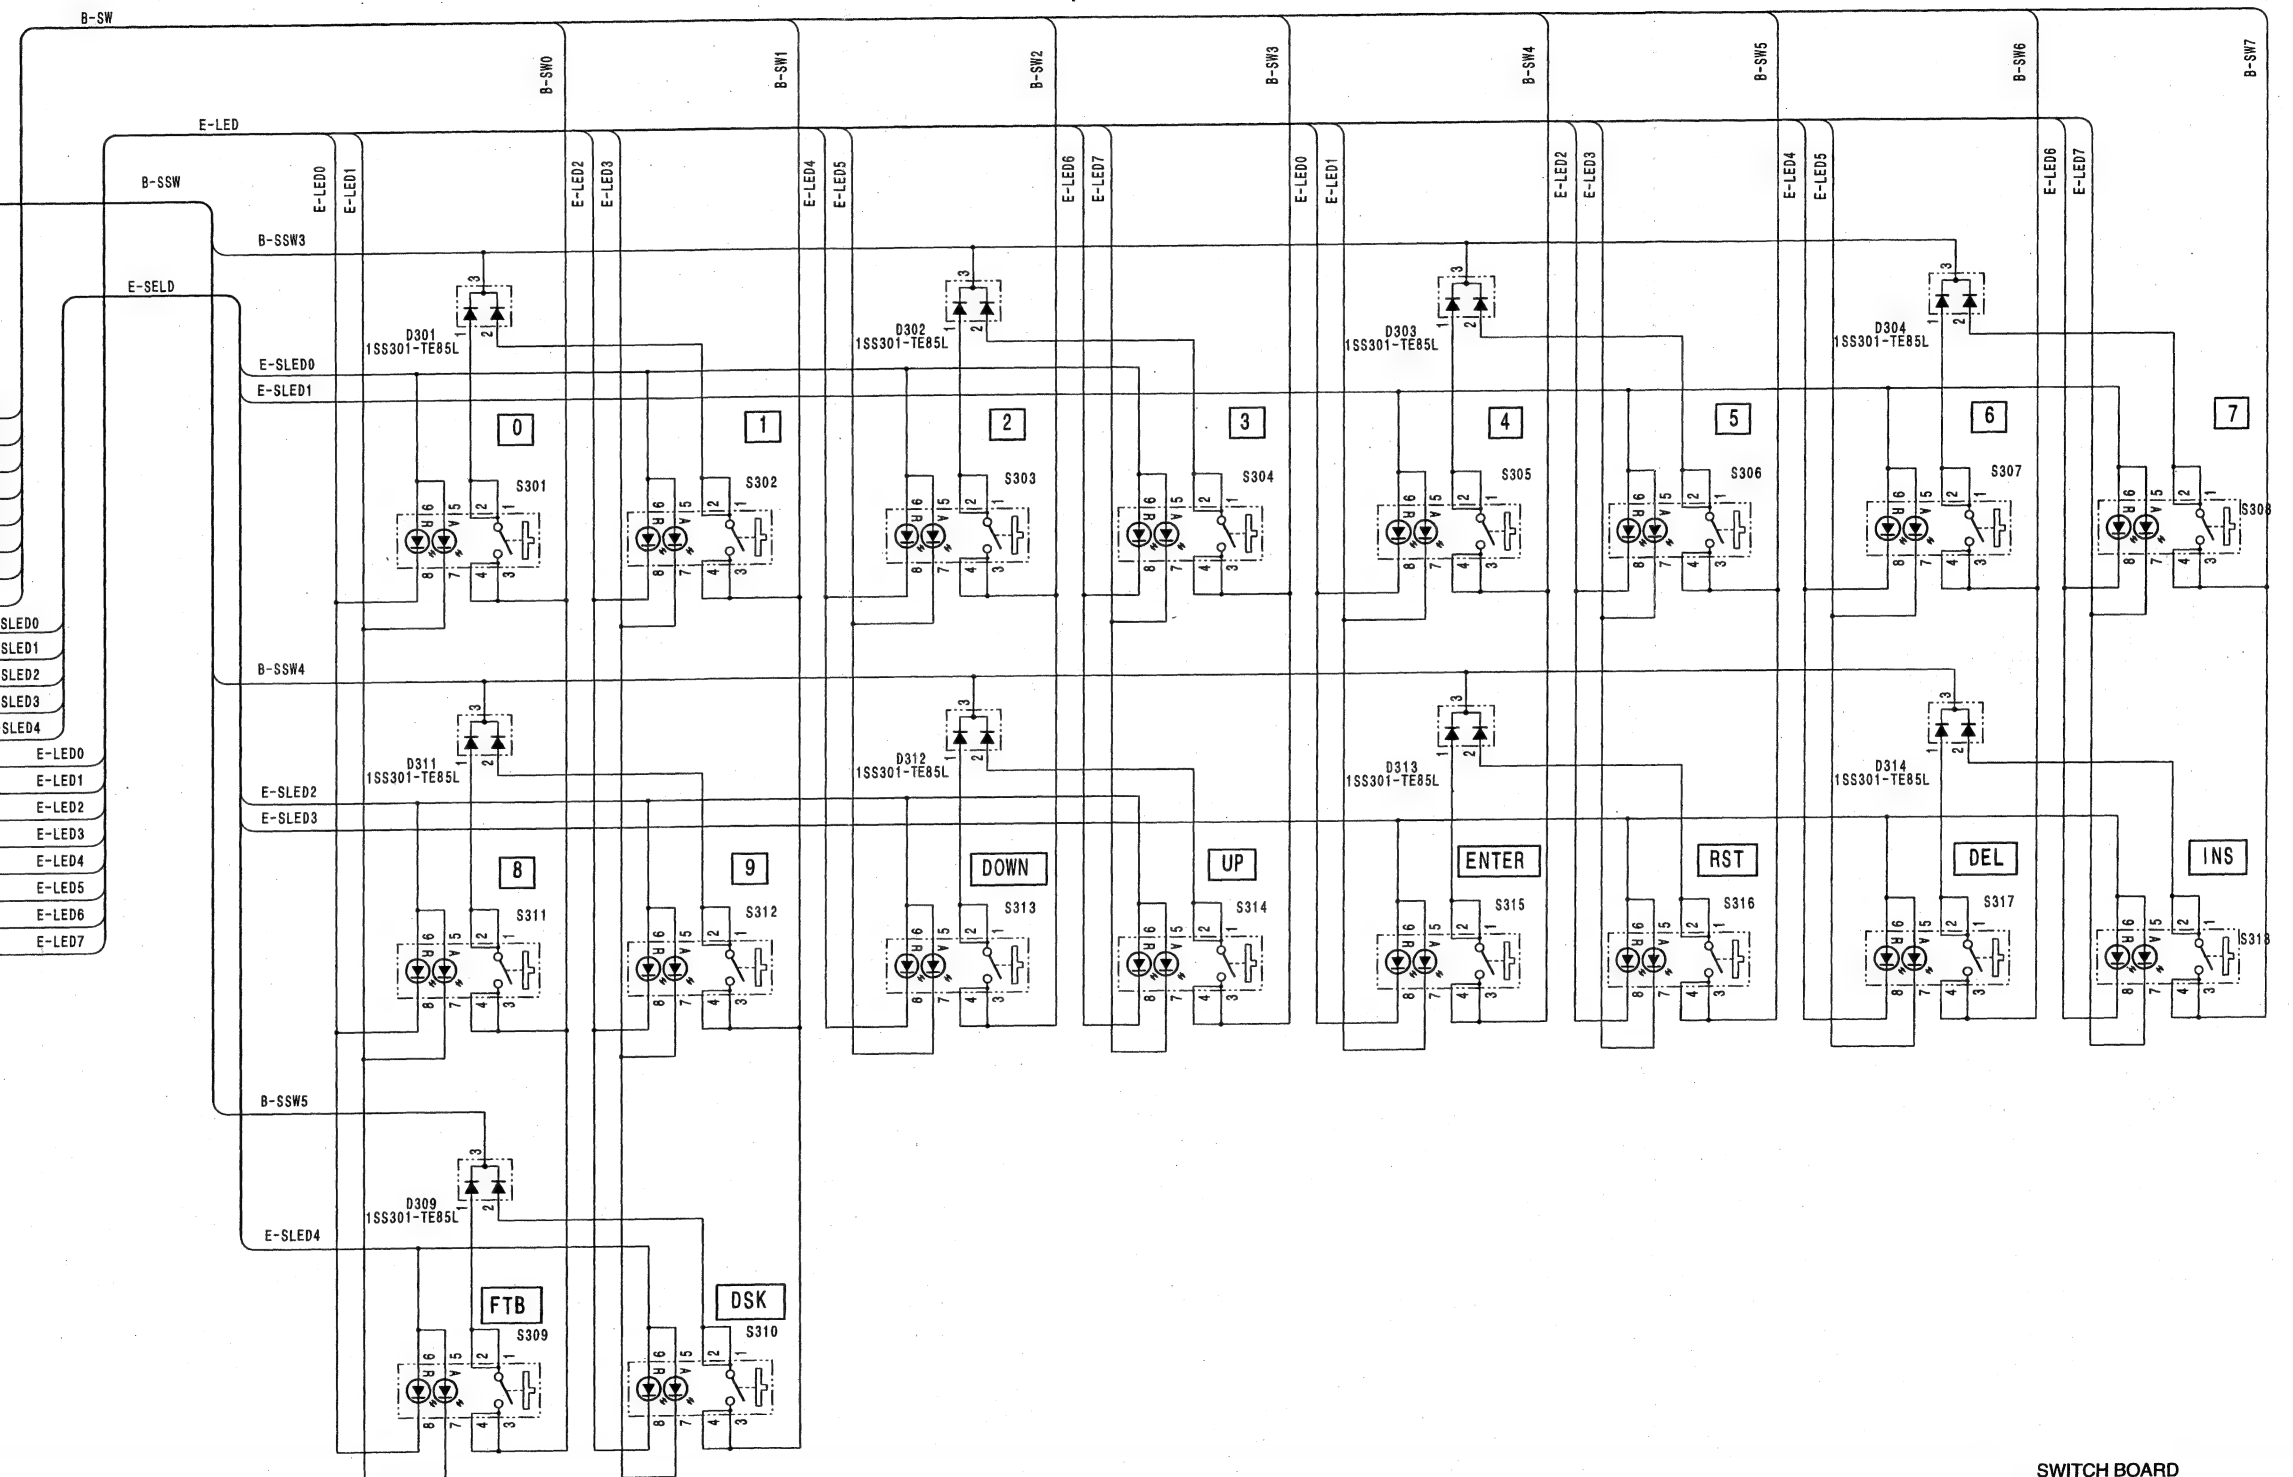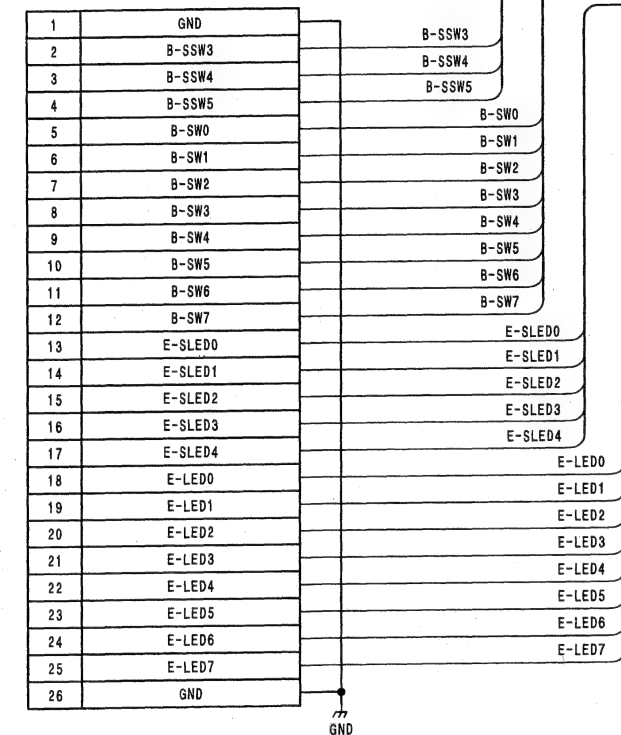

SWITCH BOARD
KY-467
 BOARD NO. 1-675-960-11
 LOT NO. 911-


DFS-700 (J): S/N 30001 and Higher
DFS-700 (UC): S/N 10001 and Higher
DFS-700P (CE): S/N 40001 and Higher

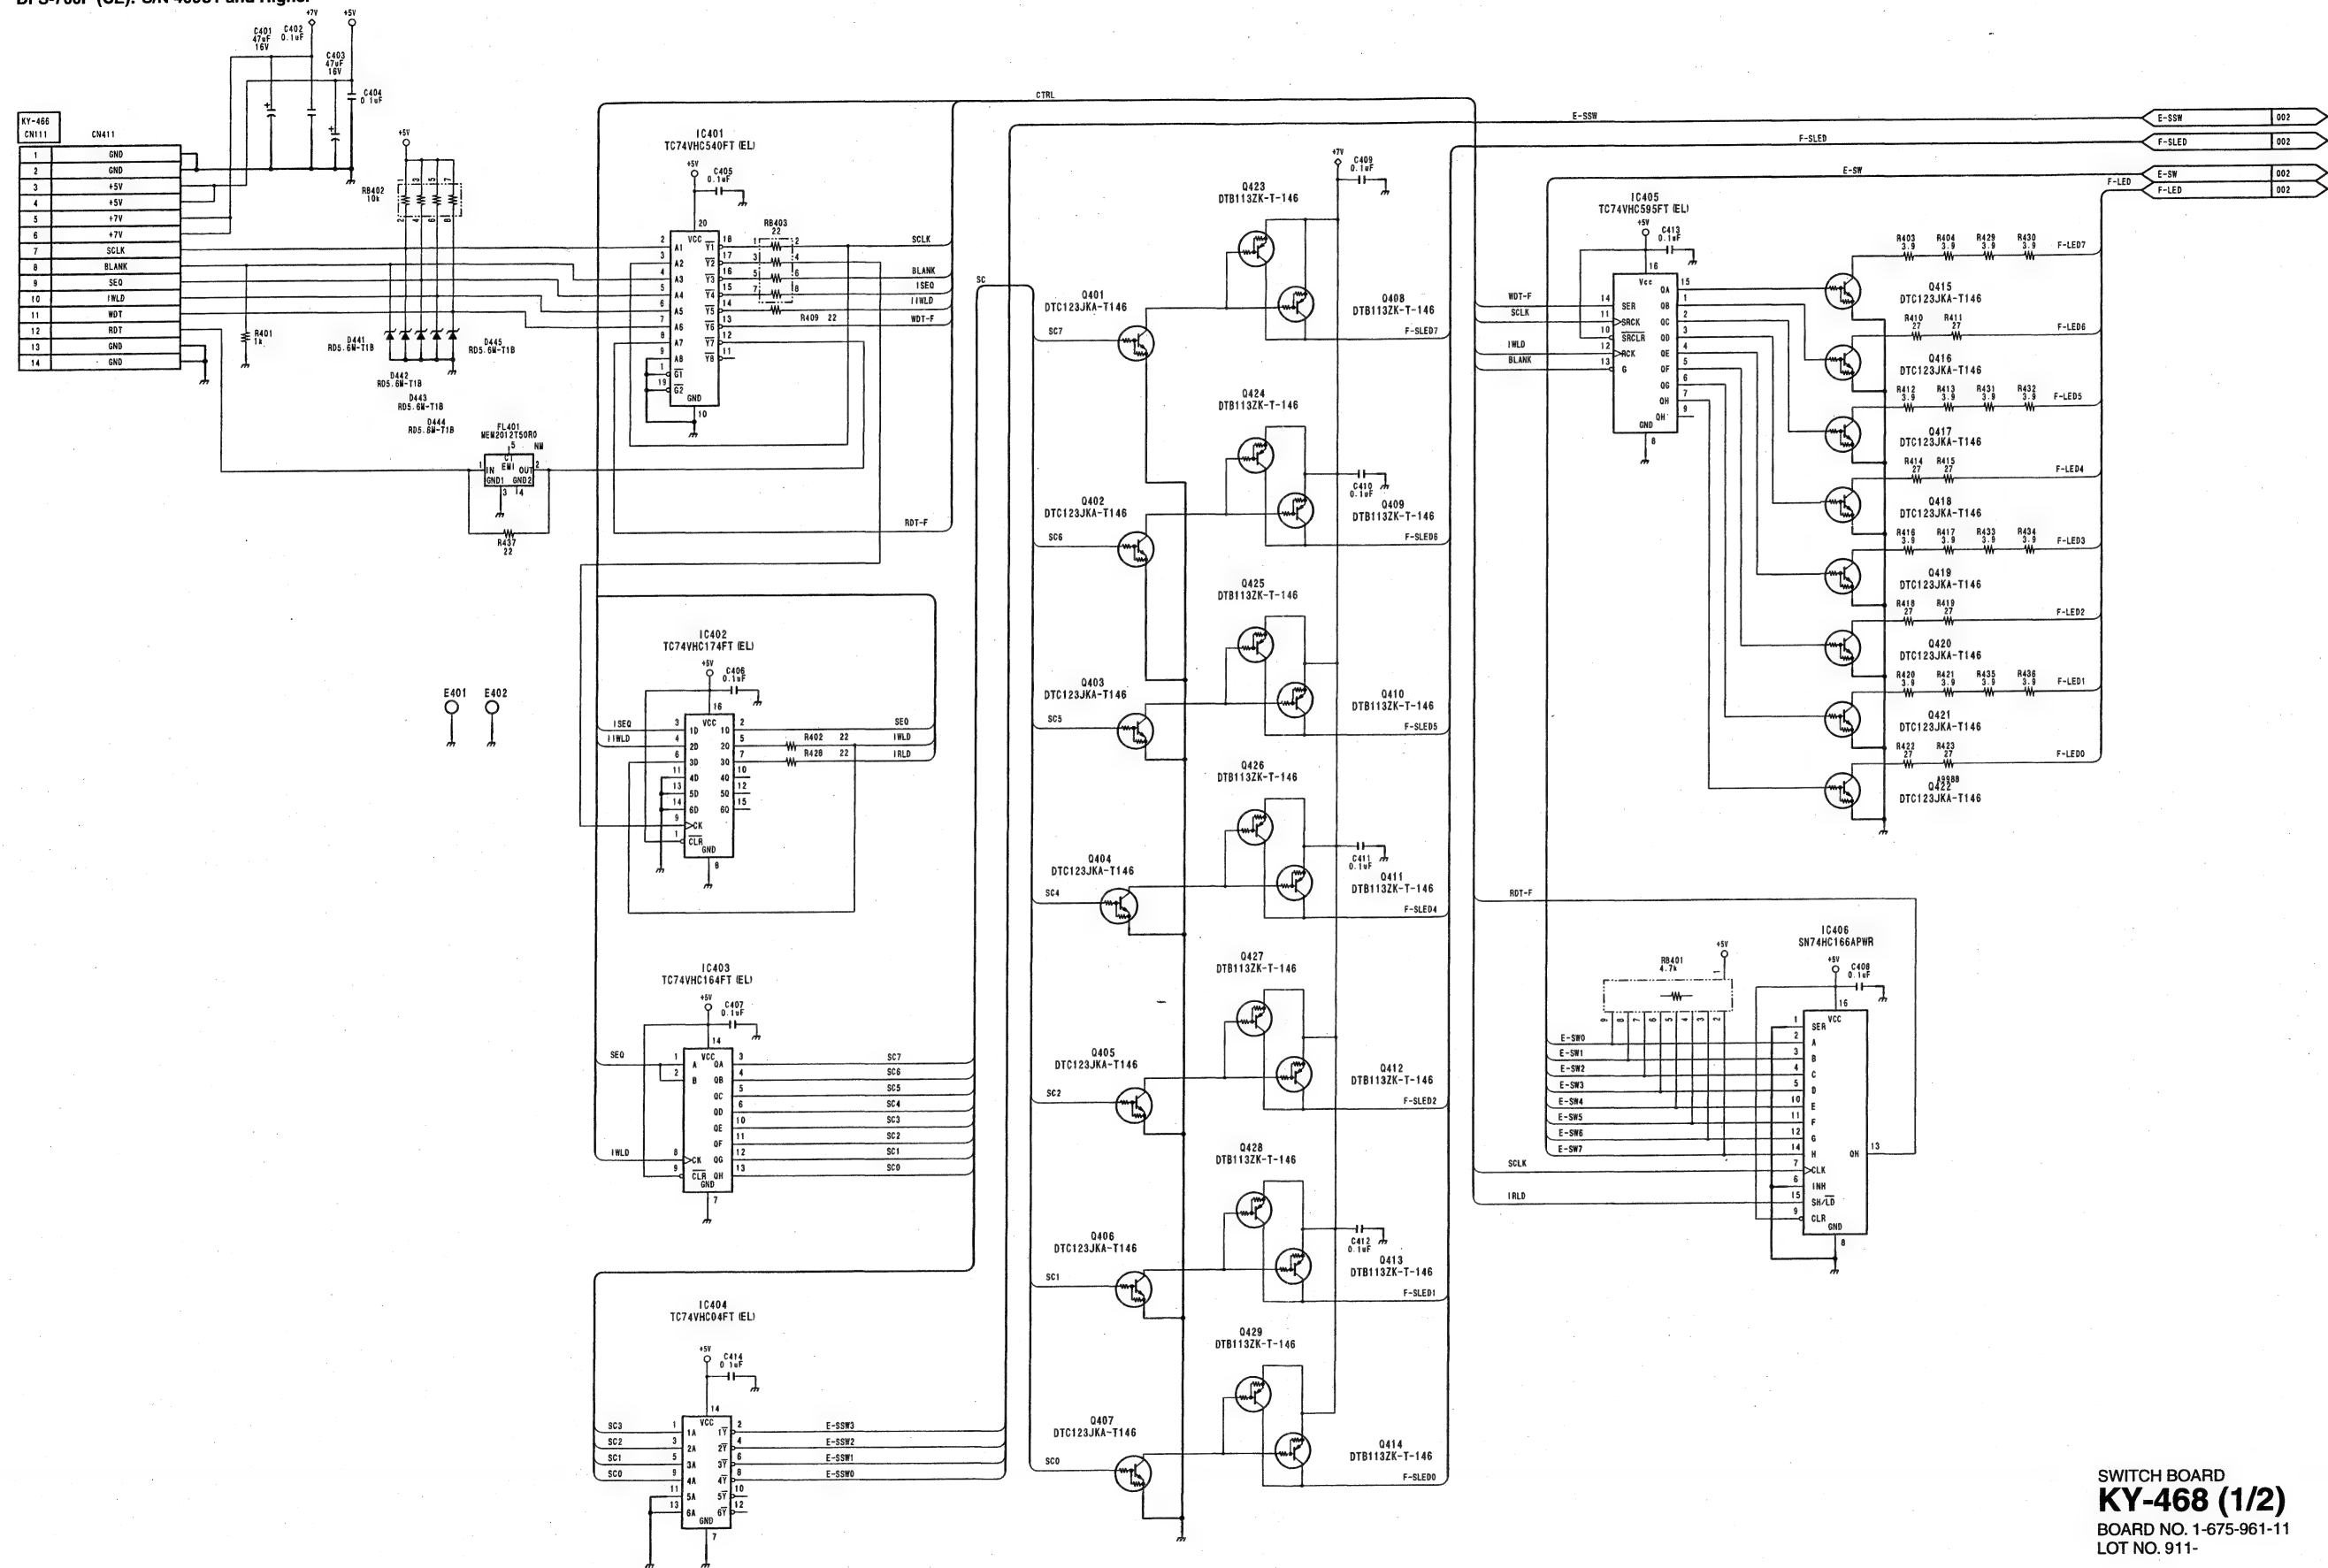

SWITCH BOARD
KY-468 (1/2)
BOARD NO. 1-675-961-11
LOT NO. 911-


DFS-700/700P

DFS-700 (J): S/N 30001 and Higher
 DFS-700 (UC): S/N 10001 and Higher
 DFS-700P (CE): S/N 40001 and Higher

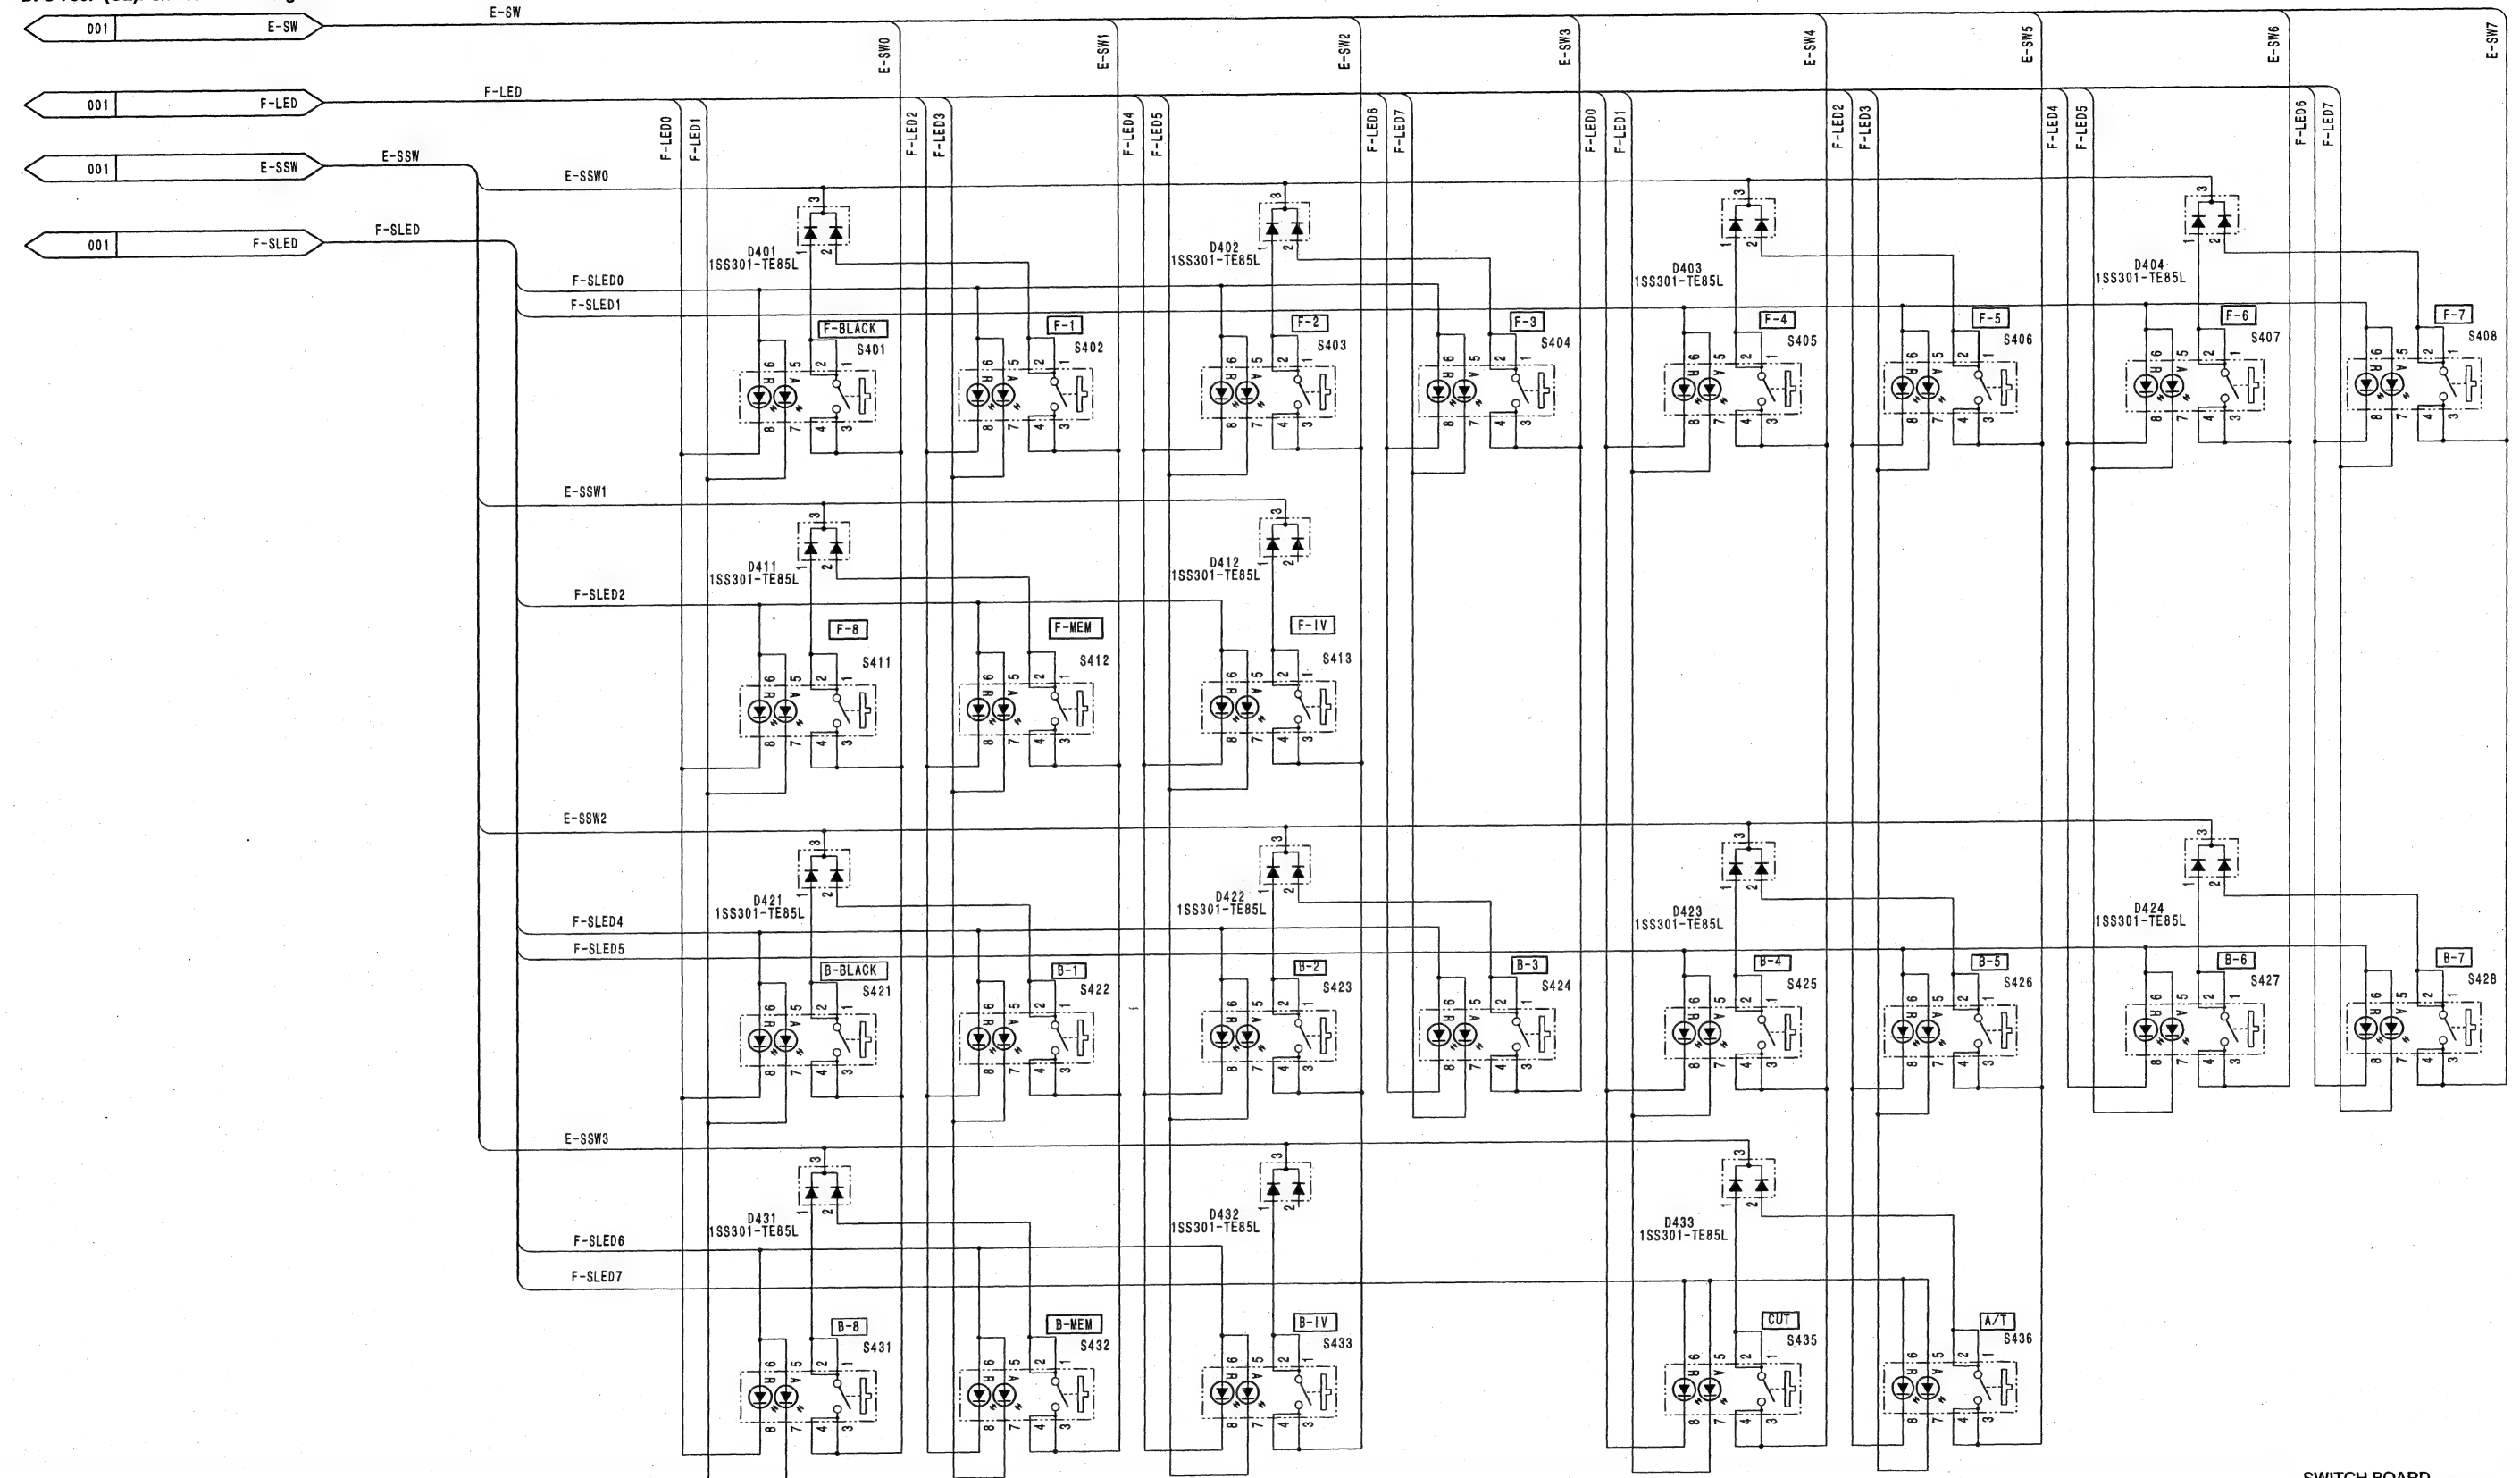

SWITCH BOARD
KY-468 (2/2)
 BOARD NO. 1-675-961-11
 LOT NO. 911-

DFS-700 (J): S/N 30001 and Higher
DFS-700 (UC): S/N 10001 and Higher
DFS-700P (CE): S/N 40001 and Higher

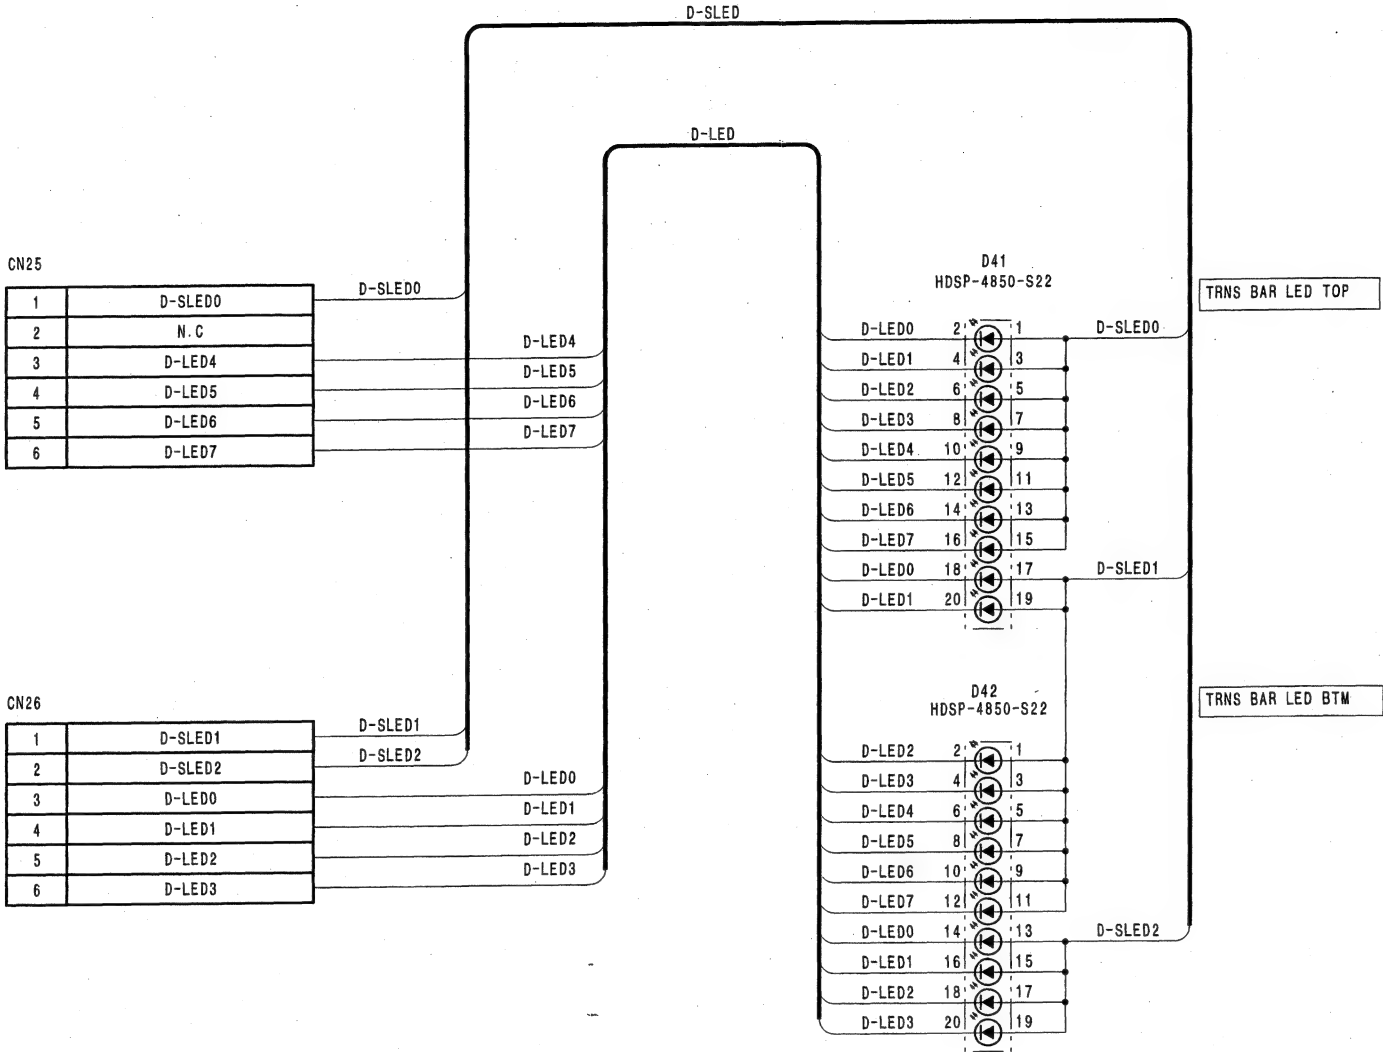

LED BOARD
LE-235
BOARD NO. 1-677-090-11
LOT NO. 911-

MB-874 (1/2) MB-874 (1/2)

DFS-700 (J): S/N 30001 and Higher
DFS-700 (UC): S/N 10001 and Higher
DFS-700P (CE): S/N 40001 and Higher

CN17				
	A	B	C	D
1	AC_L0	AC_L0	AC_L0	AC_L0
2	AC_L0	AC_L0	AC_L0	AC_L0
3	AC_L0	AC_L0	AC_L0	AC_L0
4	AC_L0	AC_L0	AC_L0	AC_L0
5	AC_L0	AC_L0	AC_L0	AC_L0
6	AC_L0	AC_L0	AC_L0	AC_L0

CN18				
	A	B	C	D
1	+12V	+12V	+12V	+12V
2	+12V	+12V	+12V	+12V
3	+12V	+12V	+12V	+12V
4	+12V	+12V	+12V	+12V
5	+12V	+12V	+12V	+12V
6	+12V	+12V	+12V	+12V

CN19				
	A	B	C	D
1	+12V	+12V	GND	GND
2	+12V	+12V	GND	GND
3	+12V	+12V	GND	GND
4	+12V	GND	GND	GND
5	+12V	GND	GND	GND
6	+12V	GND	GND	GND

CN20				
	A	B	C	D
1	GND	GND	GND	ACE0
2	GND	GND	GND	DCE0
3	GND	GND	GND	FAHE0
4	GND	GND	GND	LEDE0
5	GND	GND	GND	LEDE0
6	GND	GND	-S	PC

CN26				
	A	B	C	D
1	+5V_2	+5V_2	+5V_2	+5V_2
2	+5V_2	+5V_2	+5V_2	+5V_2
3	+5V_2	+5V_2	+5V_2	+5V_2
4	+5V_1	+5V_1	+5V_1	+5V_1
5	+5V_1	+5V_1	+5V_1	+5V_1
6	+5V_1	+5V_1	+5V_1	+5V_1

CN27				
	A	B	C	D
1	GND	GND	GND	GND
2	GND	GND	GND	GND
3	GND	GND	GND	GND
4	+5V_3	+5V_3	+5V_3	+5V_3
5	+5V_3	+5V_3	+5V_3	+5V_3
6	+5V_3	+5V_3	+5V_3	+5V_3

CN28				
	A	B	C	D
1	GND	GND	GND	GND
2	GND	GND	GND	GND
3	GND	GND	GND	GND
4	GND	GND	GND	GND
5	GND	GND	GND	GND
6	GND	GND	GND	GND

CN29				
	A	B	C	D
1	GND	GND	GND	GND
2	GND	GND	GND	GND
3	GND	GND	GND	ADJ5D
4	GND	GND	GND	GND
5	GND	GND	GND	GND
6	GND	GND	GND	GND

CN30				
	A	B	C	D
1	-7V	-7V	+7V	+7V
2	-7V	-7V	+7V	+7V
3	+3.3V	+3.3V	+3.3V	REFV
4	+3.3V	+3.3V	+3.3V	+3.3V
5	+3.3V	+3.3V	+3.3V	ADJ33
6	+3.3V	+3.3V	+3.3V	+3.3V

CN21 NW				
	A	B	C	D
1	AC_N1	AC_N1	AC_N1	AC_N1
2	AC_N1	AC_N1	AC_N1	AC_N1
3	AC_N1	AC_N1	AC_N1	AC_N1
4	AC_N1	AC_N1	AC_N1	AC_N1
5	AC_N1	AC_N1	AC_N1	AC_N1
6	AC_N1	AC_N1	AC_N1	AC_N1

CN22 NW				
	A	B	C	D
1	AC_L1	AC_L1	AC_L1	AC_L1
2	AC_L1	AC_L1	AC_L1	AC_L1
3	AC_L1	AC_L1	AC_L1	AC_L1
4	AC_L1	AC_L1	AC_L1	AC_L1
5	AC_L1	AC_L1	AC_L1	AC_L1
6	AC_L1	AC_L1	AC_L1	AC_L1

CN23 NW				
	A	B	C	D
1	+12V	+12V	+12V	+12V
2	+12V	+12V	+12V	+12V
3	+12V	+12V	+12V	+12V
4	+12V	+12V	+12V	+12V
5	+12V	+12V	+12V	+12V
6	+12V	+12V	+12V	+12V

CN24 NW				
	A	B	C	D
1	+12V	+12V	GND	GND
2	+12V	+12V	GND	GND
3	+12V	+12V	GND	GND
4	+12V	GND	GND	GND
5	+12V	GND	GND	GND
6	+12V	GND	GND	GND

CN25 NW				
	A	B	C	D
1	GND	GND	GND	ACE1
2	GND	GND	GND	DCE1
3	GND	GND	GND	FAHE1
4	GND	GND	GND	LEDE1
5	GND	GND	GND	LEDE1
6	GND	GND	-S	PC

CN16				
	A	B	C	D
1	AC_NO	AC_NO	AC_NO	AC_NO
2	AC_NO	AC_NO	AC_NO	AC_NO
3	AC_NO	AC_NO	AC_NO	AC_NO
4	AC_NO	AC_NO	AC_NO	AC_NO
5	AC_NO	AC_NO	AC_NO	AC_NO
6	AC_NO	AC_NO	AC_NO	AC_NO

CN31	
1	AC_NO
3	AC_L0

CN32 NW	
1	AC_N1
3	AC_L1

MOTHERBOARD
MB-874 (1/2)
BOARD NO. 1-677-097-11
LOT NO. 911-

DFS-700/700P

4-58

4-58

A

B

C

D

E


F


G

H

OPM-39/39P (1/9)

DFS-700 (J): S/N 30001 and Higher
DFS-700 (UC): S/N 10001 and Higher
DFS-700P (CE): S/N 40001 and Higher

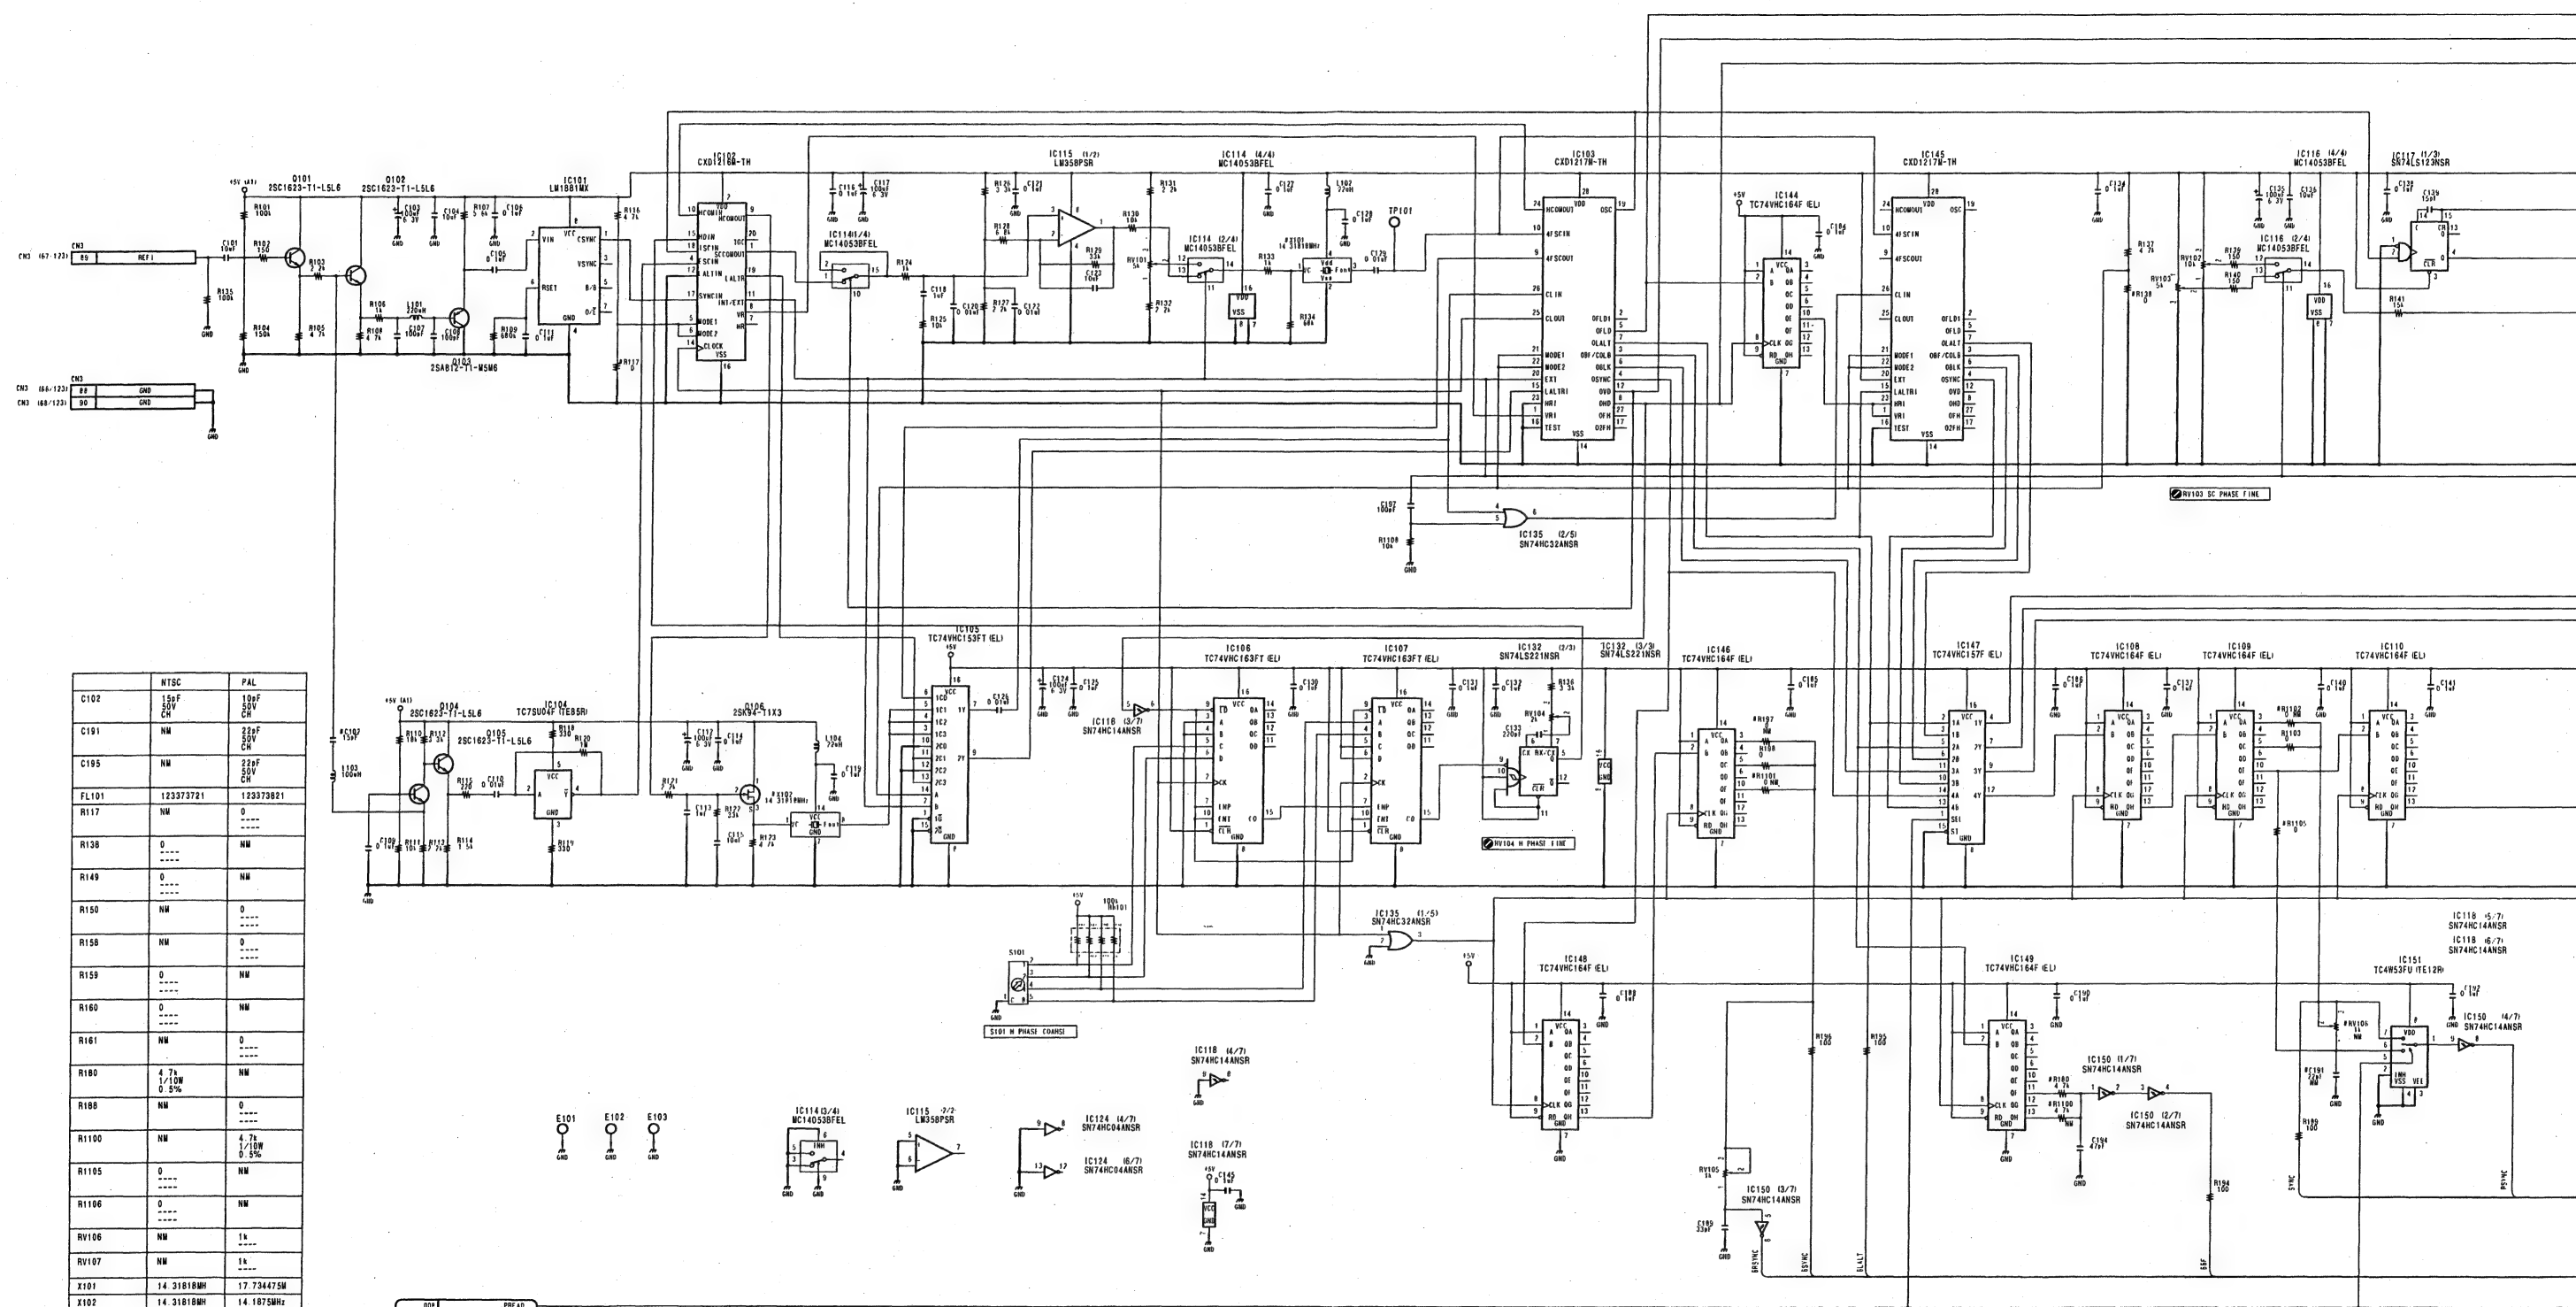

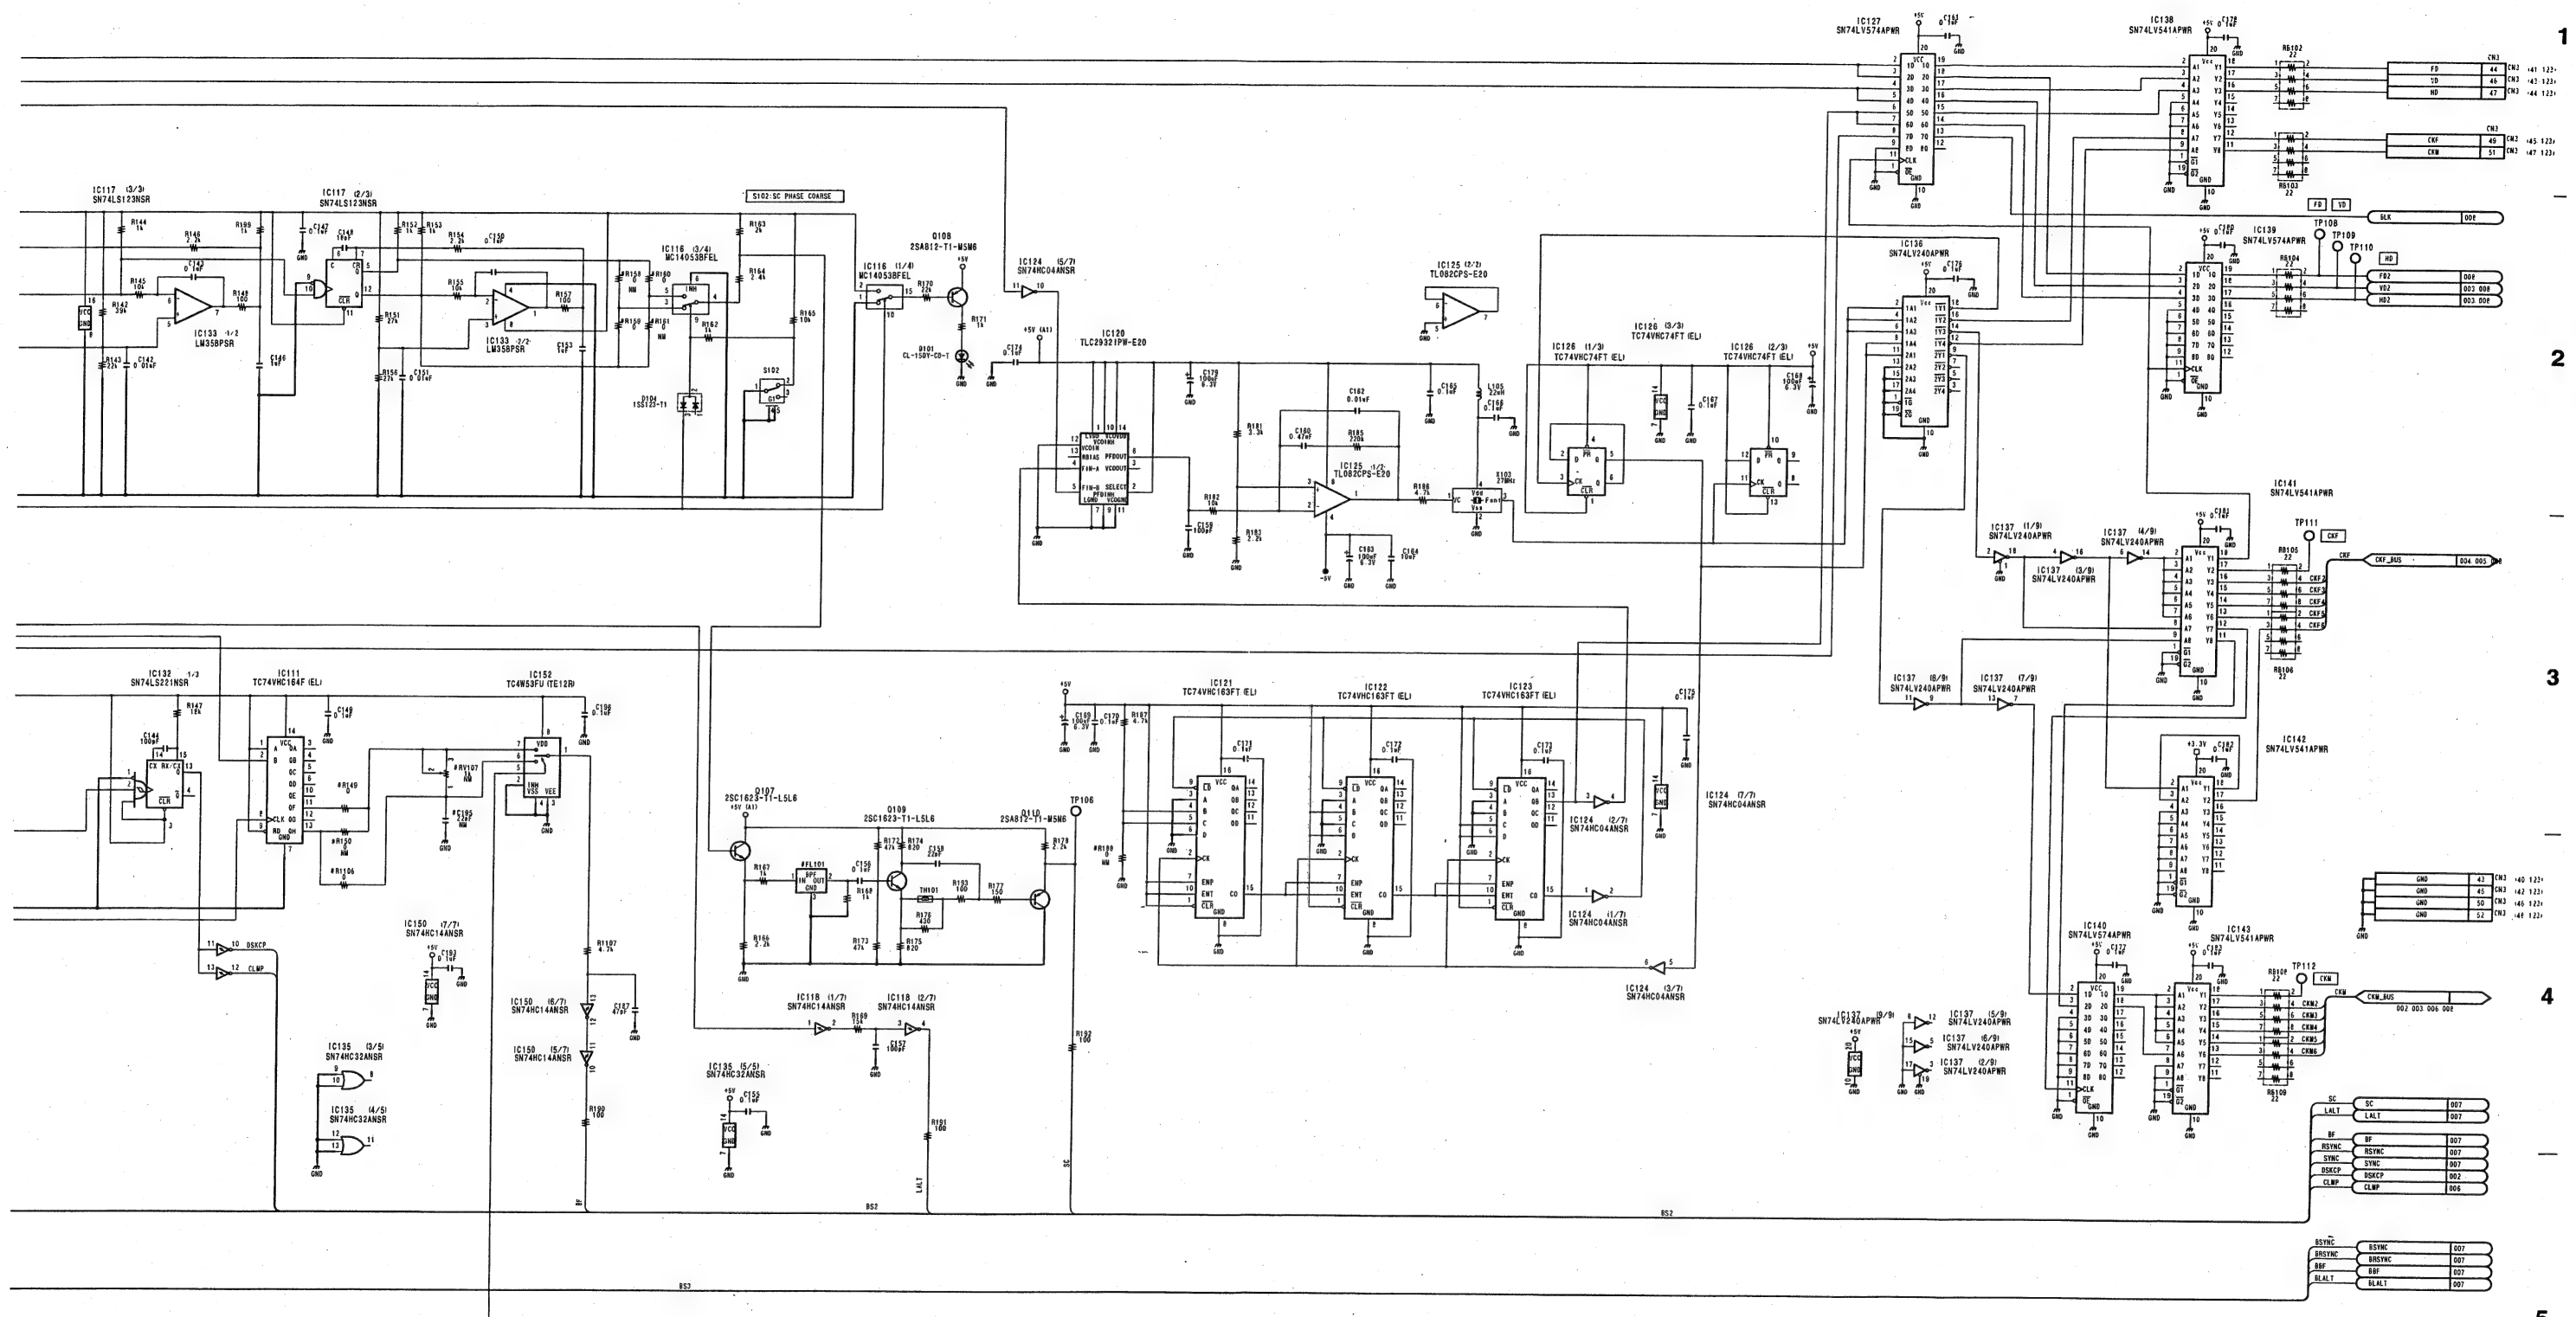

OUTPUT PROCESSOR BOARD
OPM-39/39P (1/9)
BOARD NO. 1-677-095-11, 12
LOT NO. 911-

DFS-700/700P


4-61

4-61

5


OPM-39/39P (2/9) OPM-39/39P (2/9)

DFS-700 (J): S/N 30001 and Higher
DFS-700 (UC): S/N 10001 and Higher
DFS-700P (CE): S/N 40001 and Higher

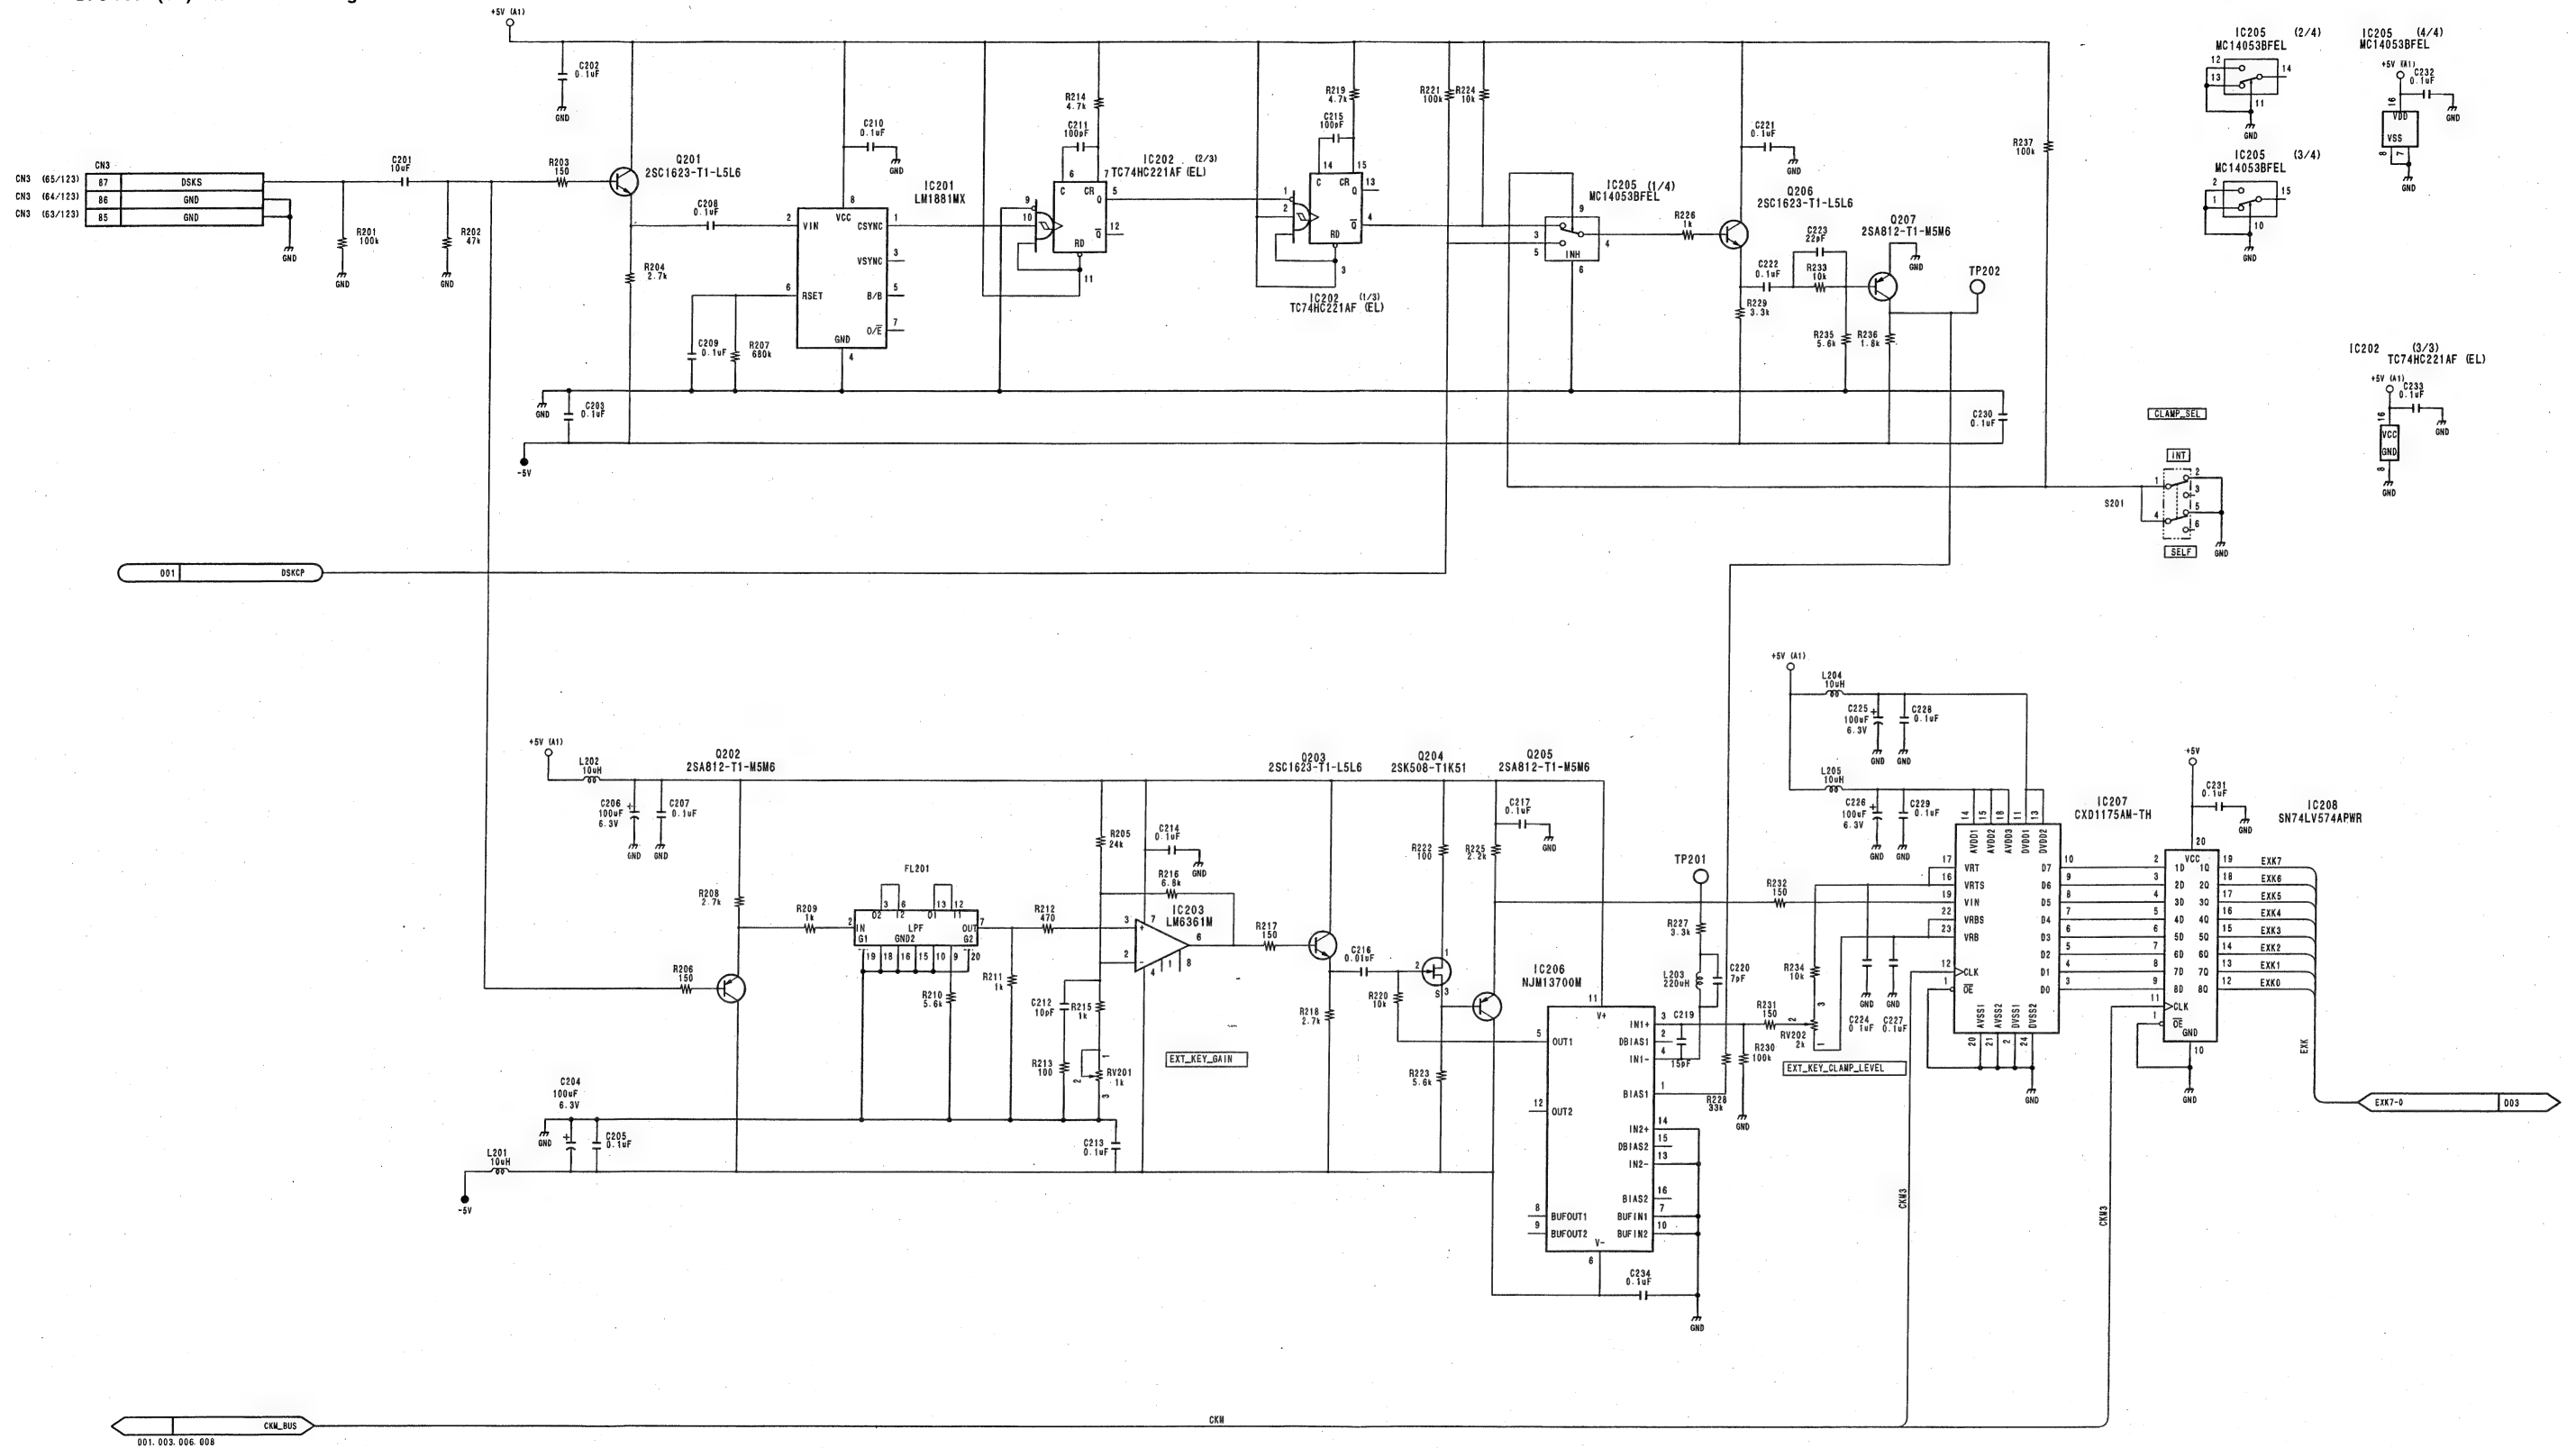


OUTPUT PROCESSOR BOARD
OPM-39/39P (2/9)
BOARD NO. 1-677-095-11, 12
LOT NO. 911-


DFS-700 (J): S/N 30001 and Higher
 DFS-700 (UC): S/N 10001 and Higher
 DFS-700P (CE): S/N 40001 and Higher

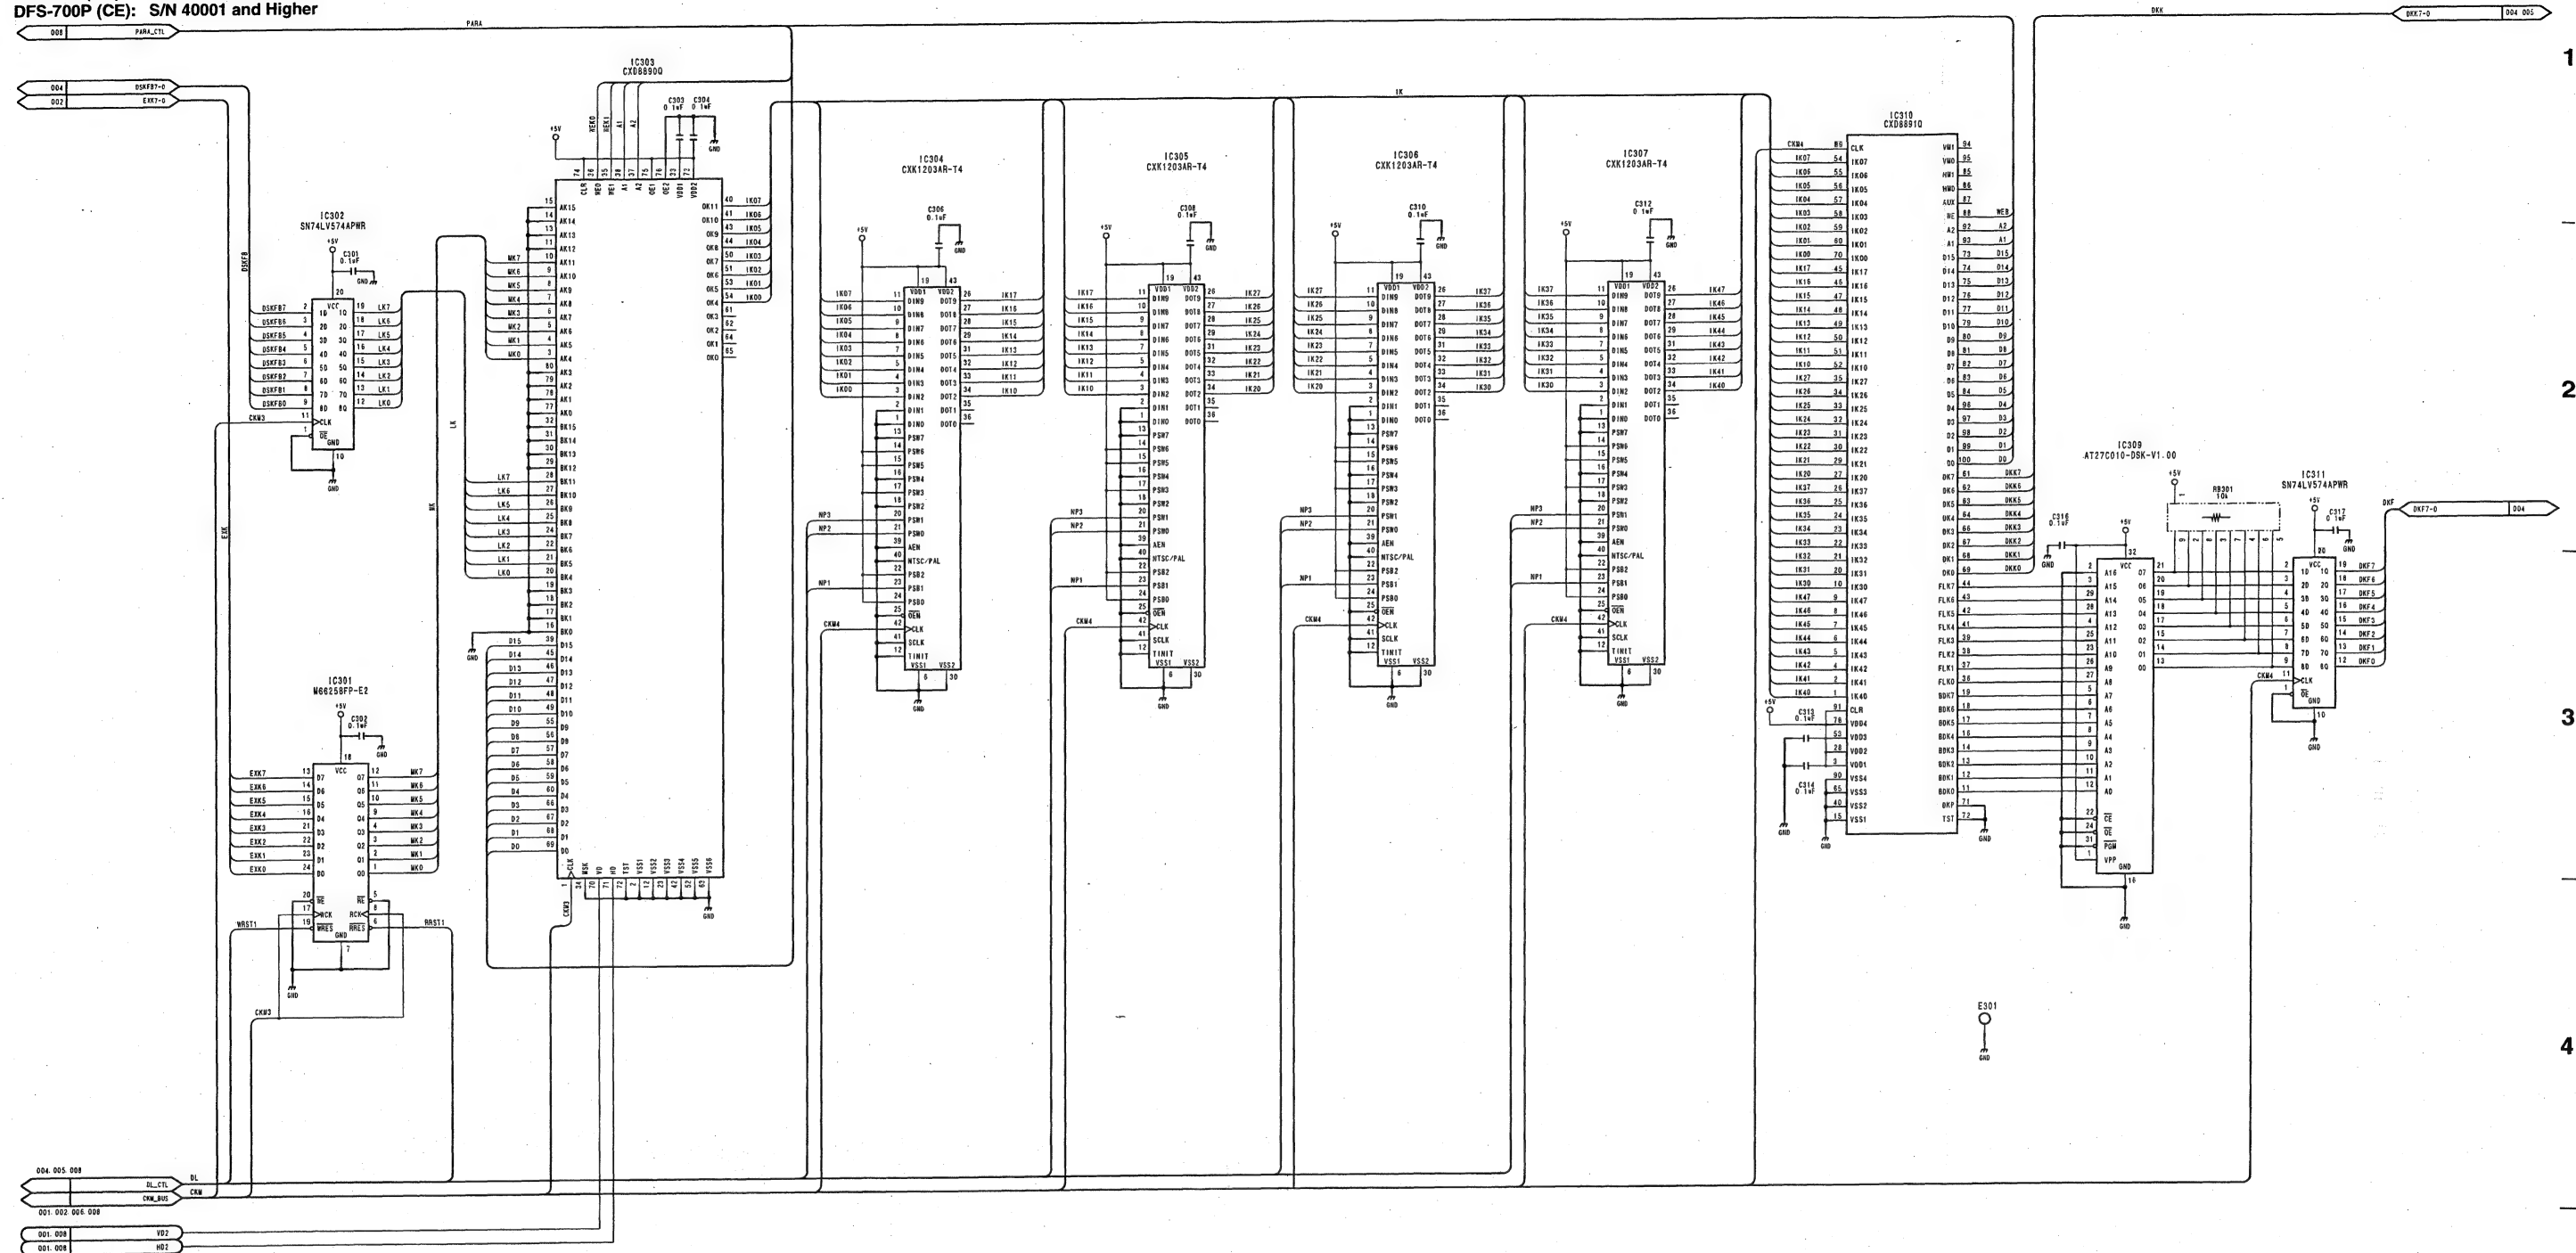

OUTPUT PROCESSOR BOARD
OPM-39/39P (3/9)
 BOARD NO. 1-677-095-11, 12
 LOT NO. 911-


DFS-700 (J): S/N 30001 and Higher
 DFS-700 (UC): S/N 10001 and Higher
 DFS-700P (CE): S/N 40001 and Higher

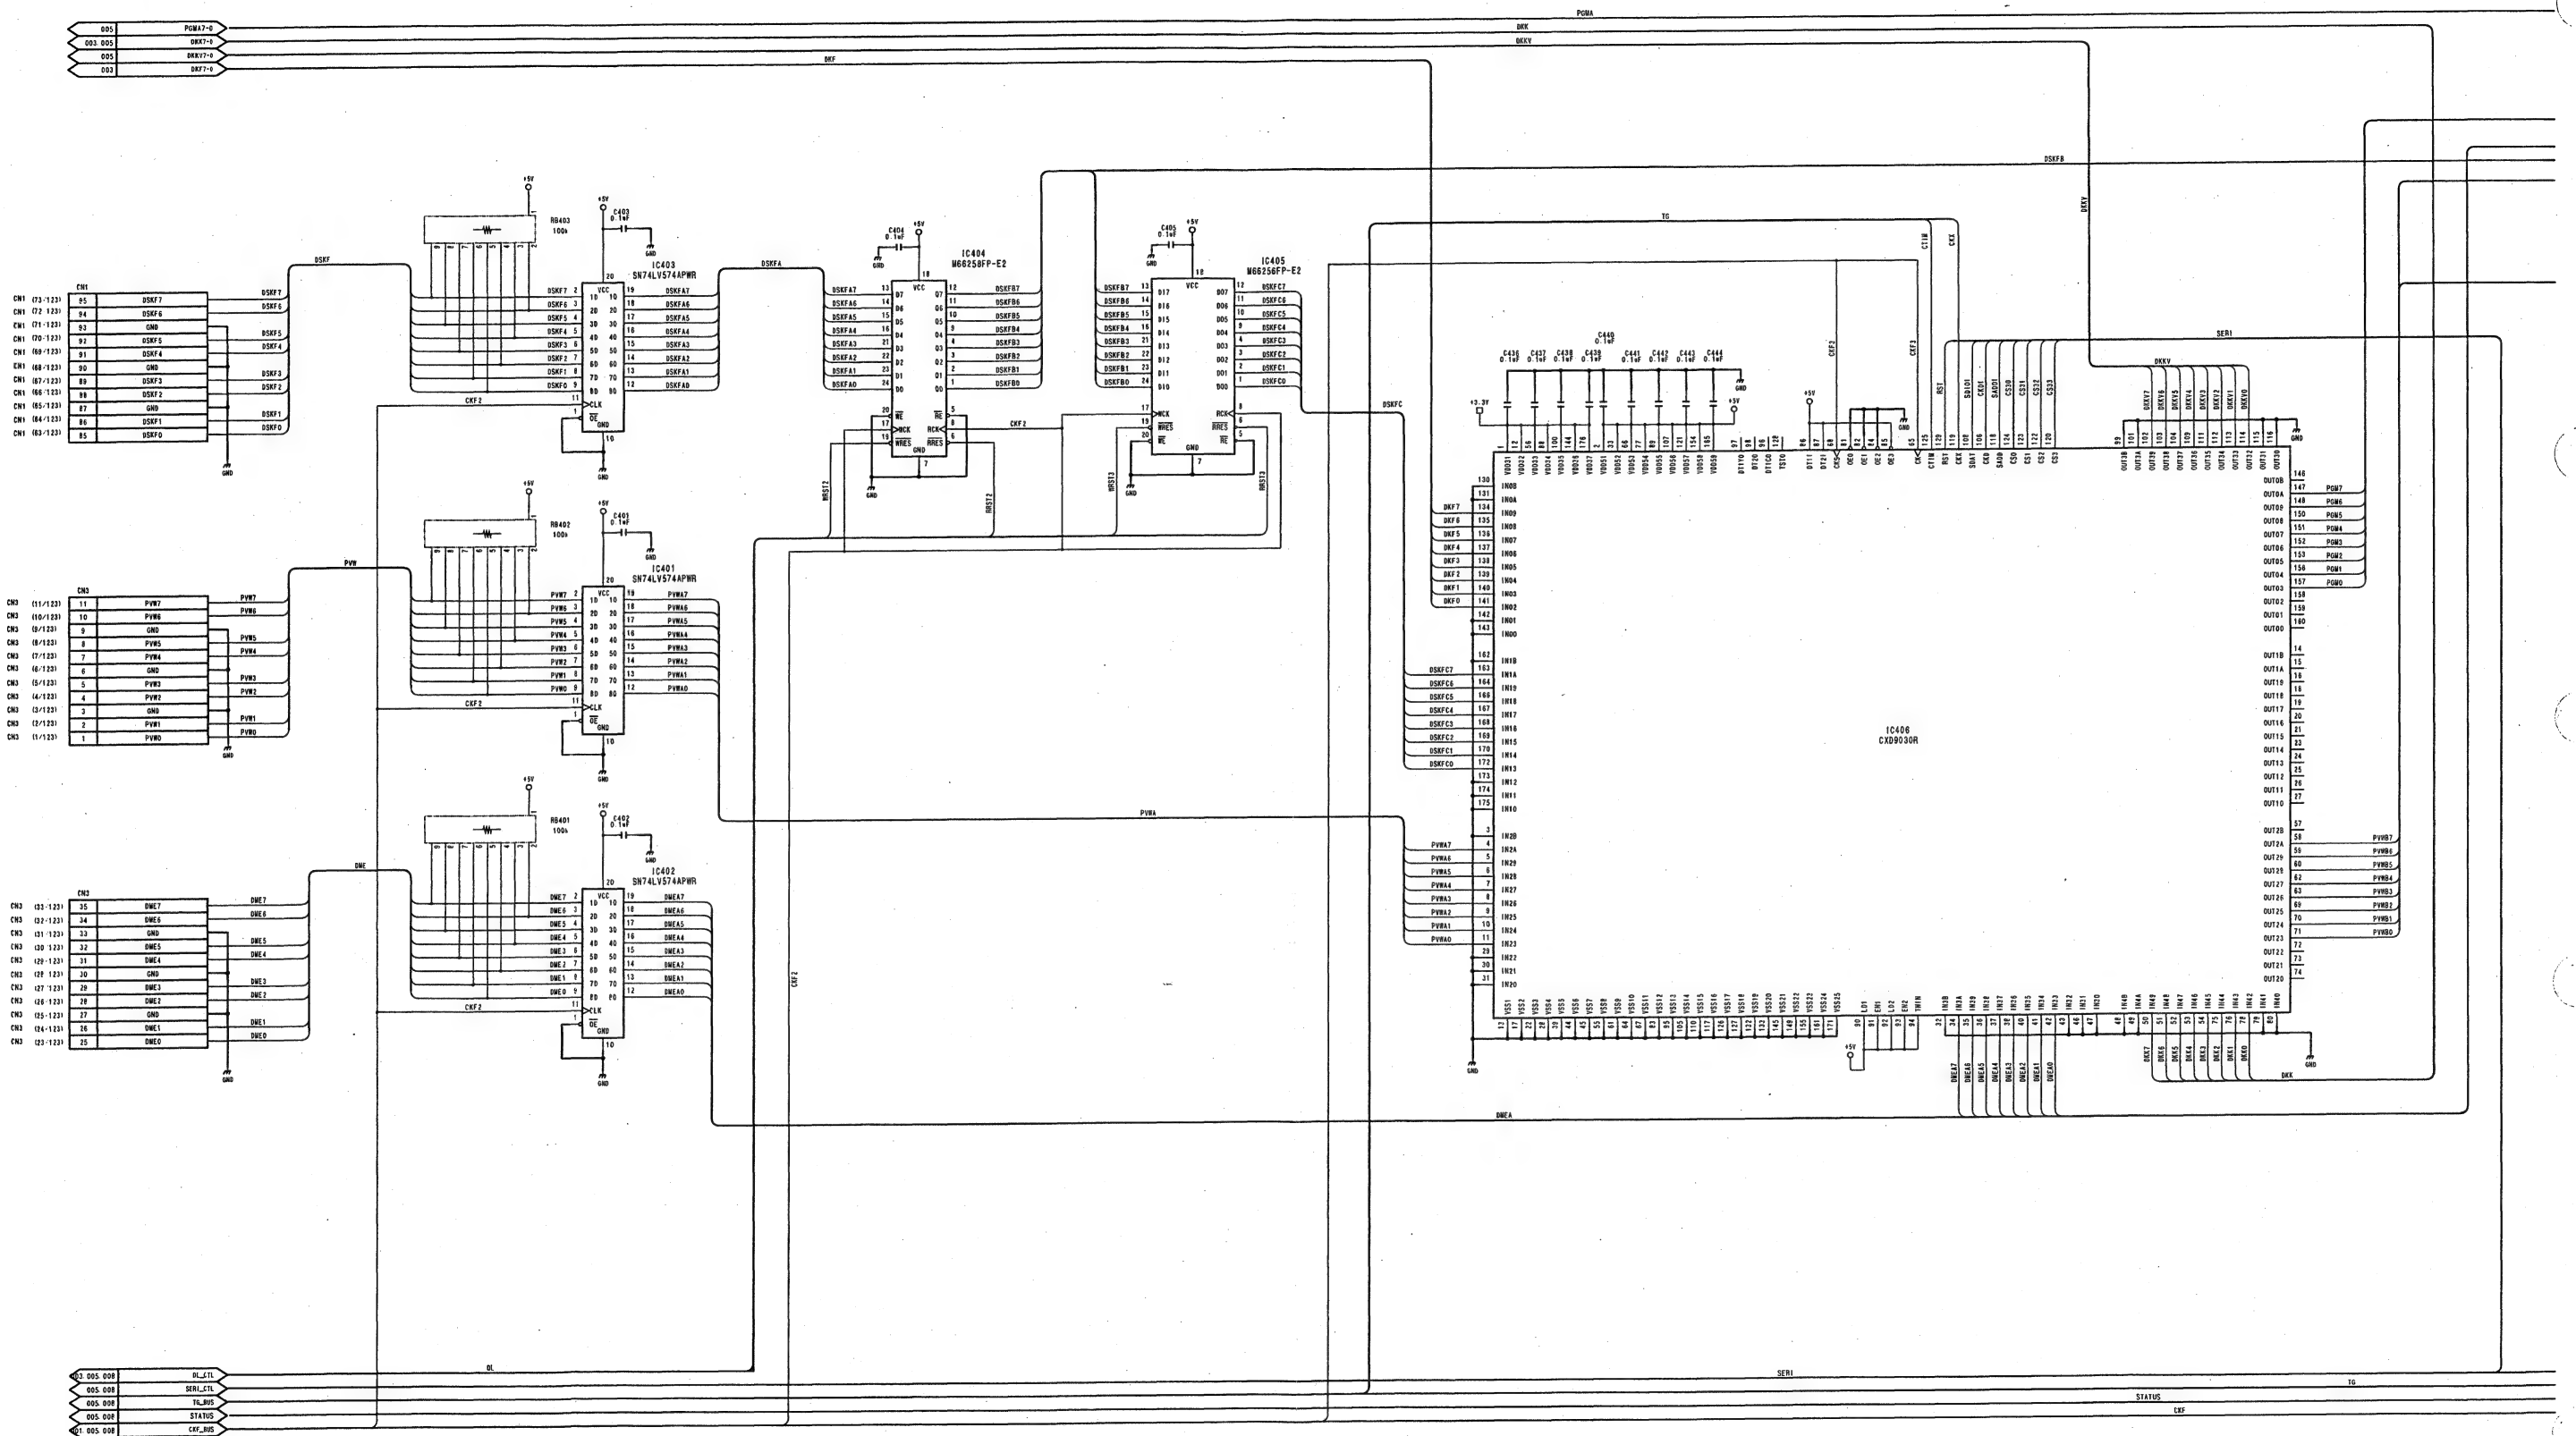


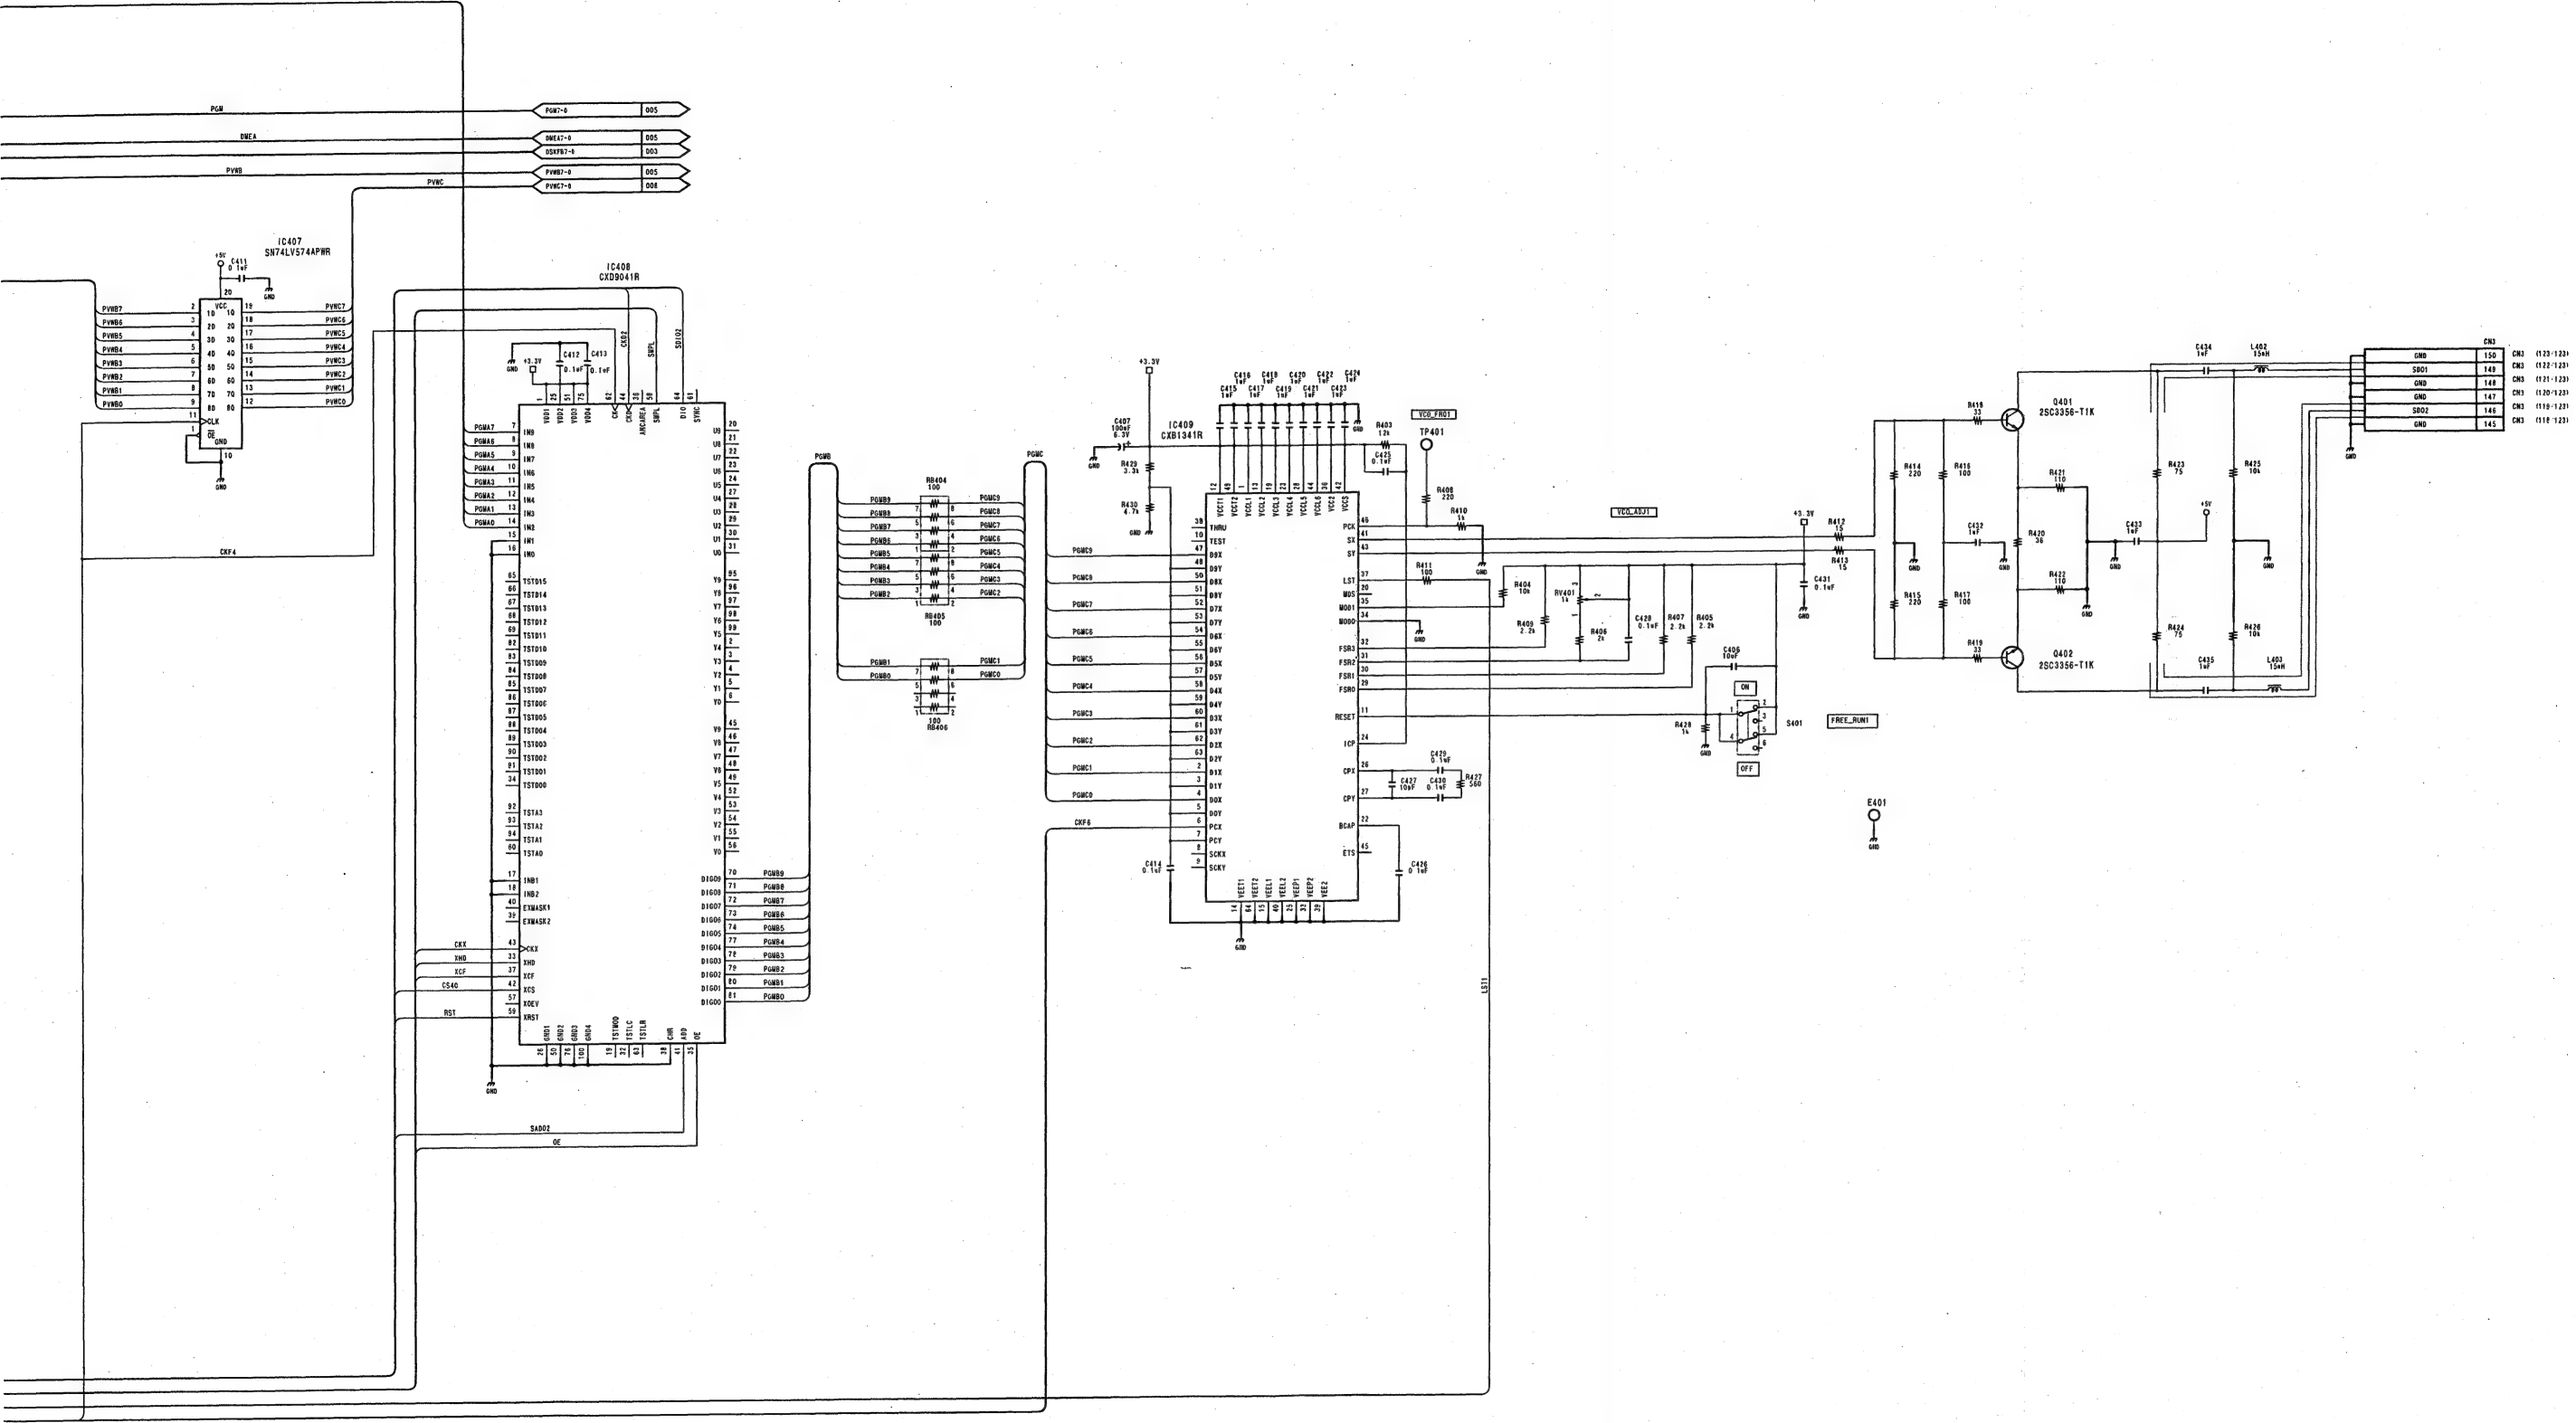


OUTPUT PROCESSOR BOARD
OPM-39/39P (4/9)
BOARD NO. 1-677-095-11, 12
LOT NO. 911-

DFS-700 (J): S/N 30001 and Higher
DFS-700 (UC): S/N 10001 and Higher
DFS-700P (CE): S/N 40001 and Higher

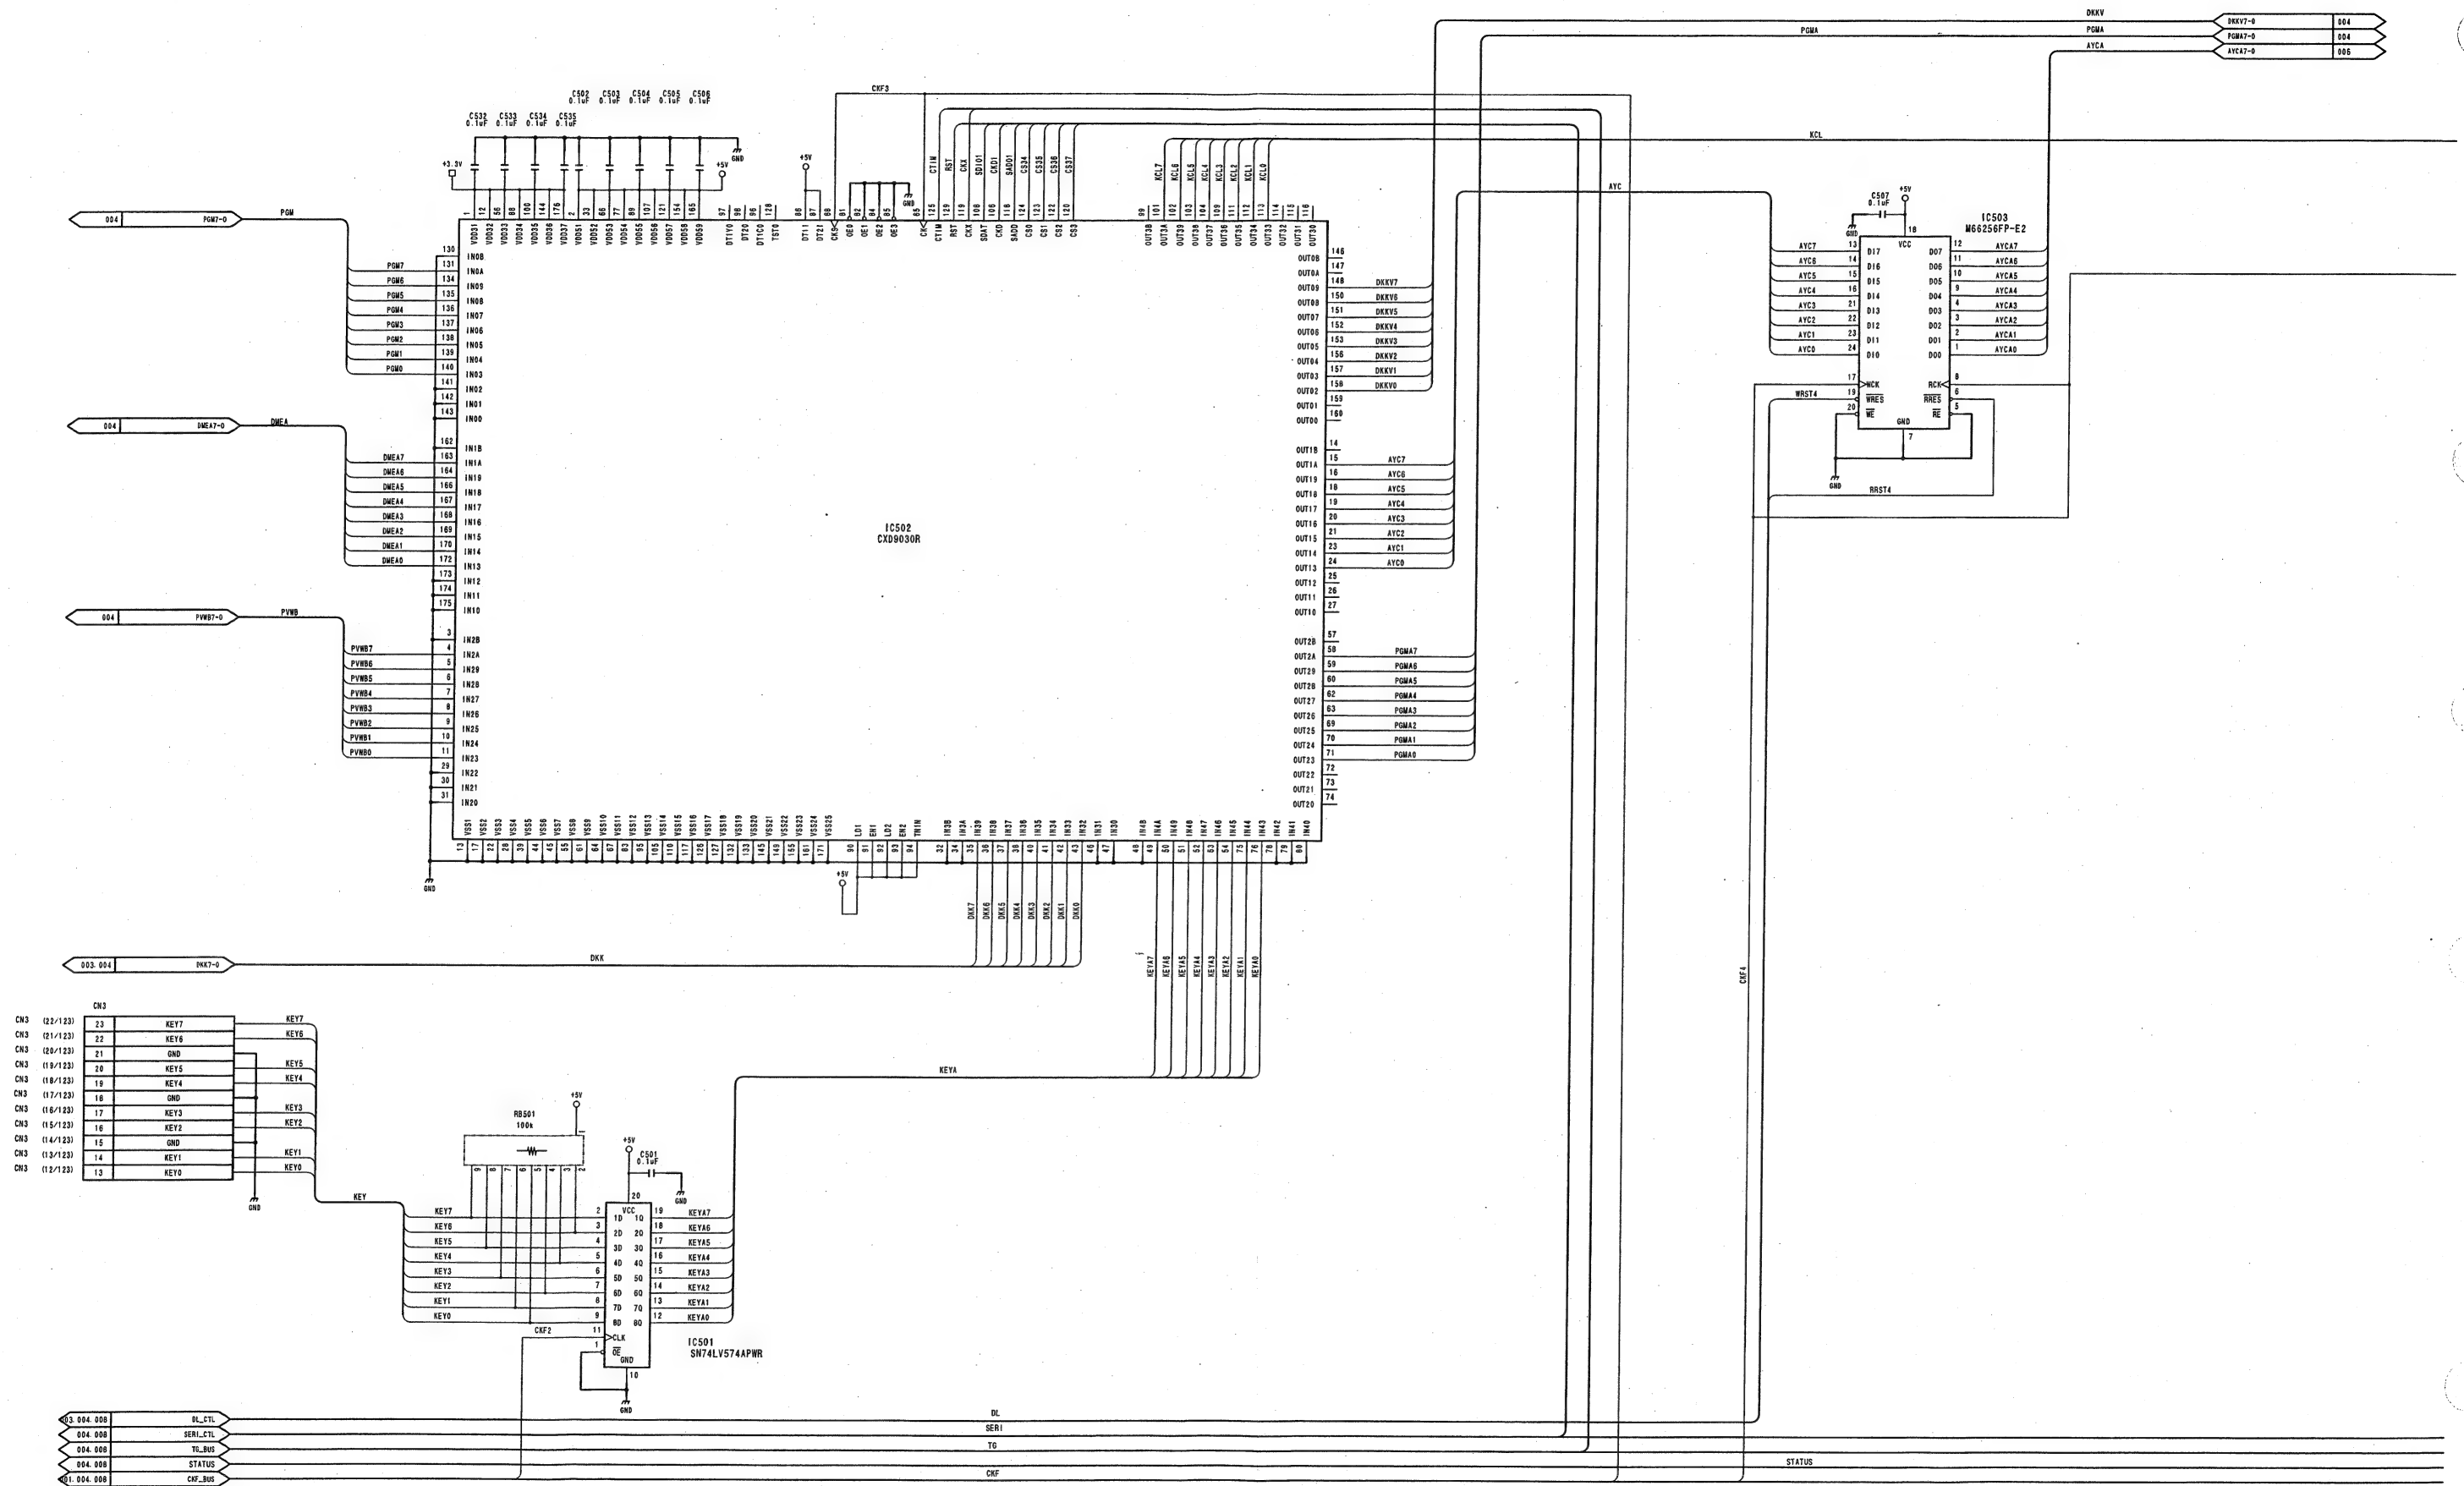


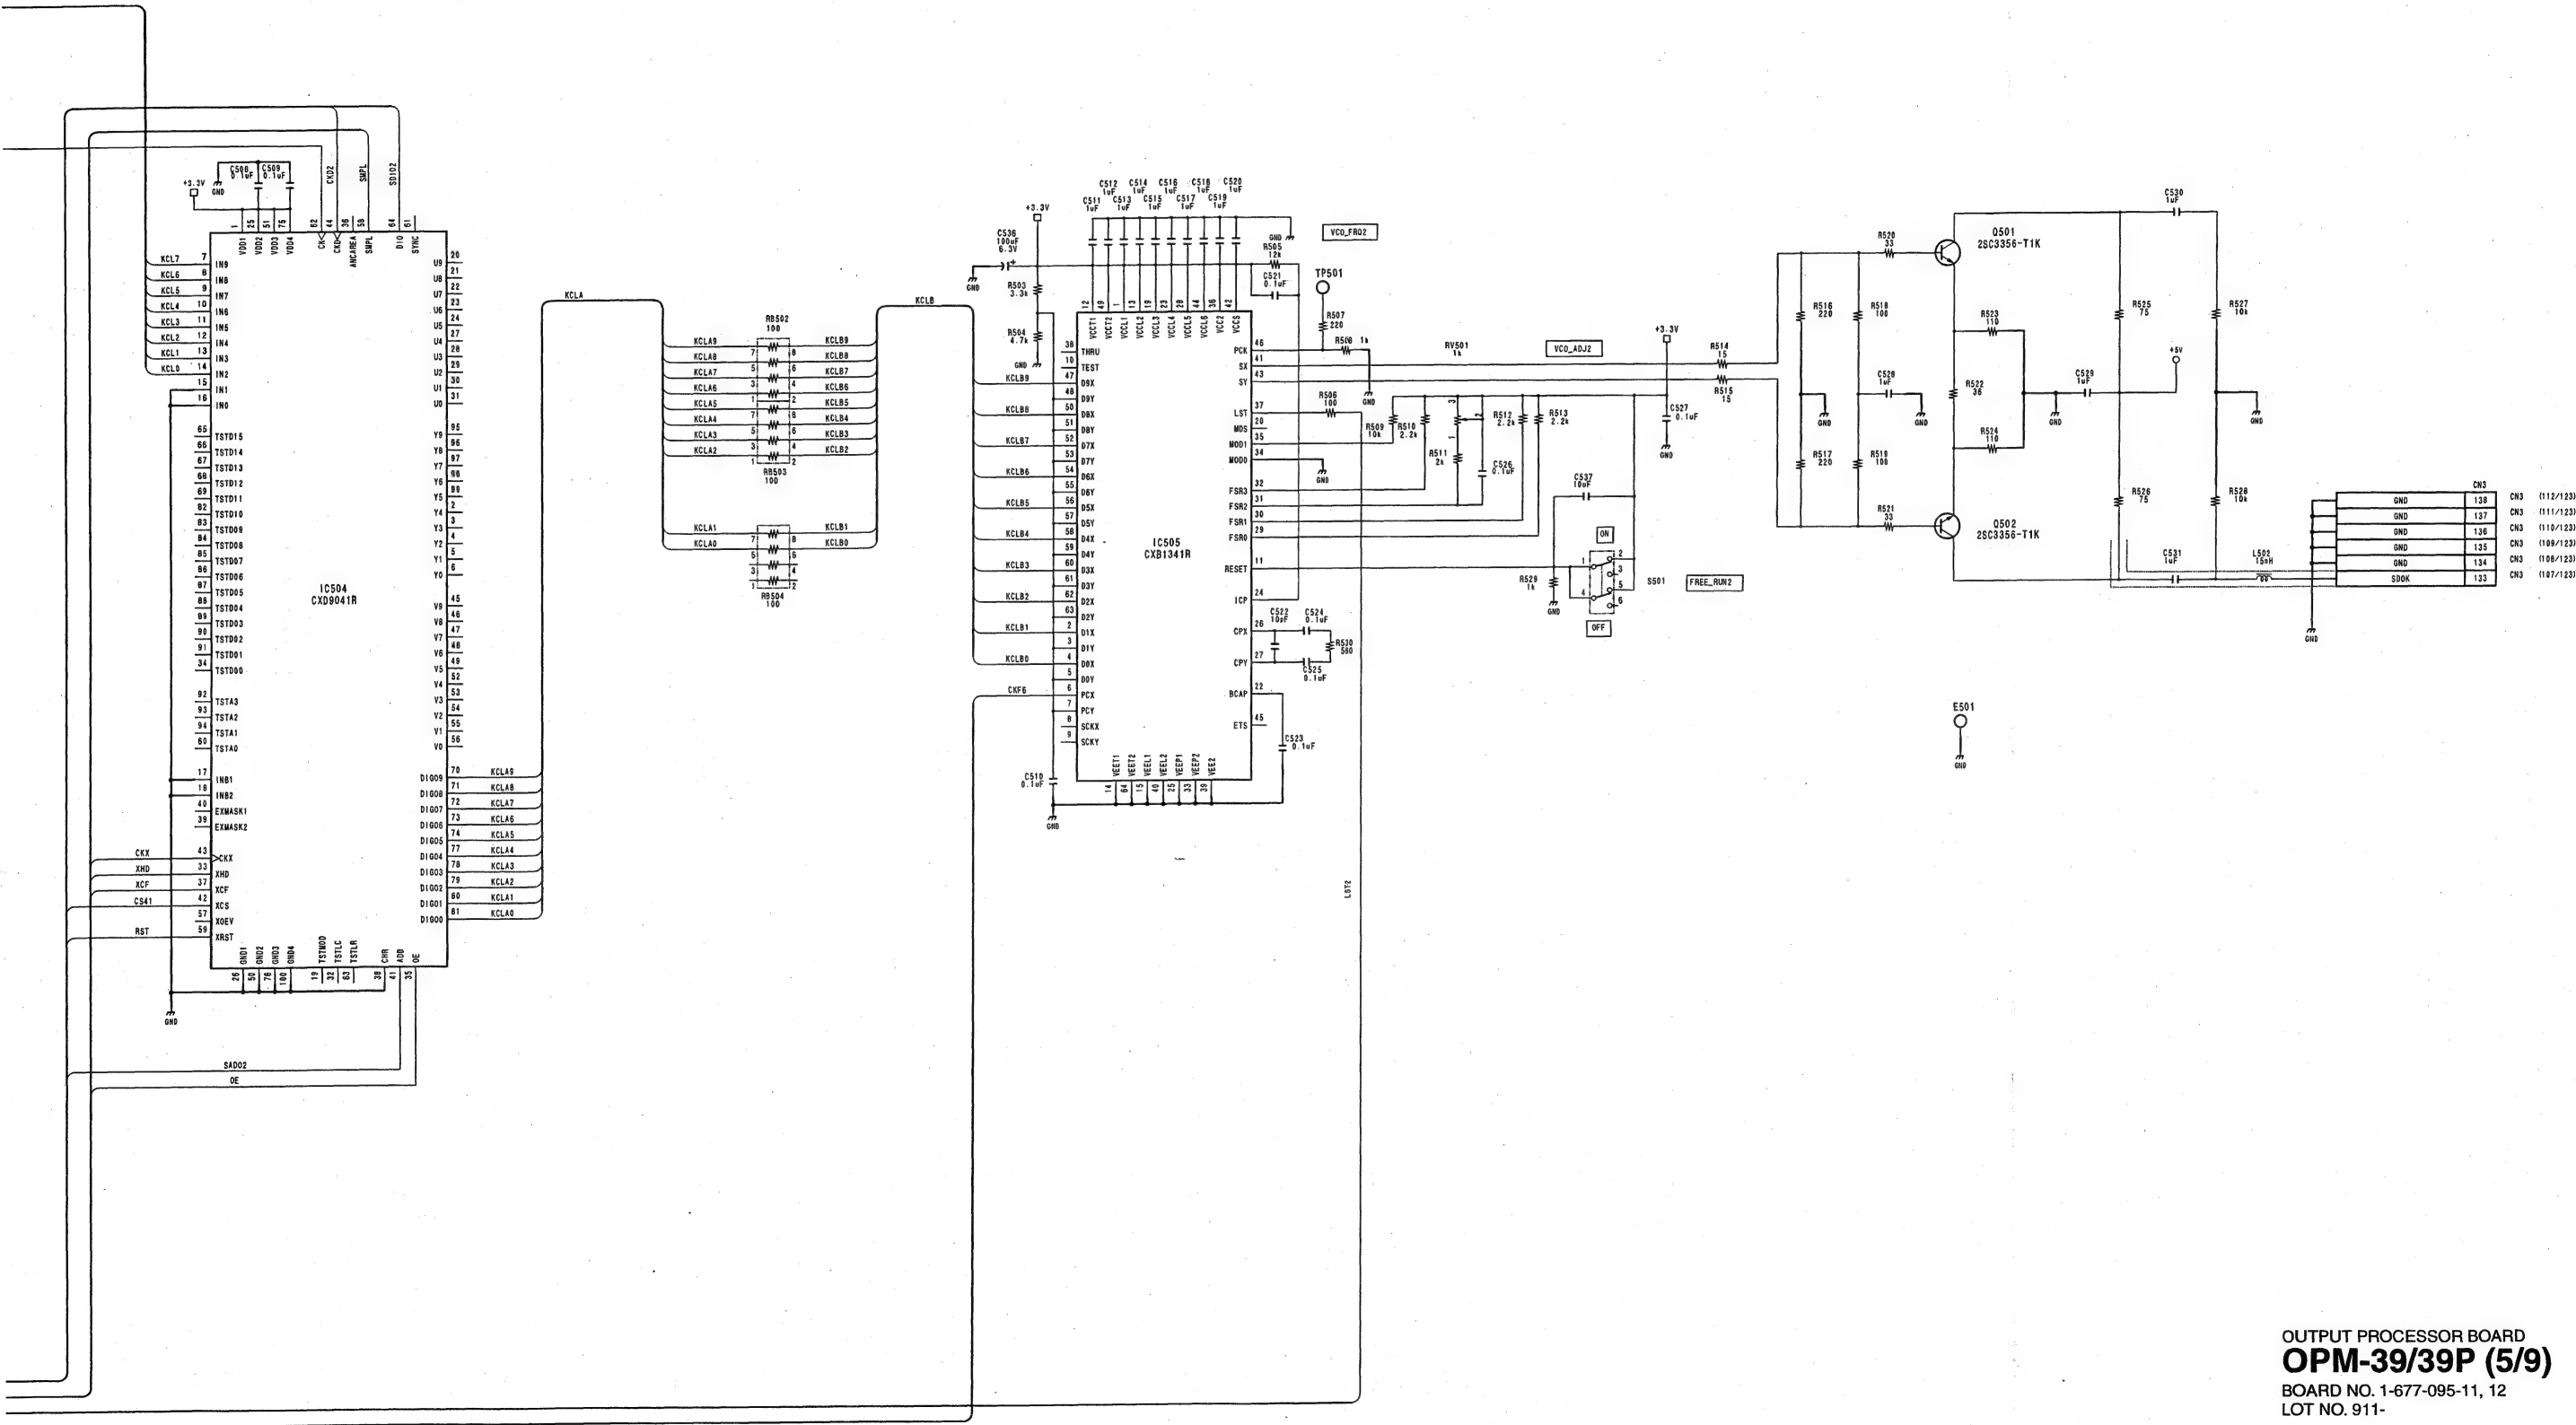

DFS-700 (J): S/N 30001 and Higher
 DFS-700 (UC): S/N 10001 and Higher
 DFS-700P (CE): S/N 40001 and Higher

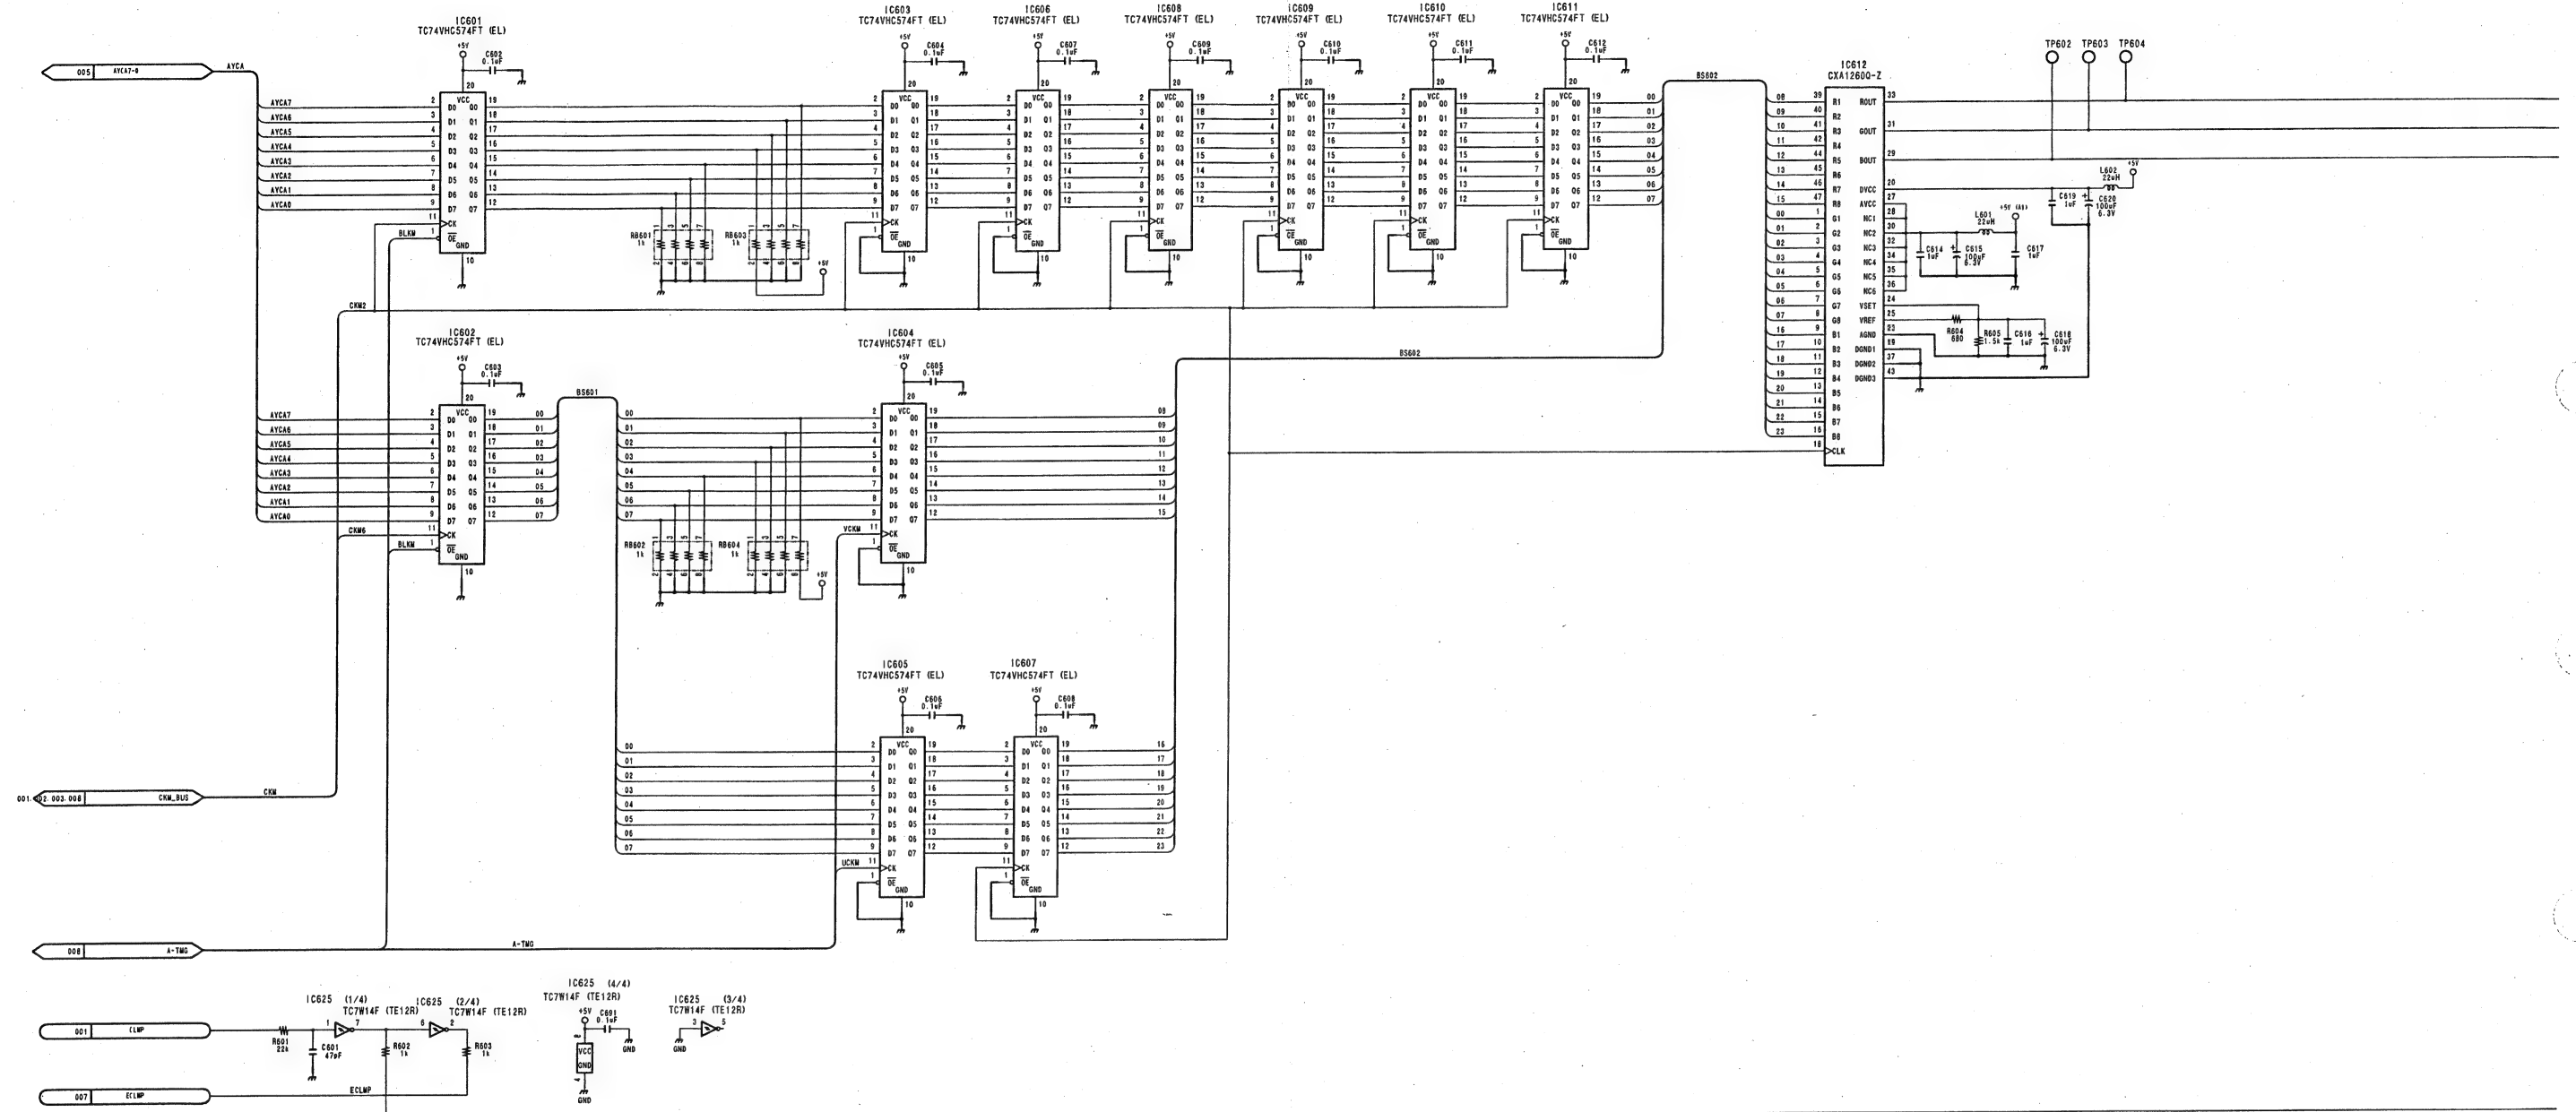


	NTSC	PAL
R1616	500 1/10W 0.5%	1.2k 1/10W 0.5%
R1617	500 1/10W 0.5%	1.2k 1/10W 0.5%

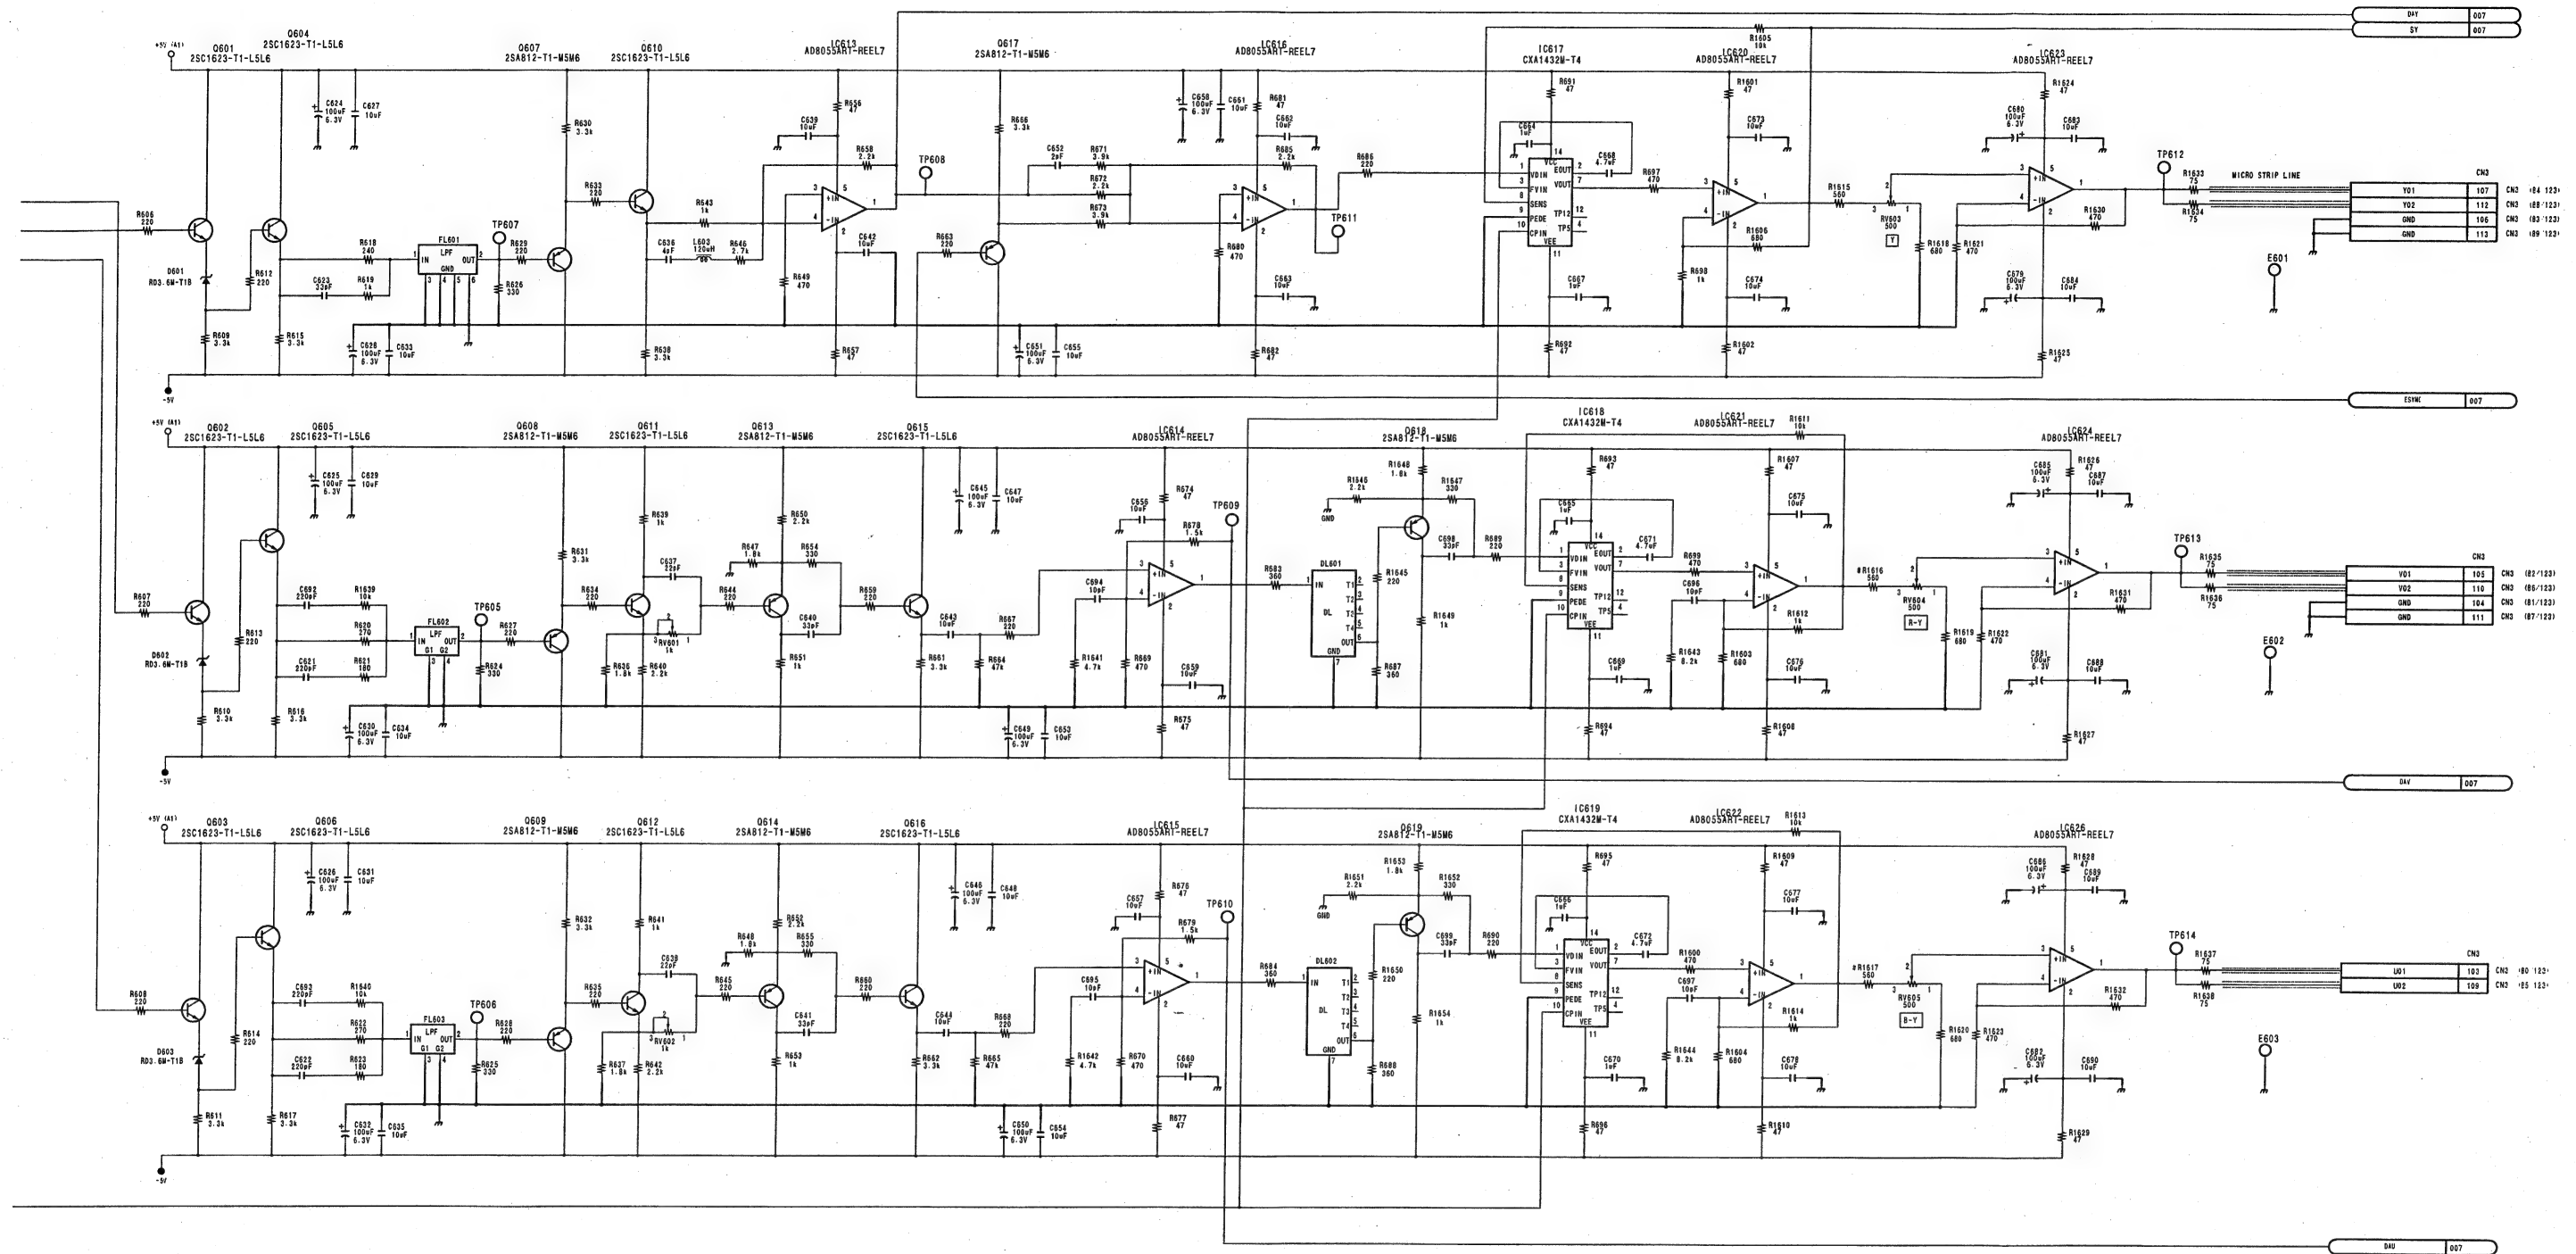


OUTPUT PROCESSOR BOARD
OPM-39/39P (6/9)
 BOARD NO. 1-677-095-11, 12
 LOT NO. 911-

OPM-39/39P (7/9)

DFS-700 (J): S/N 30001 and Higher
DFS-700 (UC): S/N 10001 and Higher
DFS-700P (CE): S/N 40001 and Higher

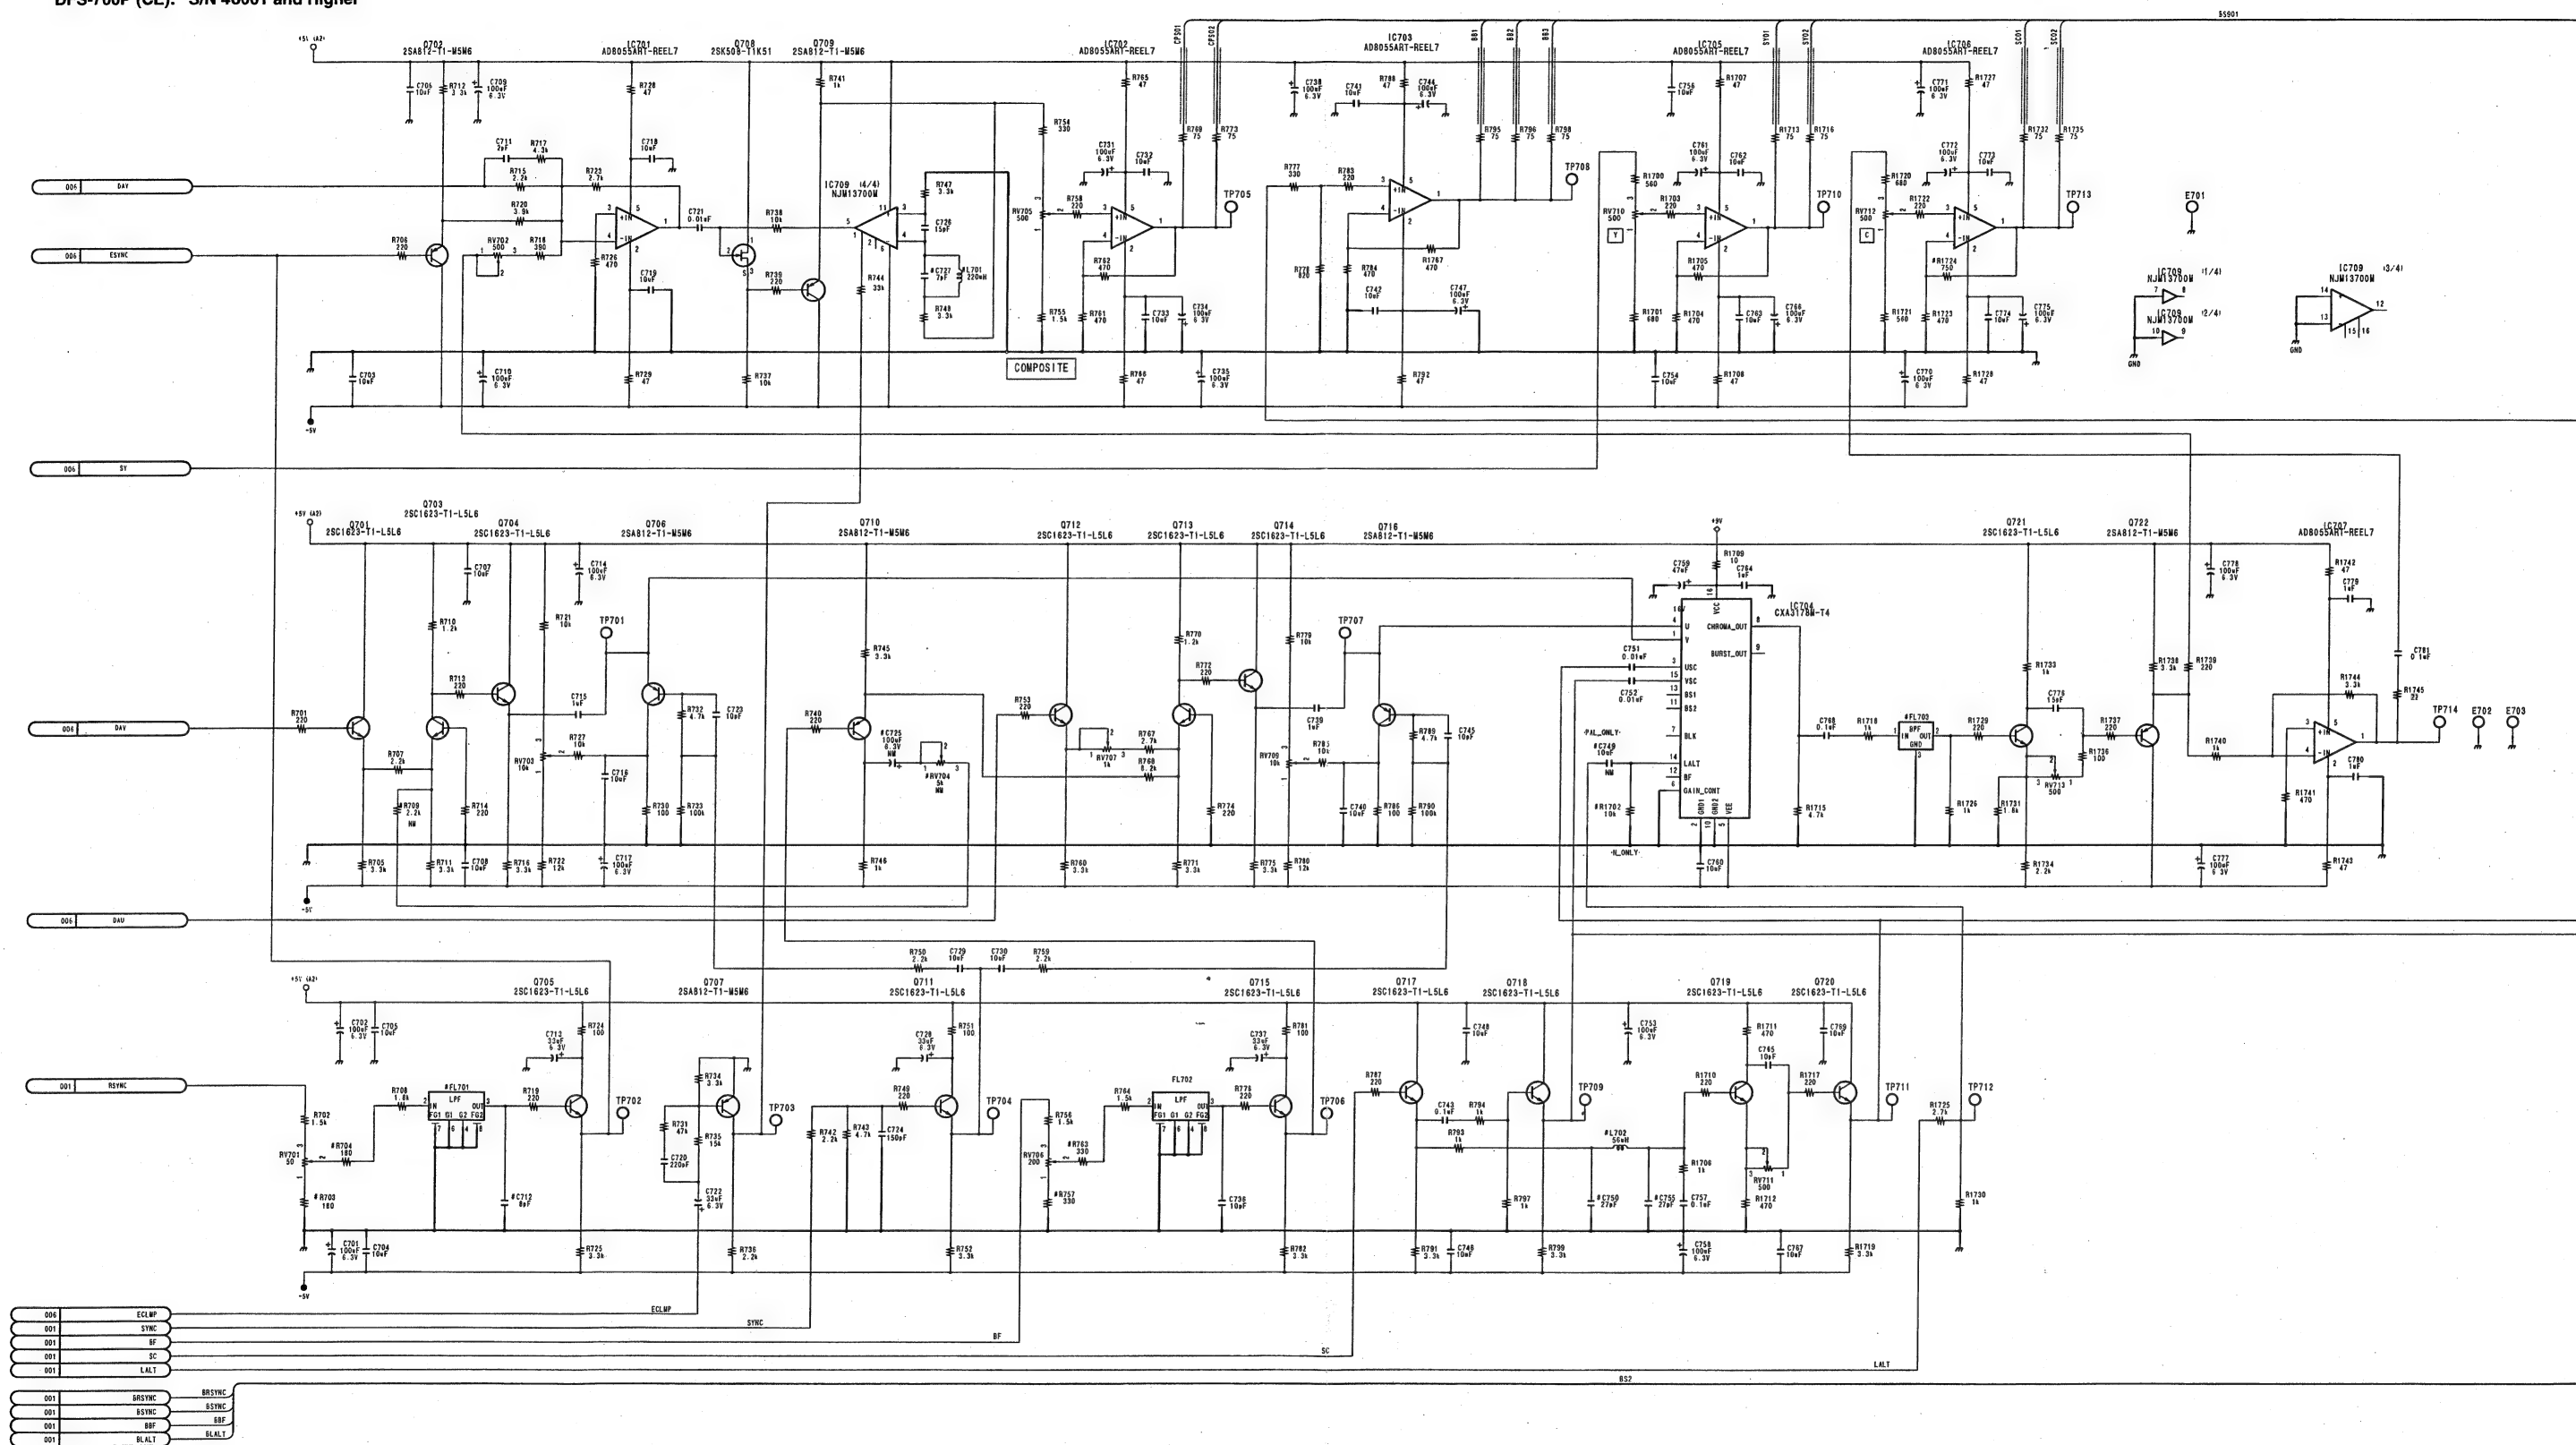

OPM-39/39P (7/9) OPM-39/39P (7/9)

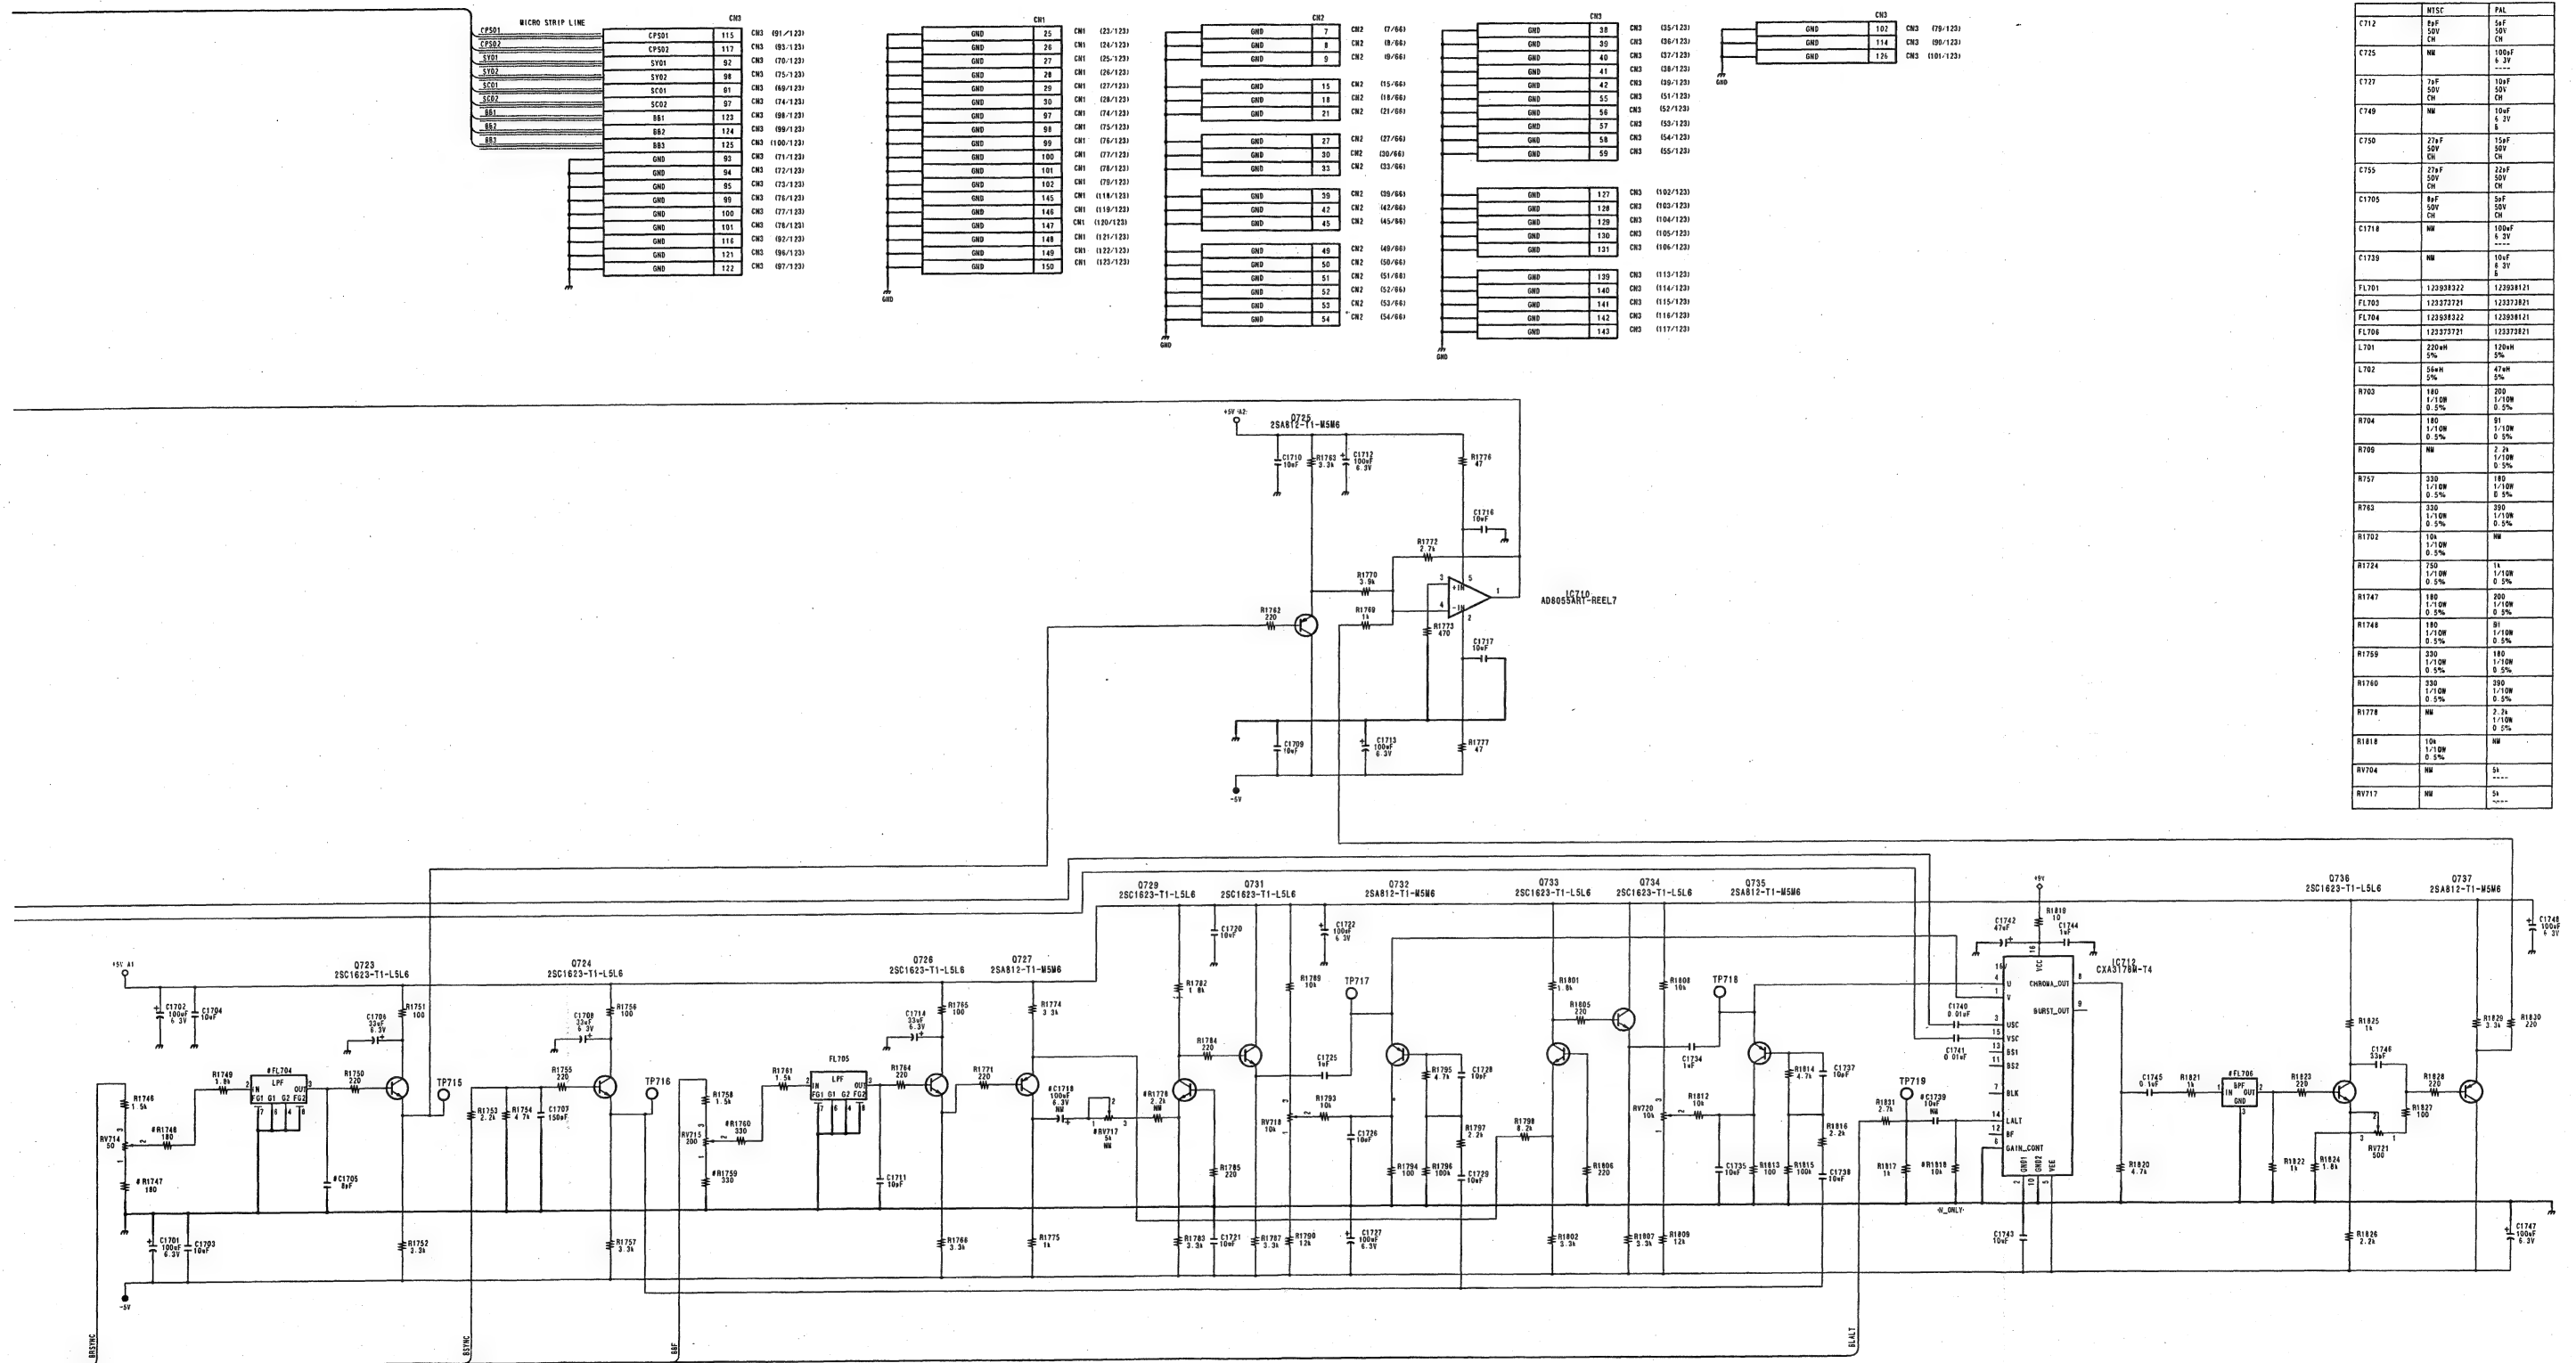


OUTPUT PROCESSOR BOARD
OPM-39/39P (7/9)
 BOARD NO. 1-677-095-11, 12
 LOT NO. 911-

DFS-700/700P

4-71

4-71

DFS-700 (J): S/N 30001 and Higher
 DFS-700 (UC): S/N 10001 and Higher
 DFS-700P (CE): S/N 40001 and Higher

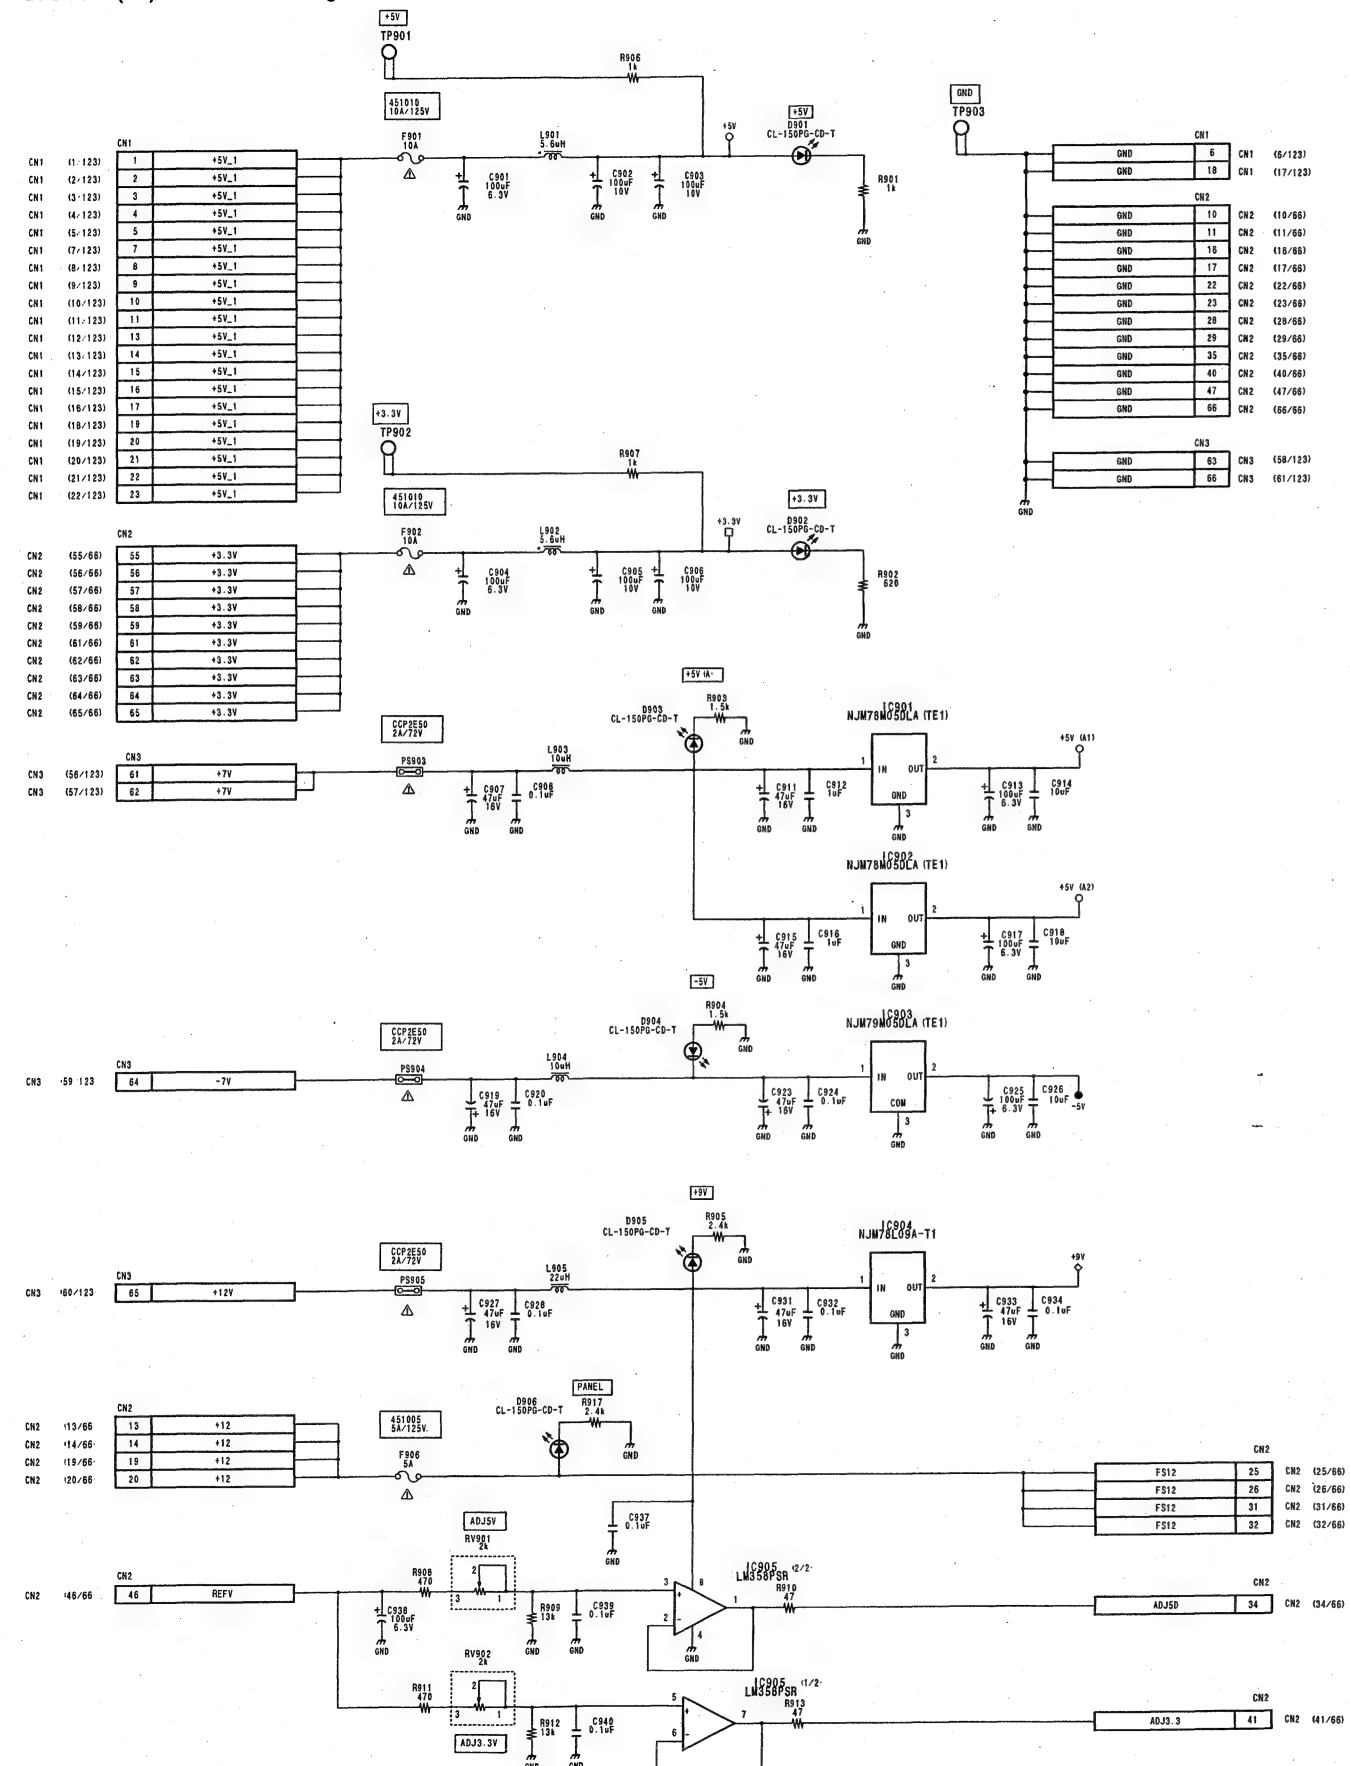

DFS-700/700P


4-73

4-73

OUTPUT PROCESSOR BOARD
OPM-39/39P (9/9)
 BOARD NO. 1-677-095-11, 12
 LOT NO. 911-


	NTSC	PAL
C117	330F 20V 0.5%	NM
C124	330F 20V 0.5%	2200F 50V 0.5%
C147	0.22uF 10V 0.5%	0.1uF 16V 0.5%
D105	NM	DA204U7105
D106	NM	DA204U7106
L107	47uH 0.5%	32uH 0.5%
R110	1.2k 1/8W 0.5%	1.8k 1/8W 0.5%
R155	NM	680k 1/8W 0.5%
R156	330k 1/8W 0.5%	680k 1/8W 0.5%
R162	10k 1/8W 0.5%	220k 1/8W 0.5%
R170	NM	2k 1/8W 0.5%
X101	14-31810MH	17.724475M

BKDF-702 (J): S/N 30111 and Higher
BKDF-702 (UC): S/N 10061 and Higher
BKDF-702P (CE): S/N 40101 and Higher

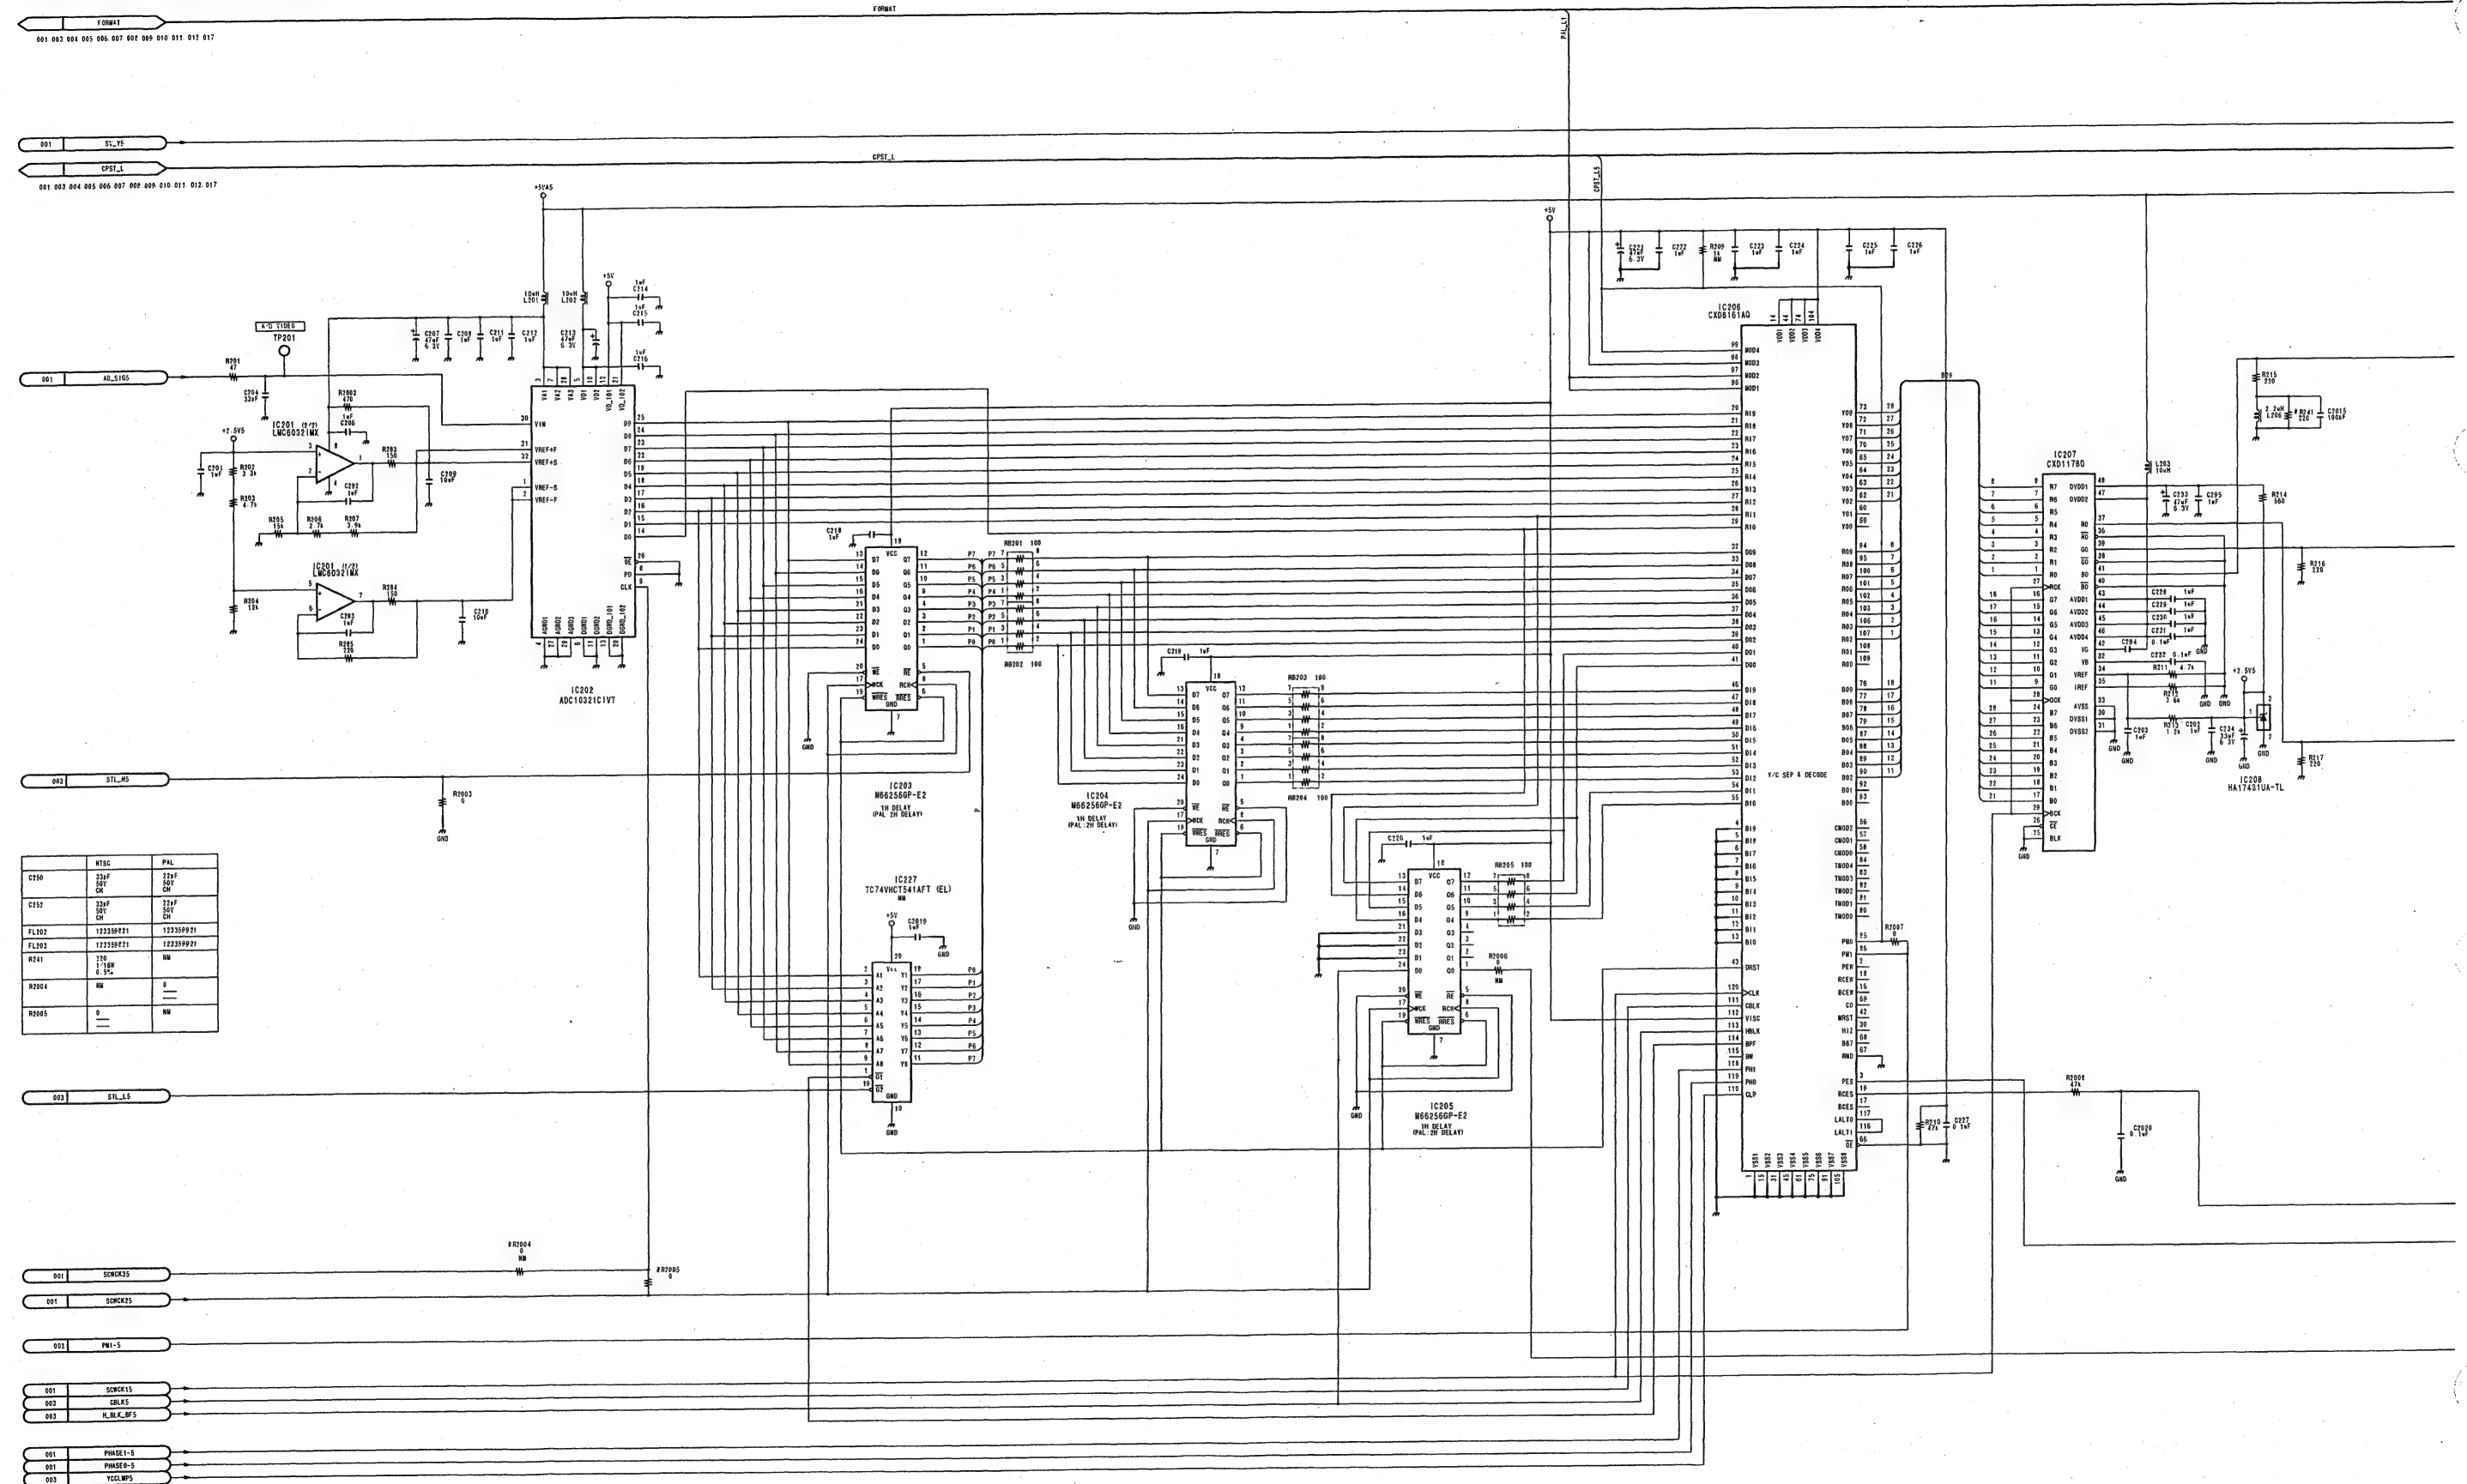

BKDF-702 (J): S/N 30111 and Higher
BKDF-702 (UC): S/N 10061 and Higher
BKDF-702P (CE): S/N 40101 and Higher






BKDF-702 (J) : S/N 30111 and Higher
BKDF-702 (UC): S/N 10061 and Higher
BKDF-702P (CE): S/N 40101 and Higher




BKDF-702 (J): S/N 30111 and Higher
BKDF-702 (UC): S/N 10061 and Higher
BKDF-702P (CE): S/N 40101 and Higher

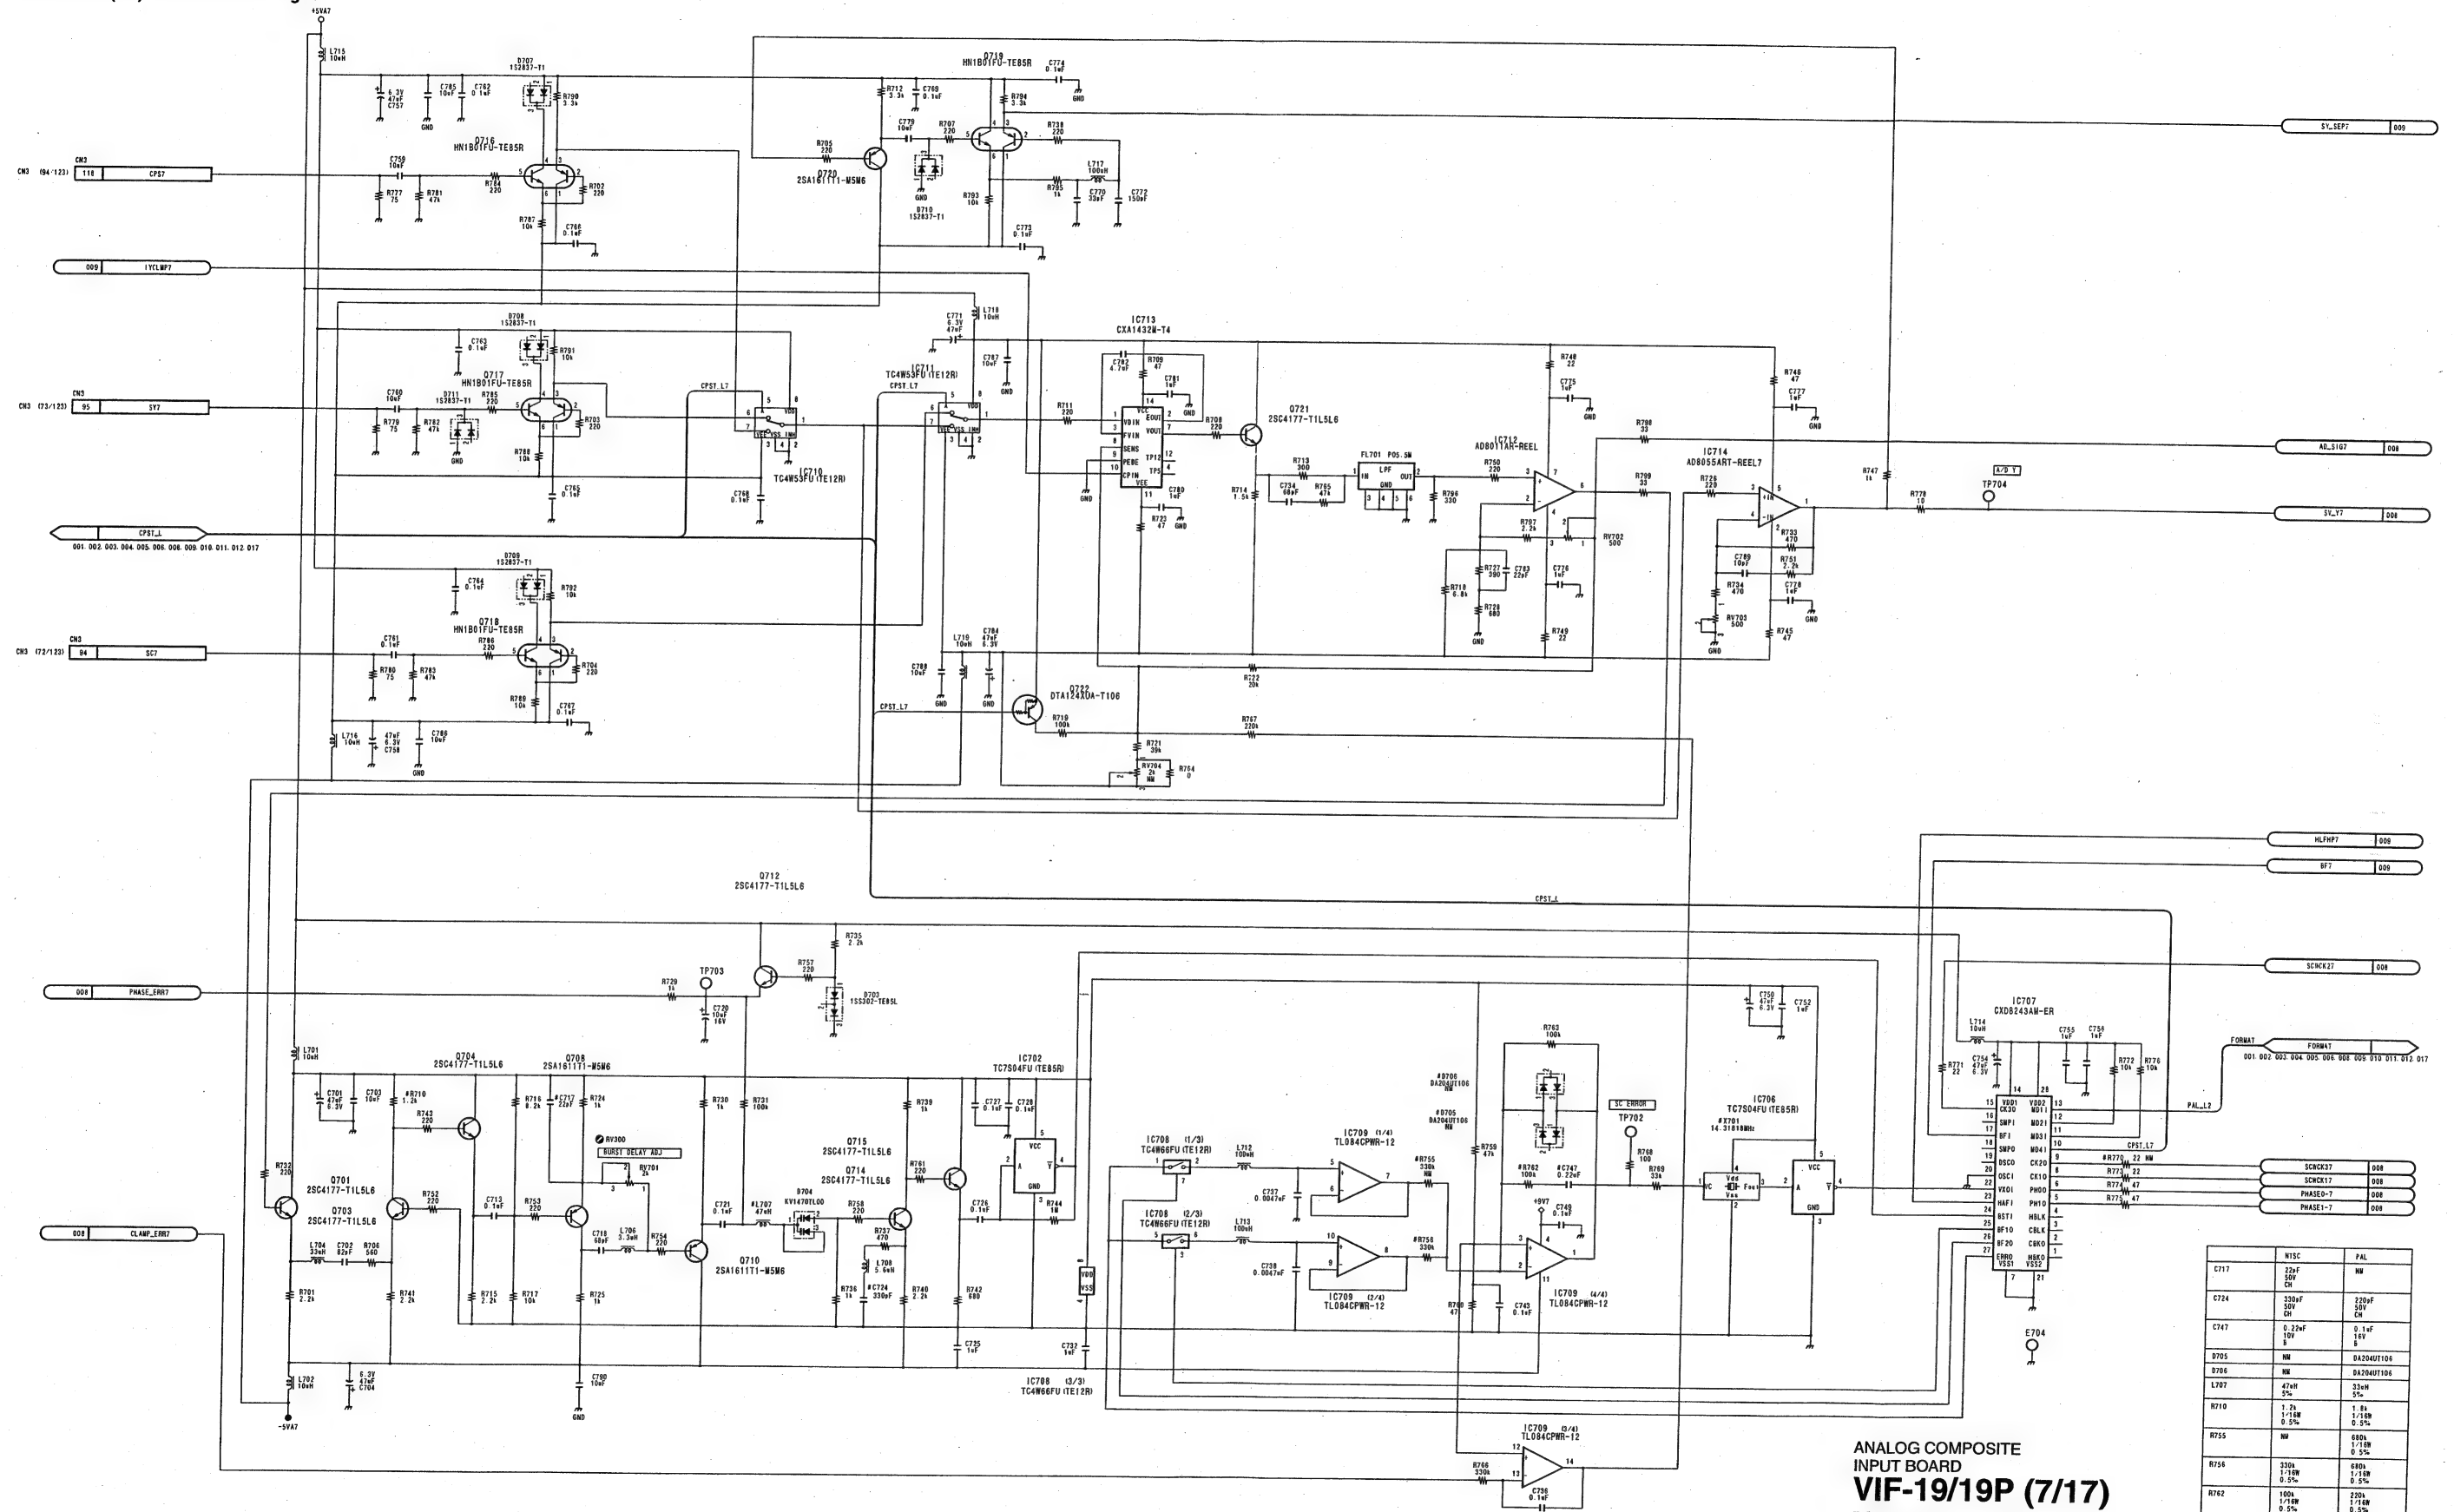


ANALOG COMPOSITE
INPUT BOARD
VIF-19/19P (7/17)
BOARD NO. 1-677-103-12
LOT NO. 003-

	WISC	PAL
C717	22pF	NW
C724	330pF	220pF
C747	0.22uF	0.1uF
D705	NW	DA2040T106
D706	NW	DA2040T106
L707	47uH	33uH
R710	1.2k	1.8k
R715	1.1k	1.1k
R716	330k	680k
R717	1.1k	1.1k
R718	1.1k	1.1k
R719	1.1k	1.1k
R720	1.1k	1.1k
R721	1.1k	1.1k
R722	1.1k	1.1k
R723	1.1k	1.1k
R724	1.1k	1.1k
R725	1.1k	1.1k
R726	1.1k	1.1k
R727	1.1k	1.1k
R728	1.1k	1.1k
R729	1.1k	1.1k
R730	1.1k	1.1k
R731	1.1k	1.1k
R732	1.1k	1.1k
R733	1.1k	1.1k
R734	1.1k	1.1k
R735	1.1k	1.1k
R736	1.1k	1.1k
R737	1.1k	1.1k
R738	1.1k	1.1k
R739	1.1k	1.1k
R740	1.1k	1.1k
R741	1.1k	1.1k
R742	1.1k	1.1k
R743	1.1k	1.1k
R744	1.1k	1.1k
R745	1.1k	1.1k
R746	1.1k	1.1k
R747	1.1k	1.1k
R748	1.1k	1.1k
R749	1.1k	1.1k
R750	1.1k	1.1k
R751	1.1k	1.1k
R752	1.1k	1.1k
R753	1.1k	1.1k
R754	1.1k	1.1k
R755	1.1k	1.1k
R756	1.1k	1.1k
R757	1.1k	1.1k
R758	1.1k	1.1k
R759	1.1k	1.1k
R760	1.1k	1.1k
R761	1.1k	1.1k
R762	1.1k	1.1k
R763	1.1k	1.1k
R764	1.1k	1.1k
R765	1.1k	1.1k
R766	1.1k	1.1k
R767	1.1k	1.1k
R768	1.1k	1.1k
R769	1.1k	1.1k
R770	1.1k	1.1k
R771	1.1k	1.1k
R772	1.1k	1.1k
R773	1.1k	1.1k
R774	1.1k	1.1k
R775	1.1k	1.1k
R776	1.1k	1.1k
R777	1.1k	1.1k
R778	1.1k	1.1k
R779	1.1k	1.1k
R780	1.1k	1.1k
R781	1.1k	1.1k
R782	1.1k	1.1k
R783	1.1k	1.1k
R784	1.1k	1.1k
R785	1.1k	1.1k
R786	1.1k	1.1k
R787	1.1k	1.1k
R788	1.1k	1.1k
R789	1.1k	1.1k
R790	1.1k	1.1k
R791	1.1k	1.1k
R792	1.1k	1.1k
R793	1.1k	1.1k
R794	1.1k	1.1k
R795	1.1k	1.1k
R796	1.1k	1.1k
R797	1.1k	1.1k
R798	1.1k	1.1k
R799	1.1k	1.1k
R800	1.1k	1.1k


BKDF-702 (J): S/N 30111 and Higher
 BKDF-702 (UC): S/N 10061 and Higher
 BKDF-702P (CE): S/N 40101 and Higher

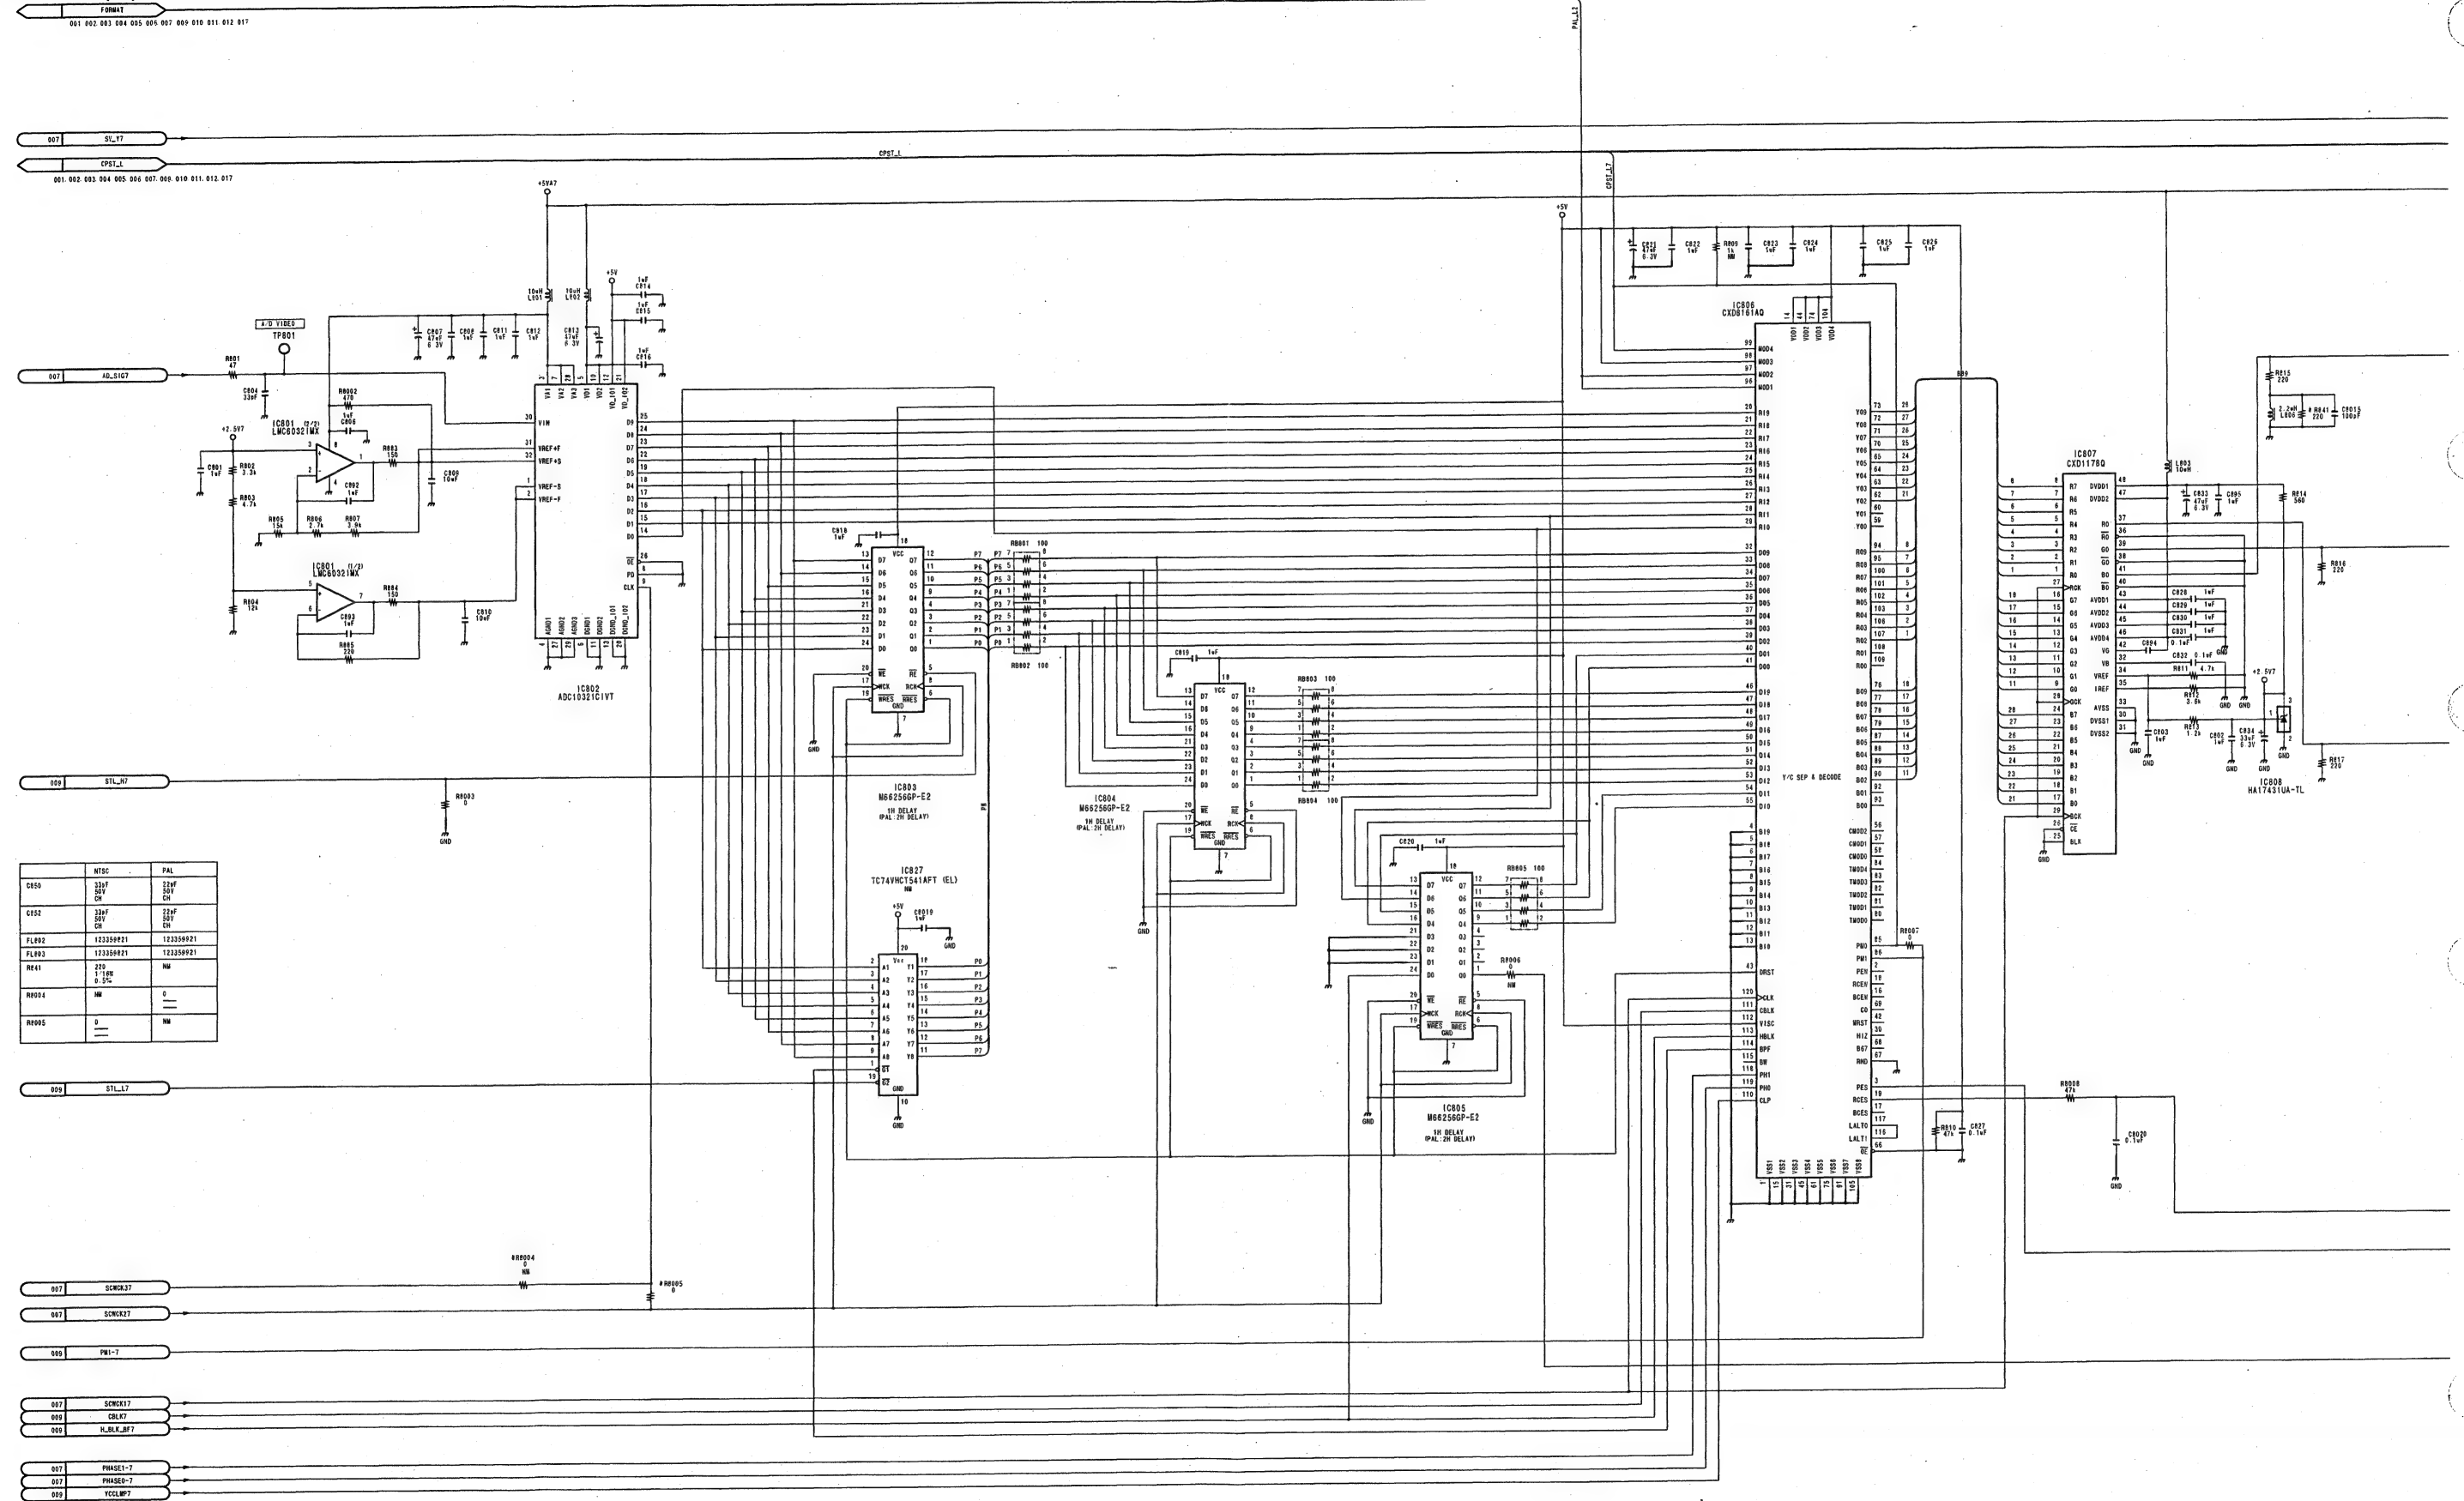

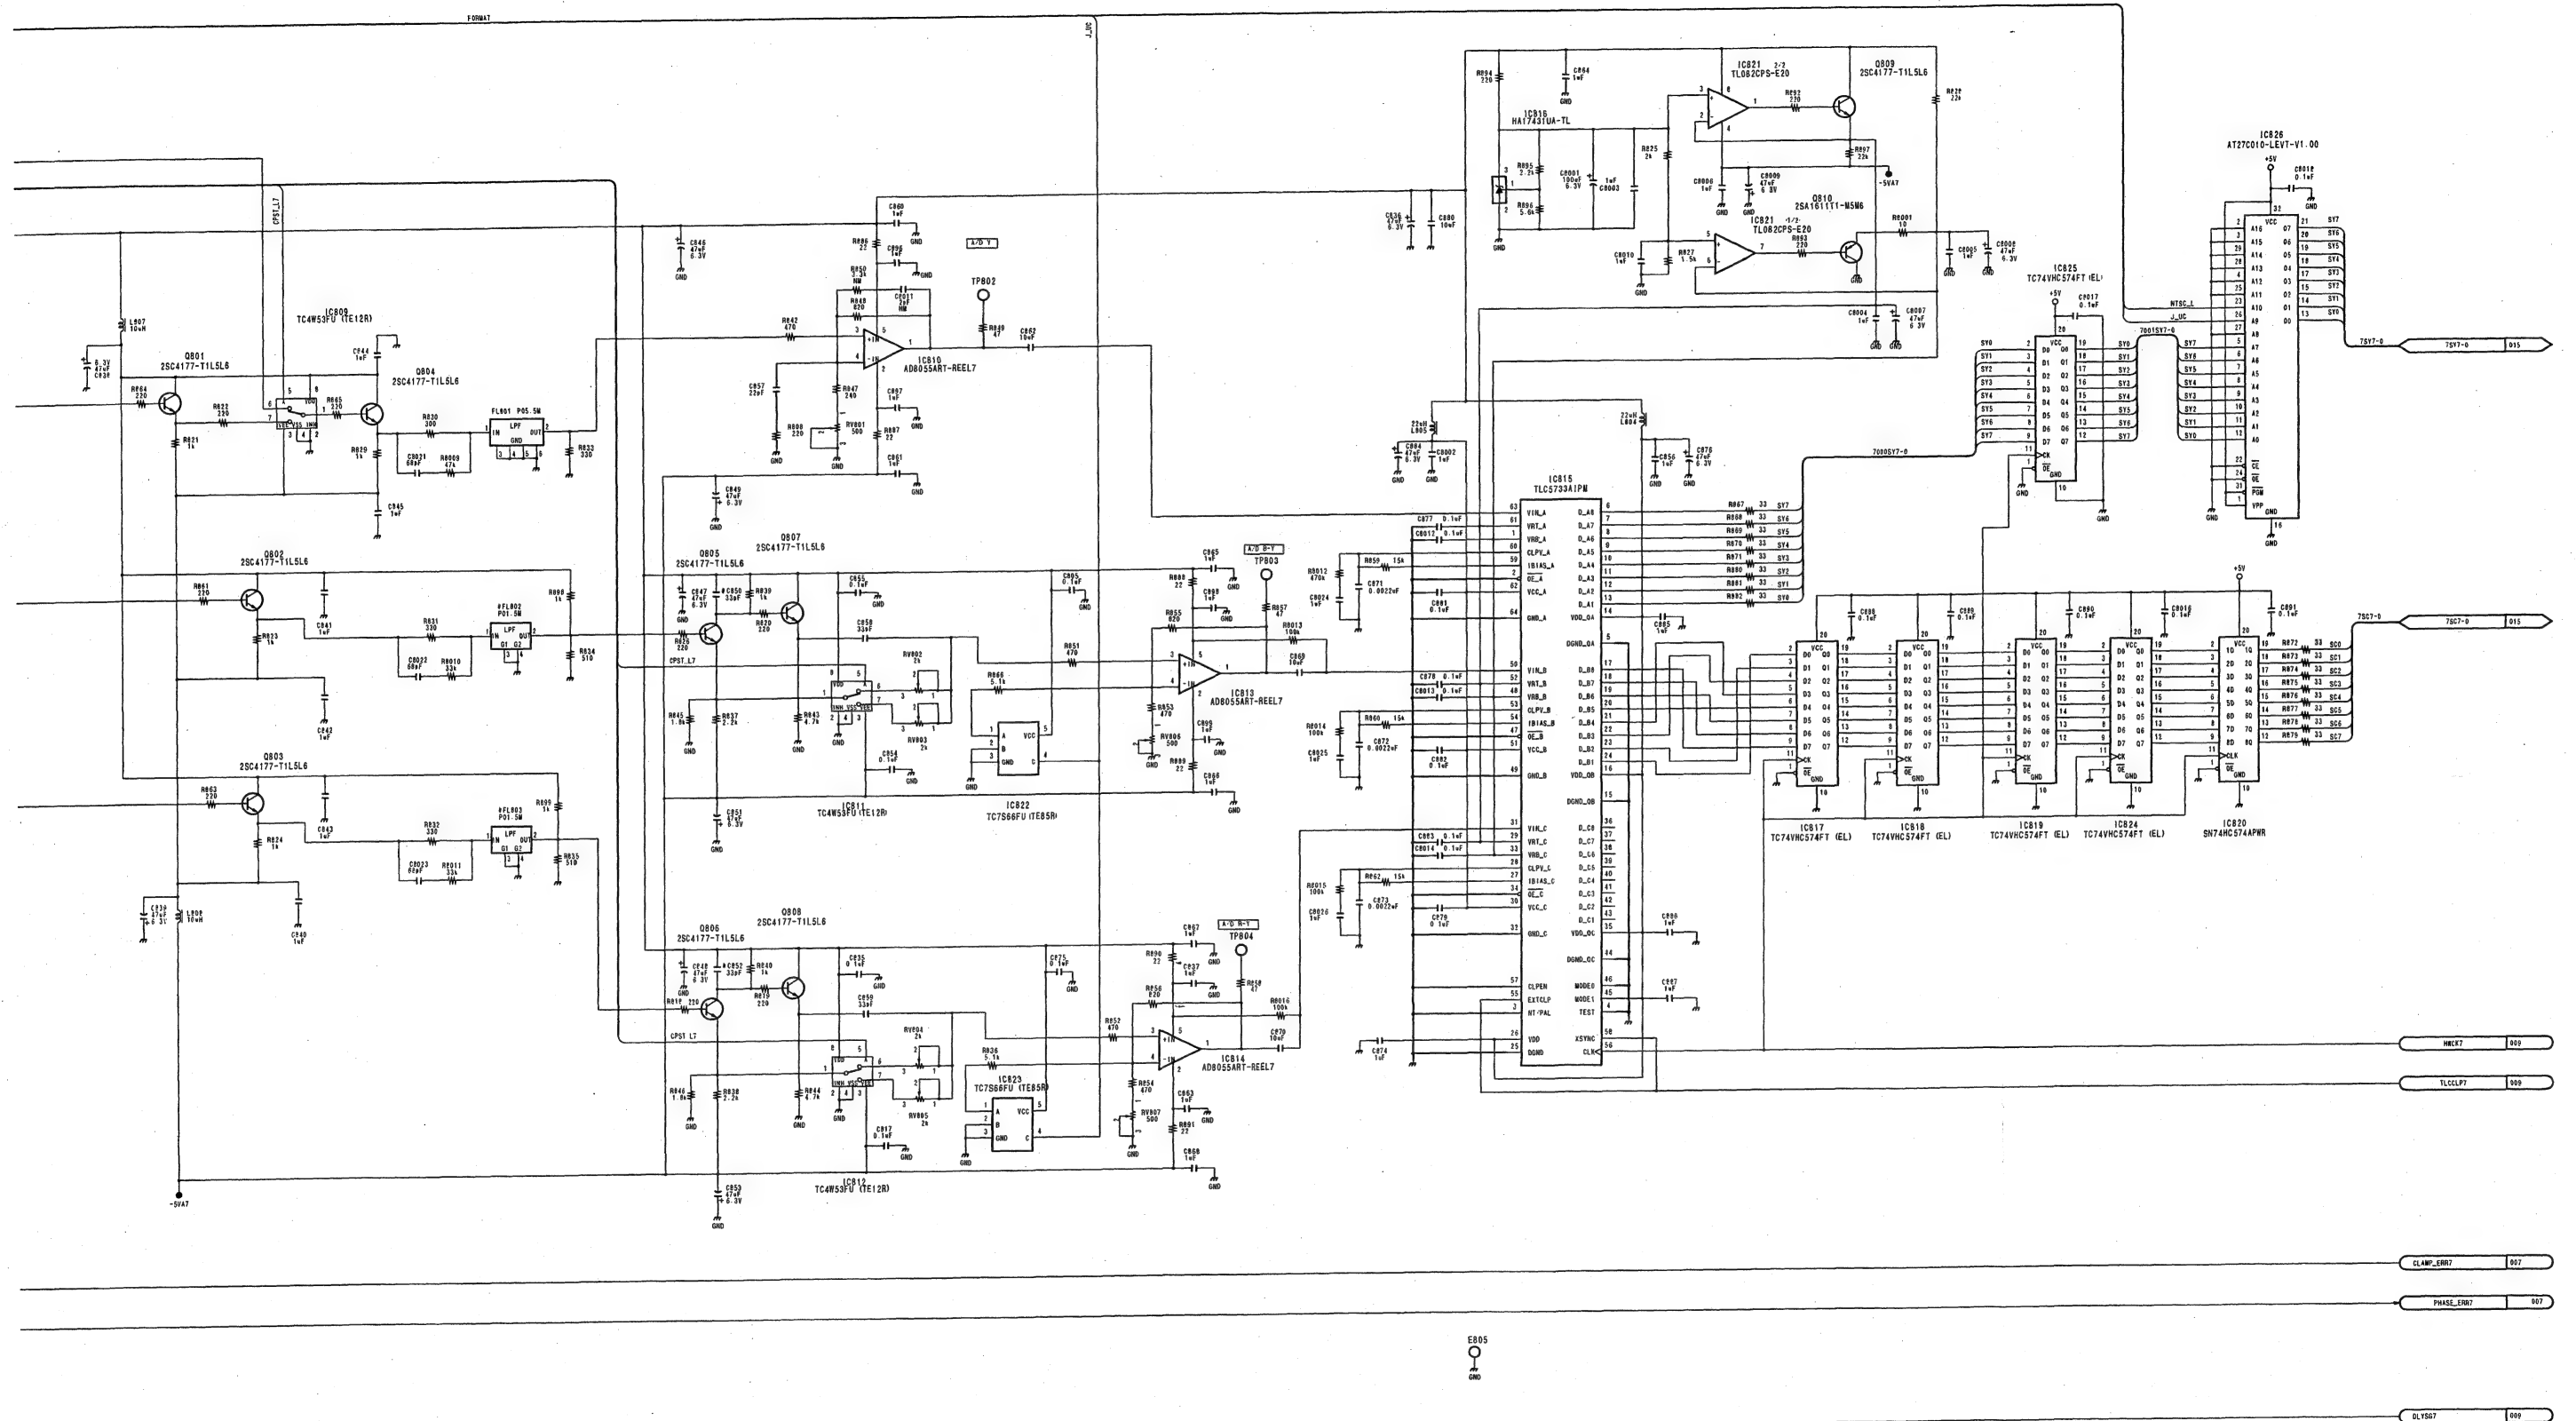

ANALOG COMPOSITE
INPUT BOARD
VIF-19/19P (8/17)
BOARD NO. 1-677-103-12
LOT NO. 003-

BKDF-702 (J): S/N 30111 and Higher
BKDF-702 (UC): S/N 10061 and Higher
BKDF-702P (CE): S/N 40101 and Higher

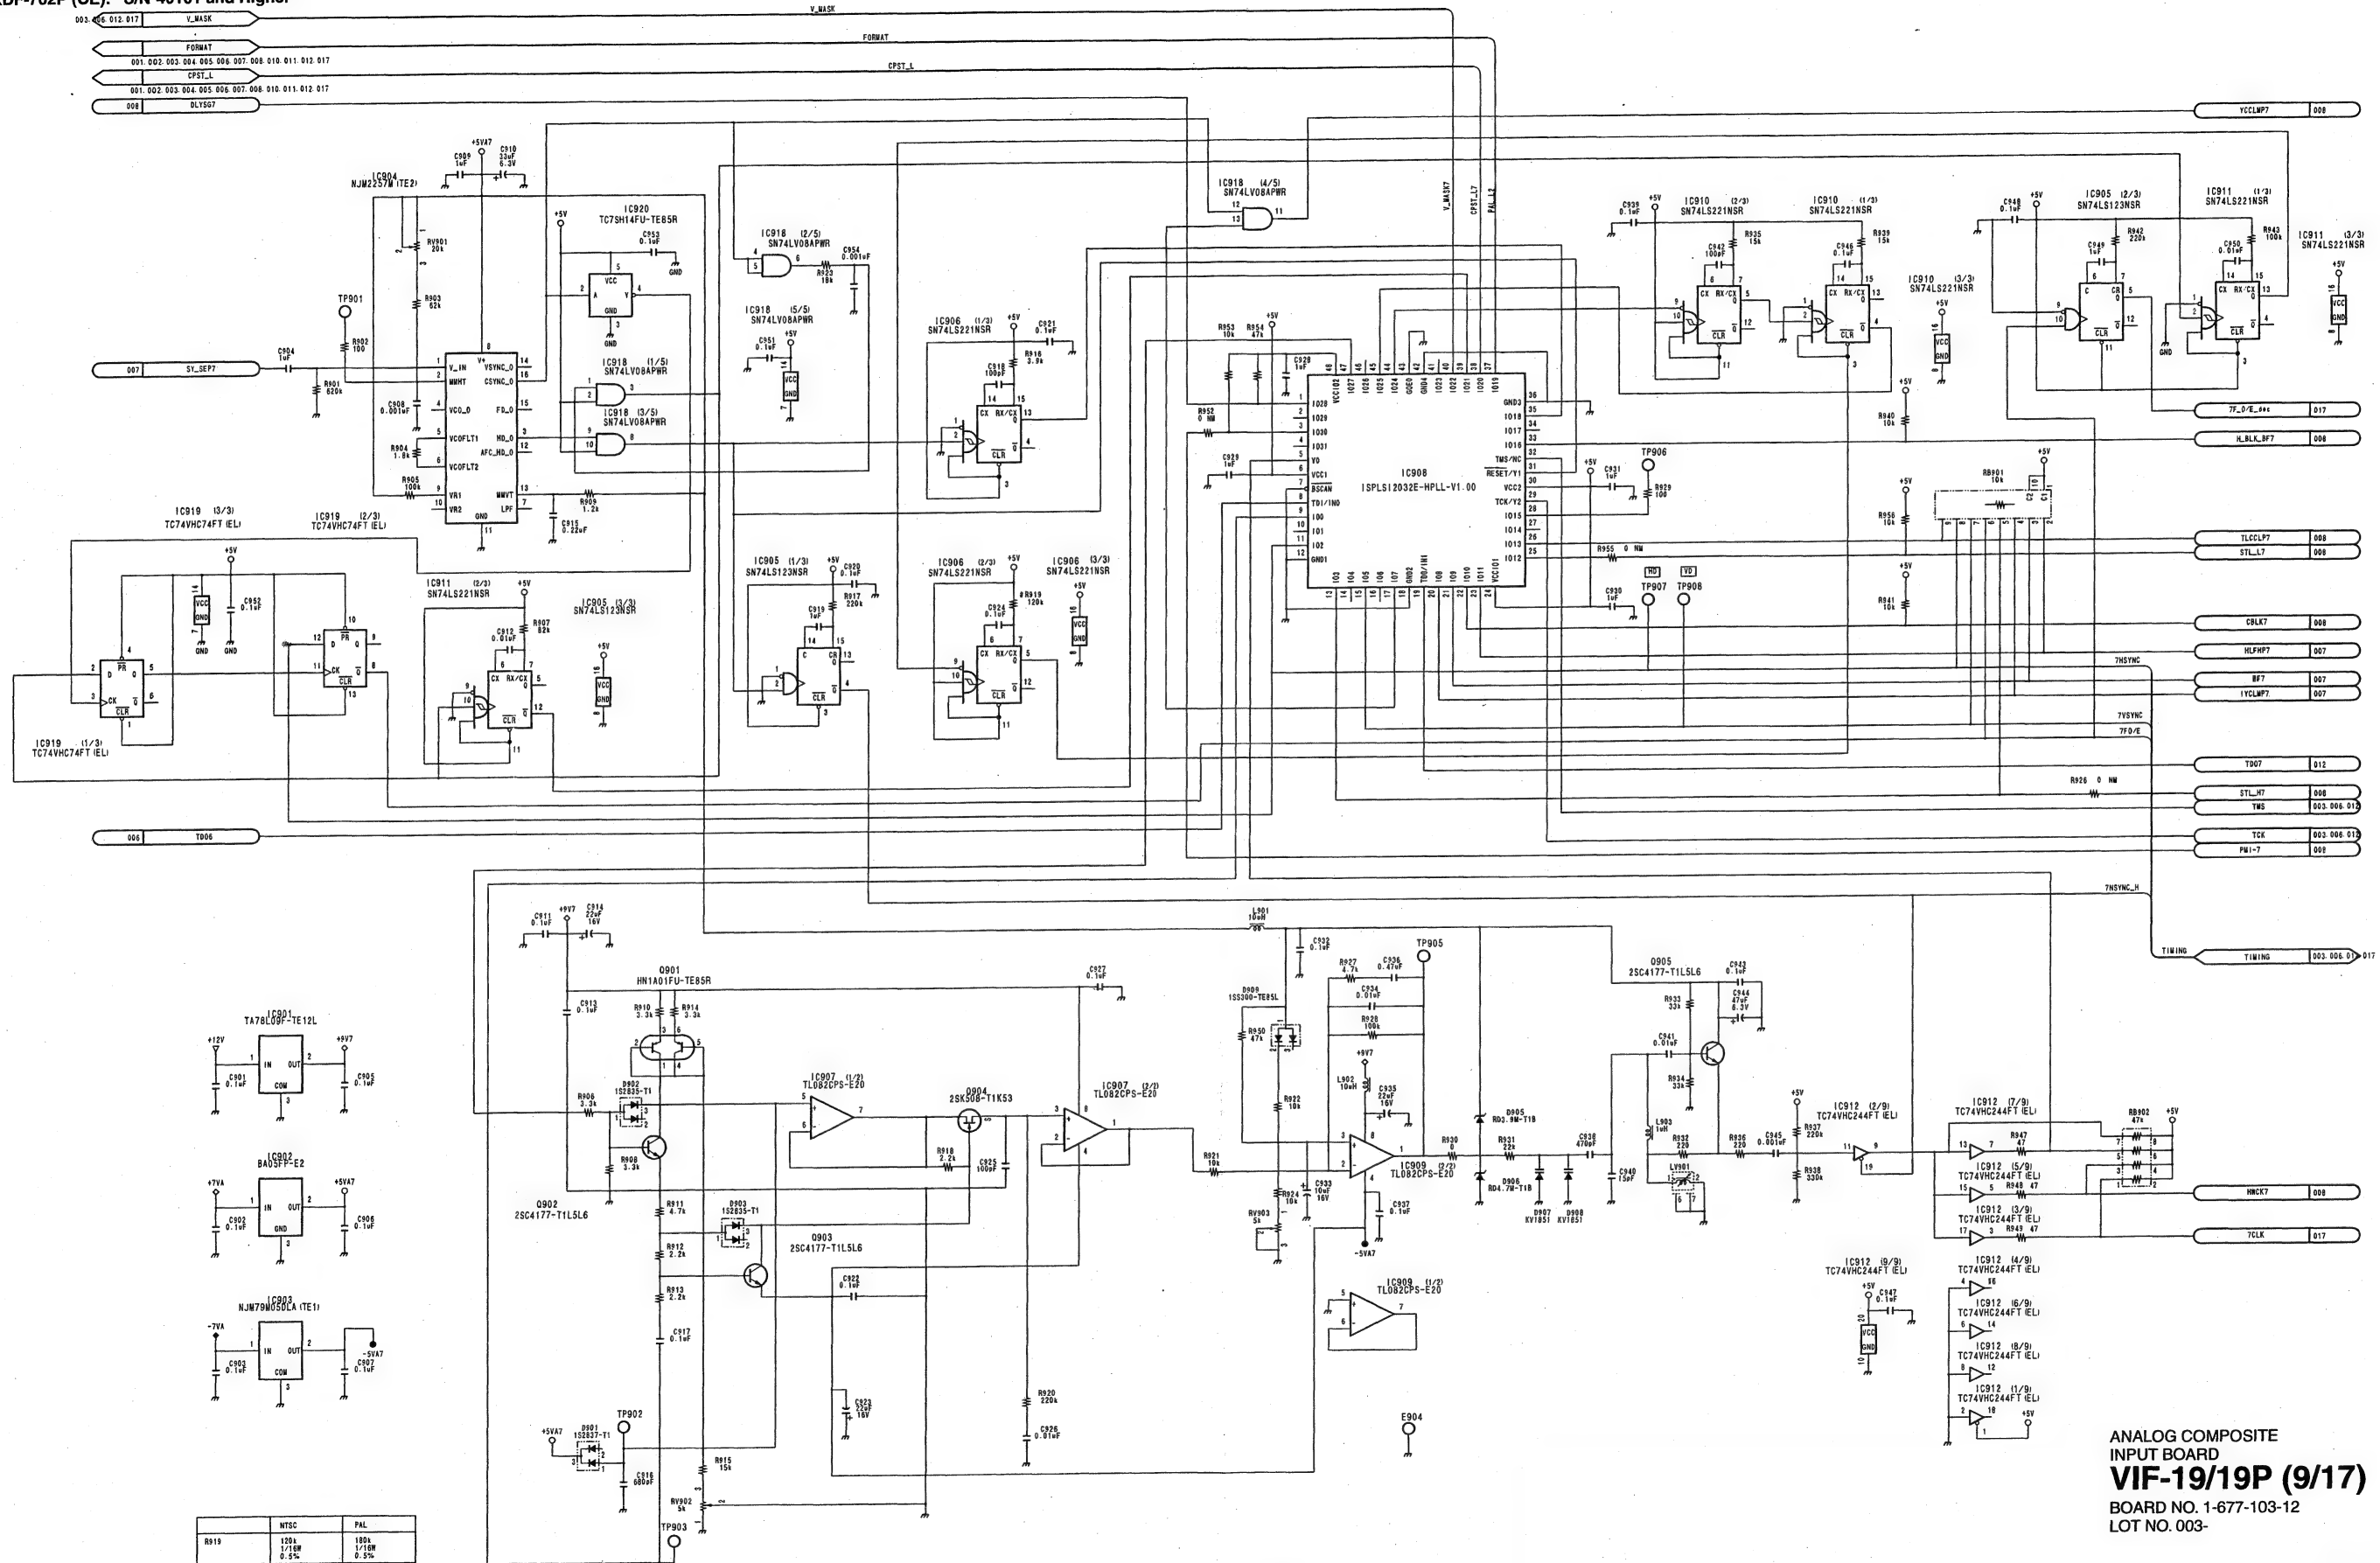


ANALOG COMPOSITE
INPUT BOARD
VIF-19/19P (9/17)
BOARD NO. 1-677-103-12
LOT NO. 003-

DFS-700/700P

VIF-19/19P (10/17)

BKDF-702 (J) : S/N 30111 and Higher
BKDF-702 (UC): S/N 10061 and Higher
BKDF-702P (CE): S/N 40101 and Higher

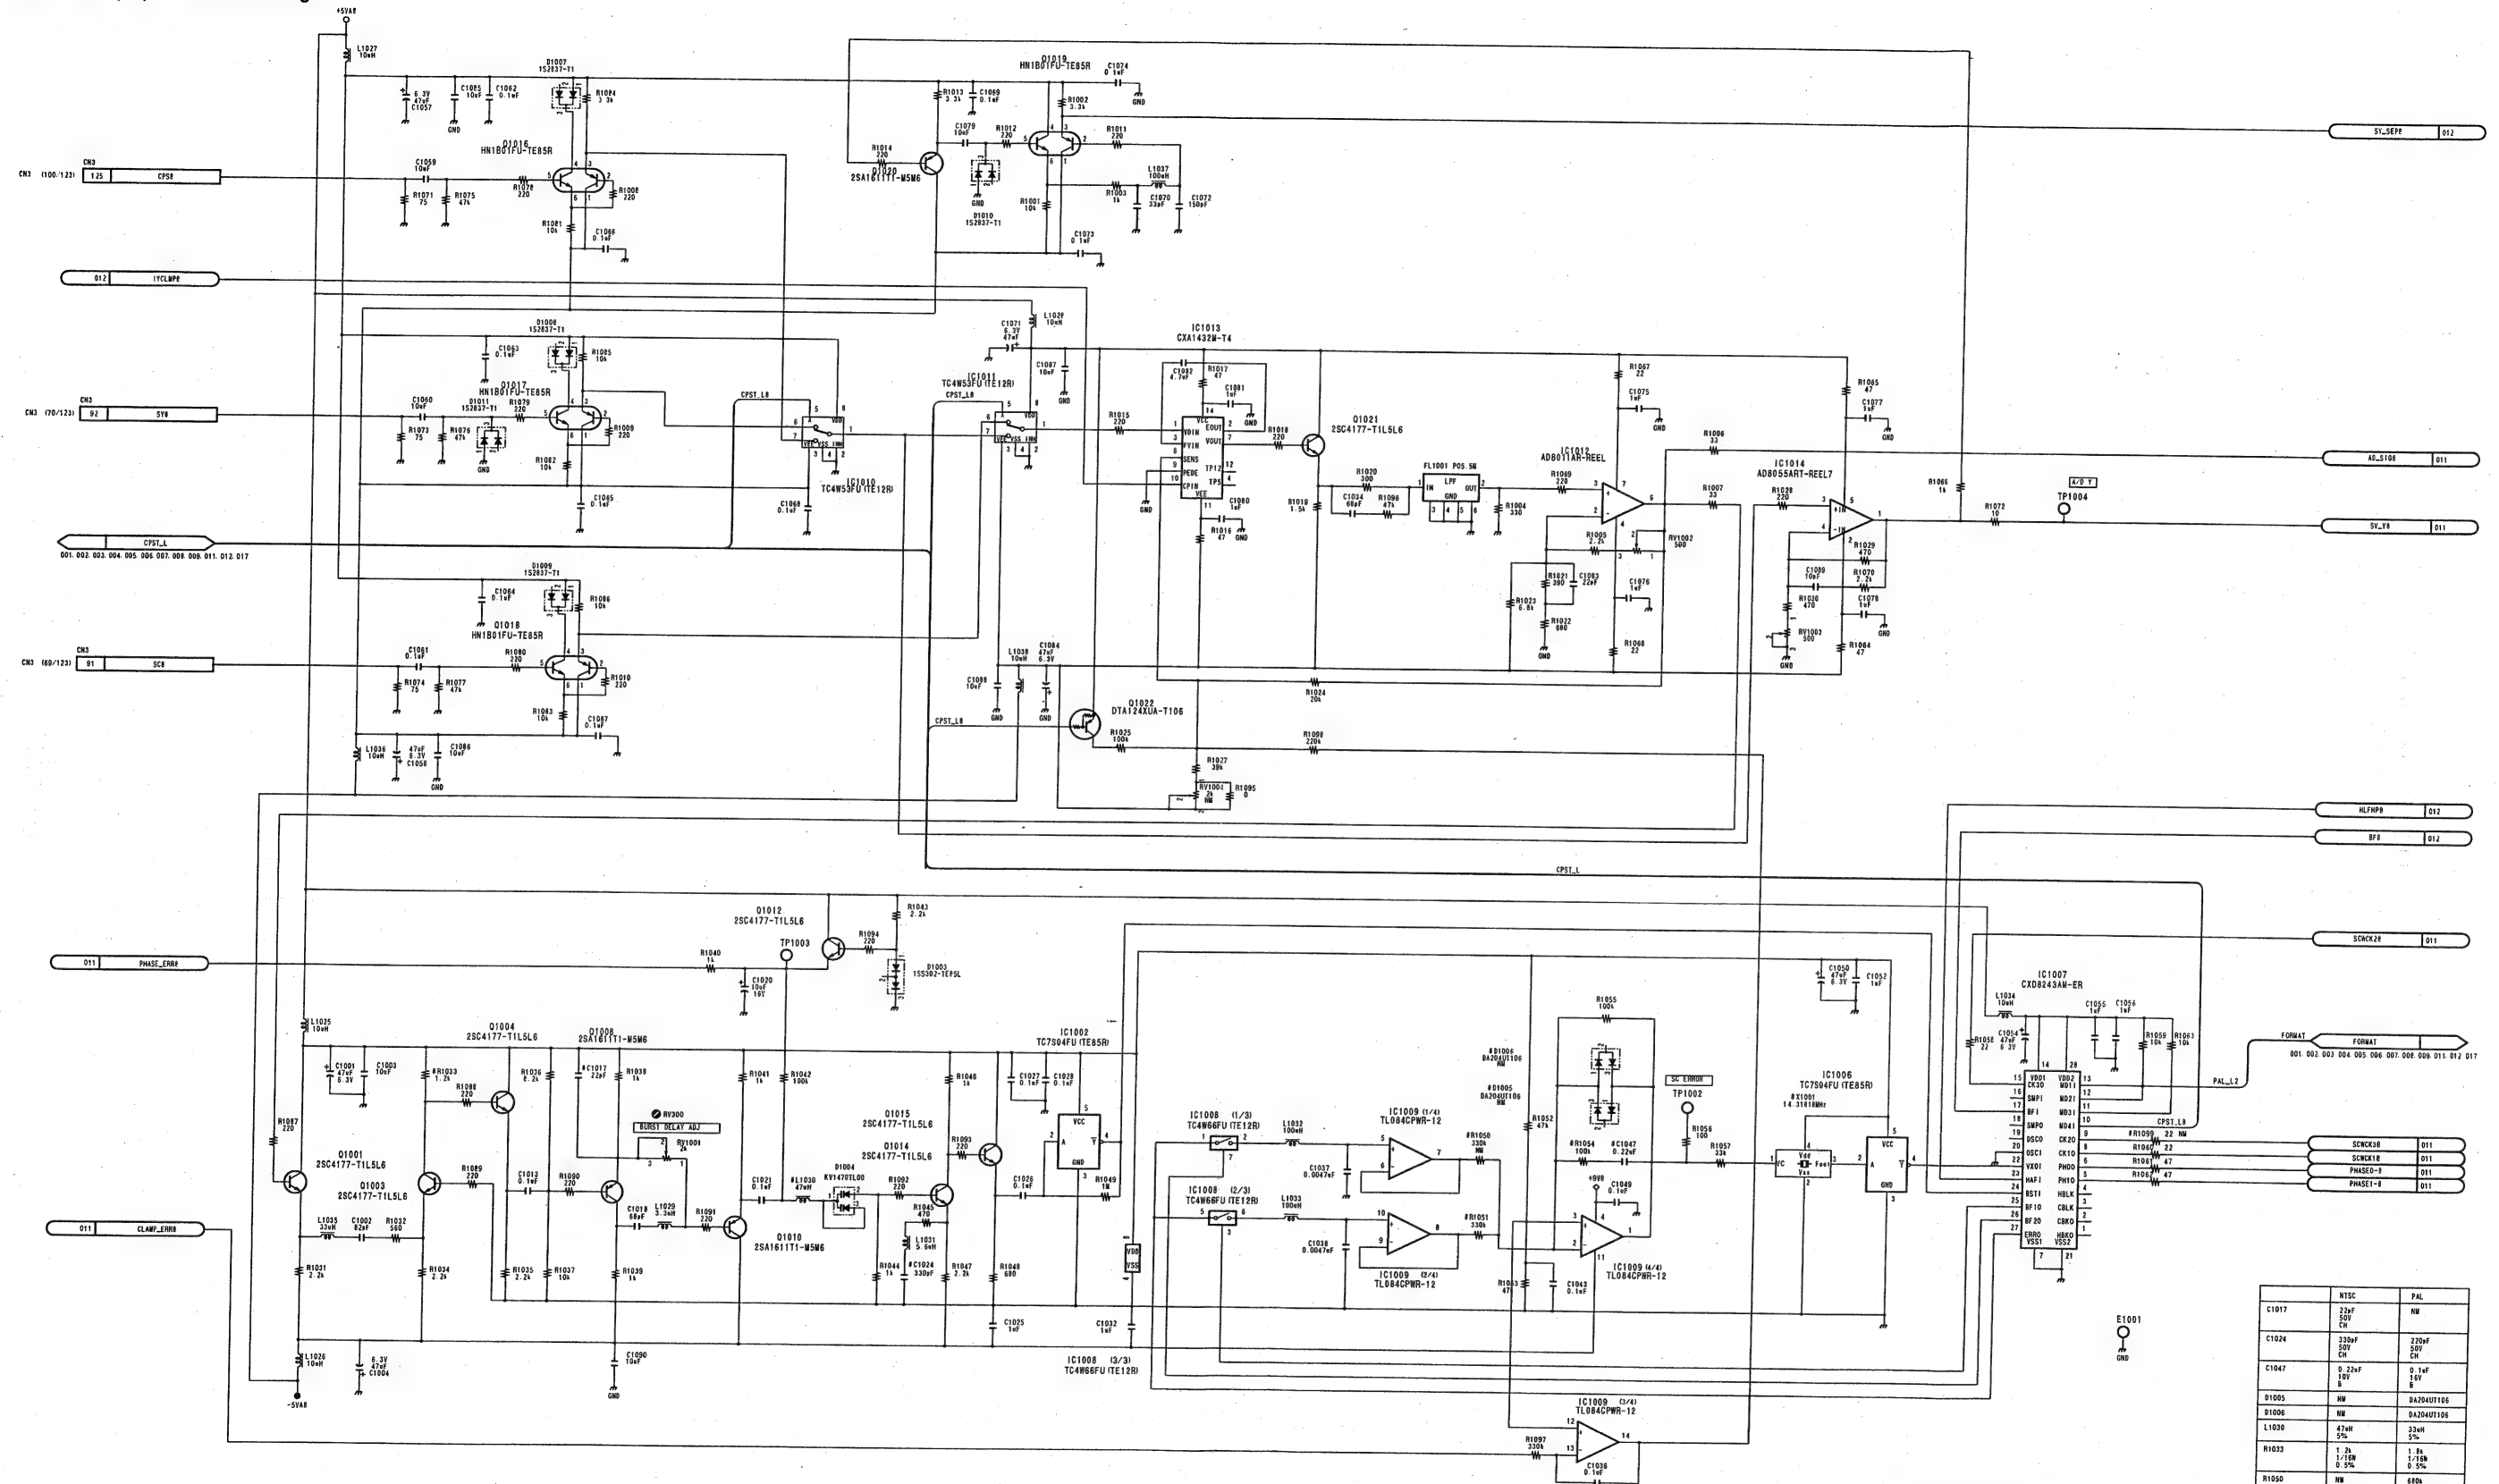


ANALOG COMPOSITE
INPUT BOARD
VIF-19/19P (10/17)
BOARD NO. 1-677-103-12
LOT NO. 003-


	NTSC	PAL
C1017	220F 50V C8	NW
C1024	2200F 50V C8	2200F 50V C8
C1047	0.22uF 10V B	0.1uF 10V B
D1005	NW	DA204U1106
D1006	NW	DA204U1106
L1020	47uH 0.5%	33uH 0.5%
R1033	1.2k 1/16W 0.5%	1.8k 1/16W 0.5%
R1050	1.7k 1/16W 0.5%	680k 1/16W 0.5%
R1051	330k 1/16W 0.5%	680k 1/16W 0.5%
R1054	20k 1/16W 0.5%	20k 1/16W 0.5%
R1059	NW	22 0.5%
X1001	14.31818MHz	17.74475MHz

BKDF-702 (J): S/N 30111 and Higher
BKDF-702 (UC): S/N 10061 and Higher
BKDF-702P (CE): S/N 40101 and Higher

001 002 003 004 005 006 007 008 009 010 011 012 017


010 SV_YE
001 002 003 004 005 006 007 008 009 010 011 012 017

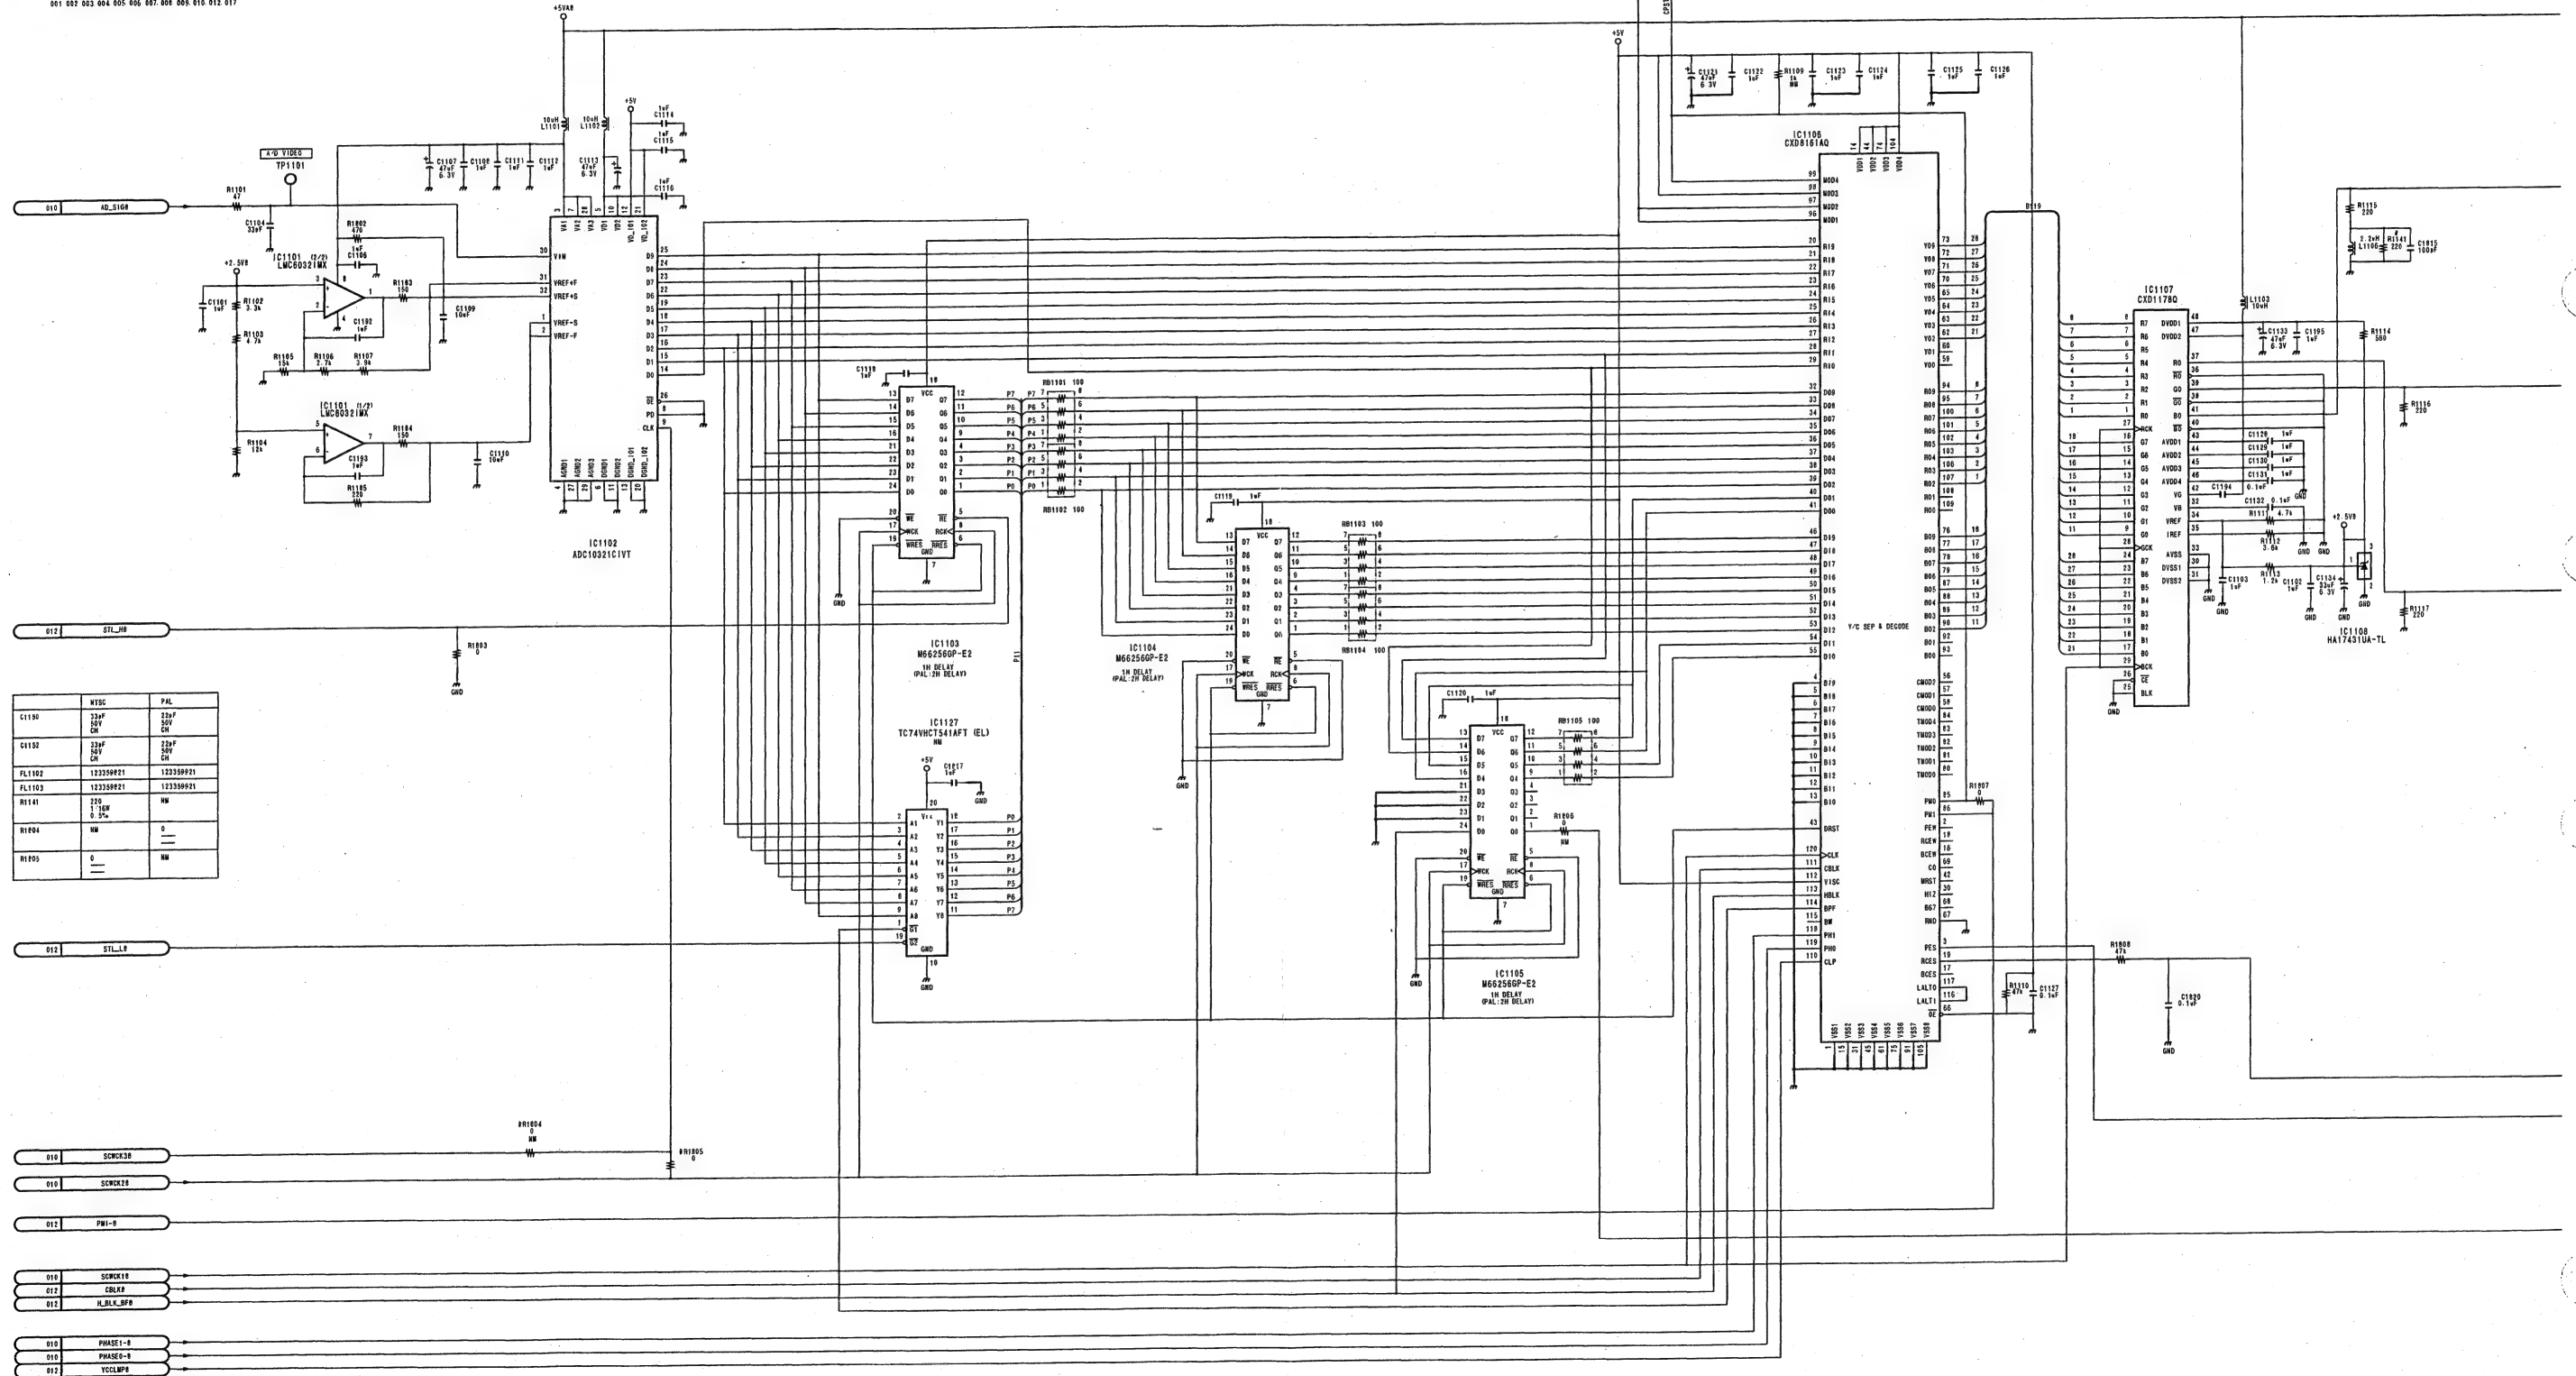

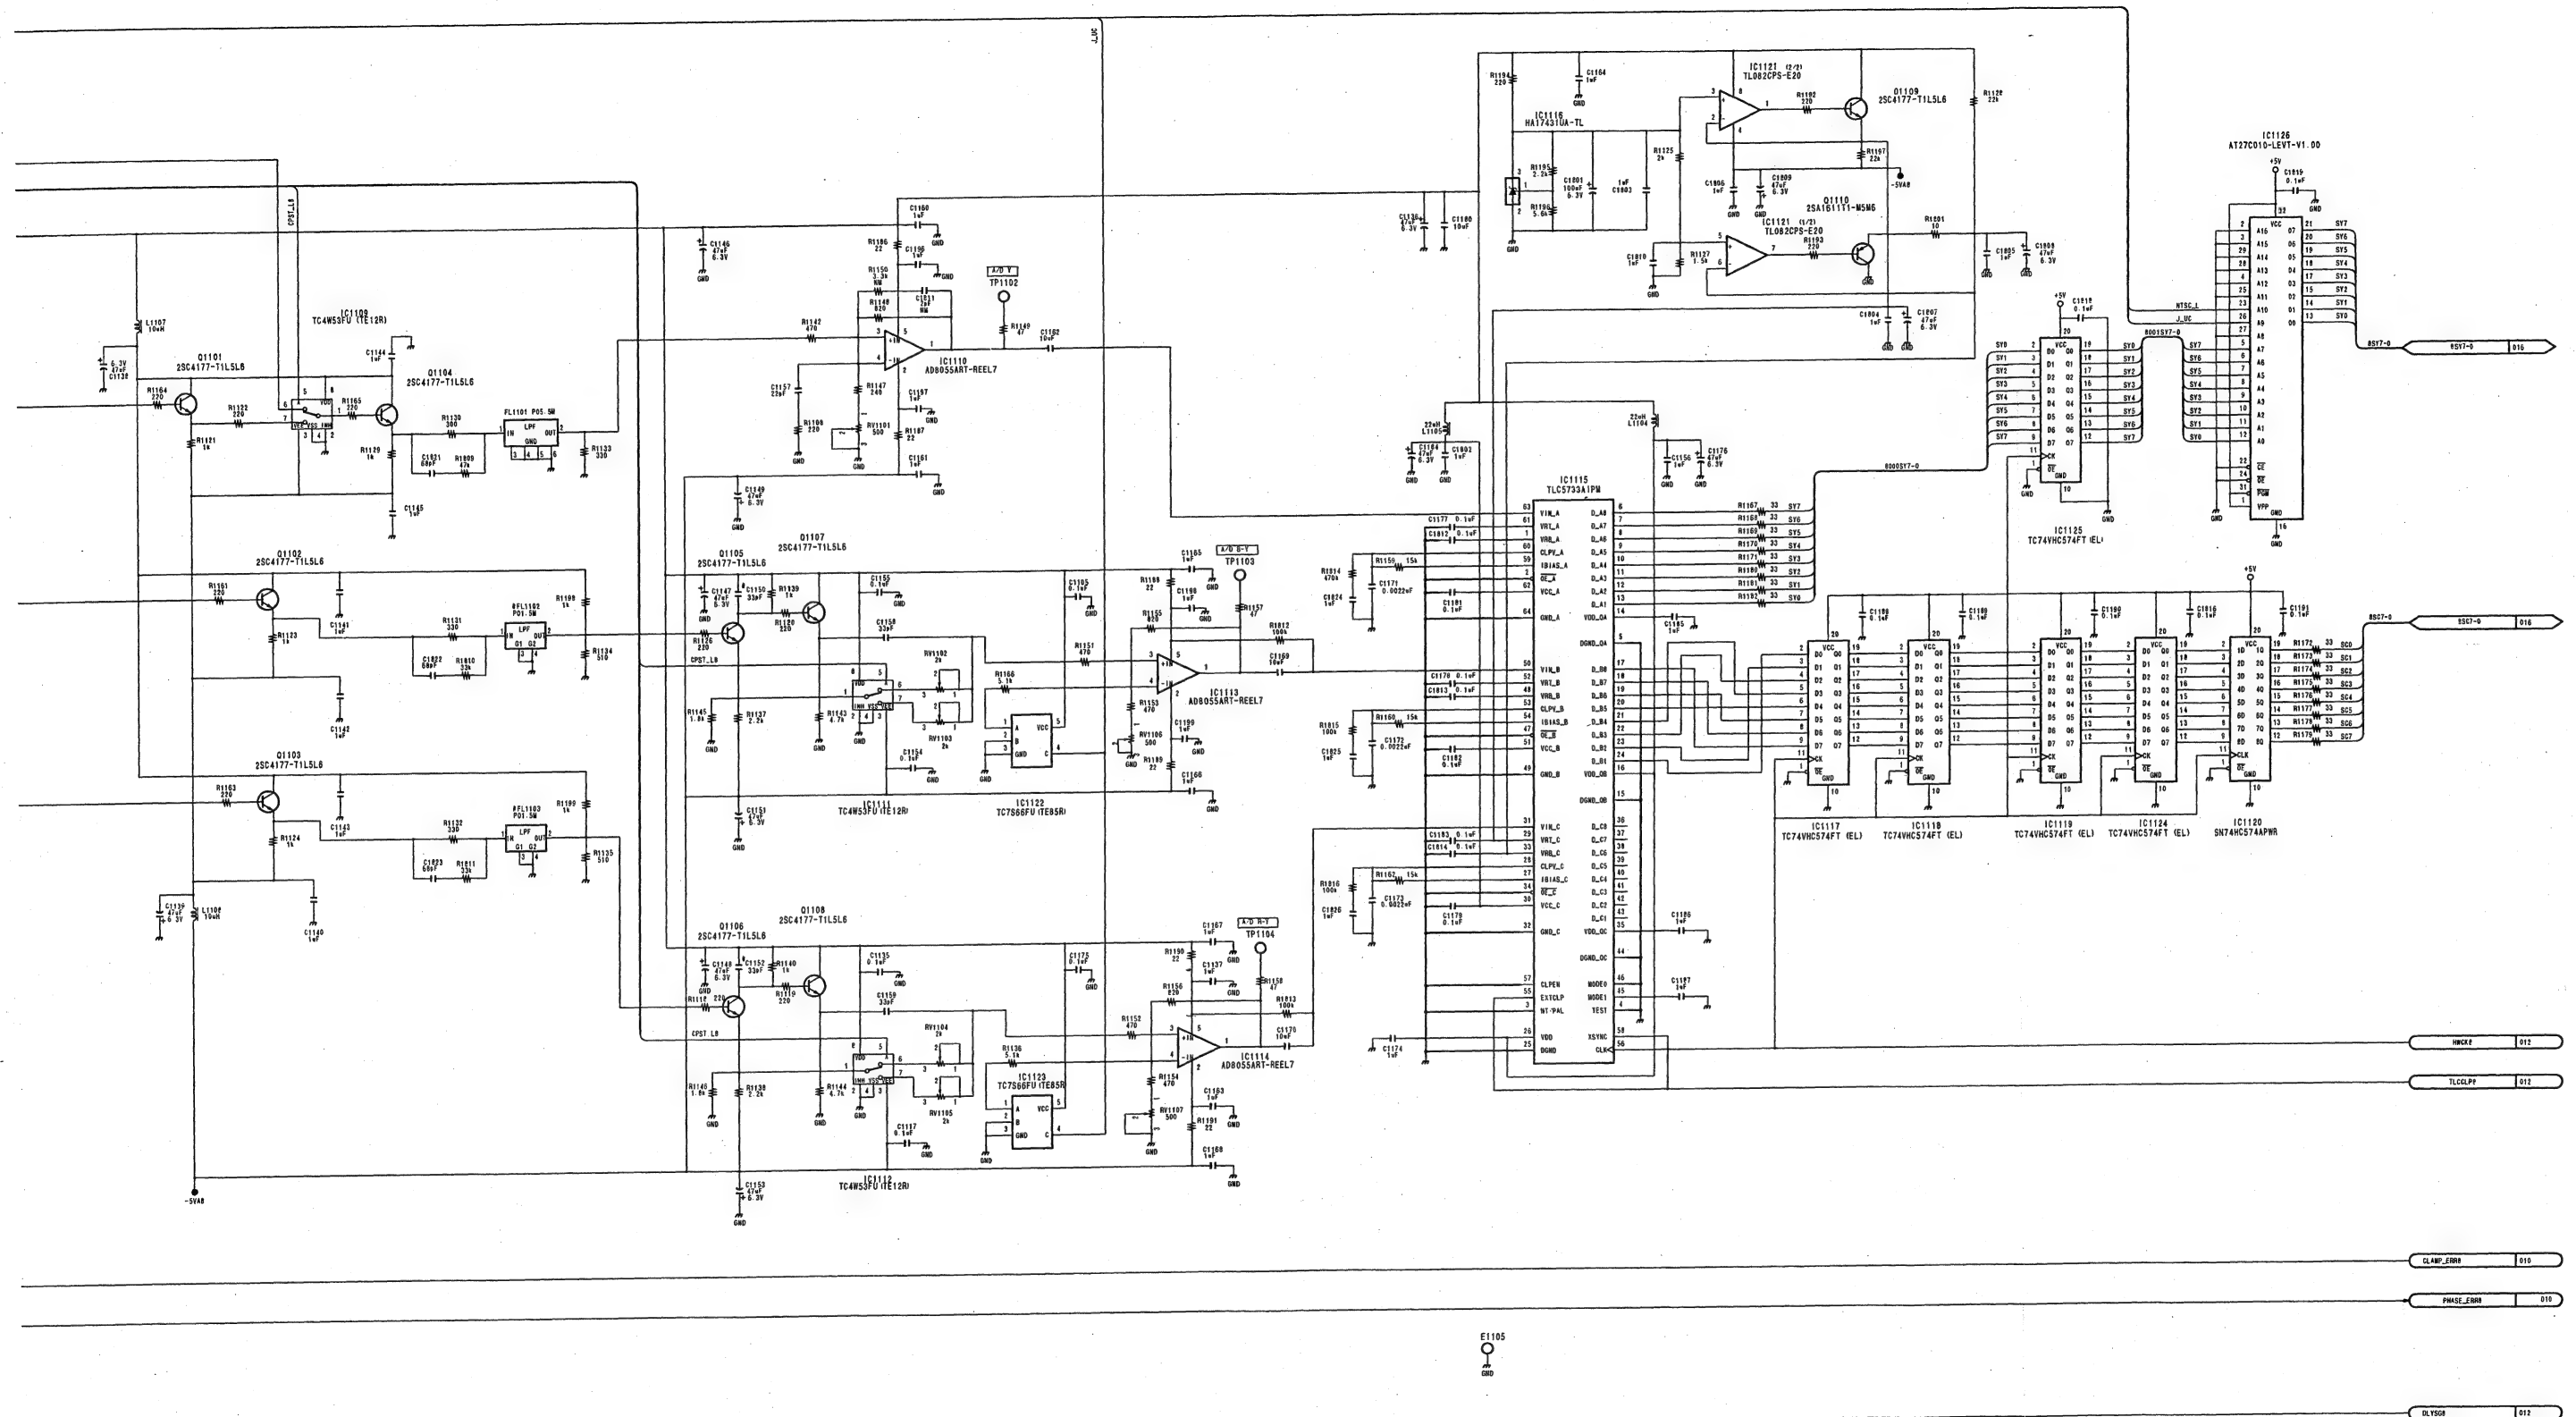


ANALOG COMPOSITE
INPUT BOARD
VIF-19/19P (11/17)
BOARD NO. 1-677-103-12
LOT NO. 003-

BKDF-702 (J): S/N 30111 and Higher
BKDF-702 (UC): S/N 10061 and Higher
BKDF-702P (CE): S/N 40101 and Higher

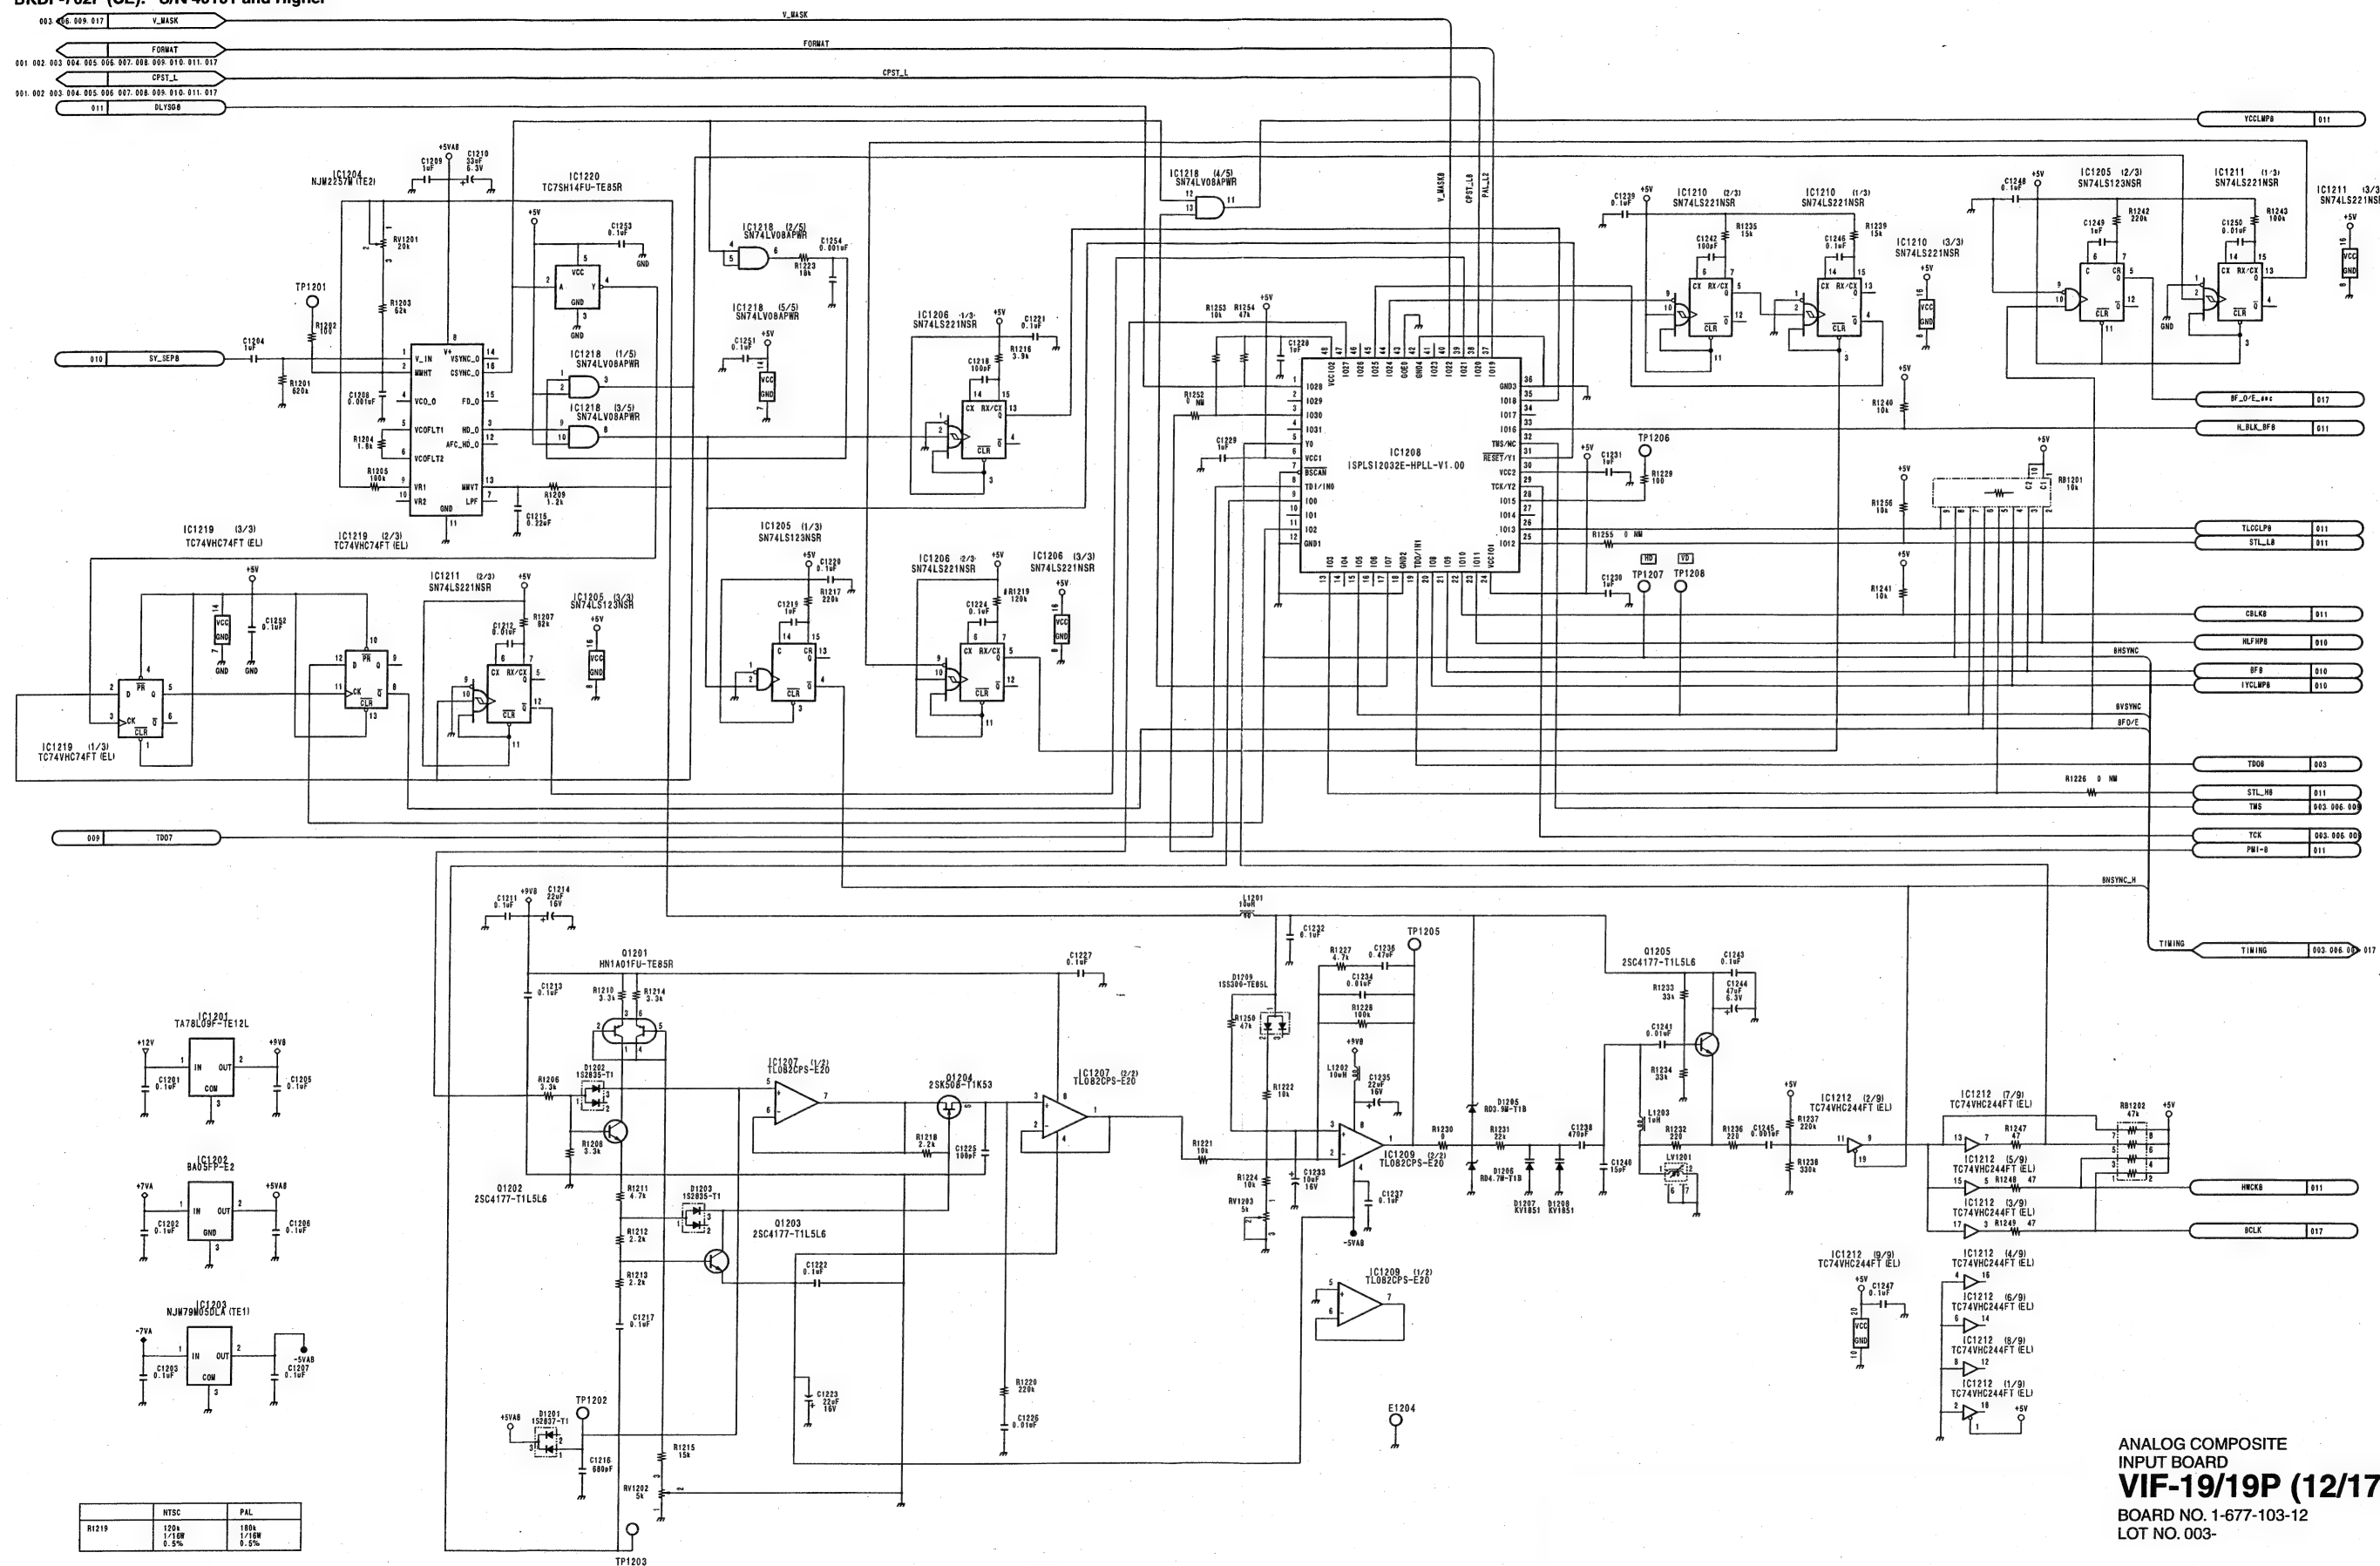

BKDF-702 (J): S/N 30111 and Higher
BKDF-702 (UC): S/N 10061 and Higher
BKDF-702P (CE): S/N 40101 and Higher

FR SYNC 5

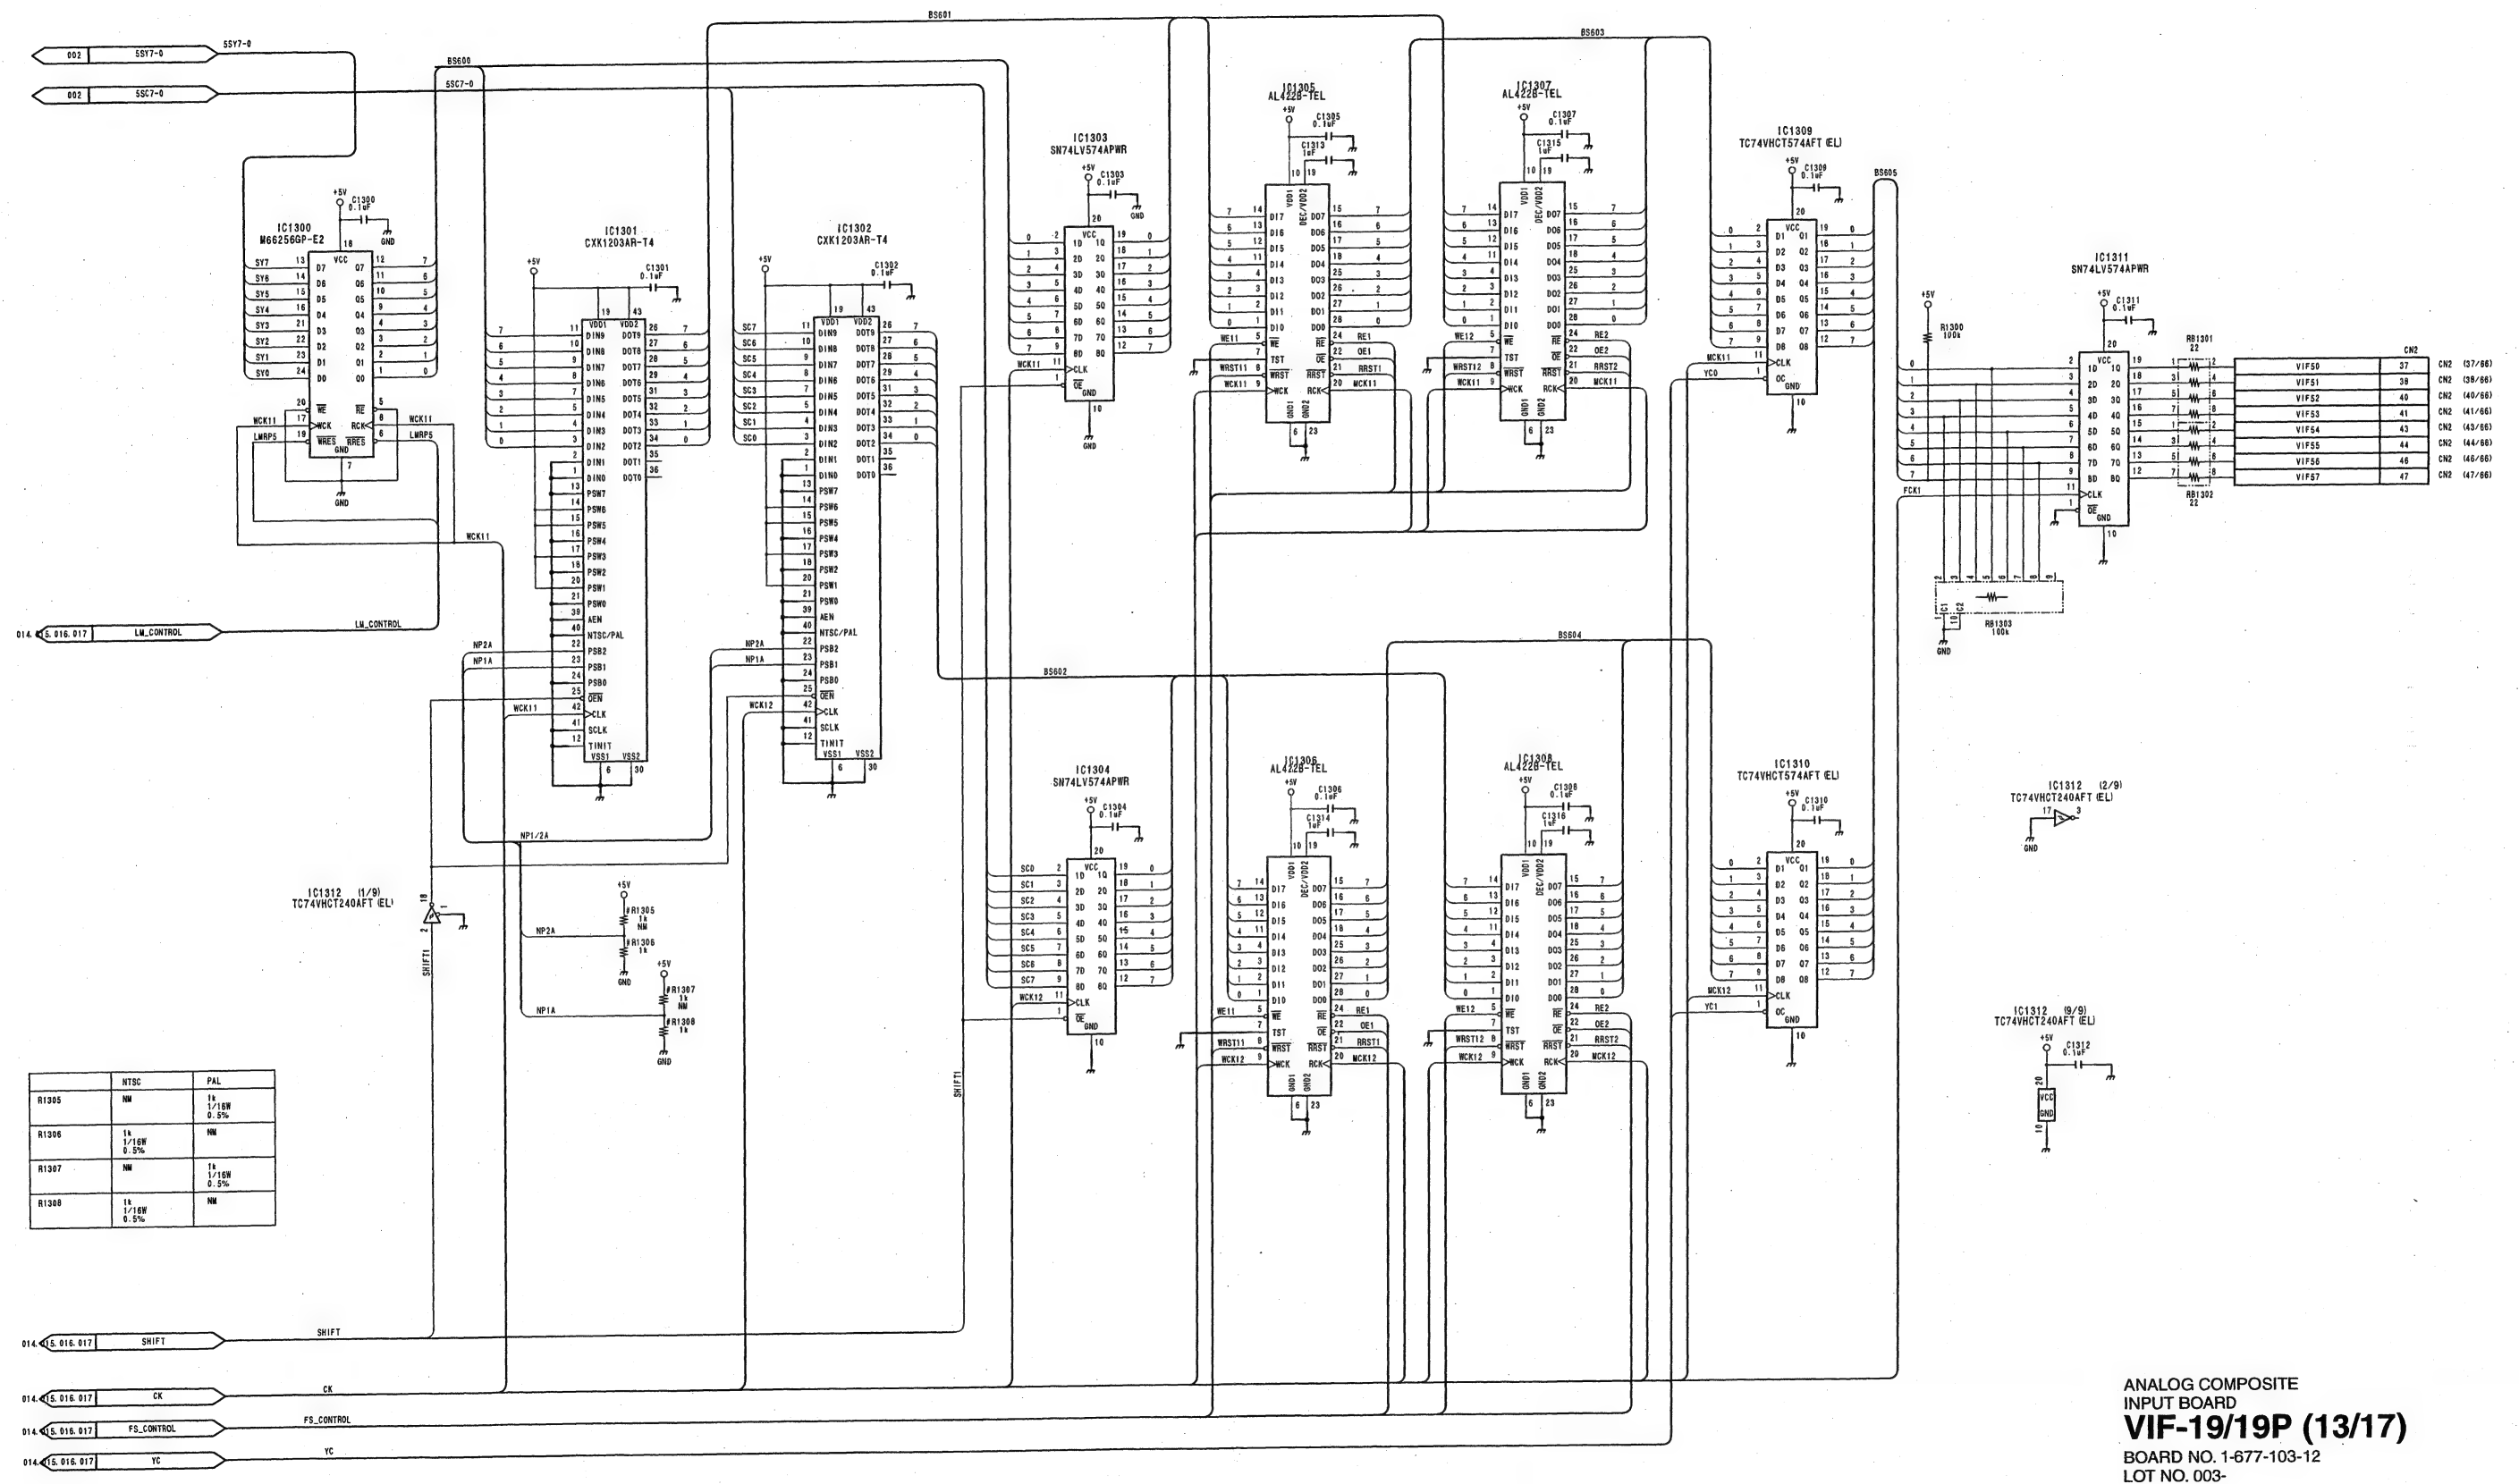

DFS-700/700P


4-91

4-91

ANALOG COMPOSITE
INPUT BOARD
VIF-19/19P (13/17)
BOARD NO. 1-677-103-12
LOT NO. 003-

BKDF-702 (J): S/N 30111 and Higher
BKDF-702 (UC): S/N 10061 and Higher
BKDF-702P (CE): S/N 40101 and Higher


FR SYNC 6

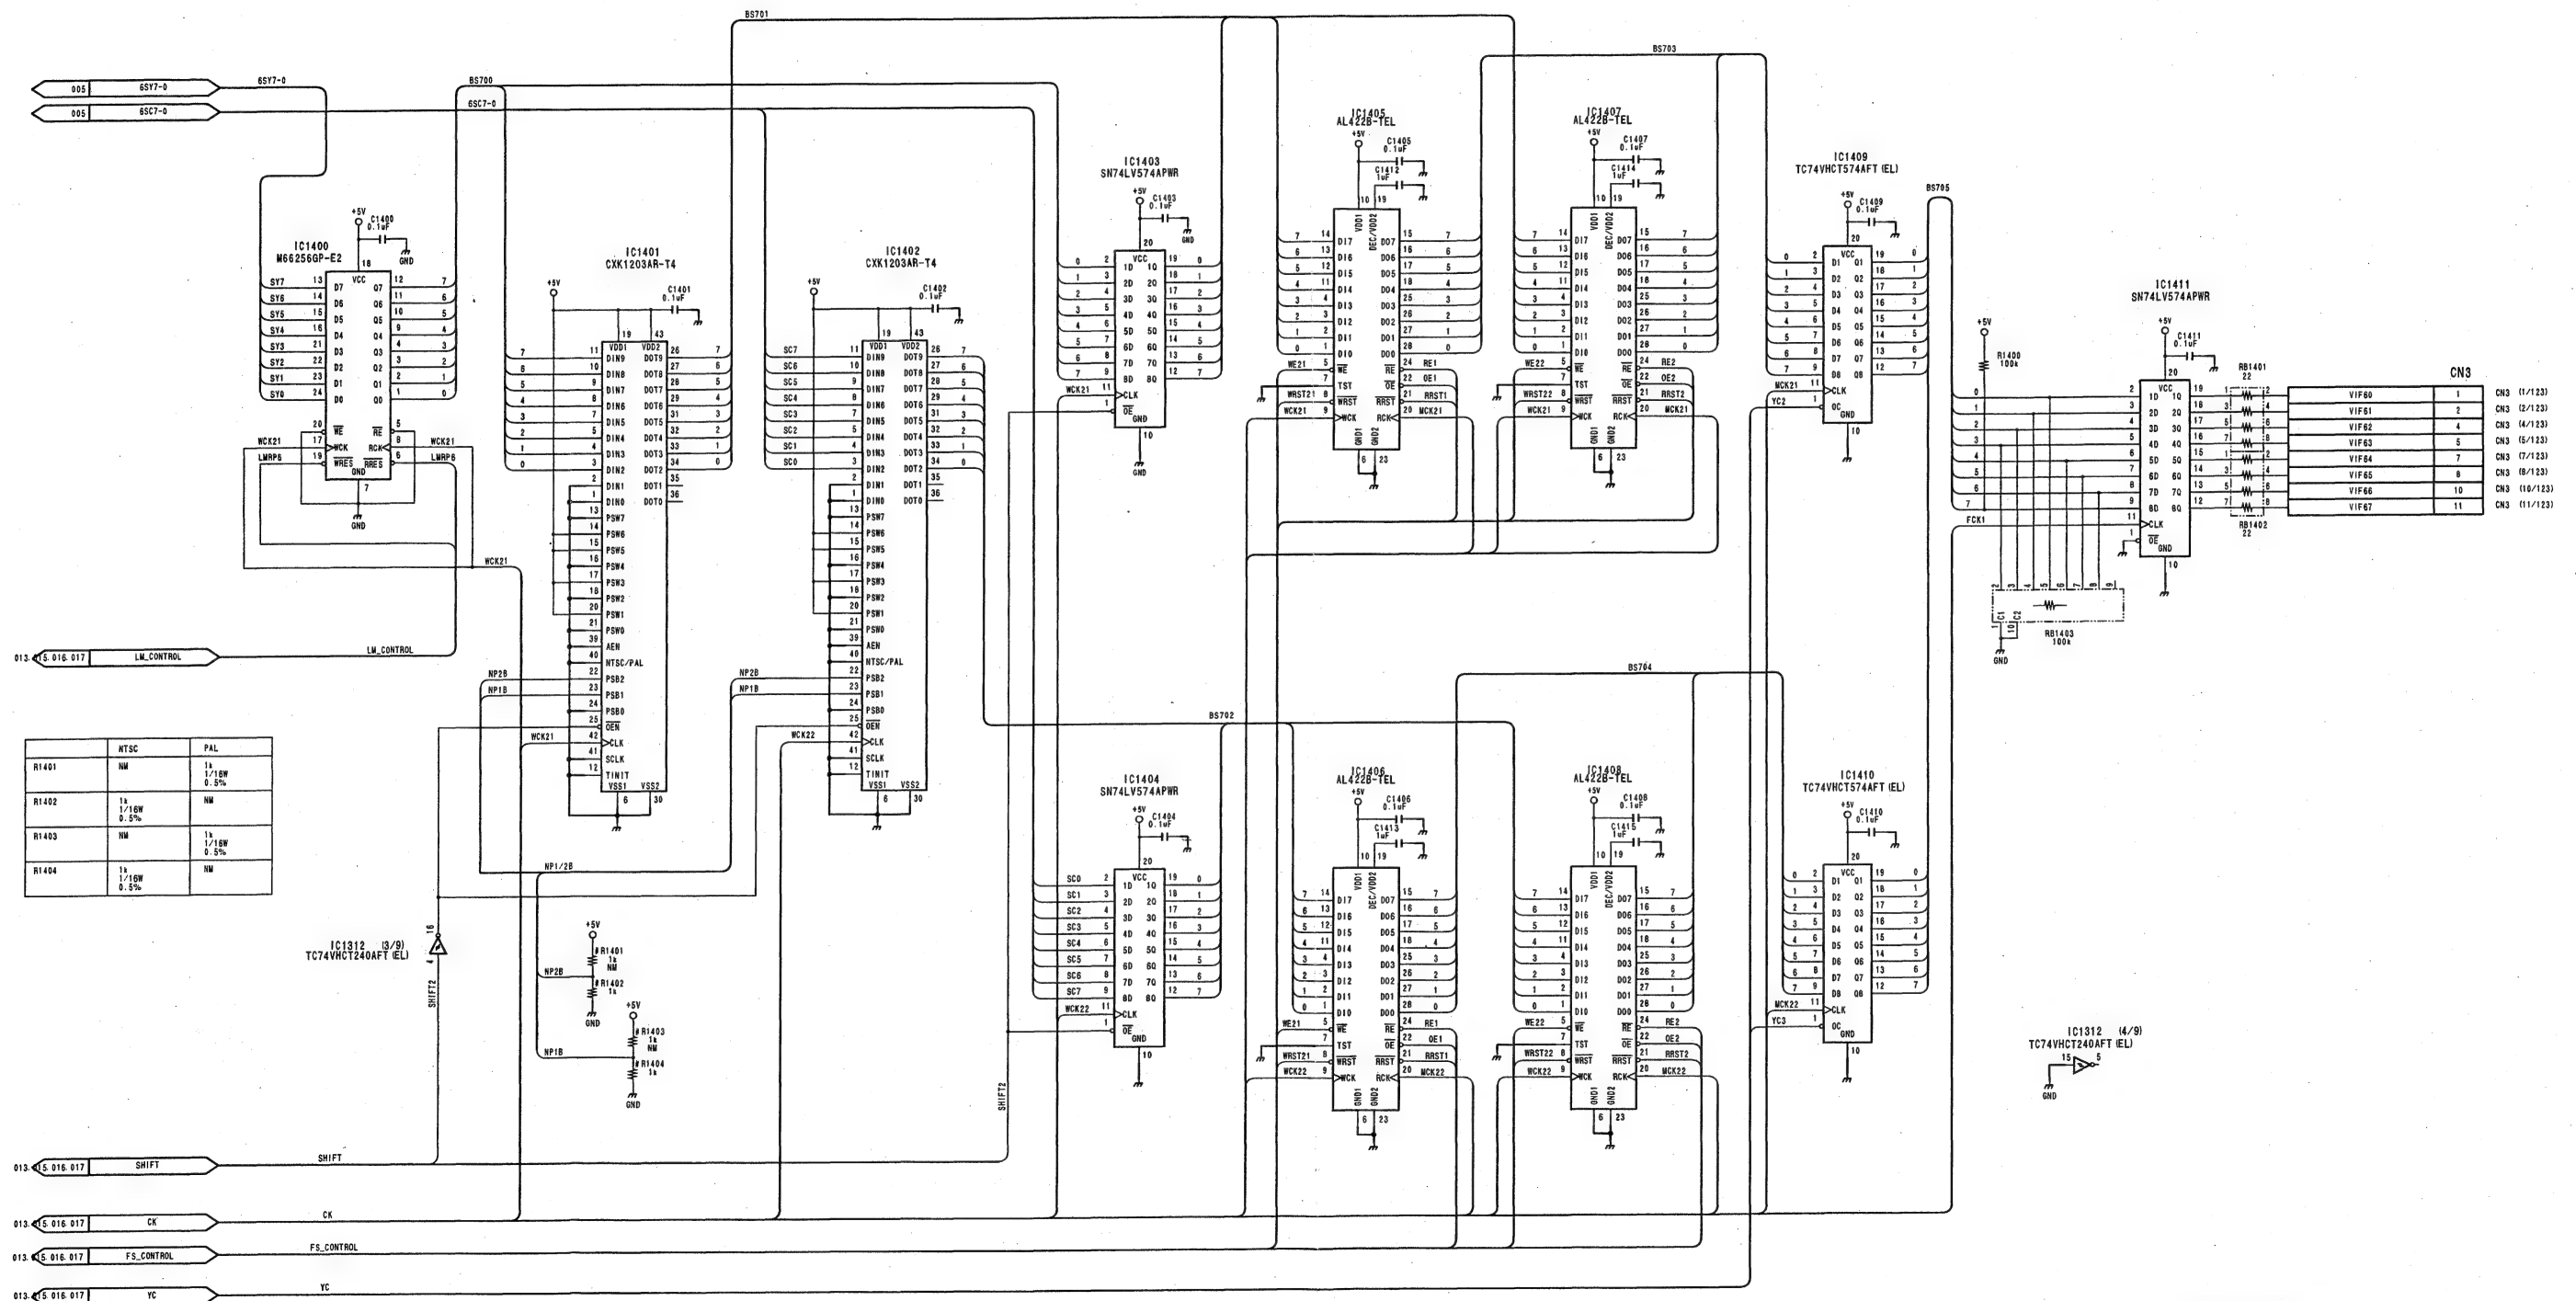

ANALOG COMPOSITE
INPUT BOARD
VIF-19/19P (14/17)
BOARD NO. 1-677-103-12
LOT NO. 003-

BKDF-702 (J): S/N 30111 and Higher
BKDF-702 (UC): S/N 10061 and Higher
BKDF-702P (CE): S/N 40101 and Higher


FR SYNC 7

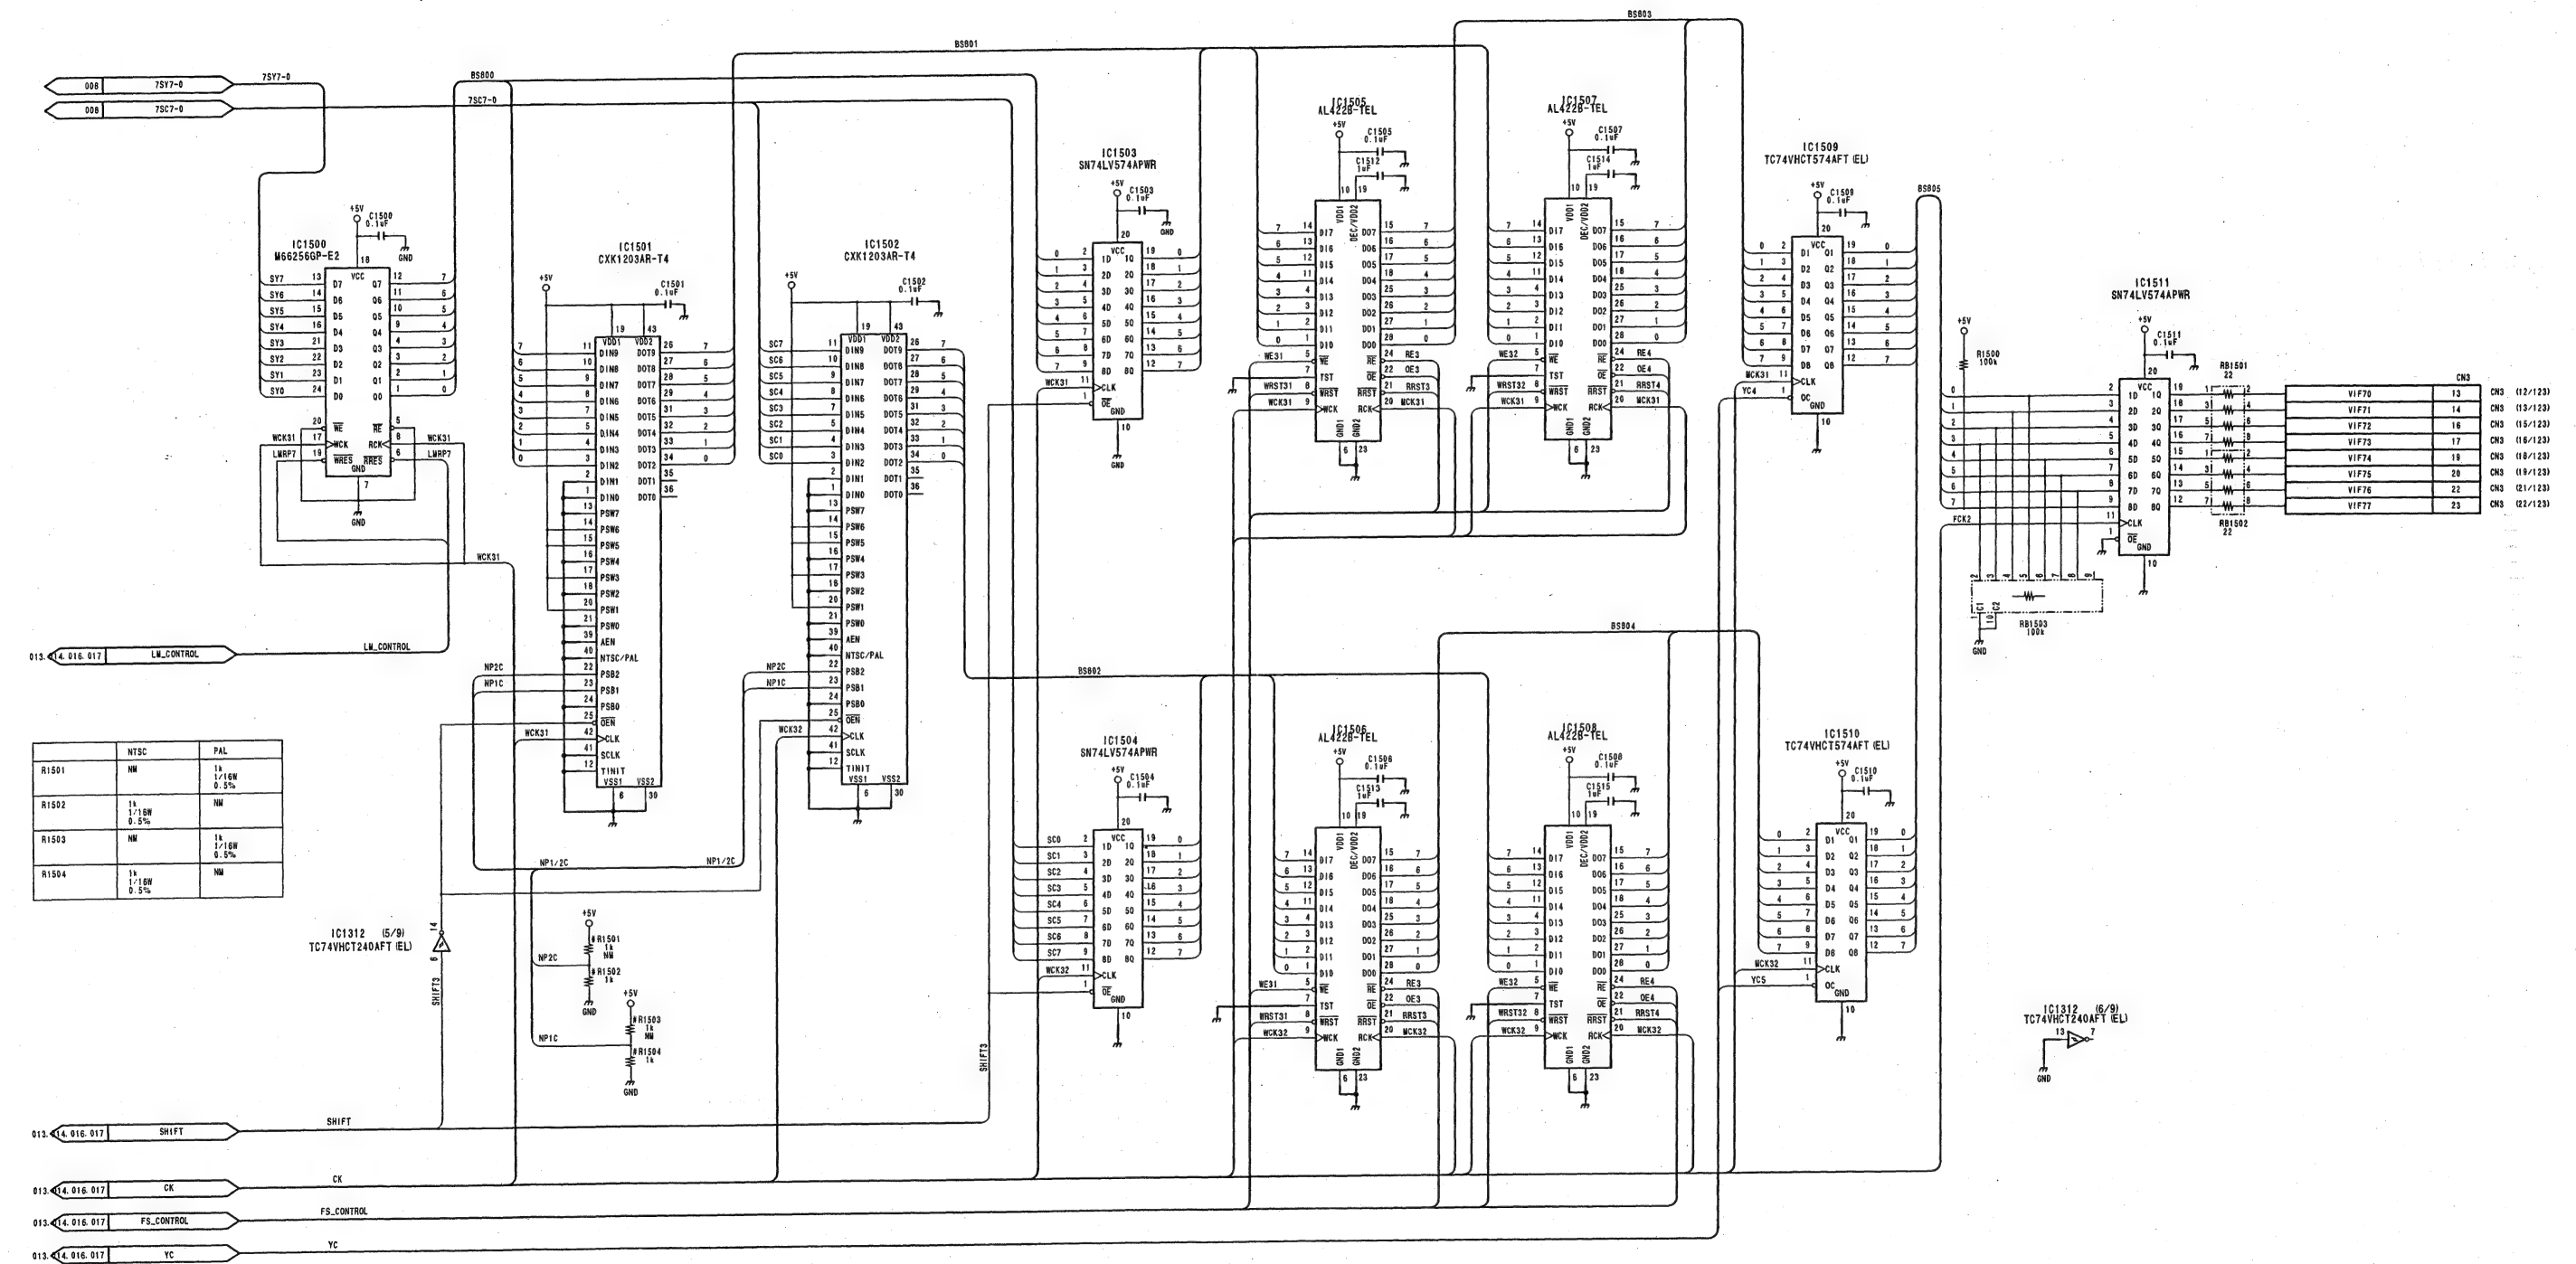


ANALOG COMPOSITE
INPUT BOARD
VIF-19/19P (15/17)
BOARD NO. 1-677-103-12
LOT NO. 003-


BKDF-702 (J): S/N 30111 and Higher
BKDF-702 (UC): S/N 10061 and Higher
BKDF-702P (CE): S/N 40101 and Higher

PARALLEL I/F & TIMING GEN

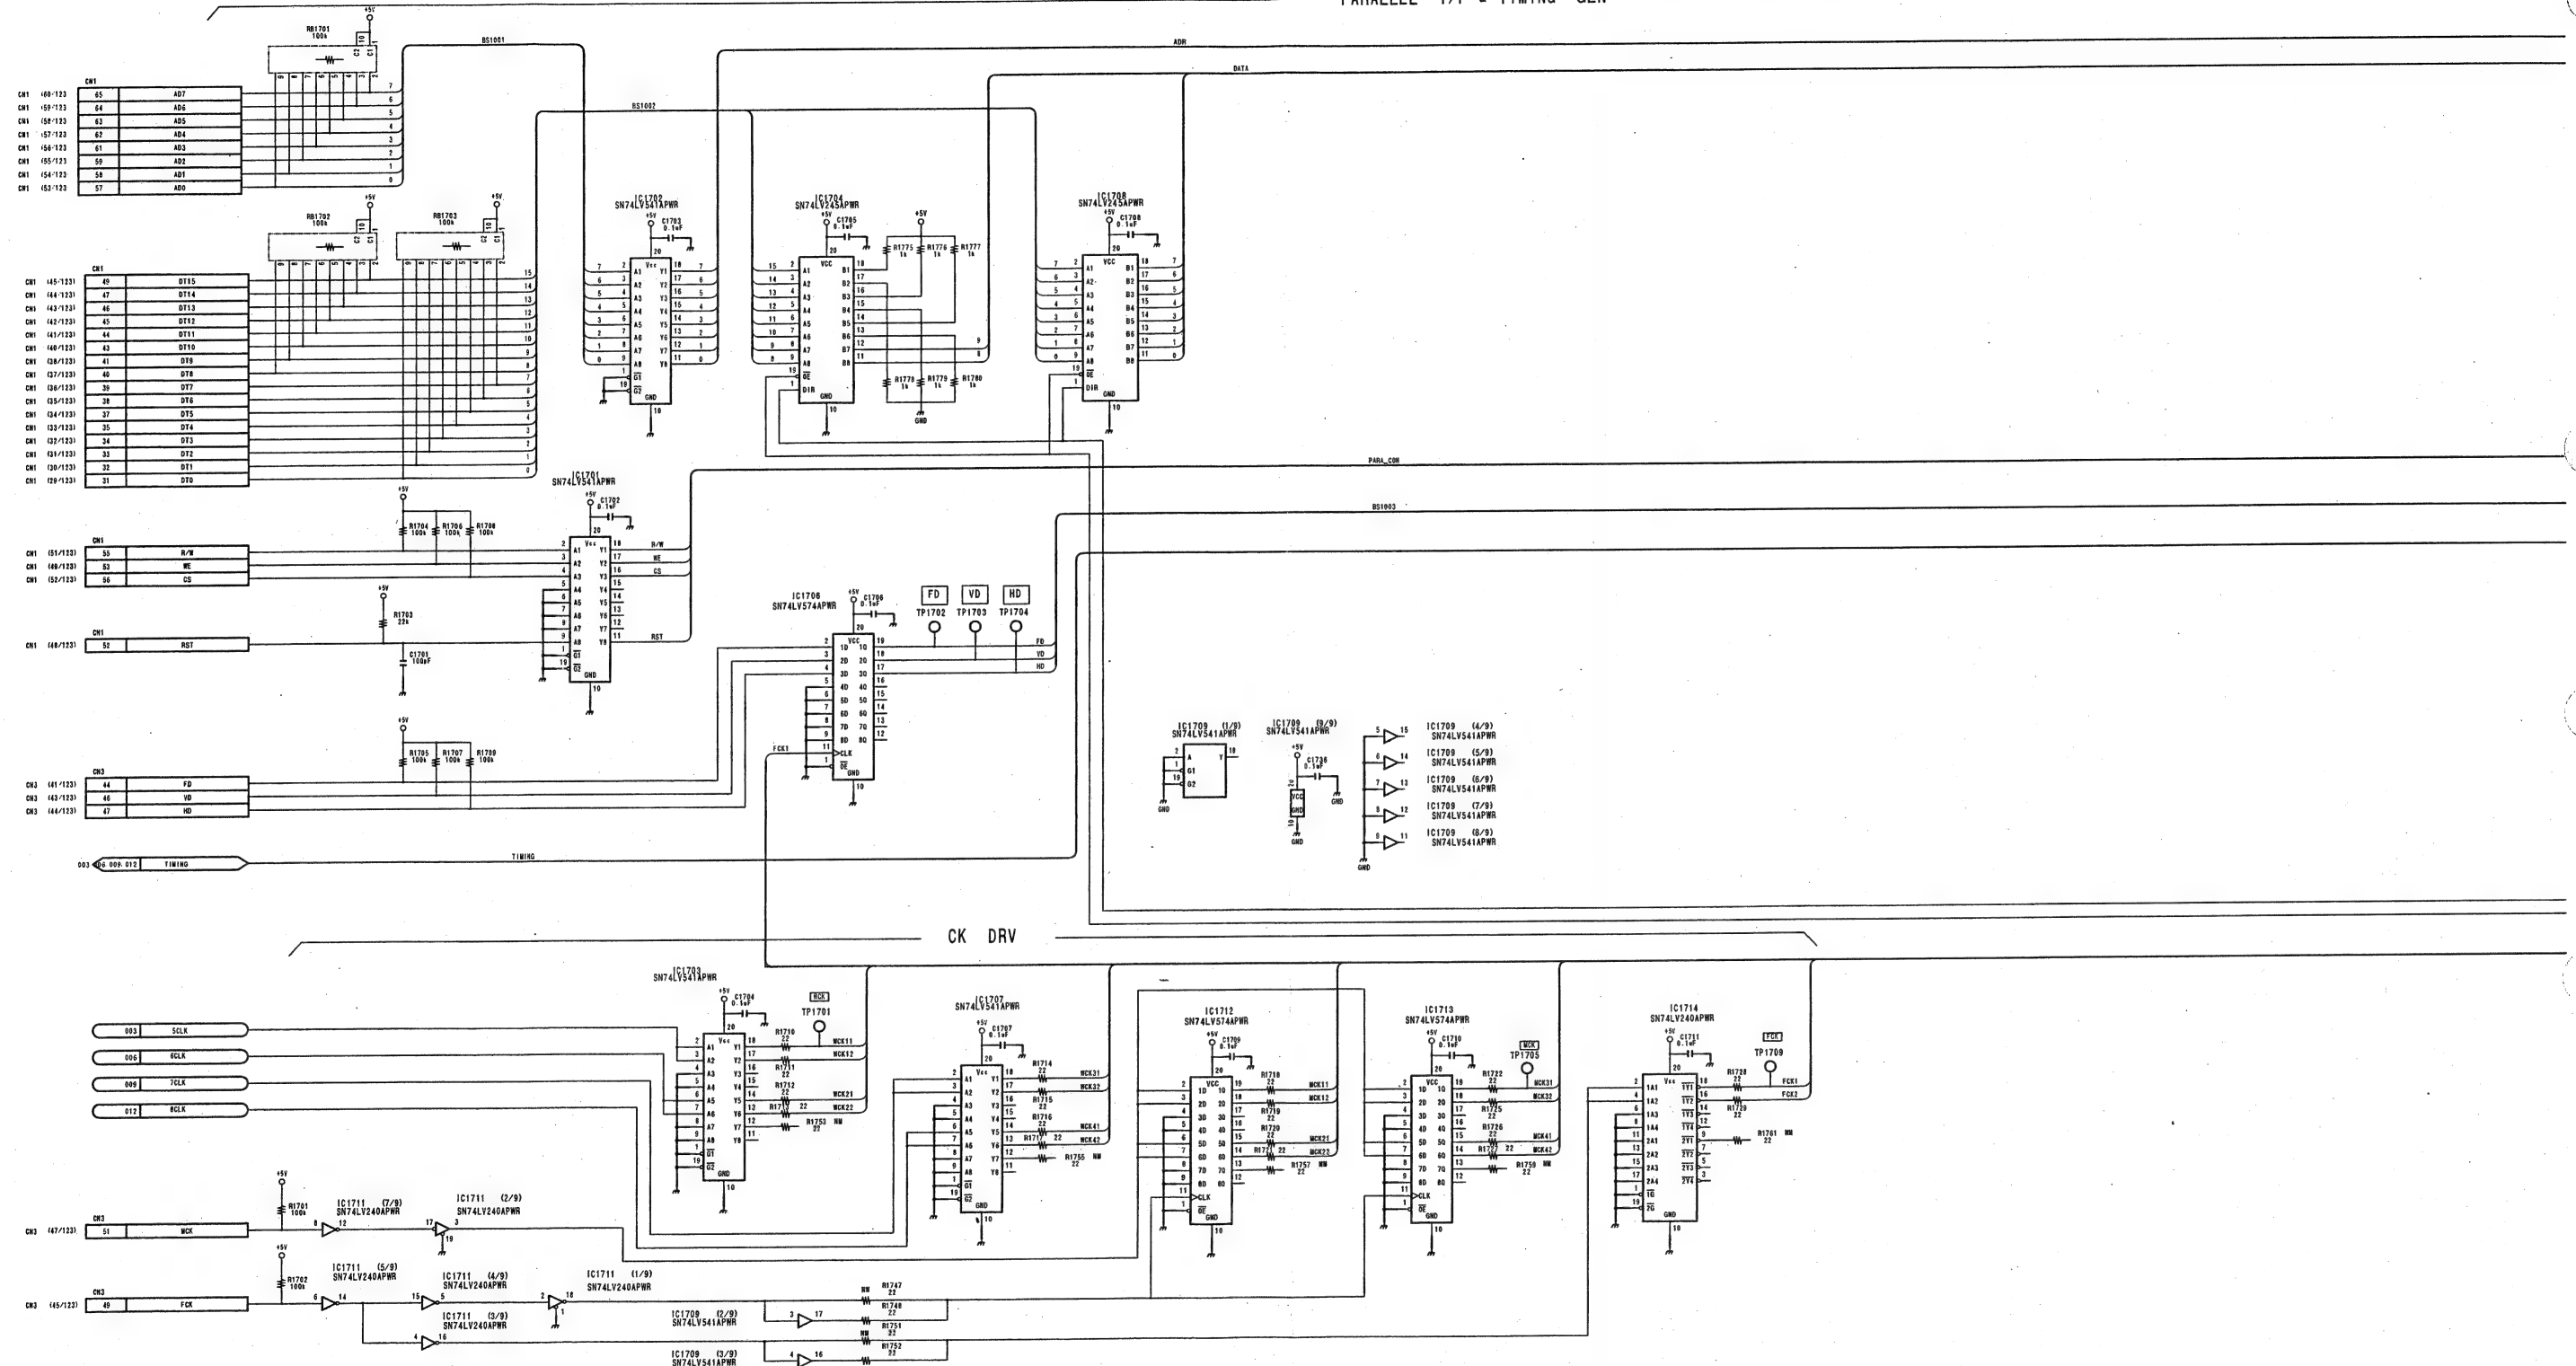



BKDF-702 (J): S/N 30001 through 30110
BKDF-702 (UC): S/N 10001 through 10060

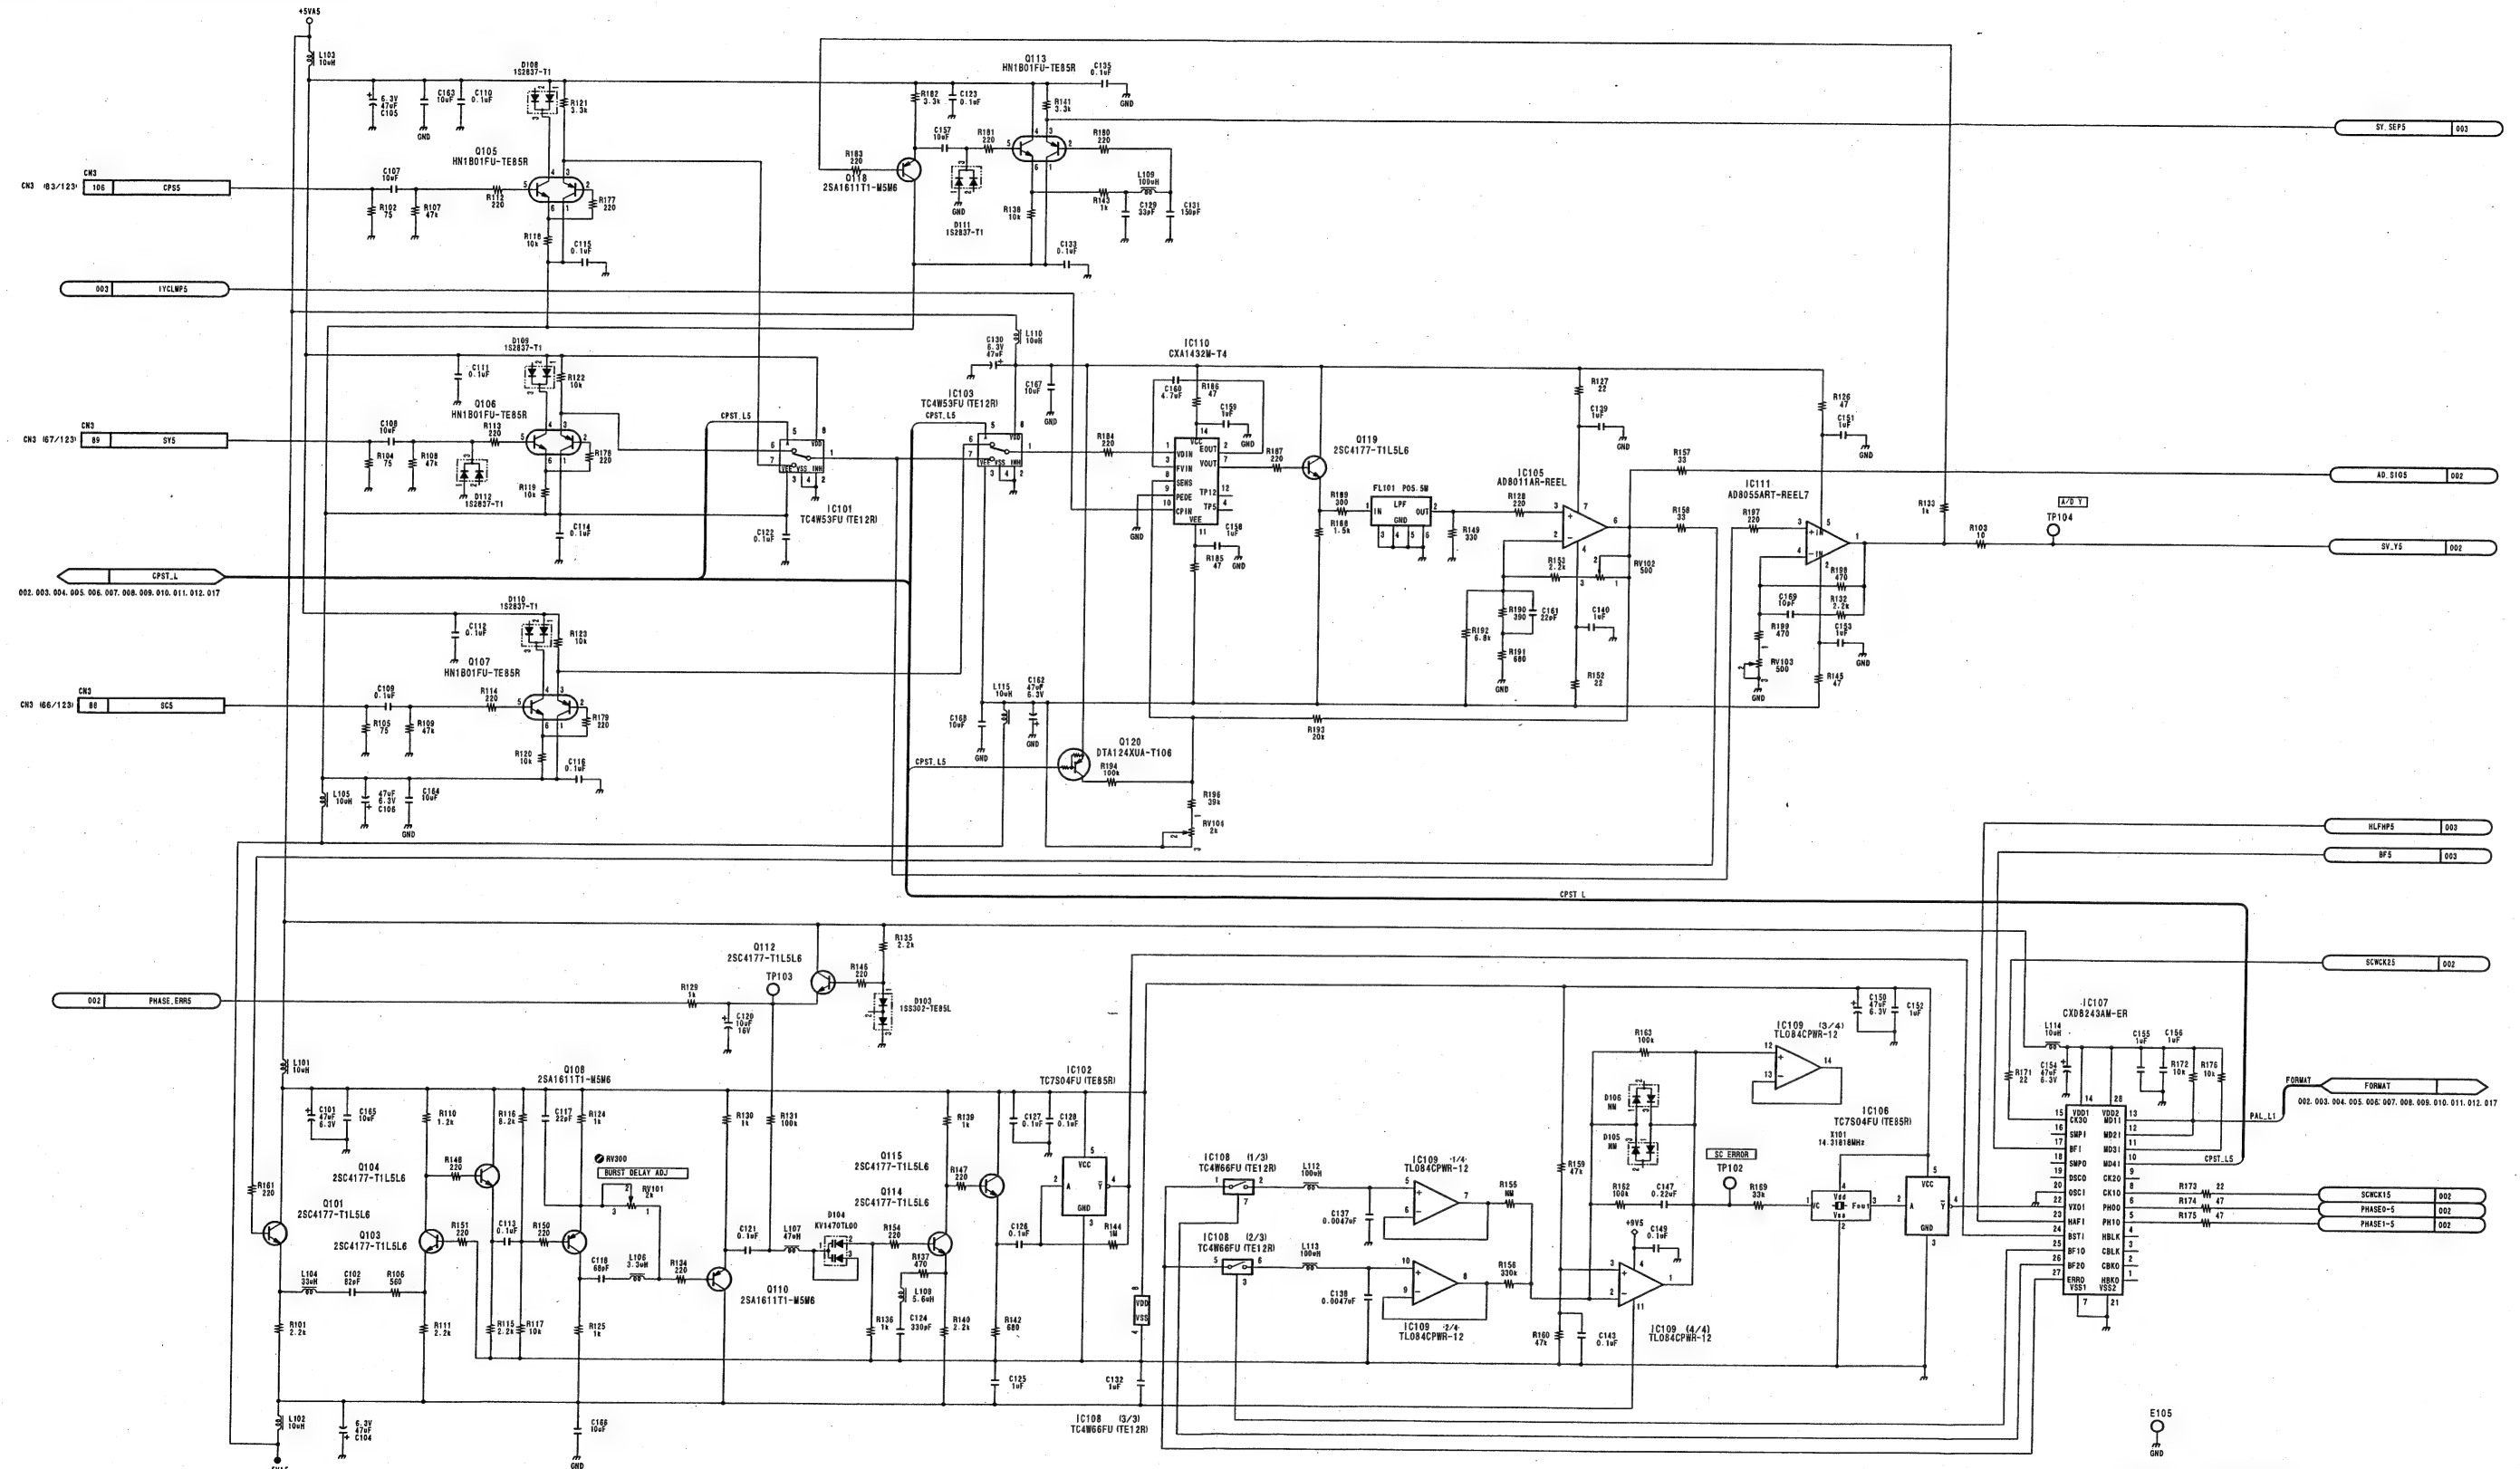

ANALOG COMPOSITE
INPUT BOARD
VIF-19 (1/17)
BOARD NO. 1-677-103-11
LOT NO. 912-002

DFS-700/700P


A B C D E F G H

BKDF-702 (J): S/N 30001 through 30110
BKDF-702 (UC): S/N 10001 through 10060

1

2

3

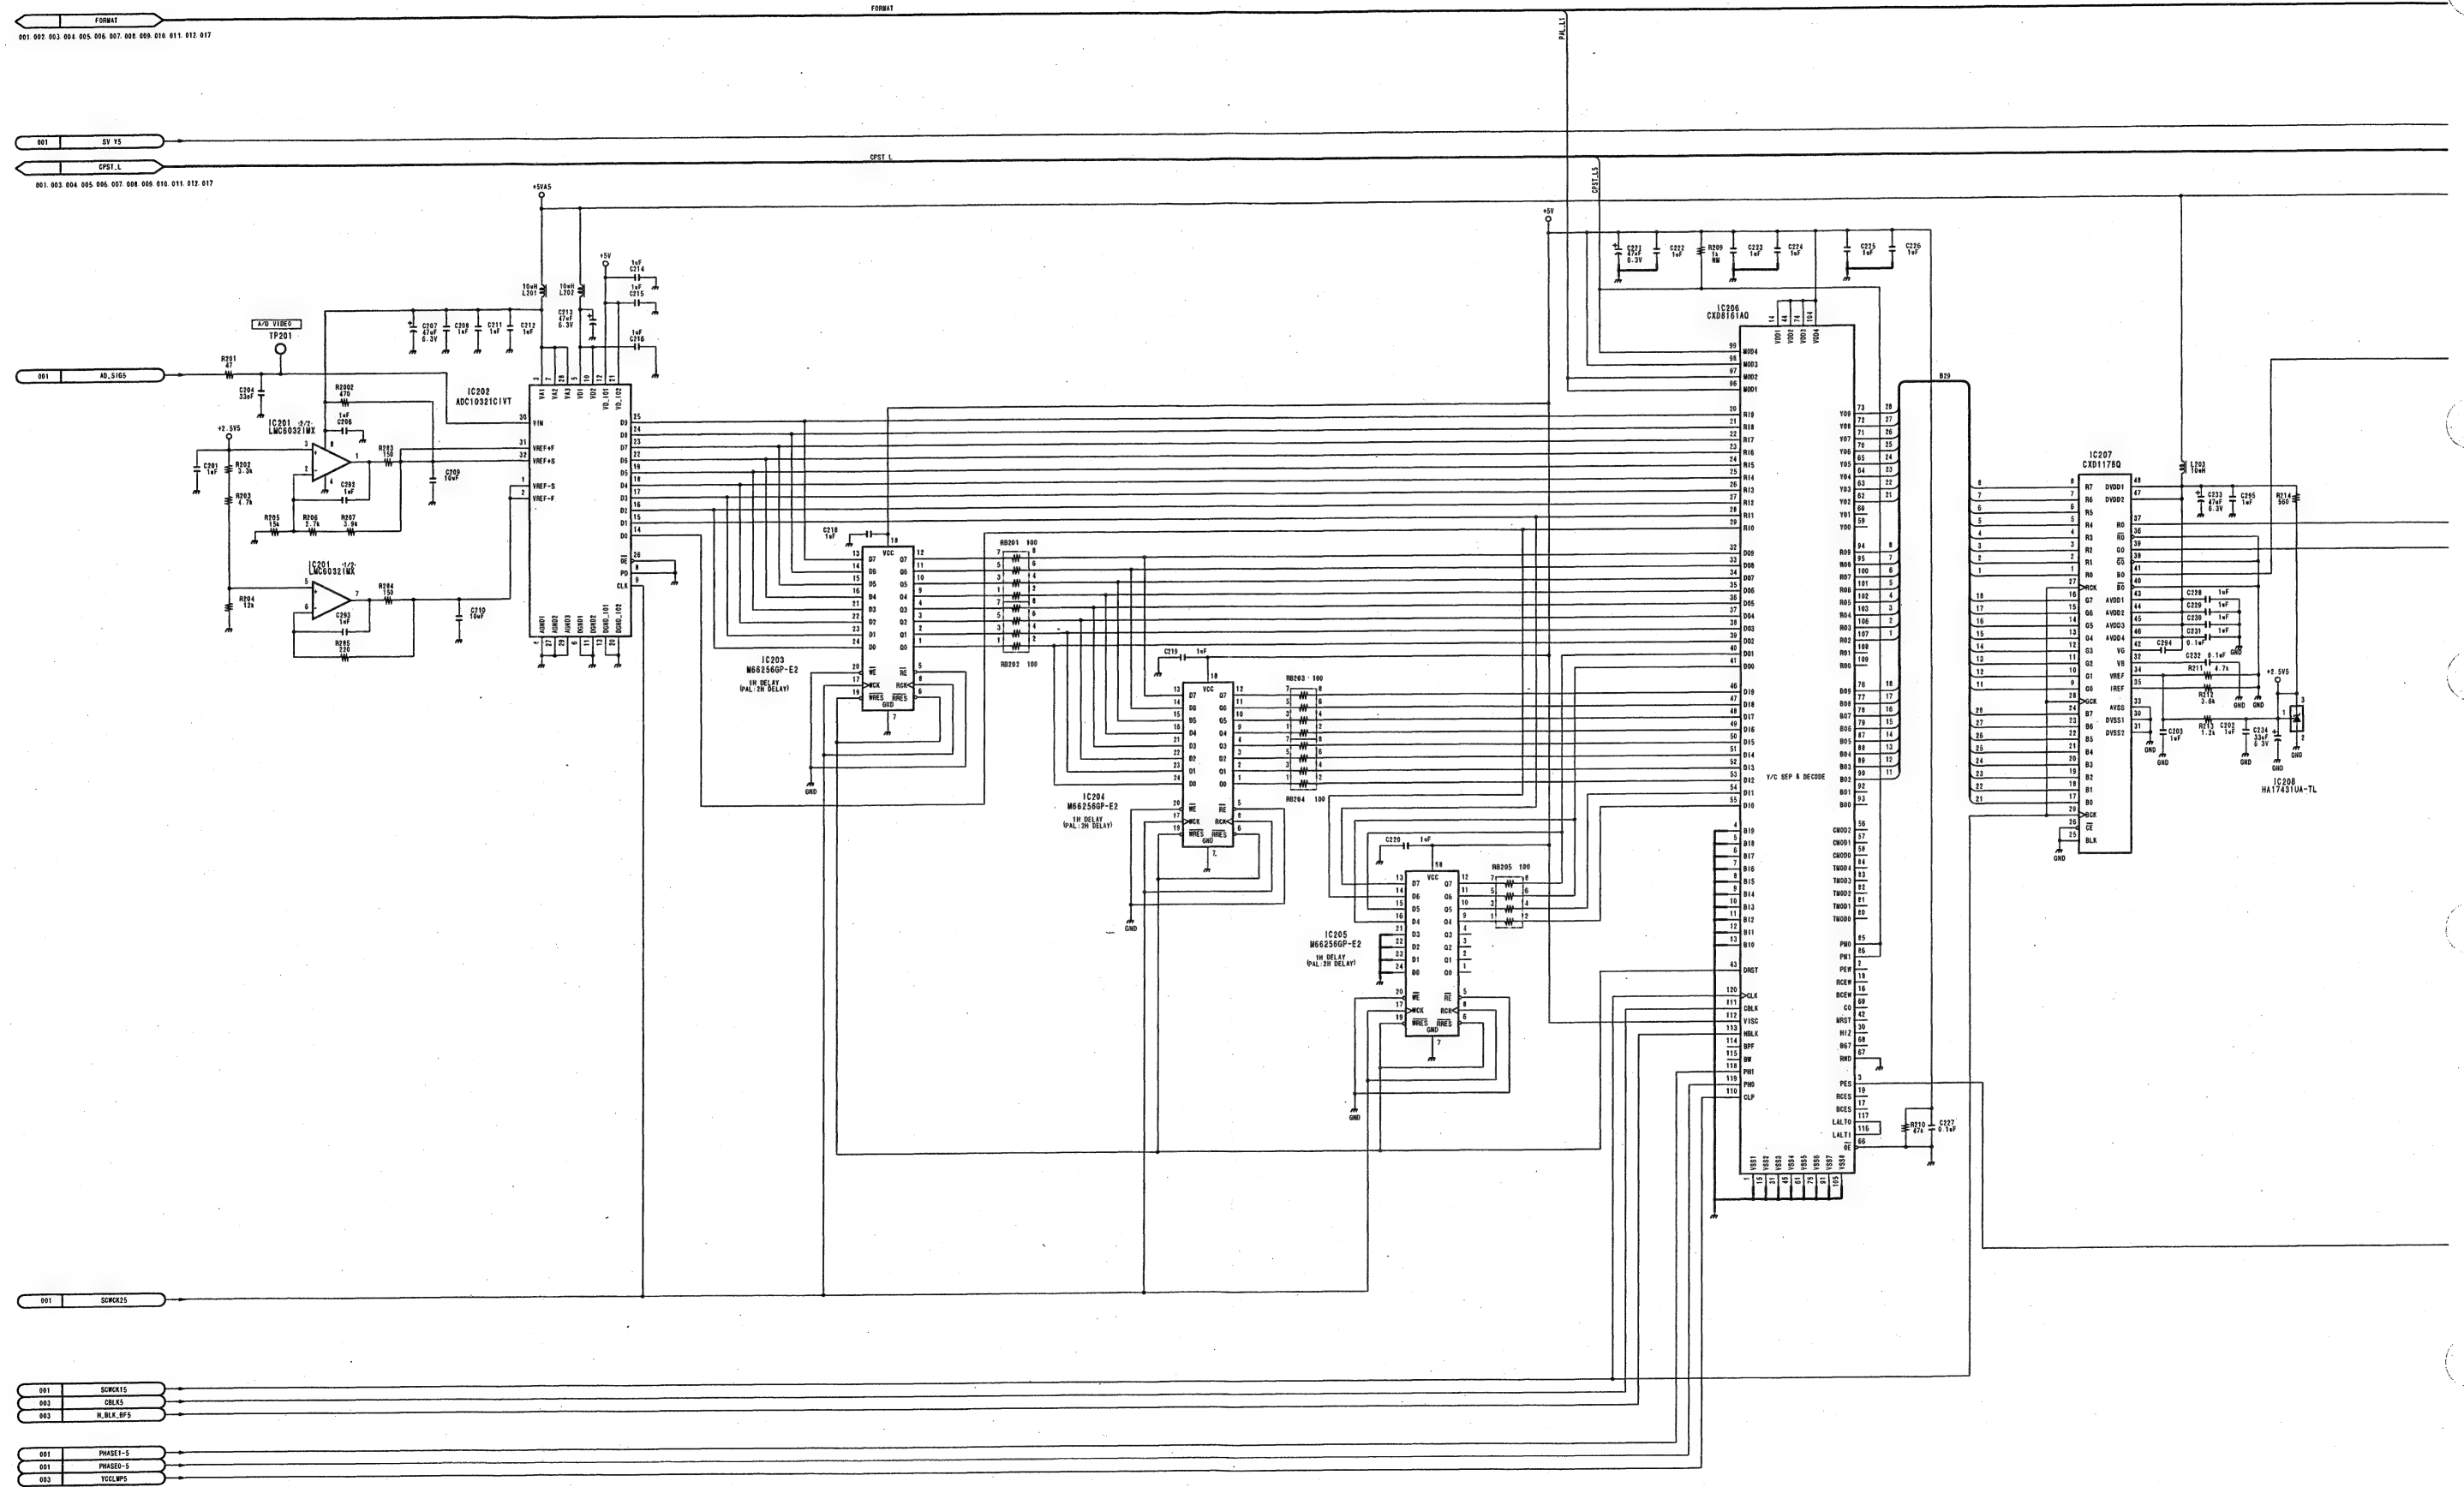

4-100

4-100

DFS-700/700P

A

B

C


D

E

F

G

H

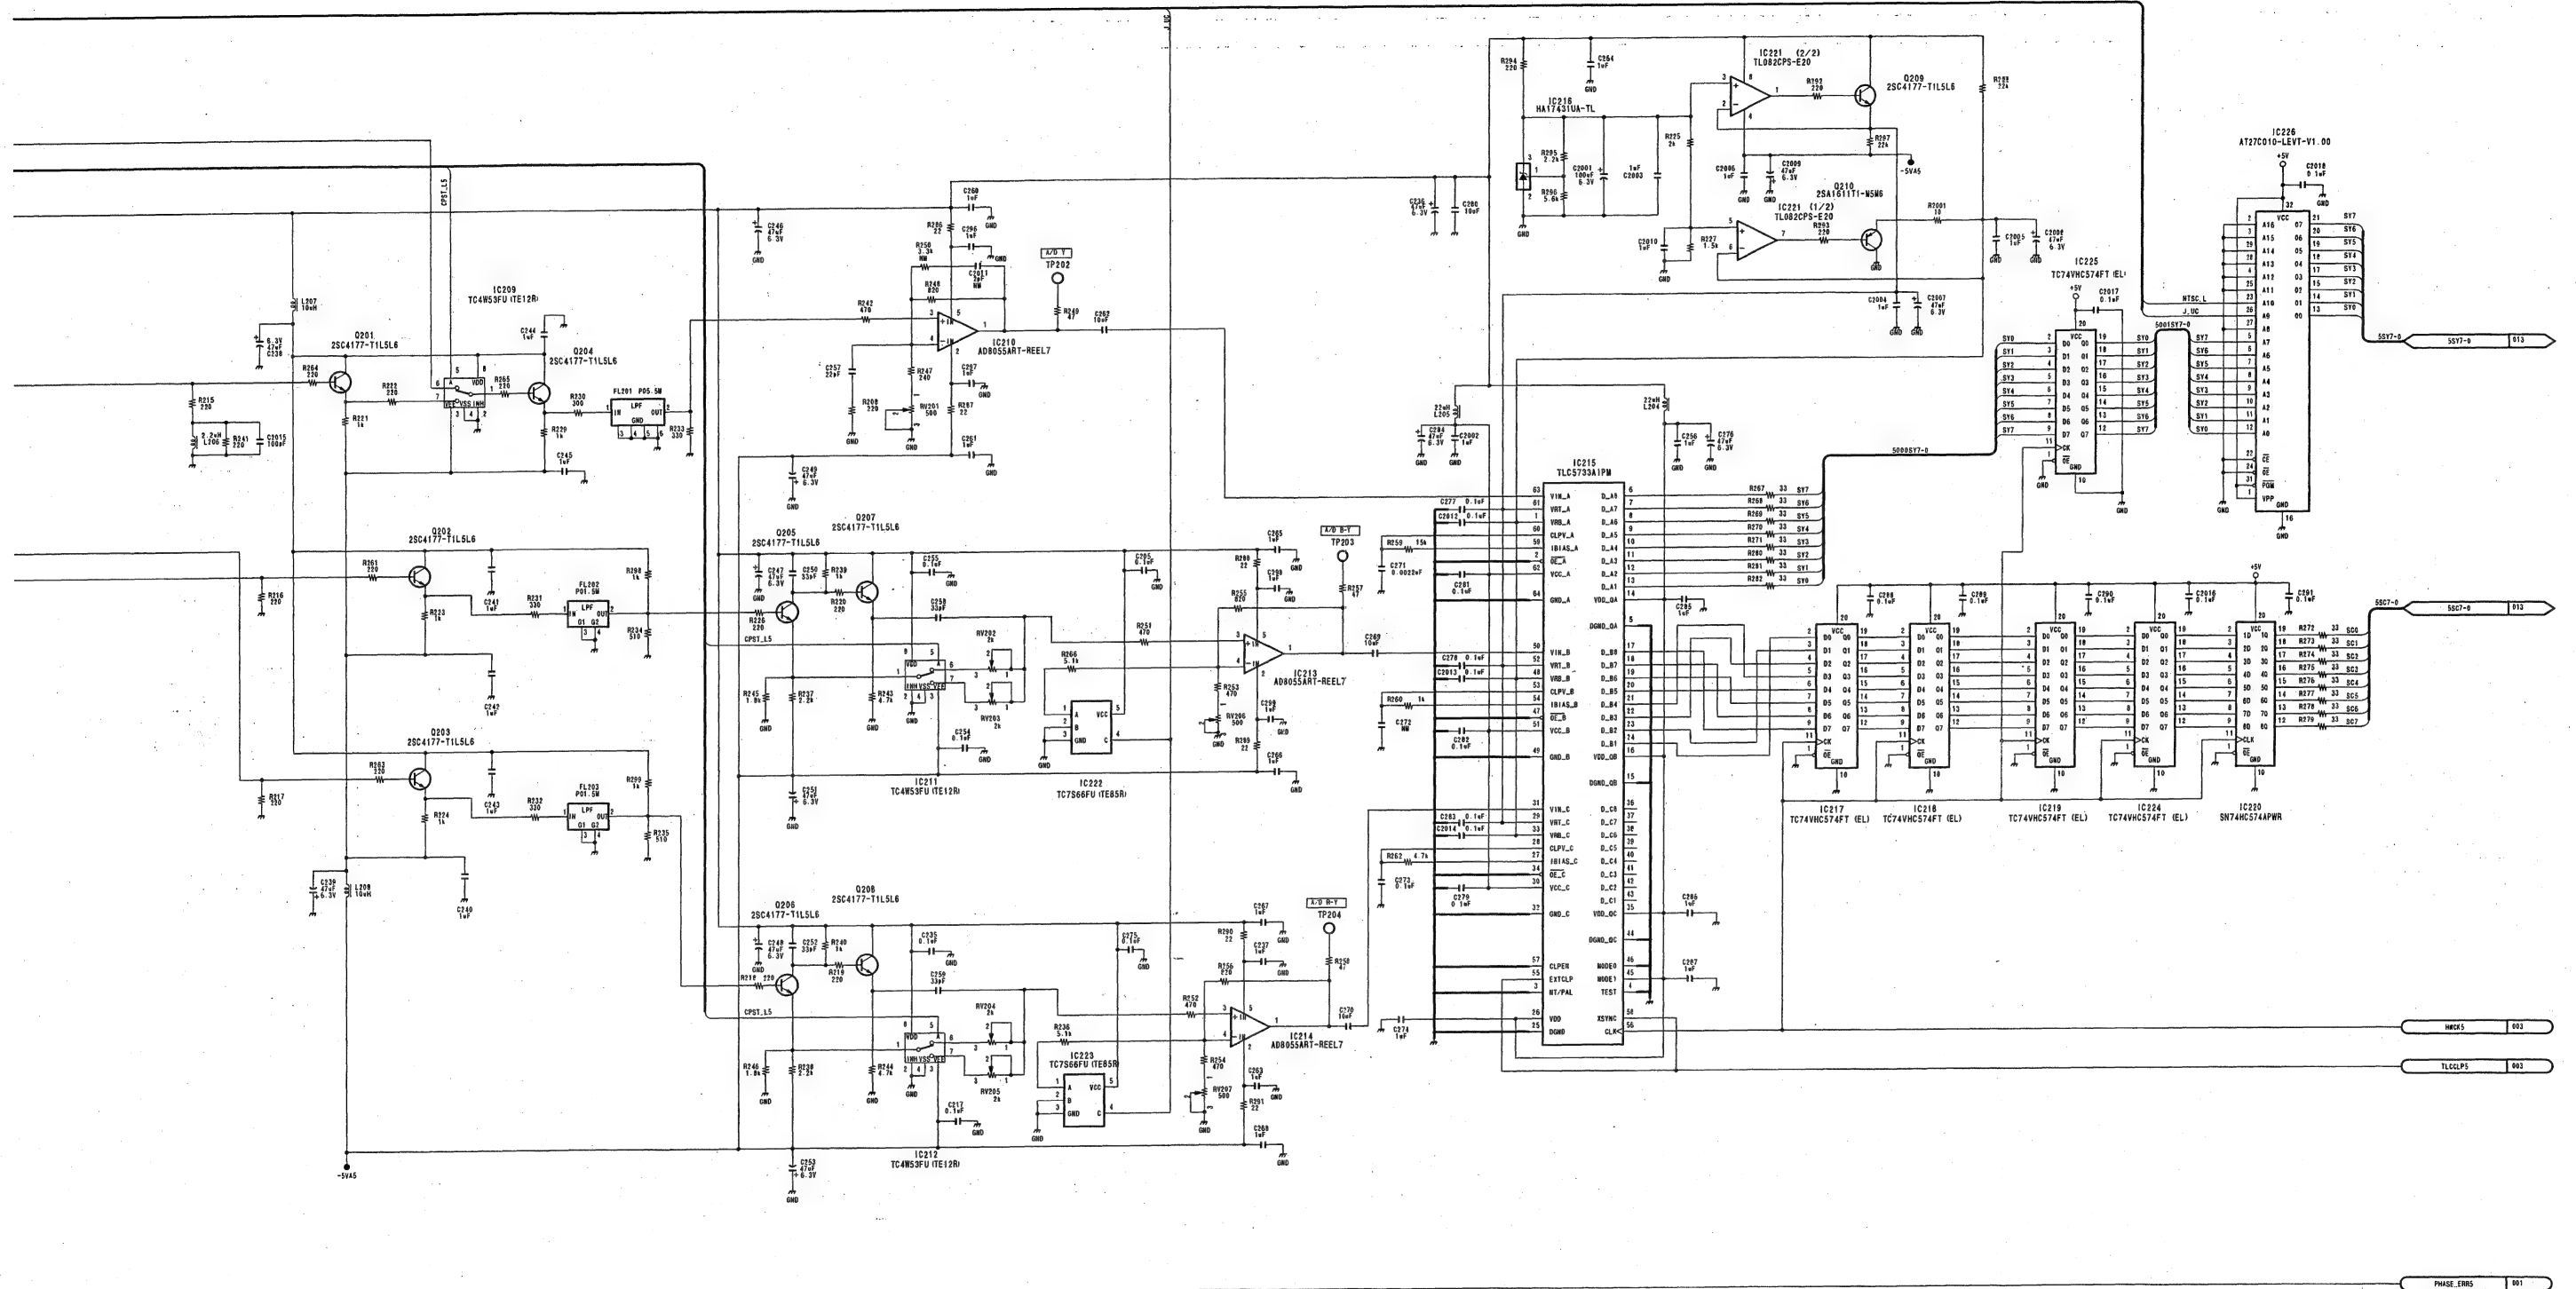


ANALOG COMPOSITE
INPUT BOARD
VIF-19 (2/17)
BOARD NO. 1-677-103-11
LOT NO. 912-002

BKDF-702 (J): S/N 30001 through 30110
BKDF-702 (UC): S/N 10001 through 10060


1

2

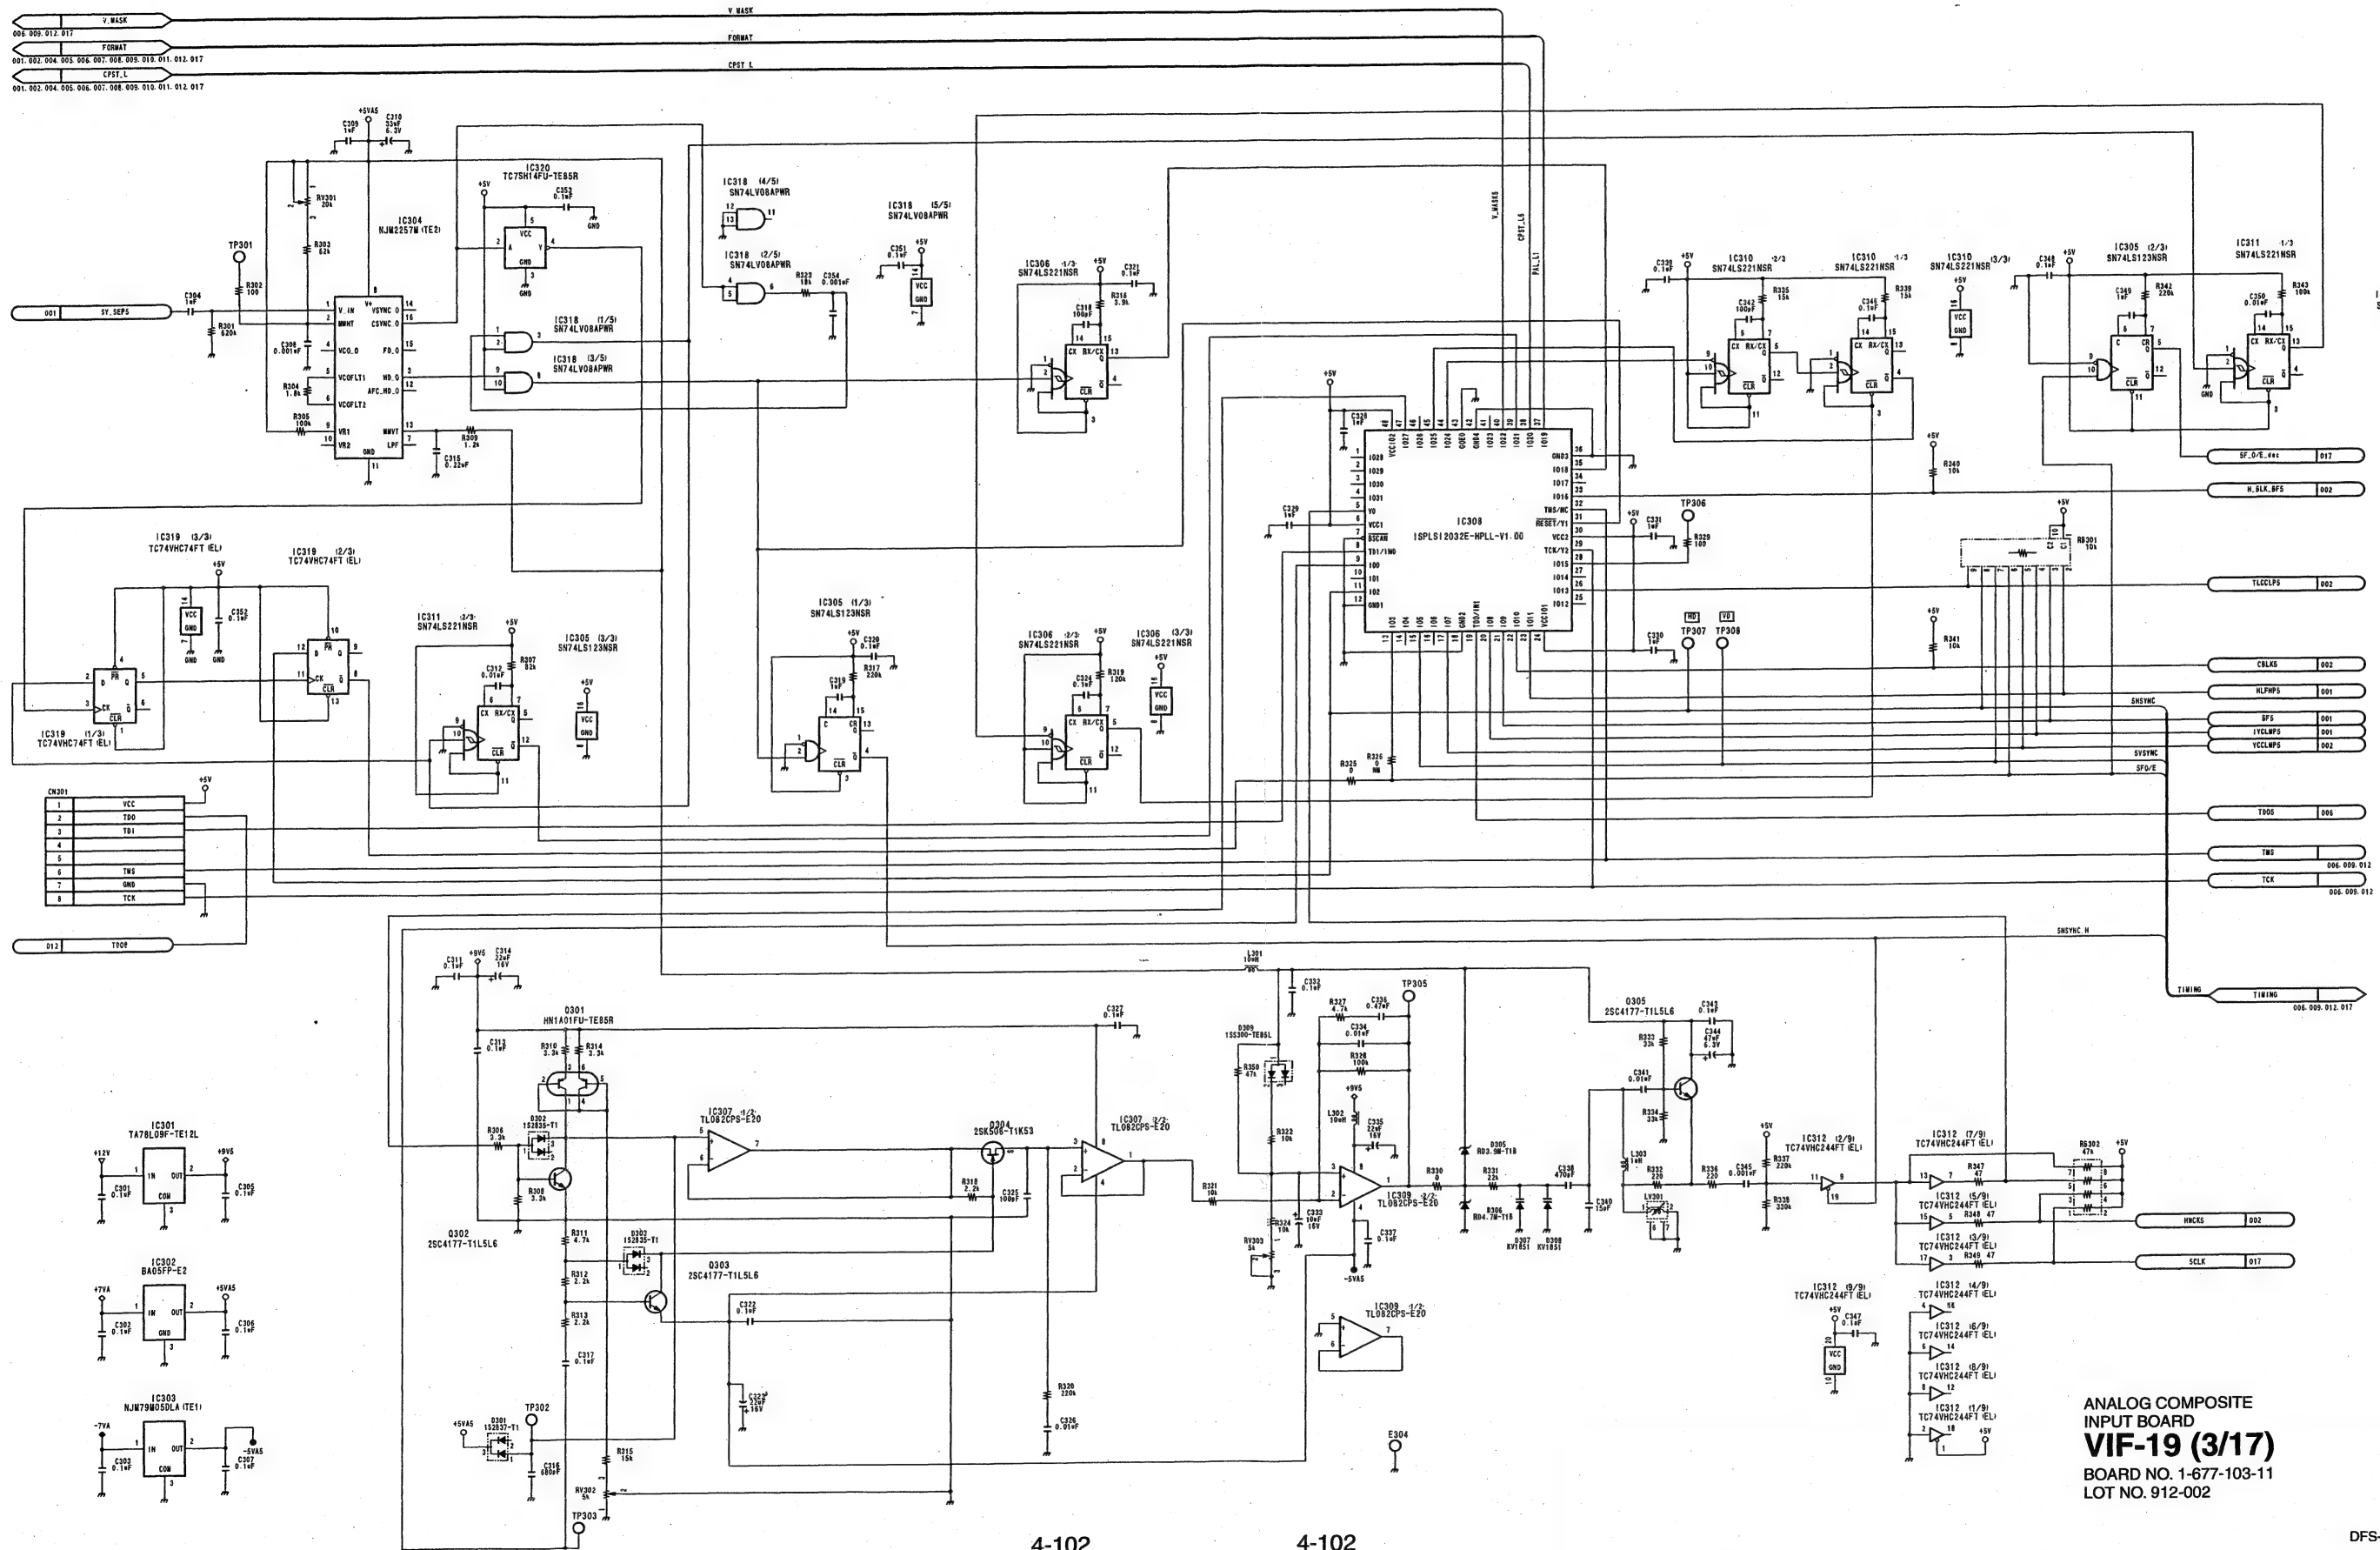


ANALOG COMPOSITE
INPUT BOARD
VIF-19 (3/17)
BOARD NO. 1-677-103-11
LOT NO. 912-002


BKDF-702 (J): S/N 30001 through 30110
BKDF-702 (UC): S/N 10001 through 10060

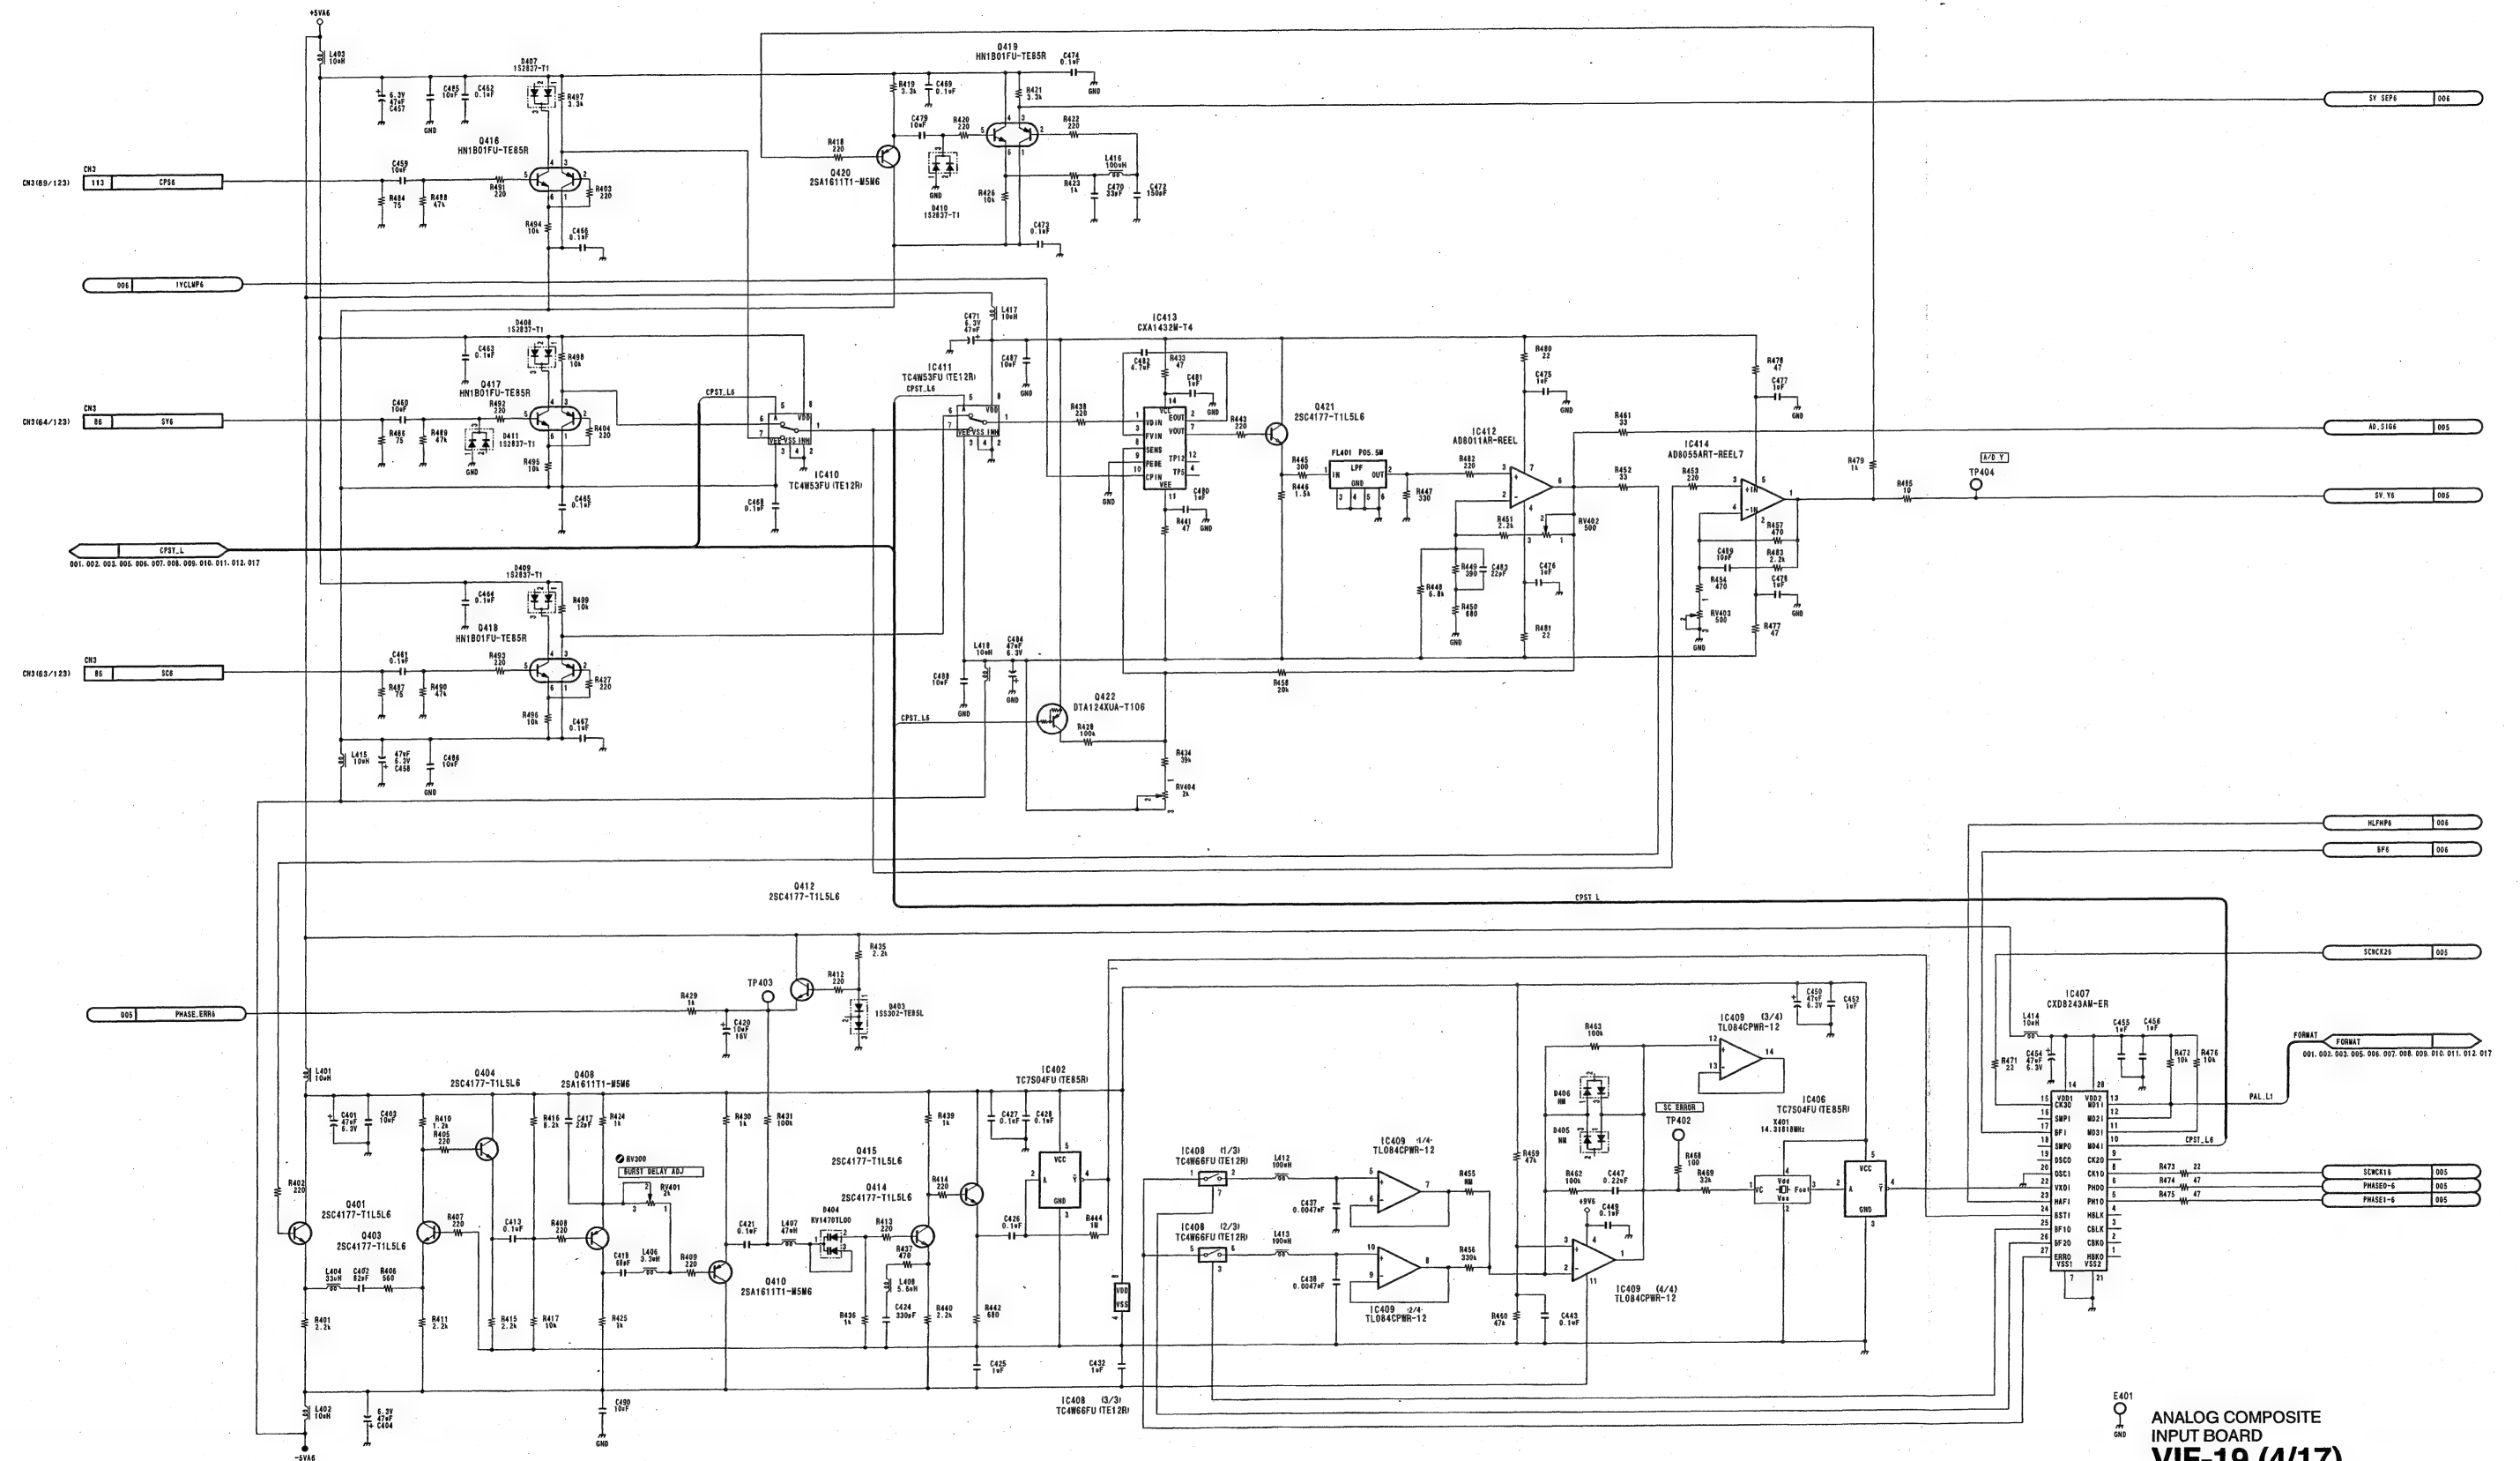

ANALOG COMPOSITE
INPUT BOARD
VIF-19 (4/17)
BOARD NO. 1-677-103-11
LOT NO. 912-002


BKDF-702 (J): S/N 30001 through 30110
BKDF-702 (UC): S/N 10001 through 10060

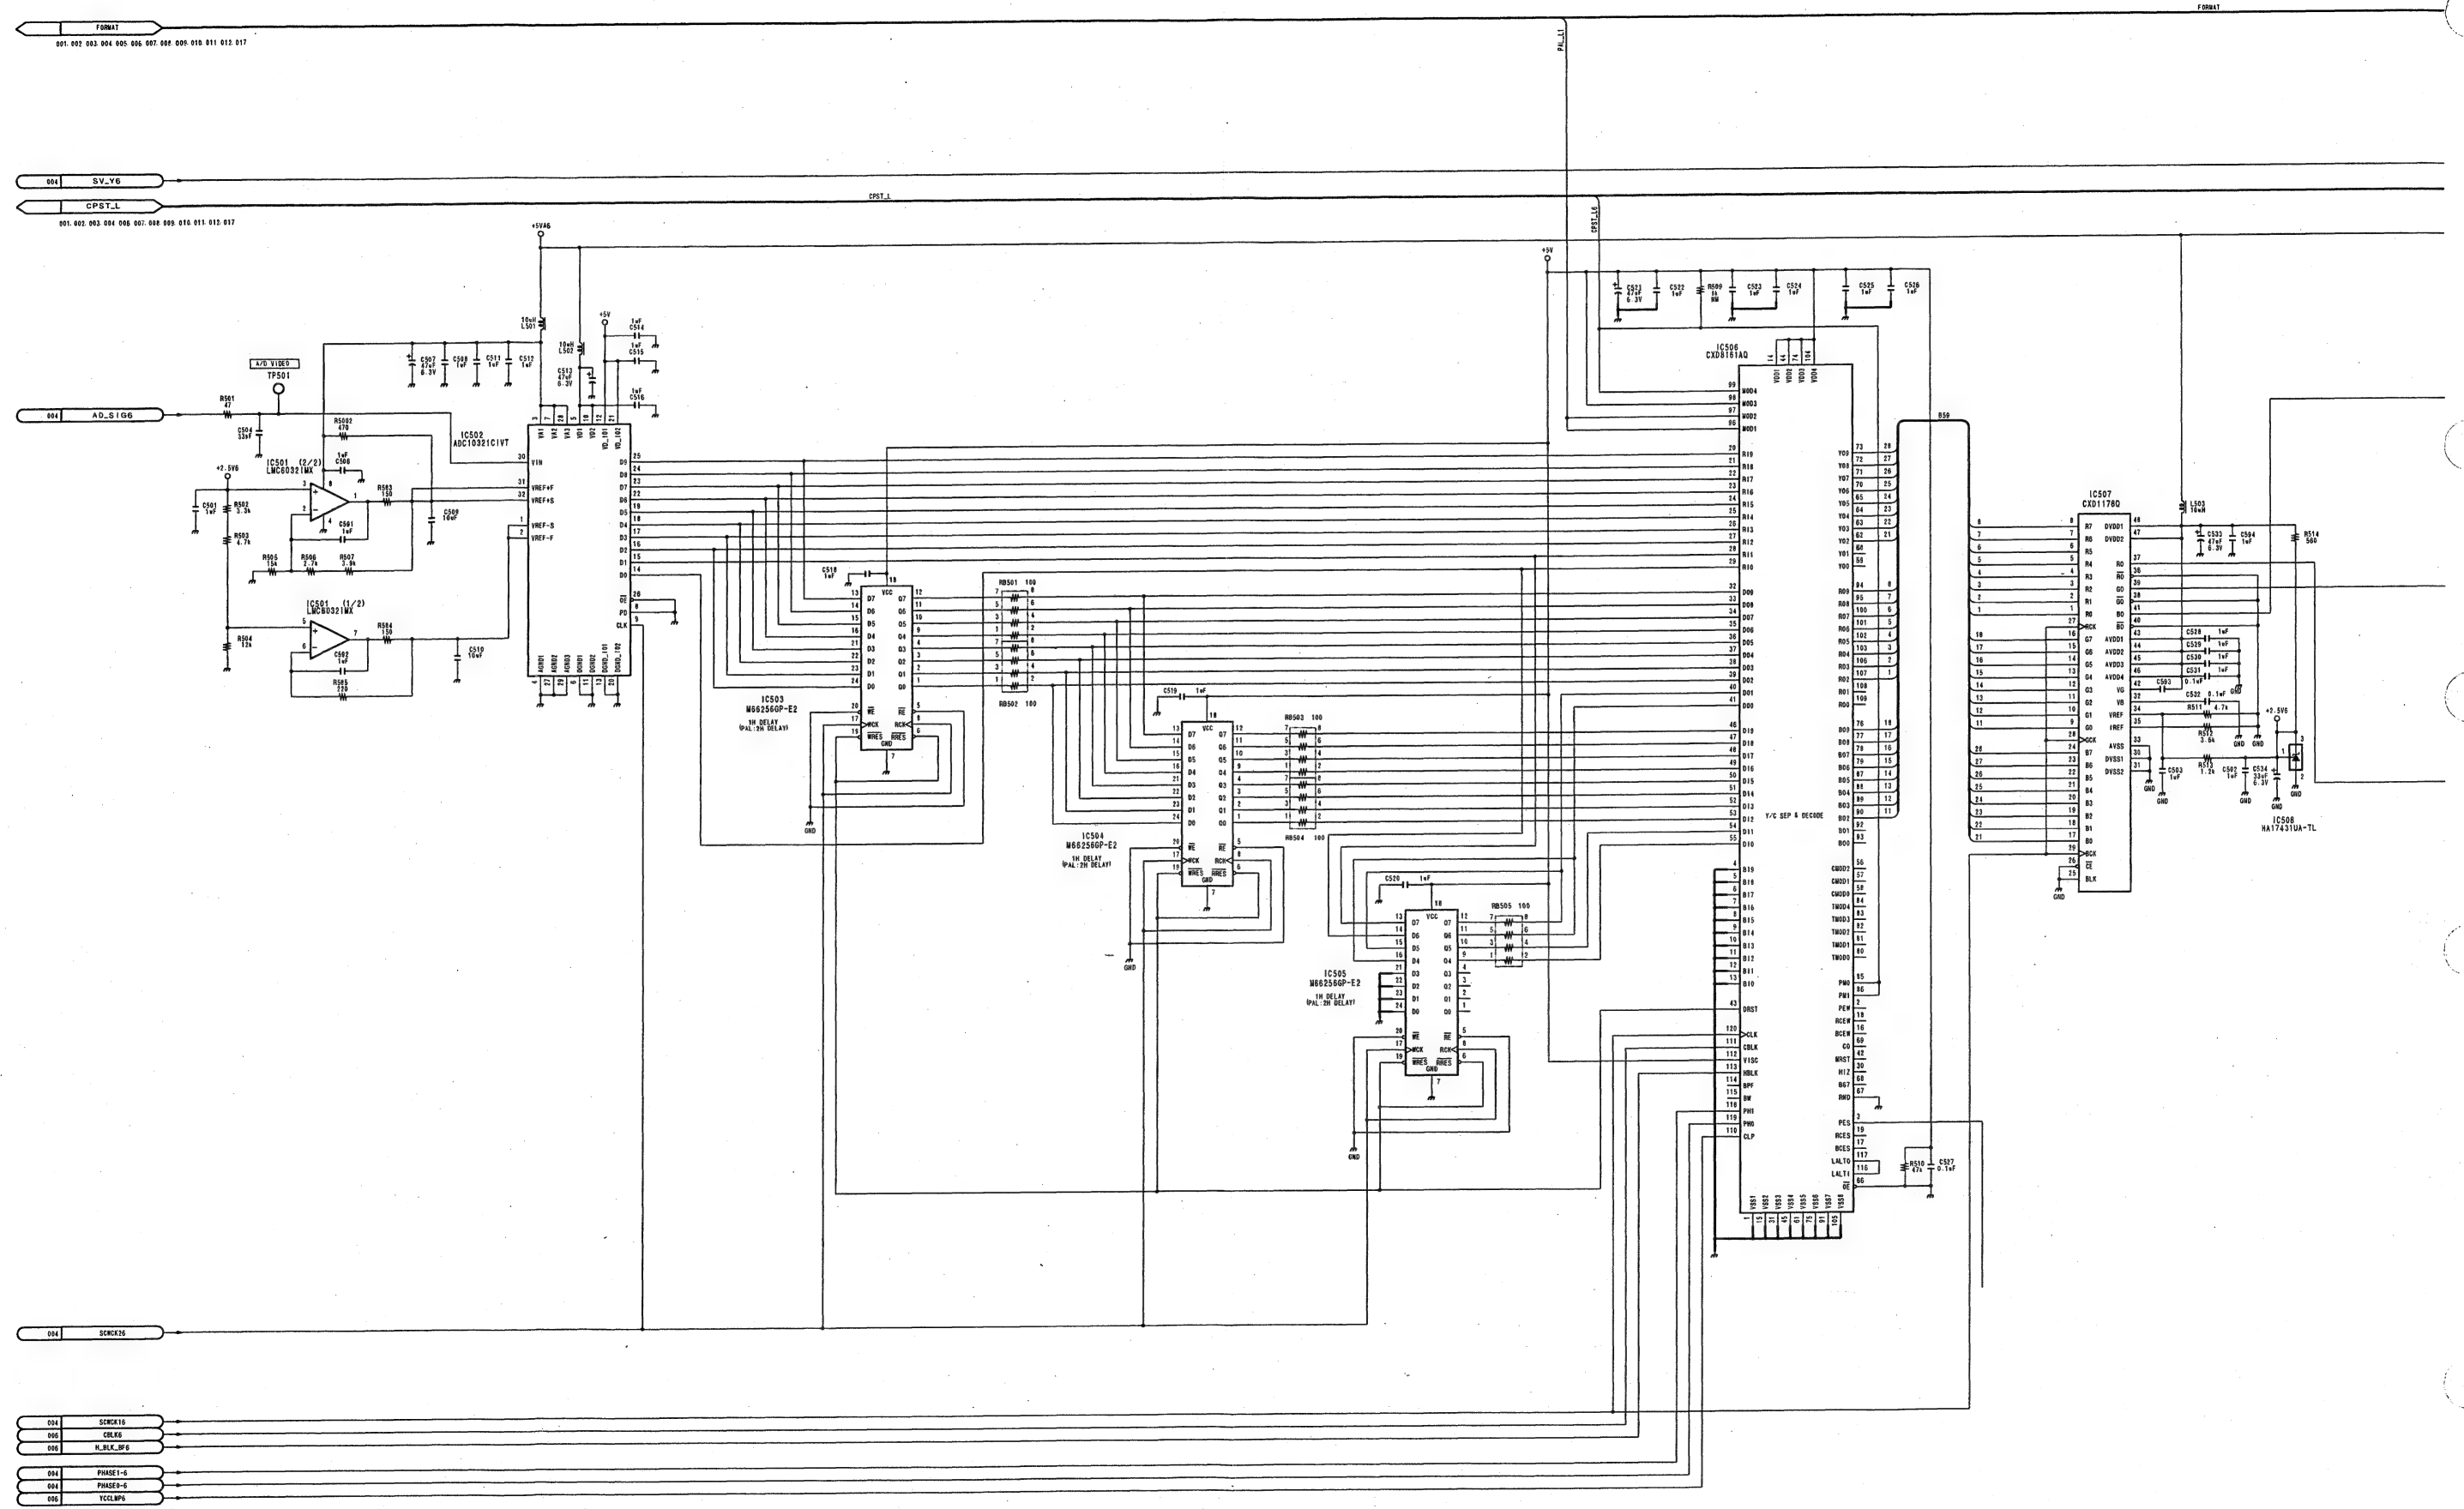

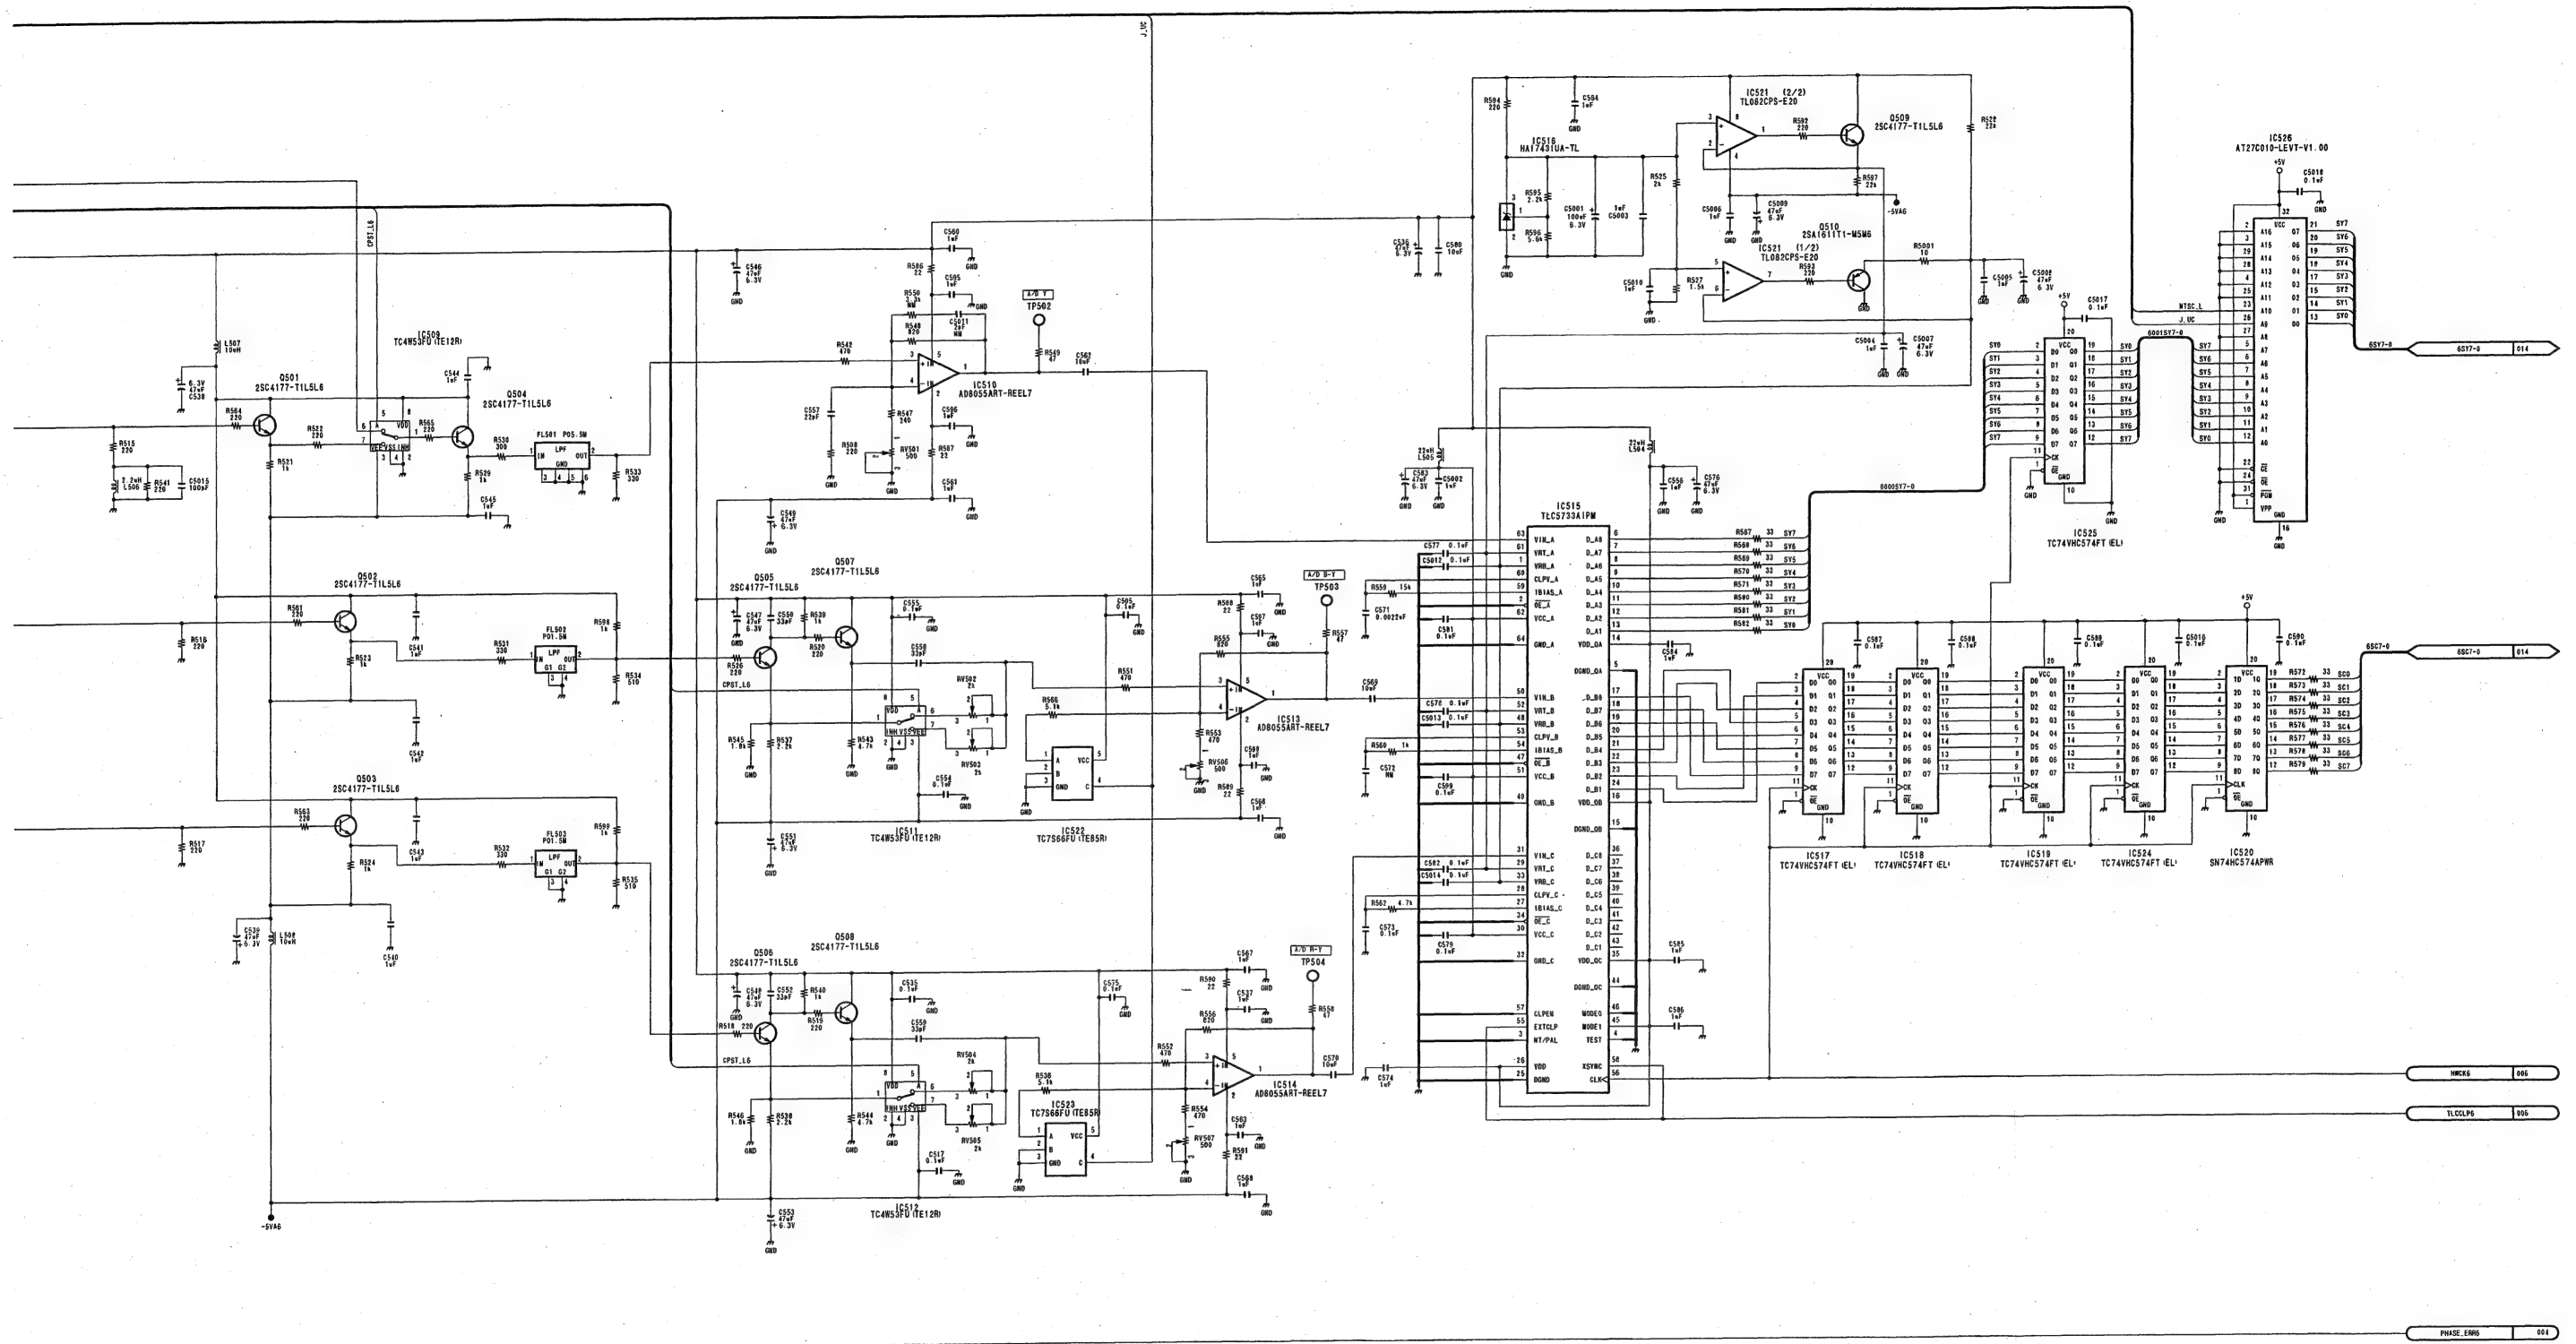


ANALOG COMPOSITE
INPUT BOARD
VIF-19 (5/17)
BOARD NO. 1-677-103-11
LOT NO. 912-002

BKDF-702 (J): S/N 30001 through 30110
BKDF-702 (UC): S/N 10001 through 10060

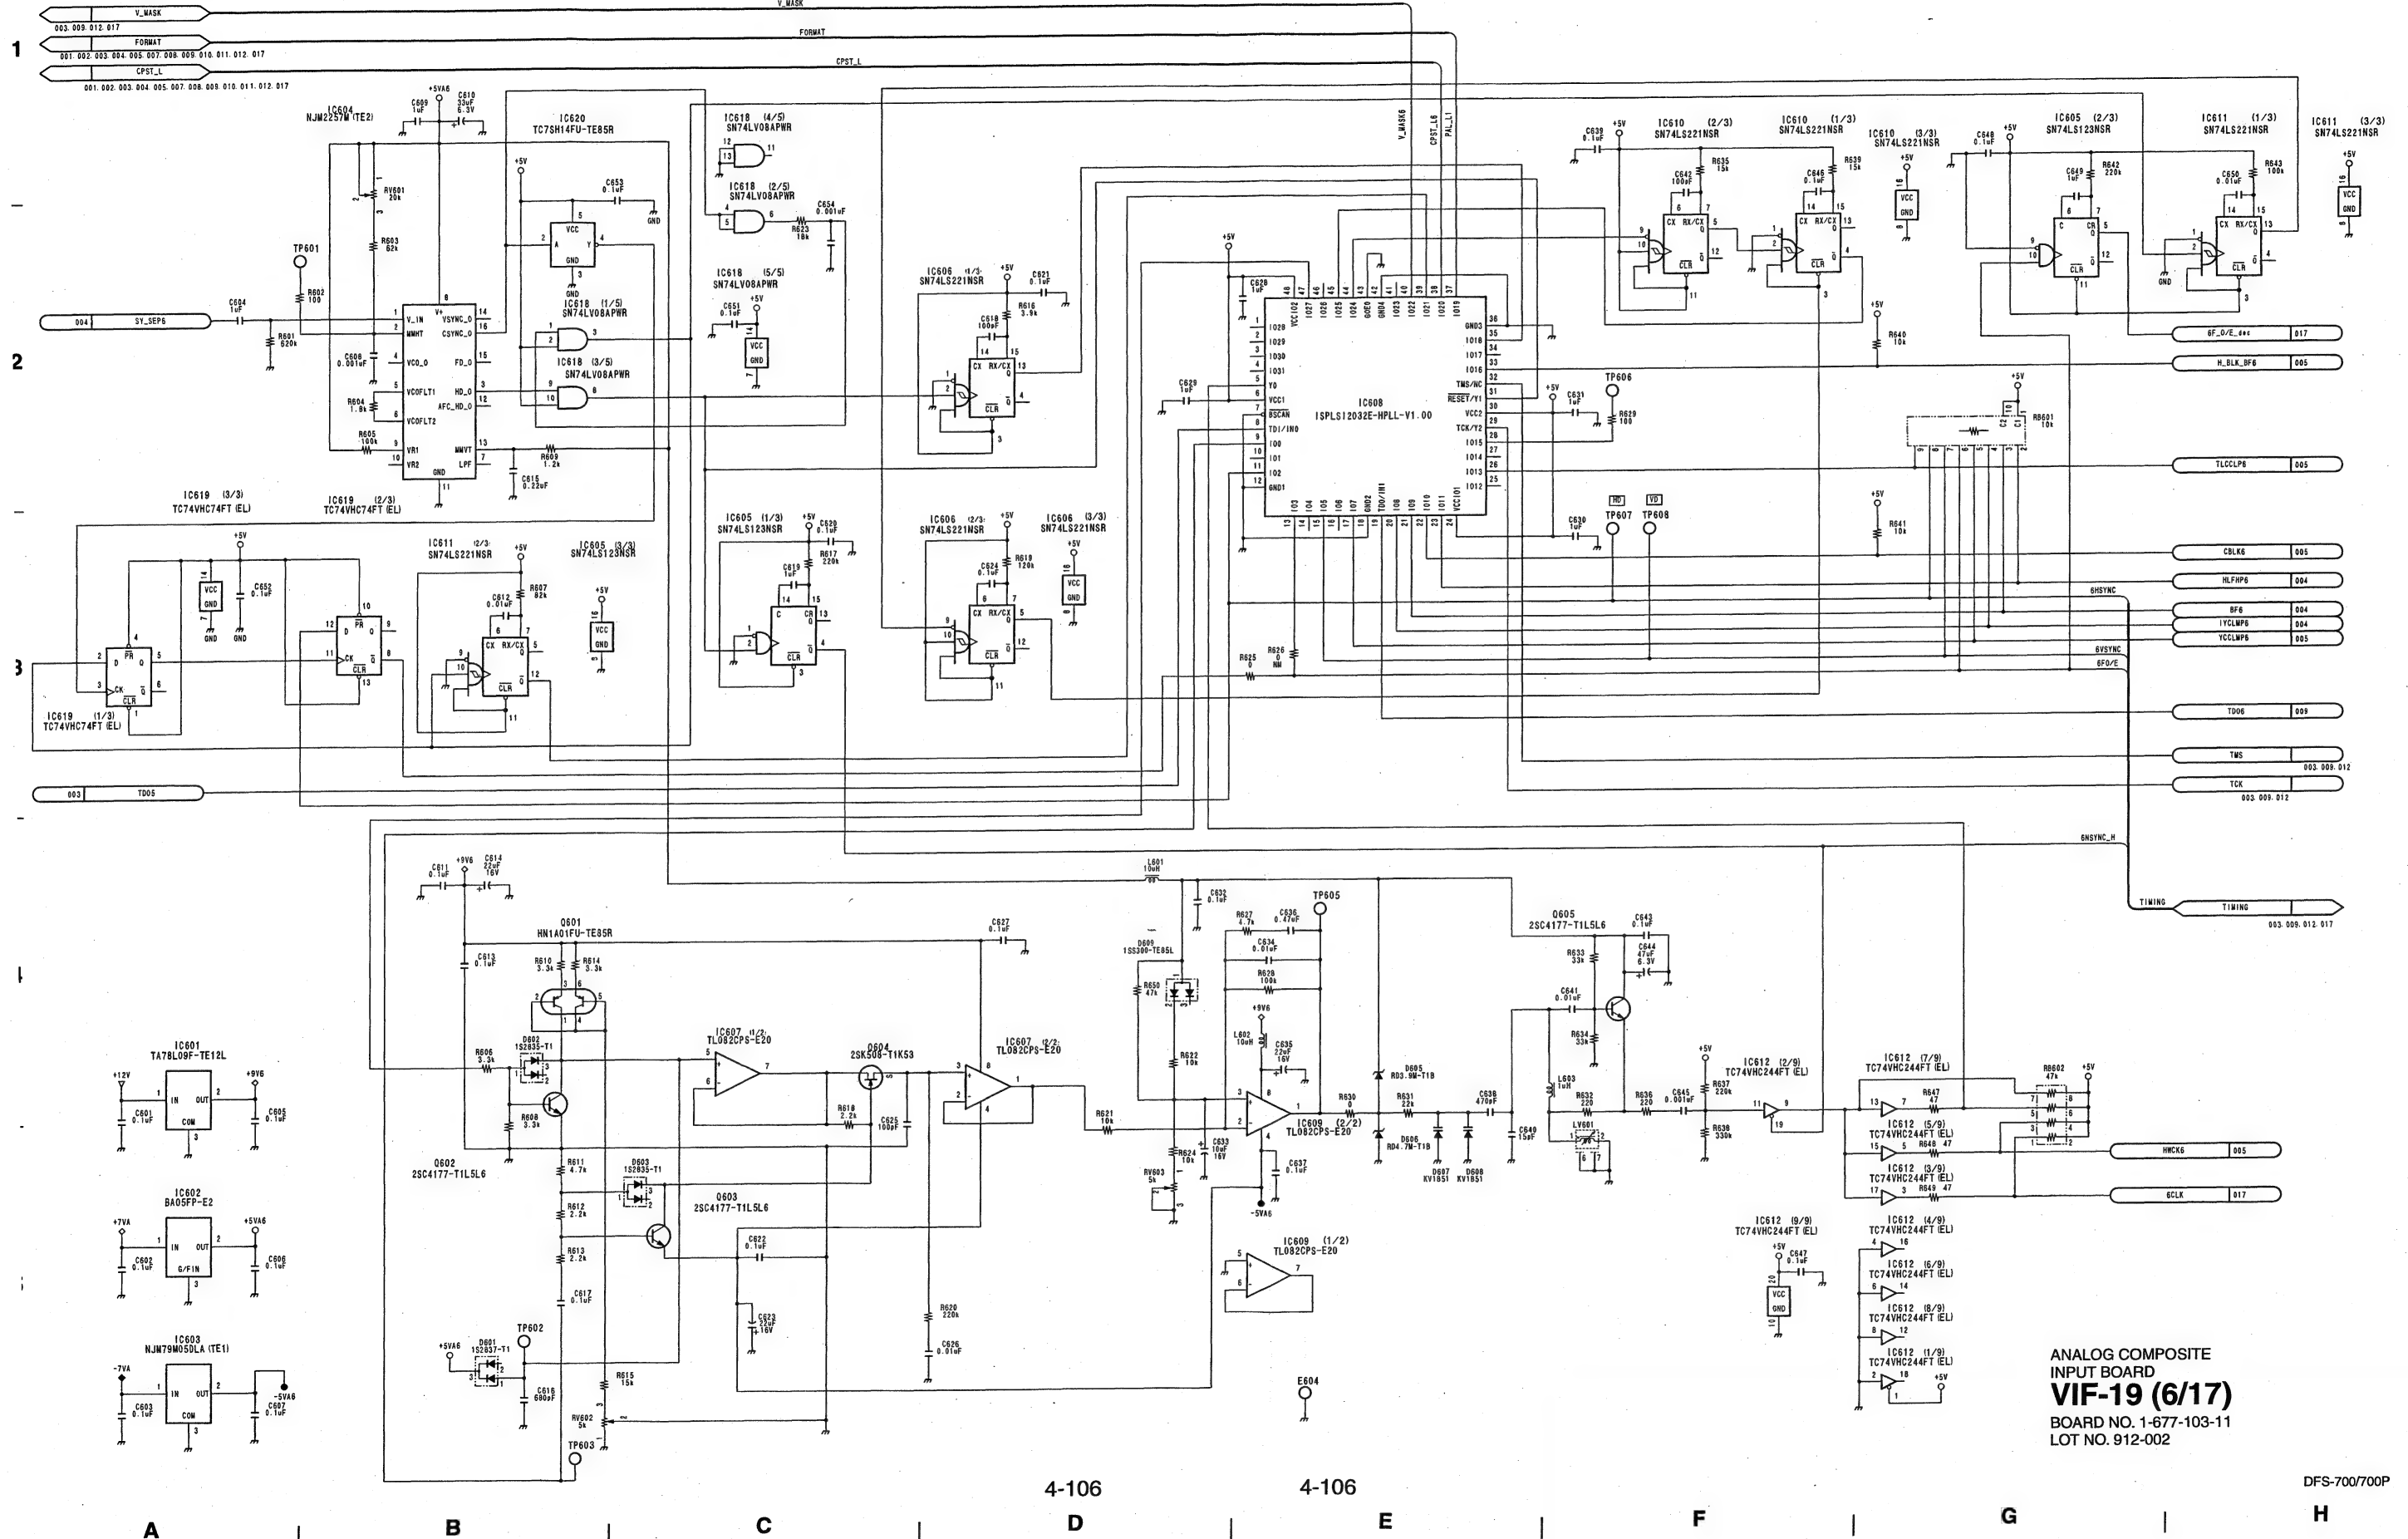

ANALOG COMPOSITE
INPUT BOARD
VIF-19 (6/17)
BOARD NO. 1-677-103-11
LOT NO. 912-002

BKDF-702 (J): S/N 30001 through 30110
BKDF-702 (UC): S/N 10001 through 10060

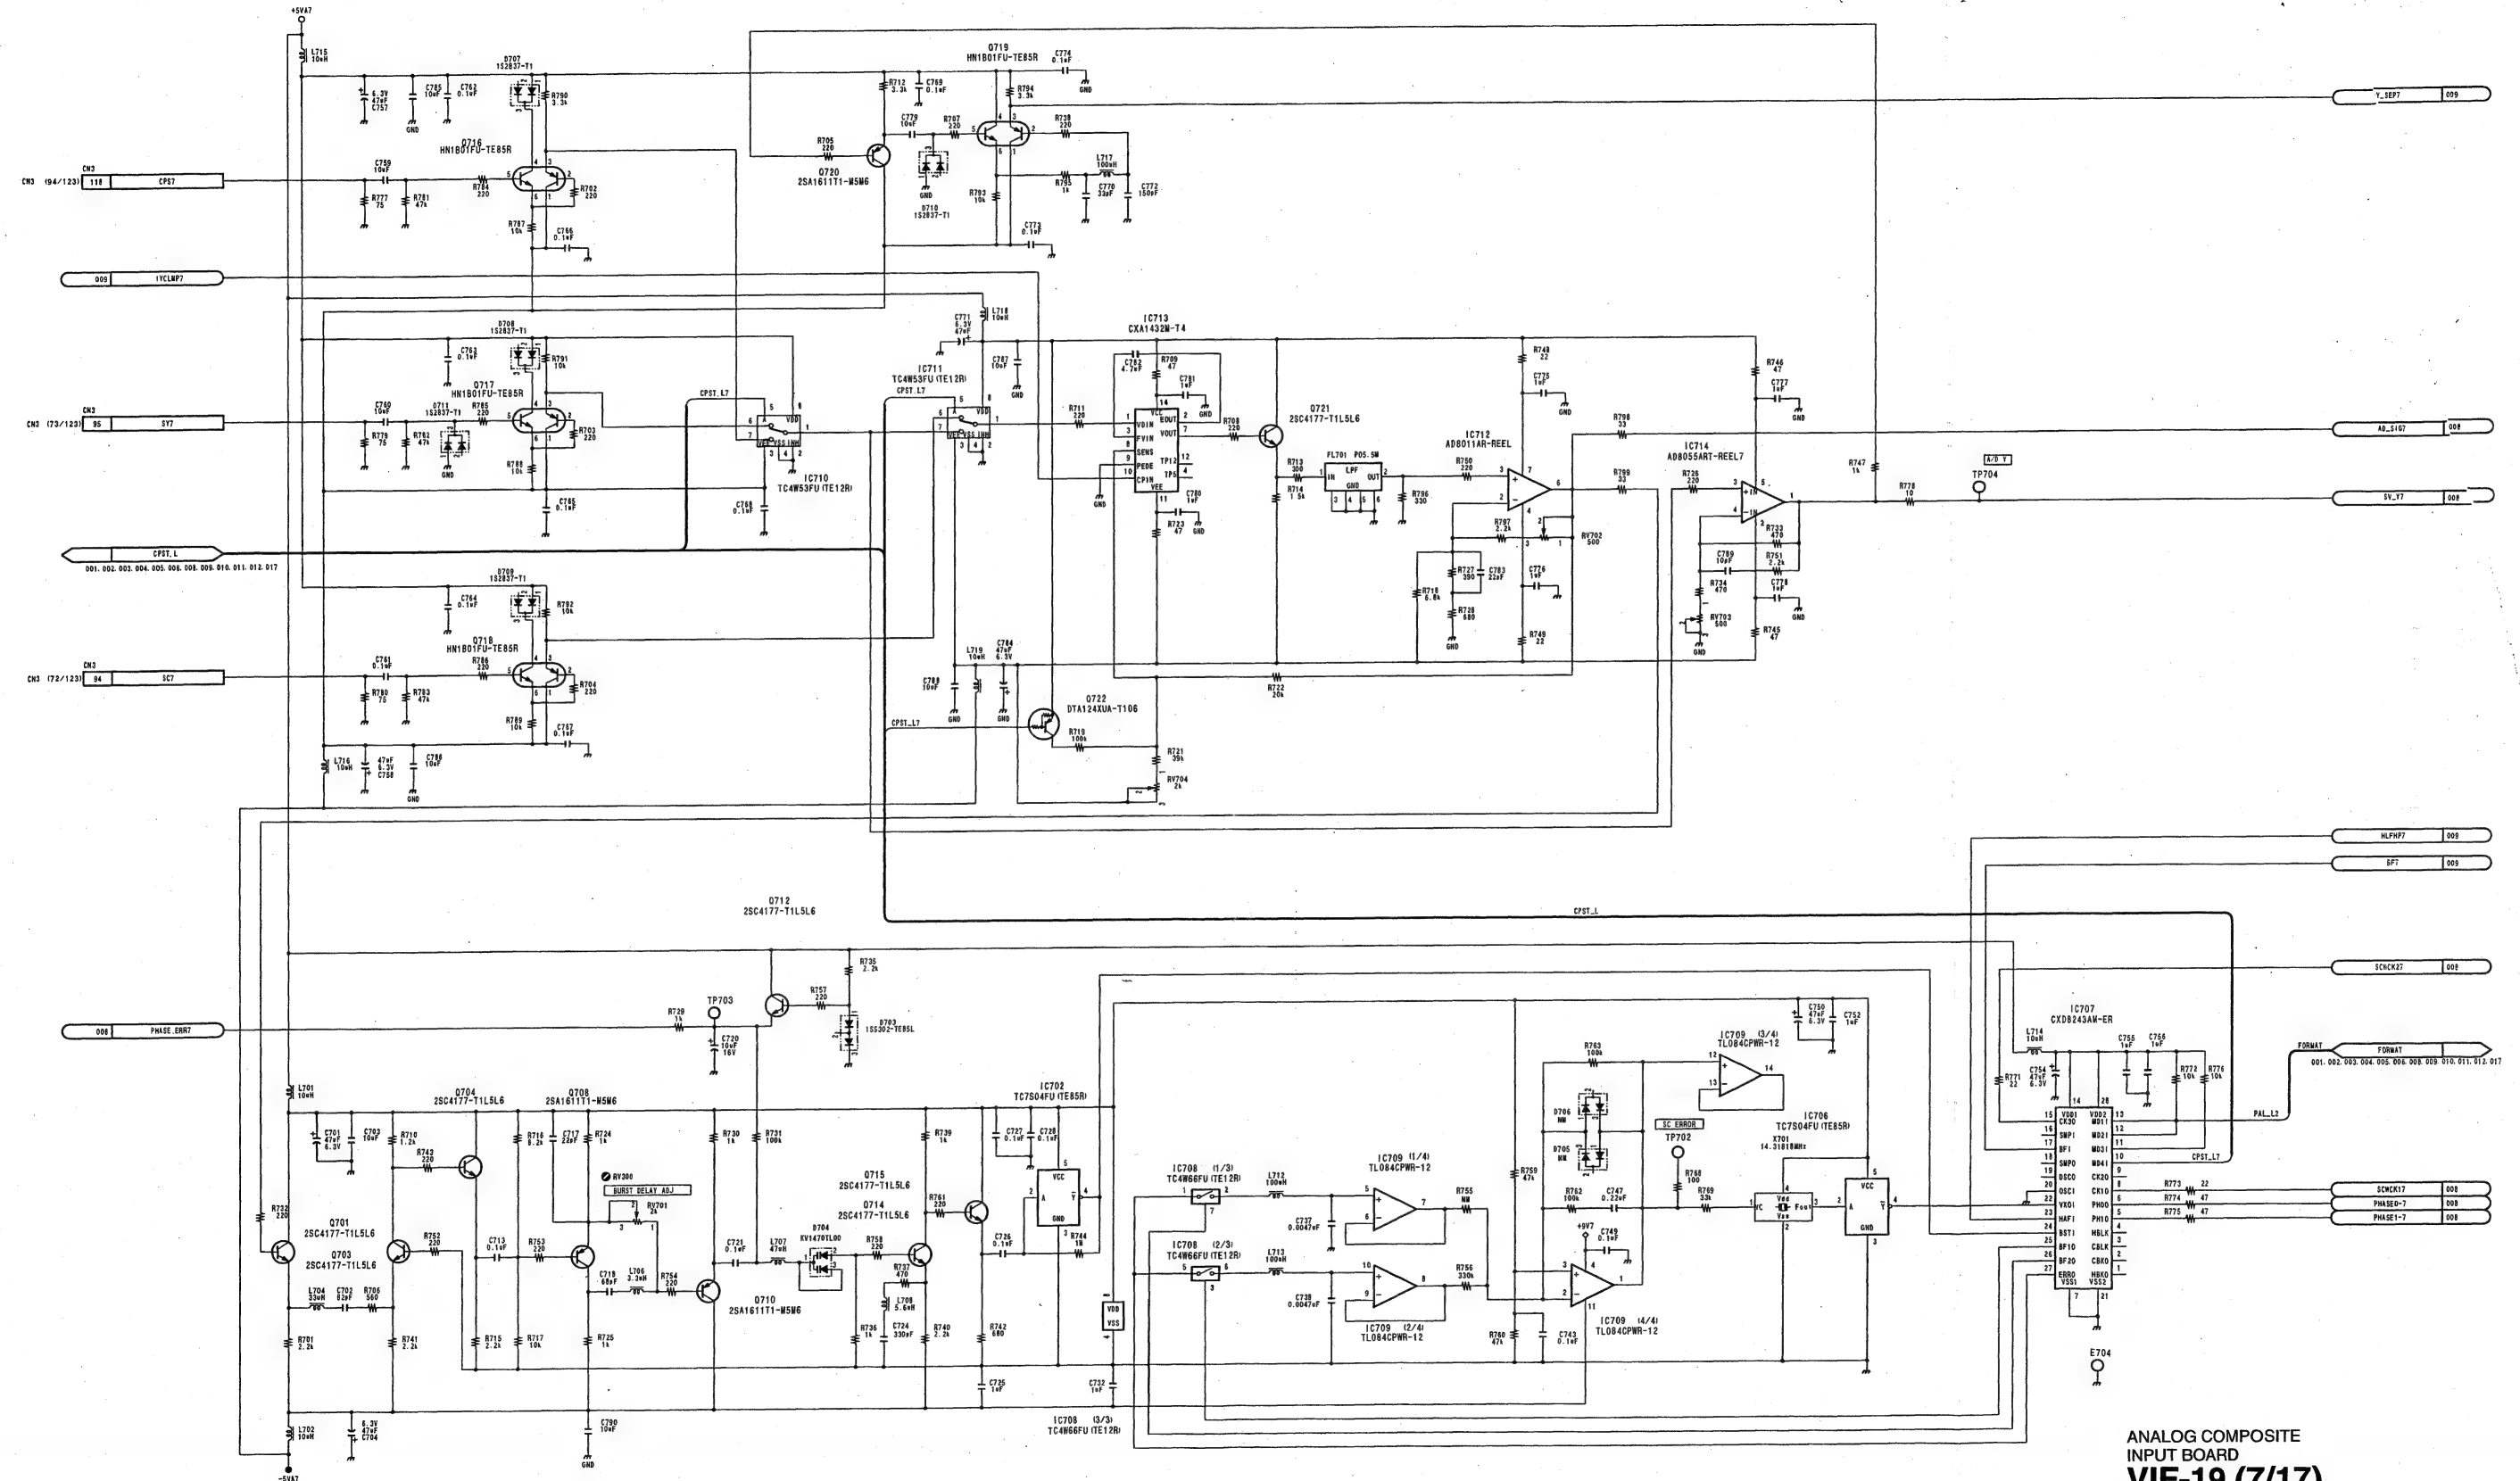



ANALOG COMPOSITE
INPUT BOARD
VIF-19 (7/17)
BOARD NO. 1-677-103-11
LOT NO. 912-002

DFS-700/700P

A B C D E F G H

BKDF-702 (J): S/N 30001 through 30110
BKDF-702 (UC): S/N 10001 through 10060

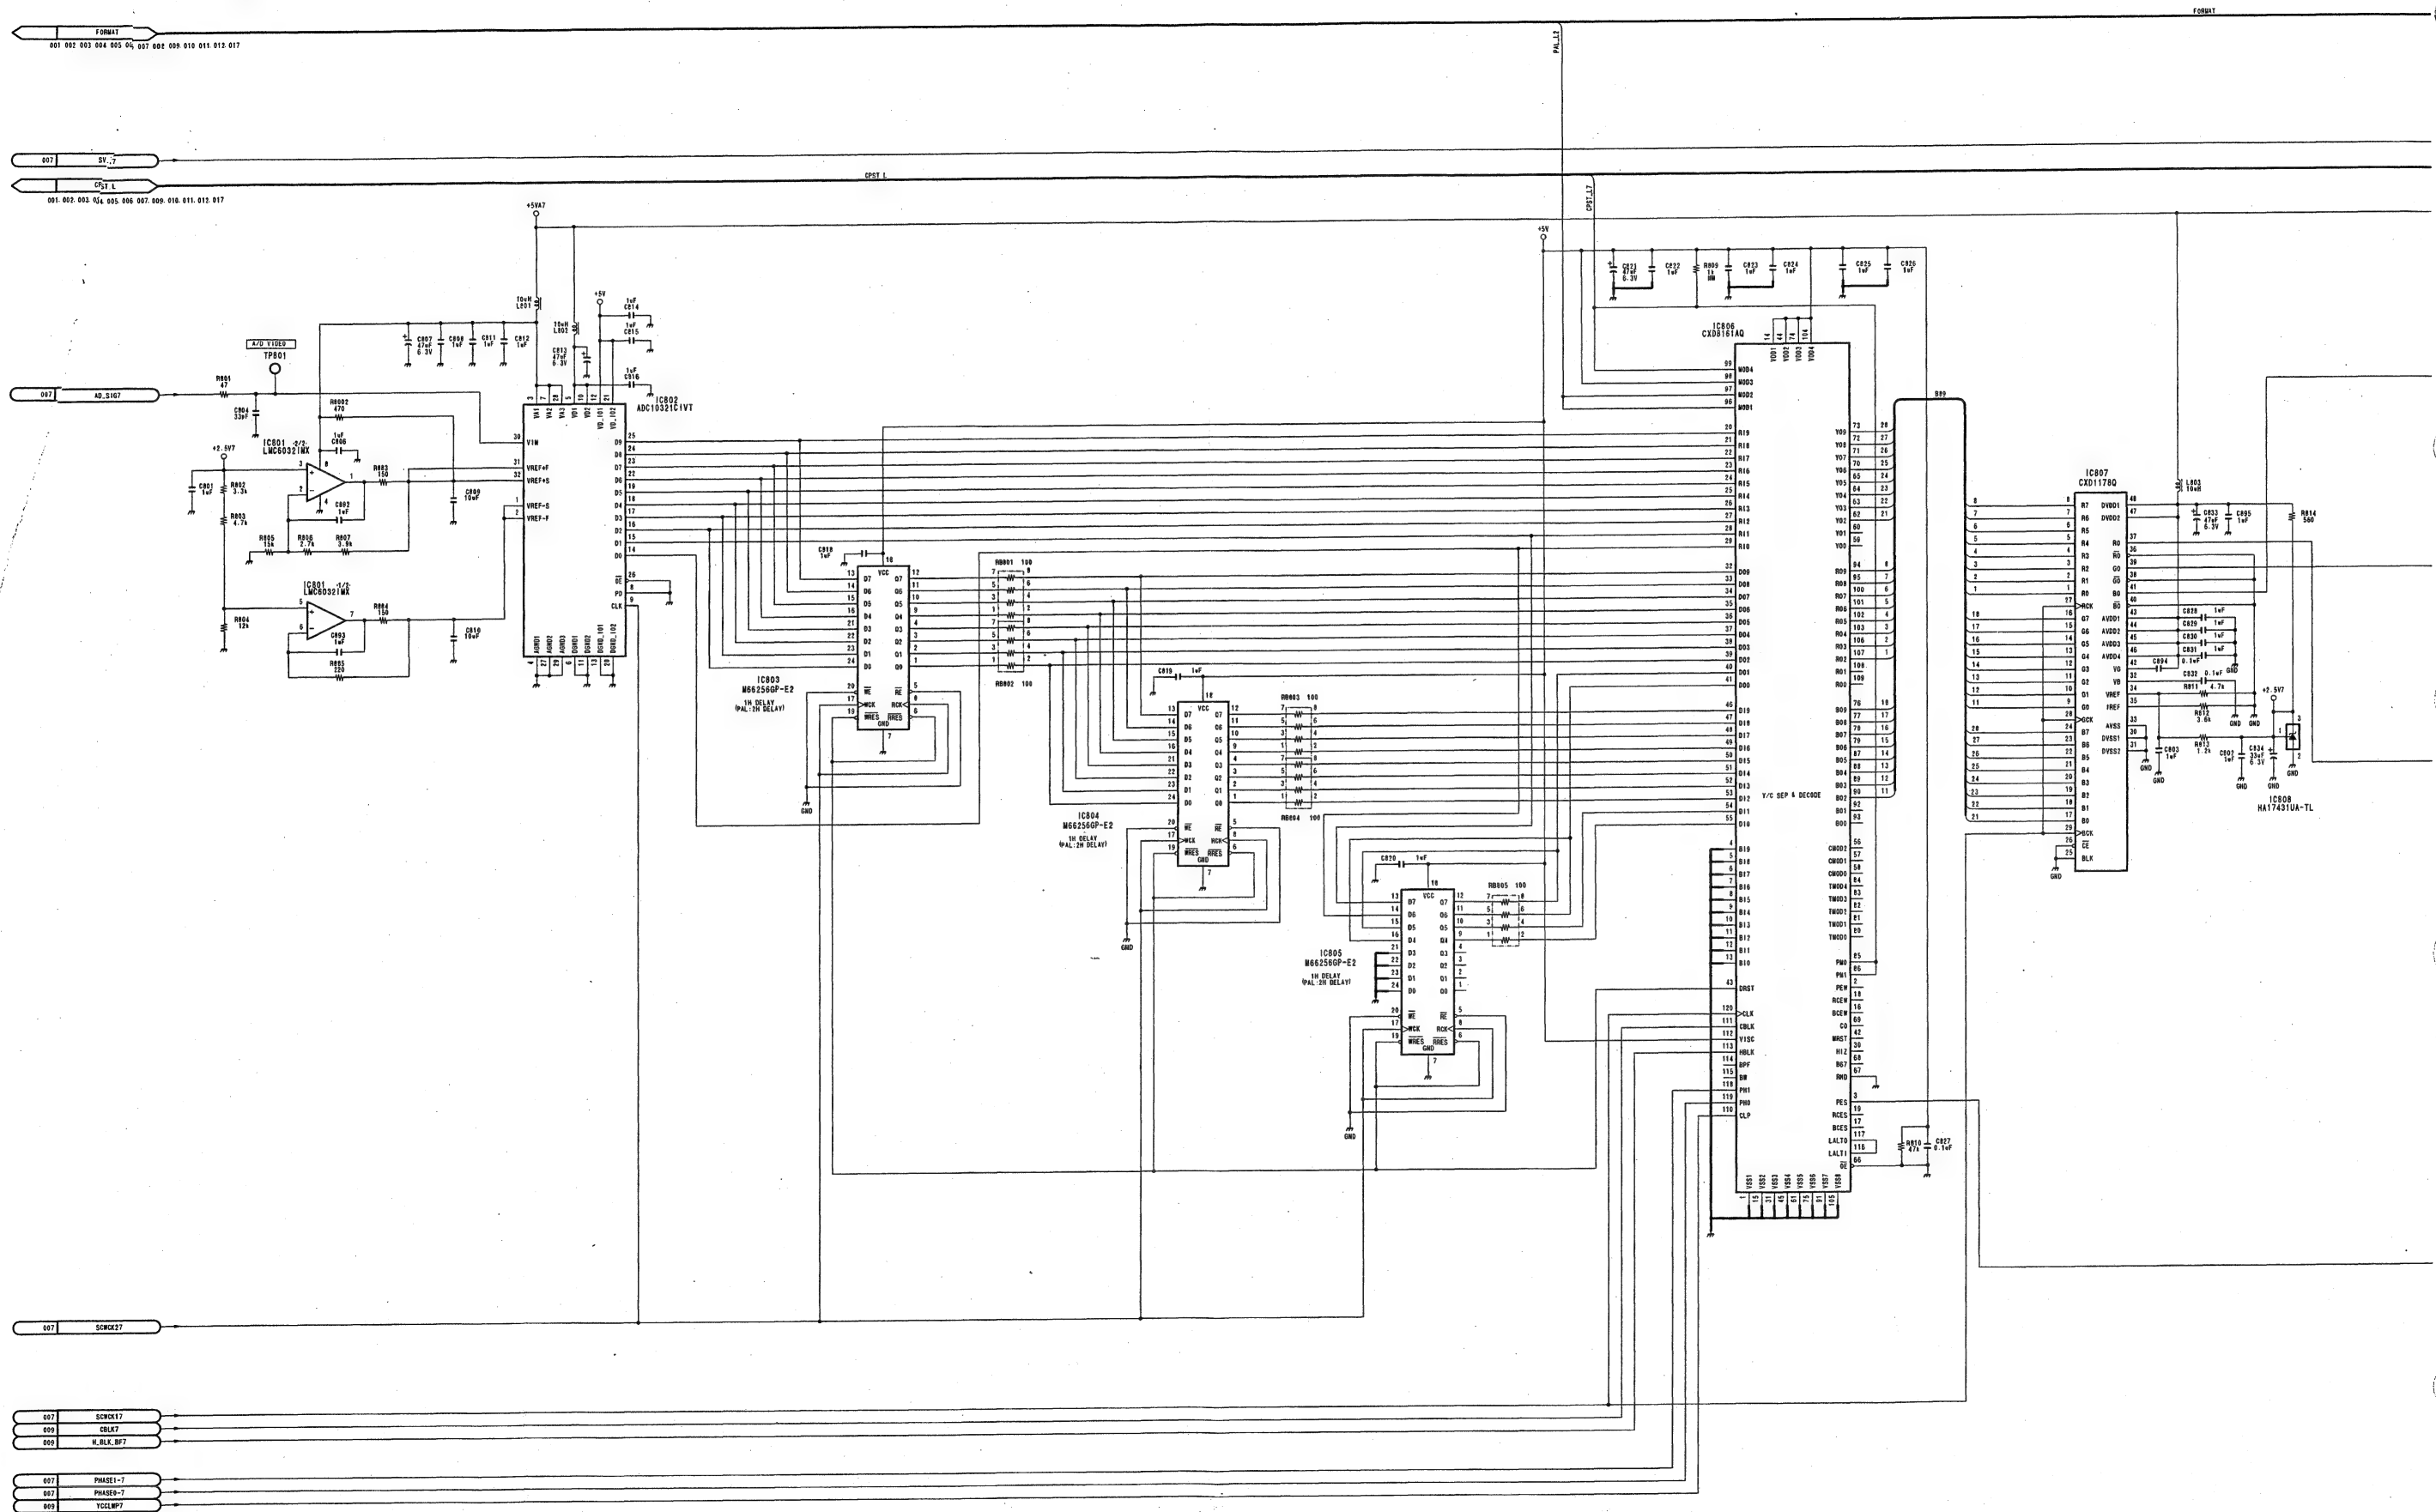

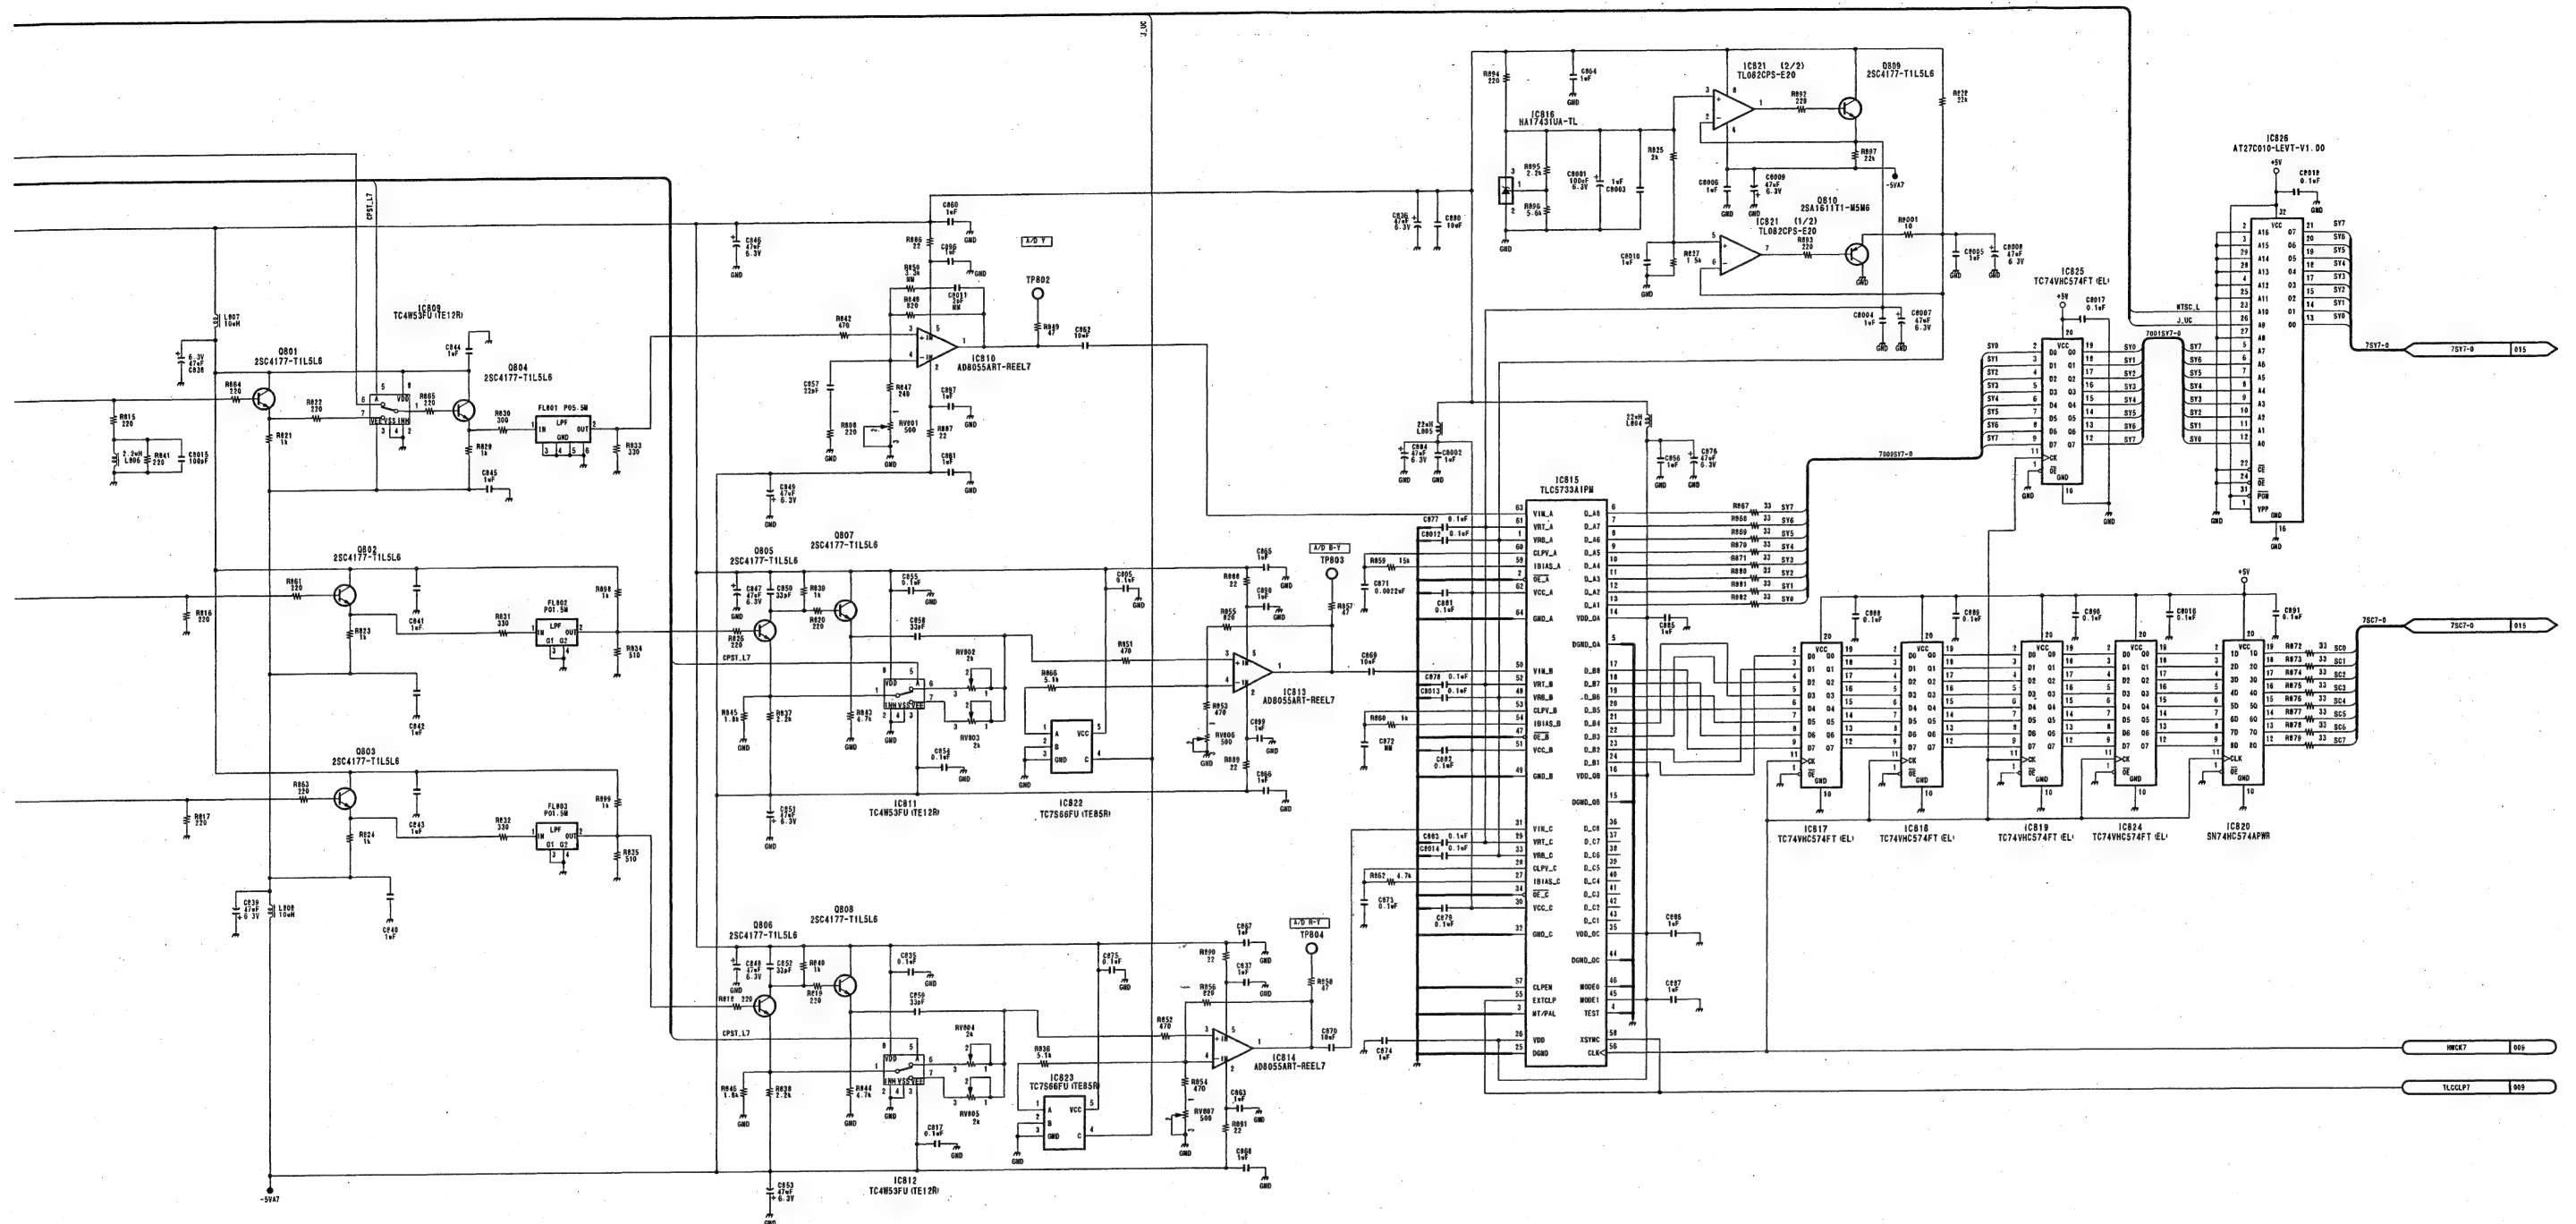


ANALOG COMPOSITE
INPUT BOARD
VIF-19 (8/17)
BOARD NO. 1-677-103-11
LOT NO. 912-002

BKDF-702 (J) : S/N 30001 through 30110
BKDF-702 (UC): S/N 10001 through 10060





BKDF-702 (J) : S/N 30001 through 30110
BKDF-702 (UC): S/N 10001 through 10060

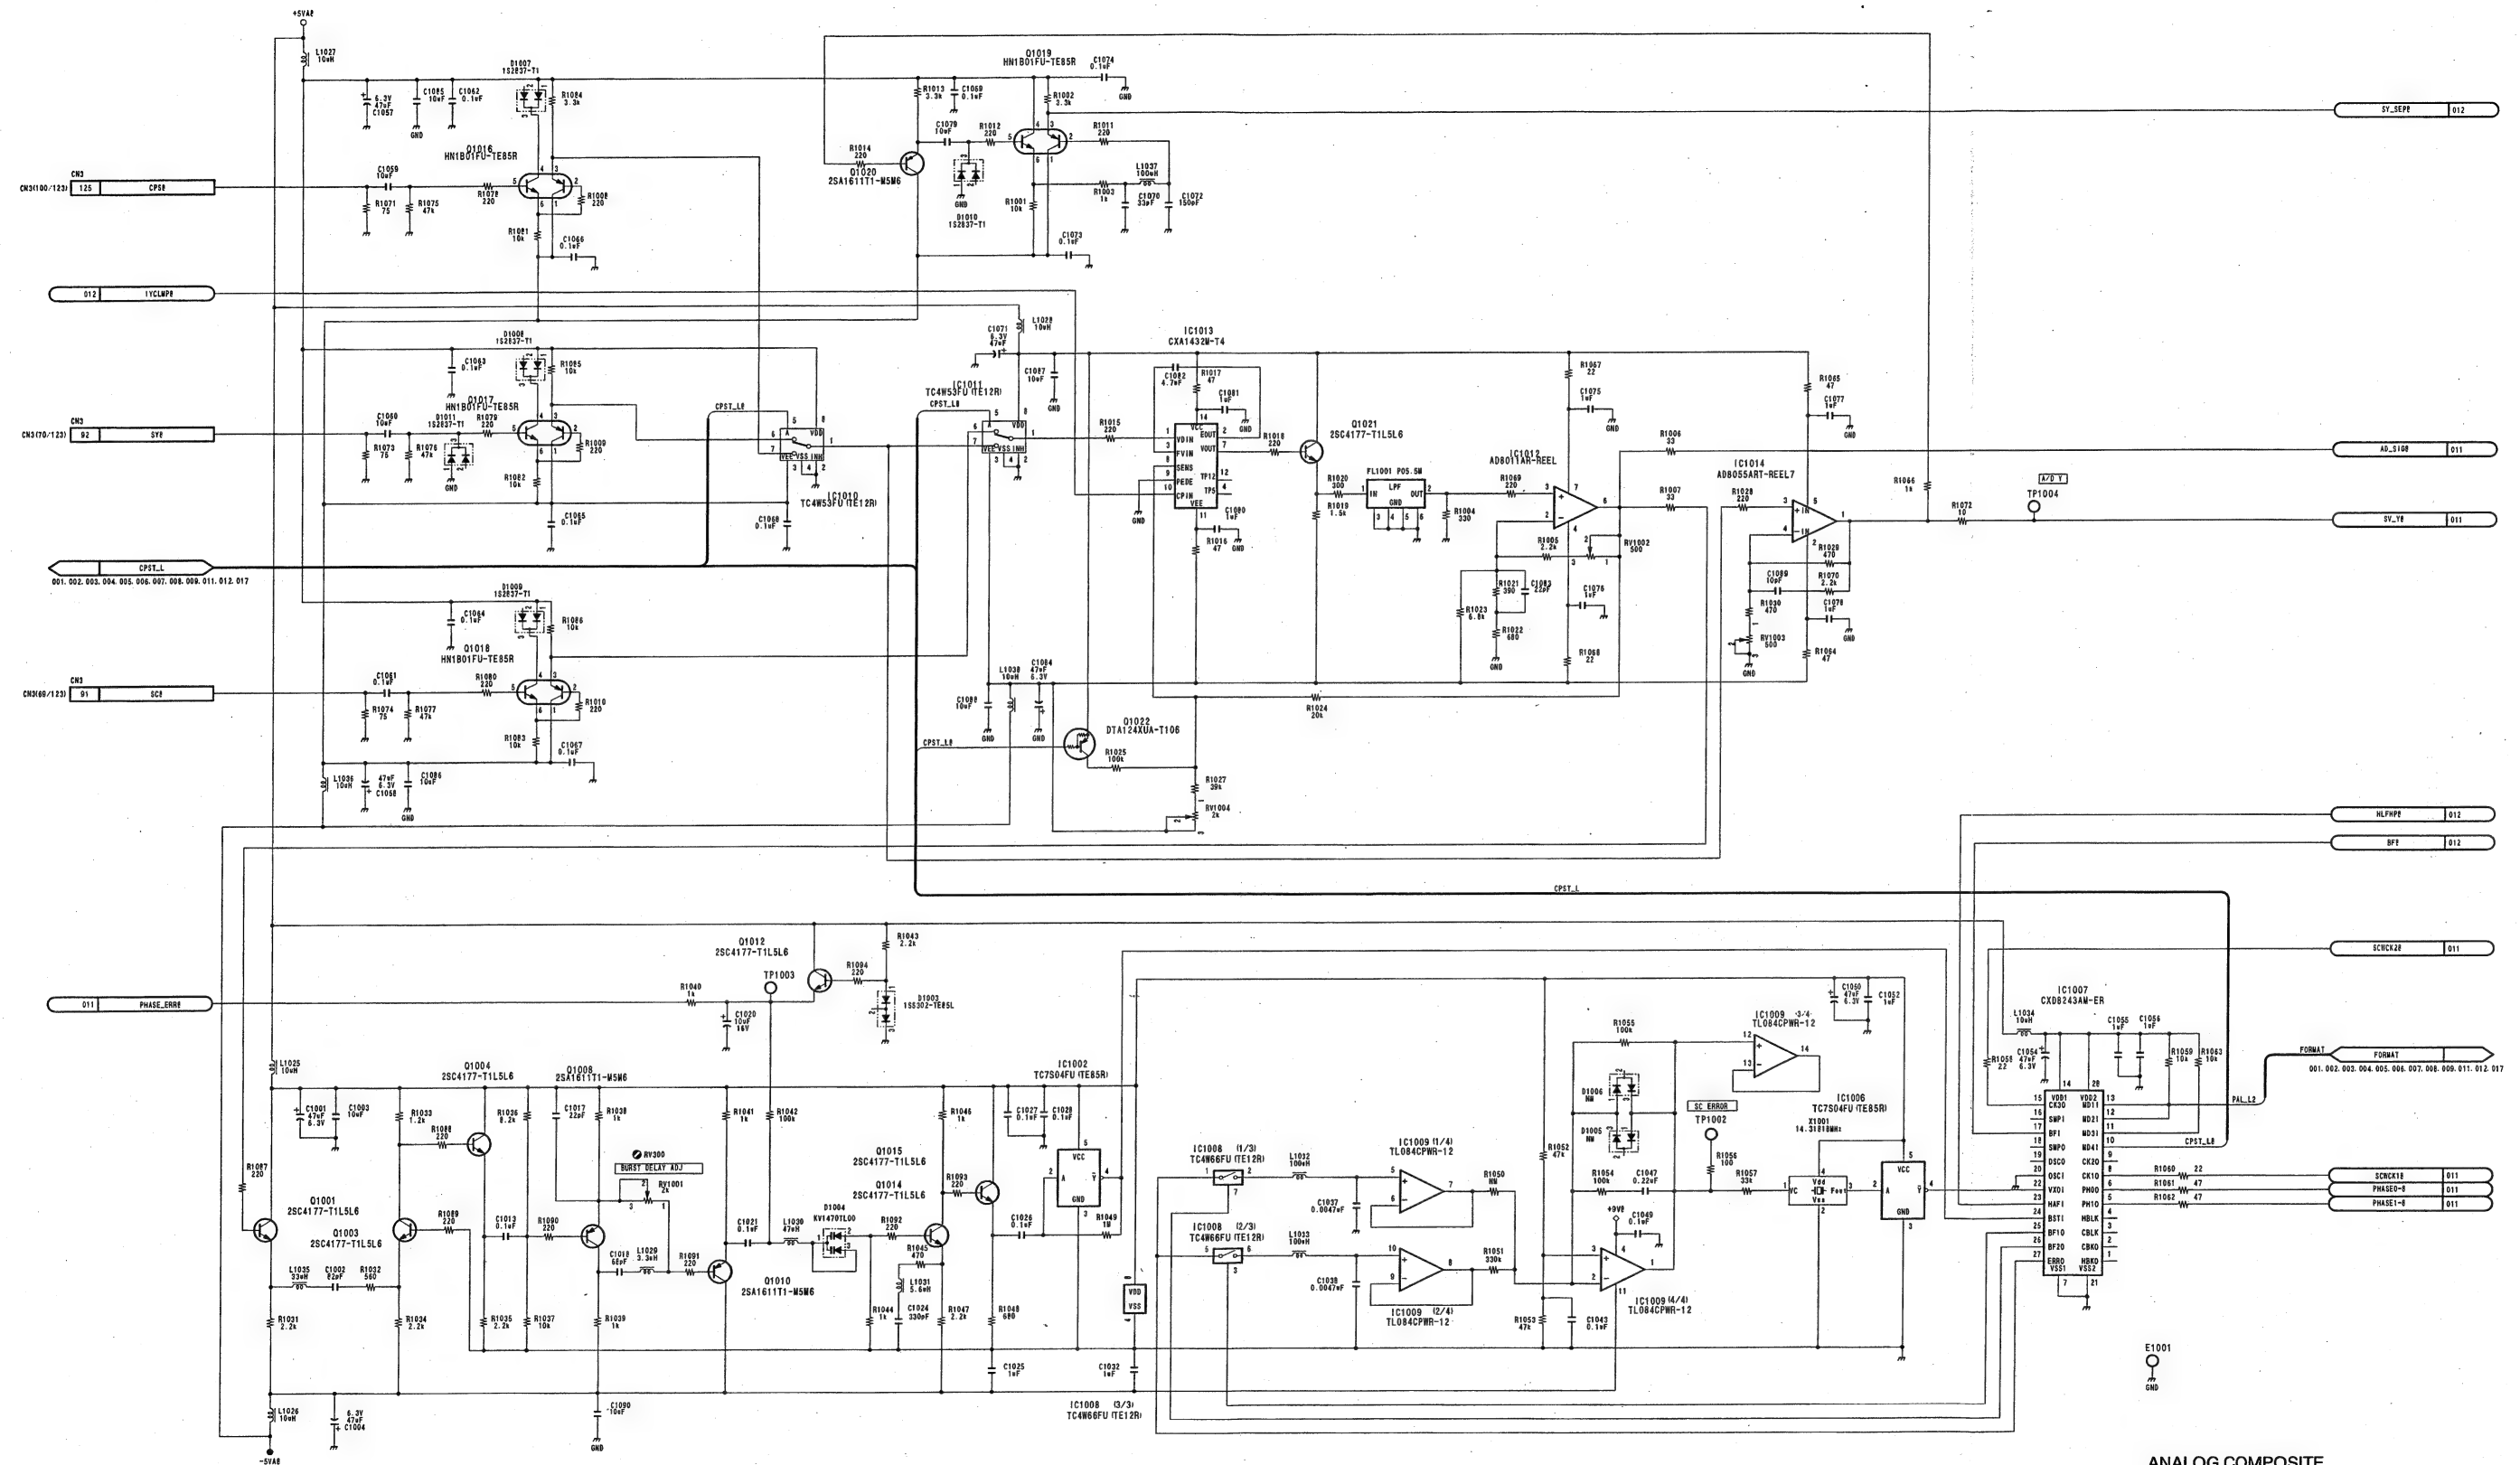

ANALOG COMPOSITE
INPUT BOARD
VIF-19 (10/17)
BOARD NO. 1-677-103-11
LOT NO. 912-002

BKDF-702 (J): S/N 30001 through 30110
BKDF-702 (UC): S/N 10001 through 10060

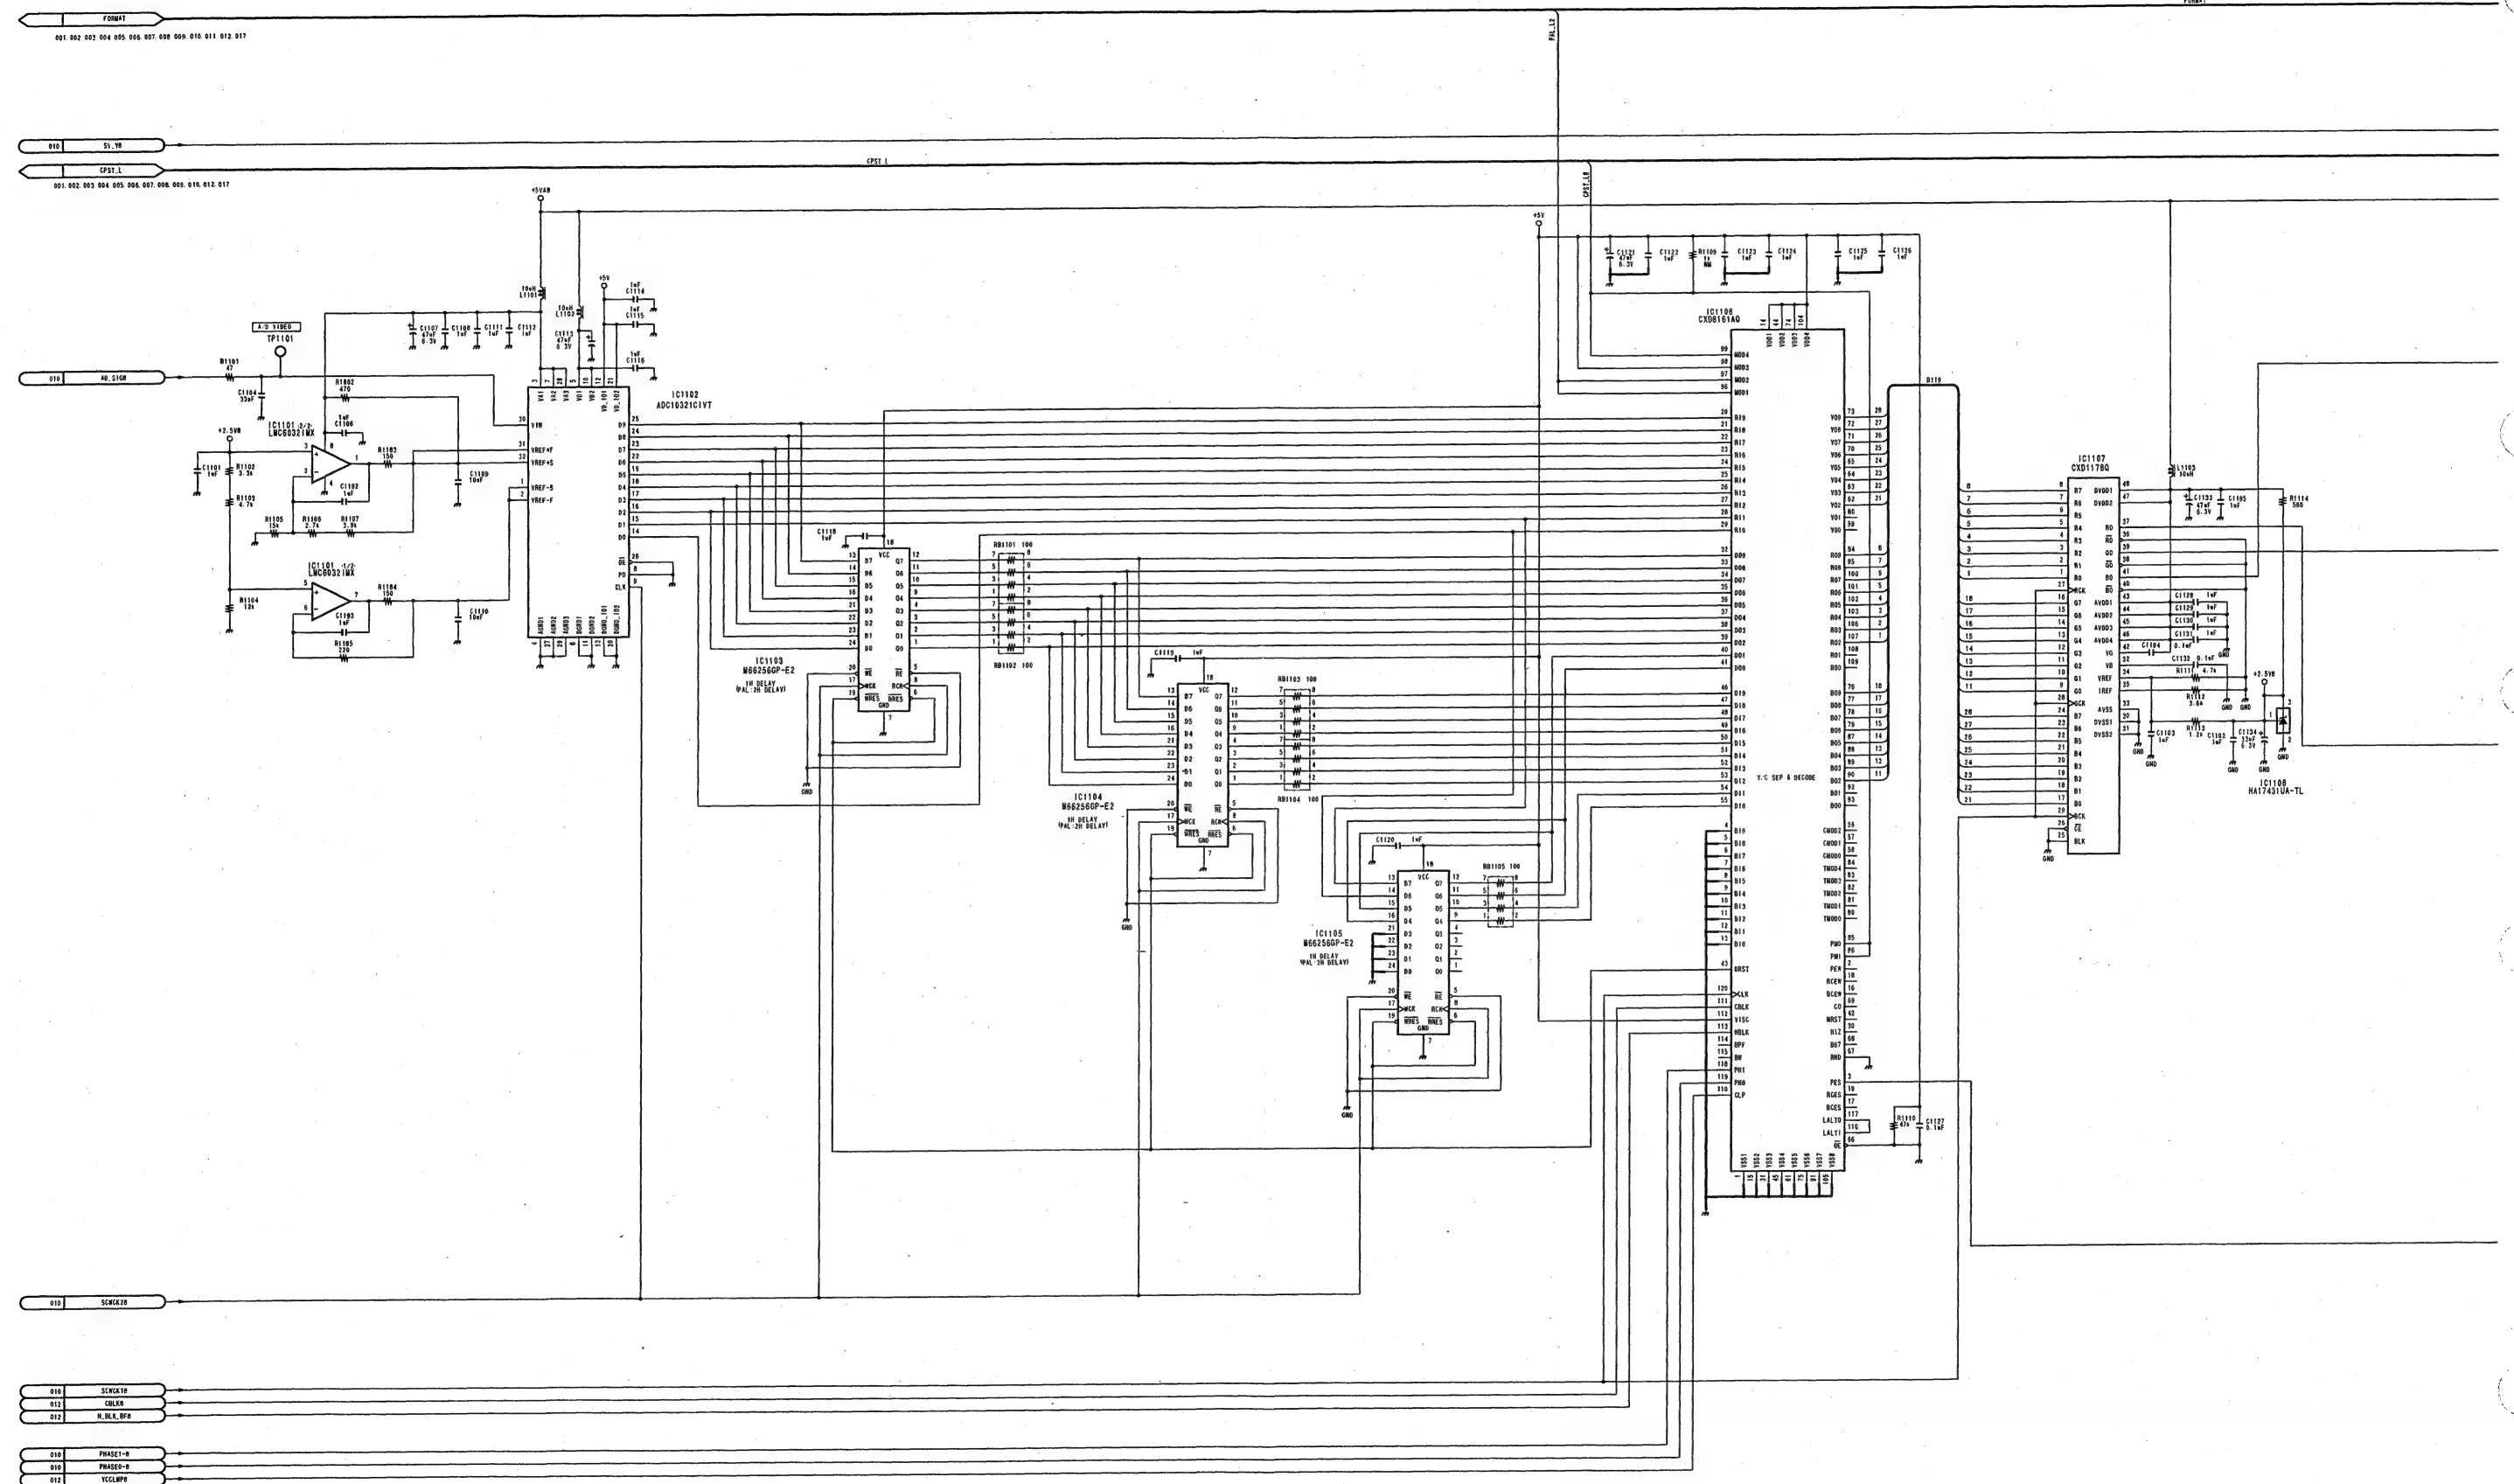

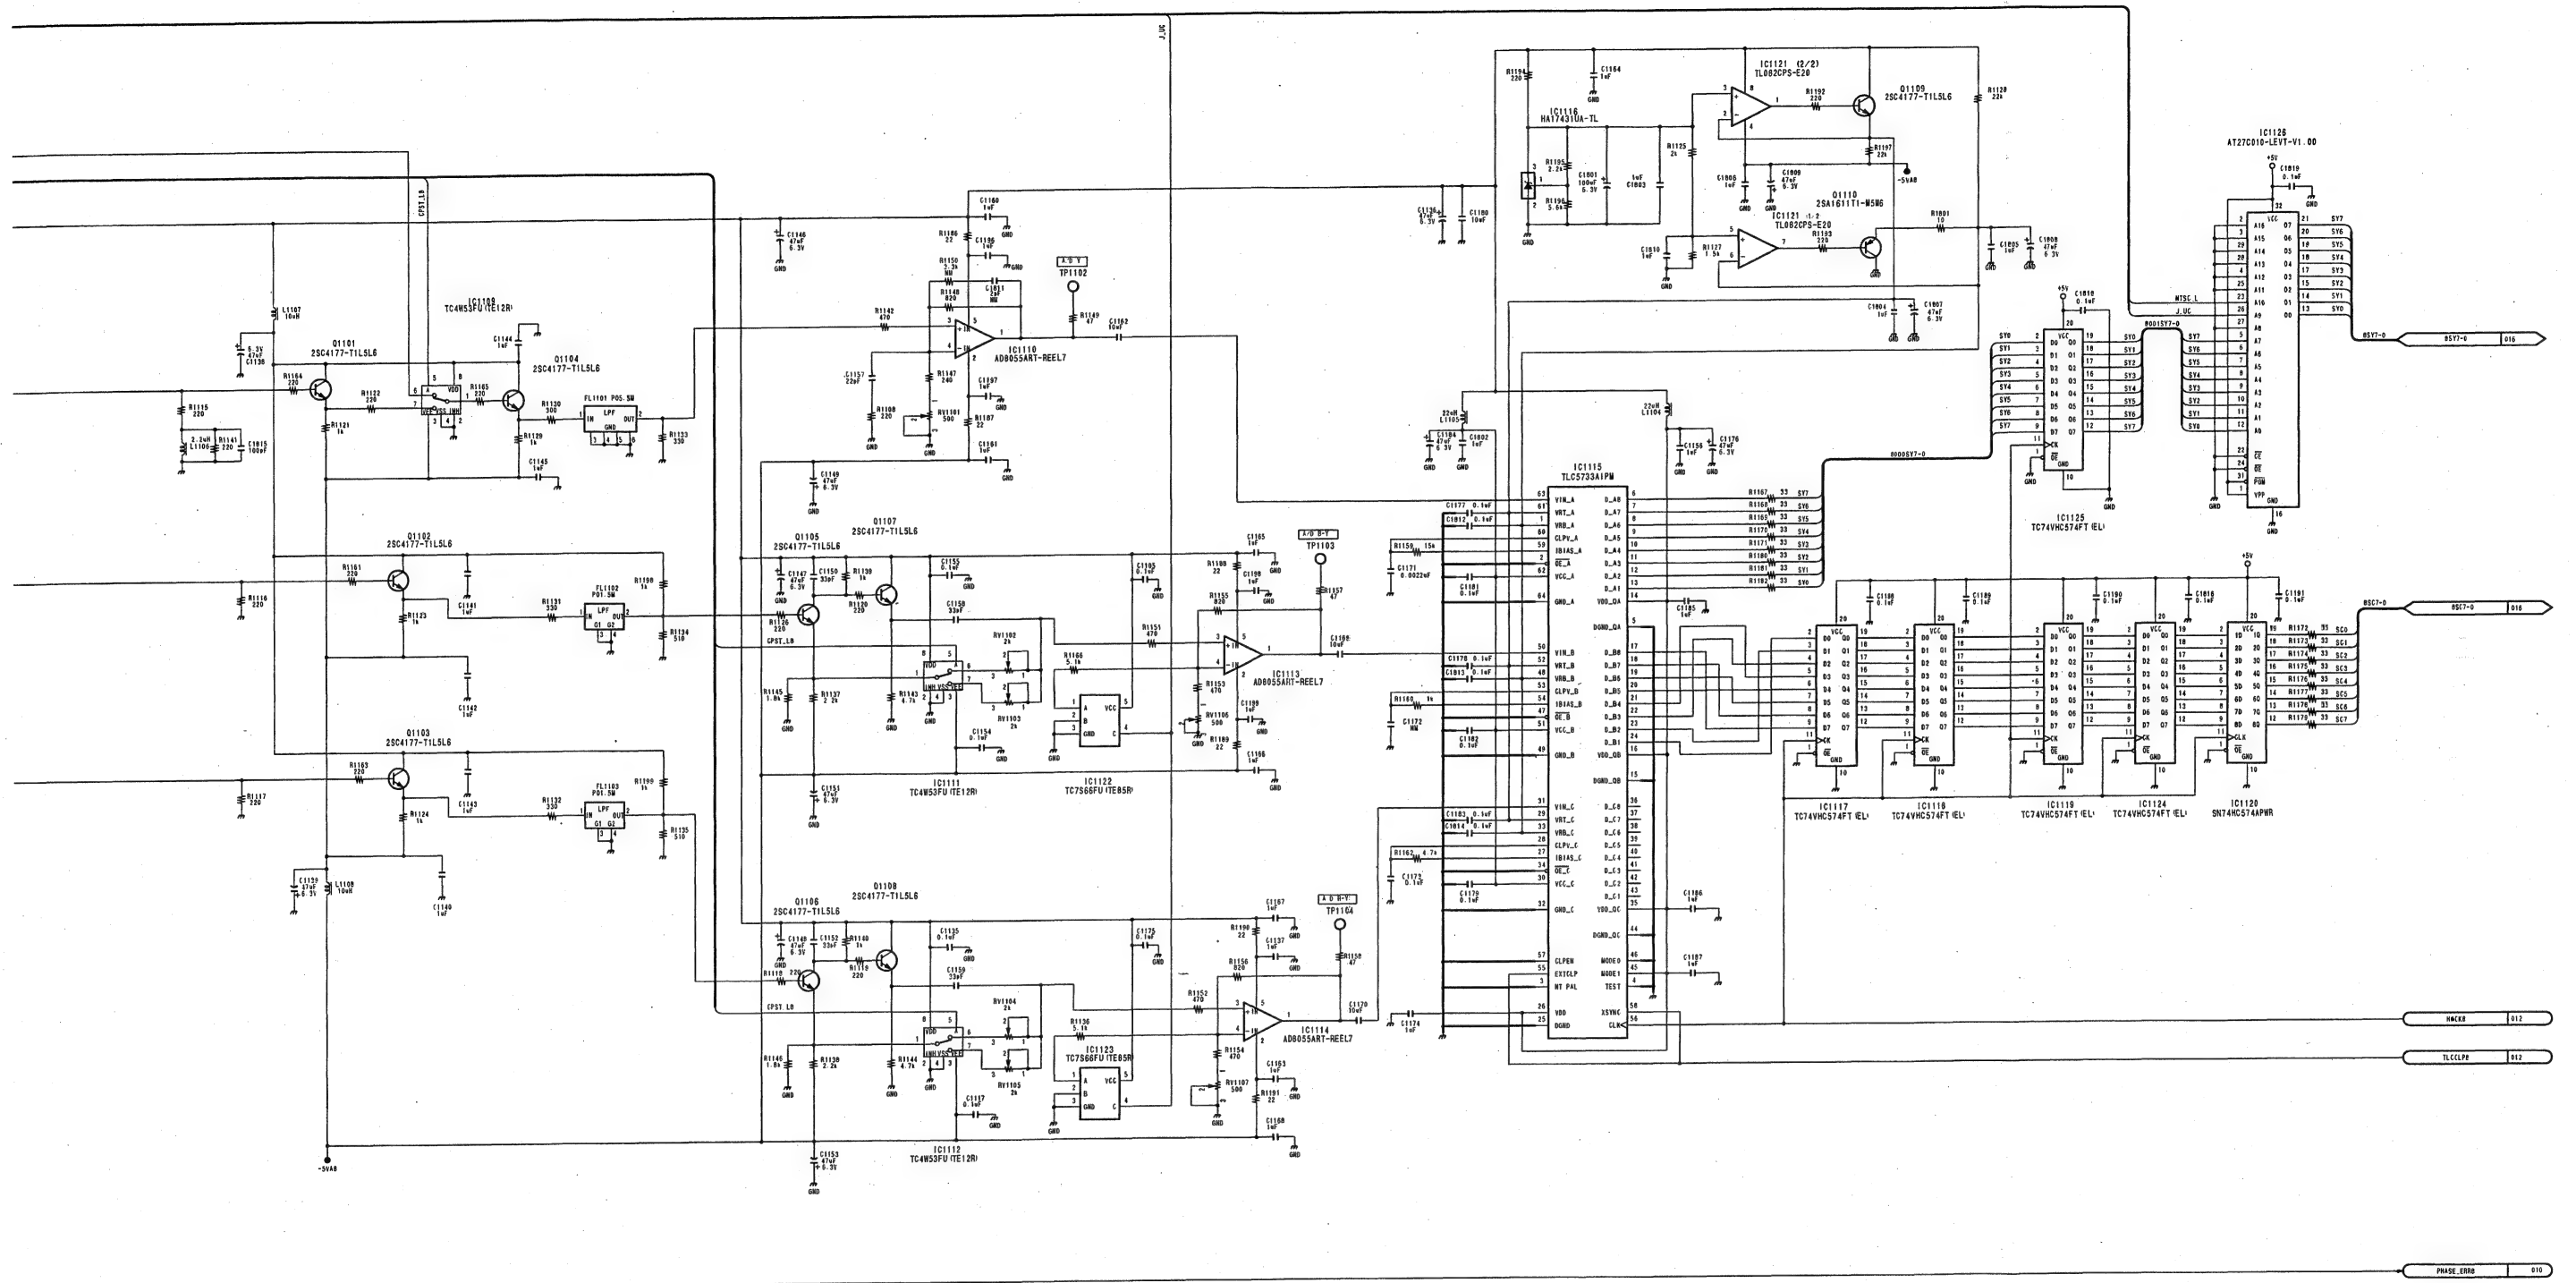


ANALOG COMPOSITE
INPUT BOARD
VIF-19 (11/17)
BOARD NO. 1-677-103-11
LOT NO. 912-002

BKDF-702 (J) : S/N 30001 through 30110
BKDF-702 (UC): S/N 10001 through 10060




BKDF-702 (J): S/N 30001 through 30110
BKDF-702 (UC): S/N 10001 through 10060

FR SYNC 7

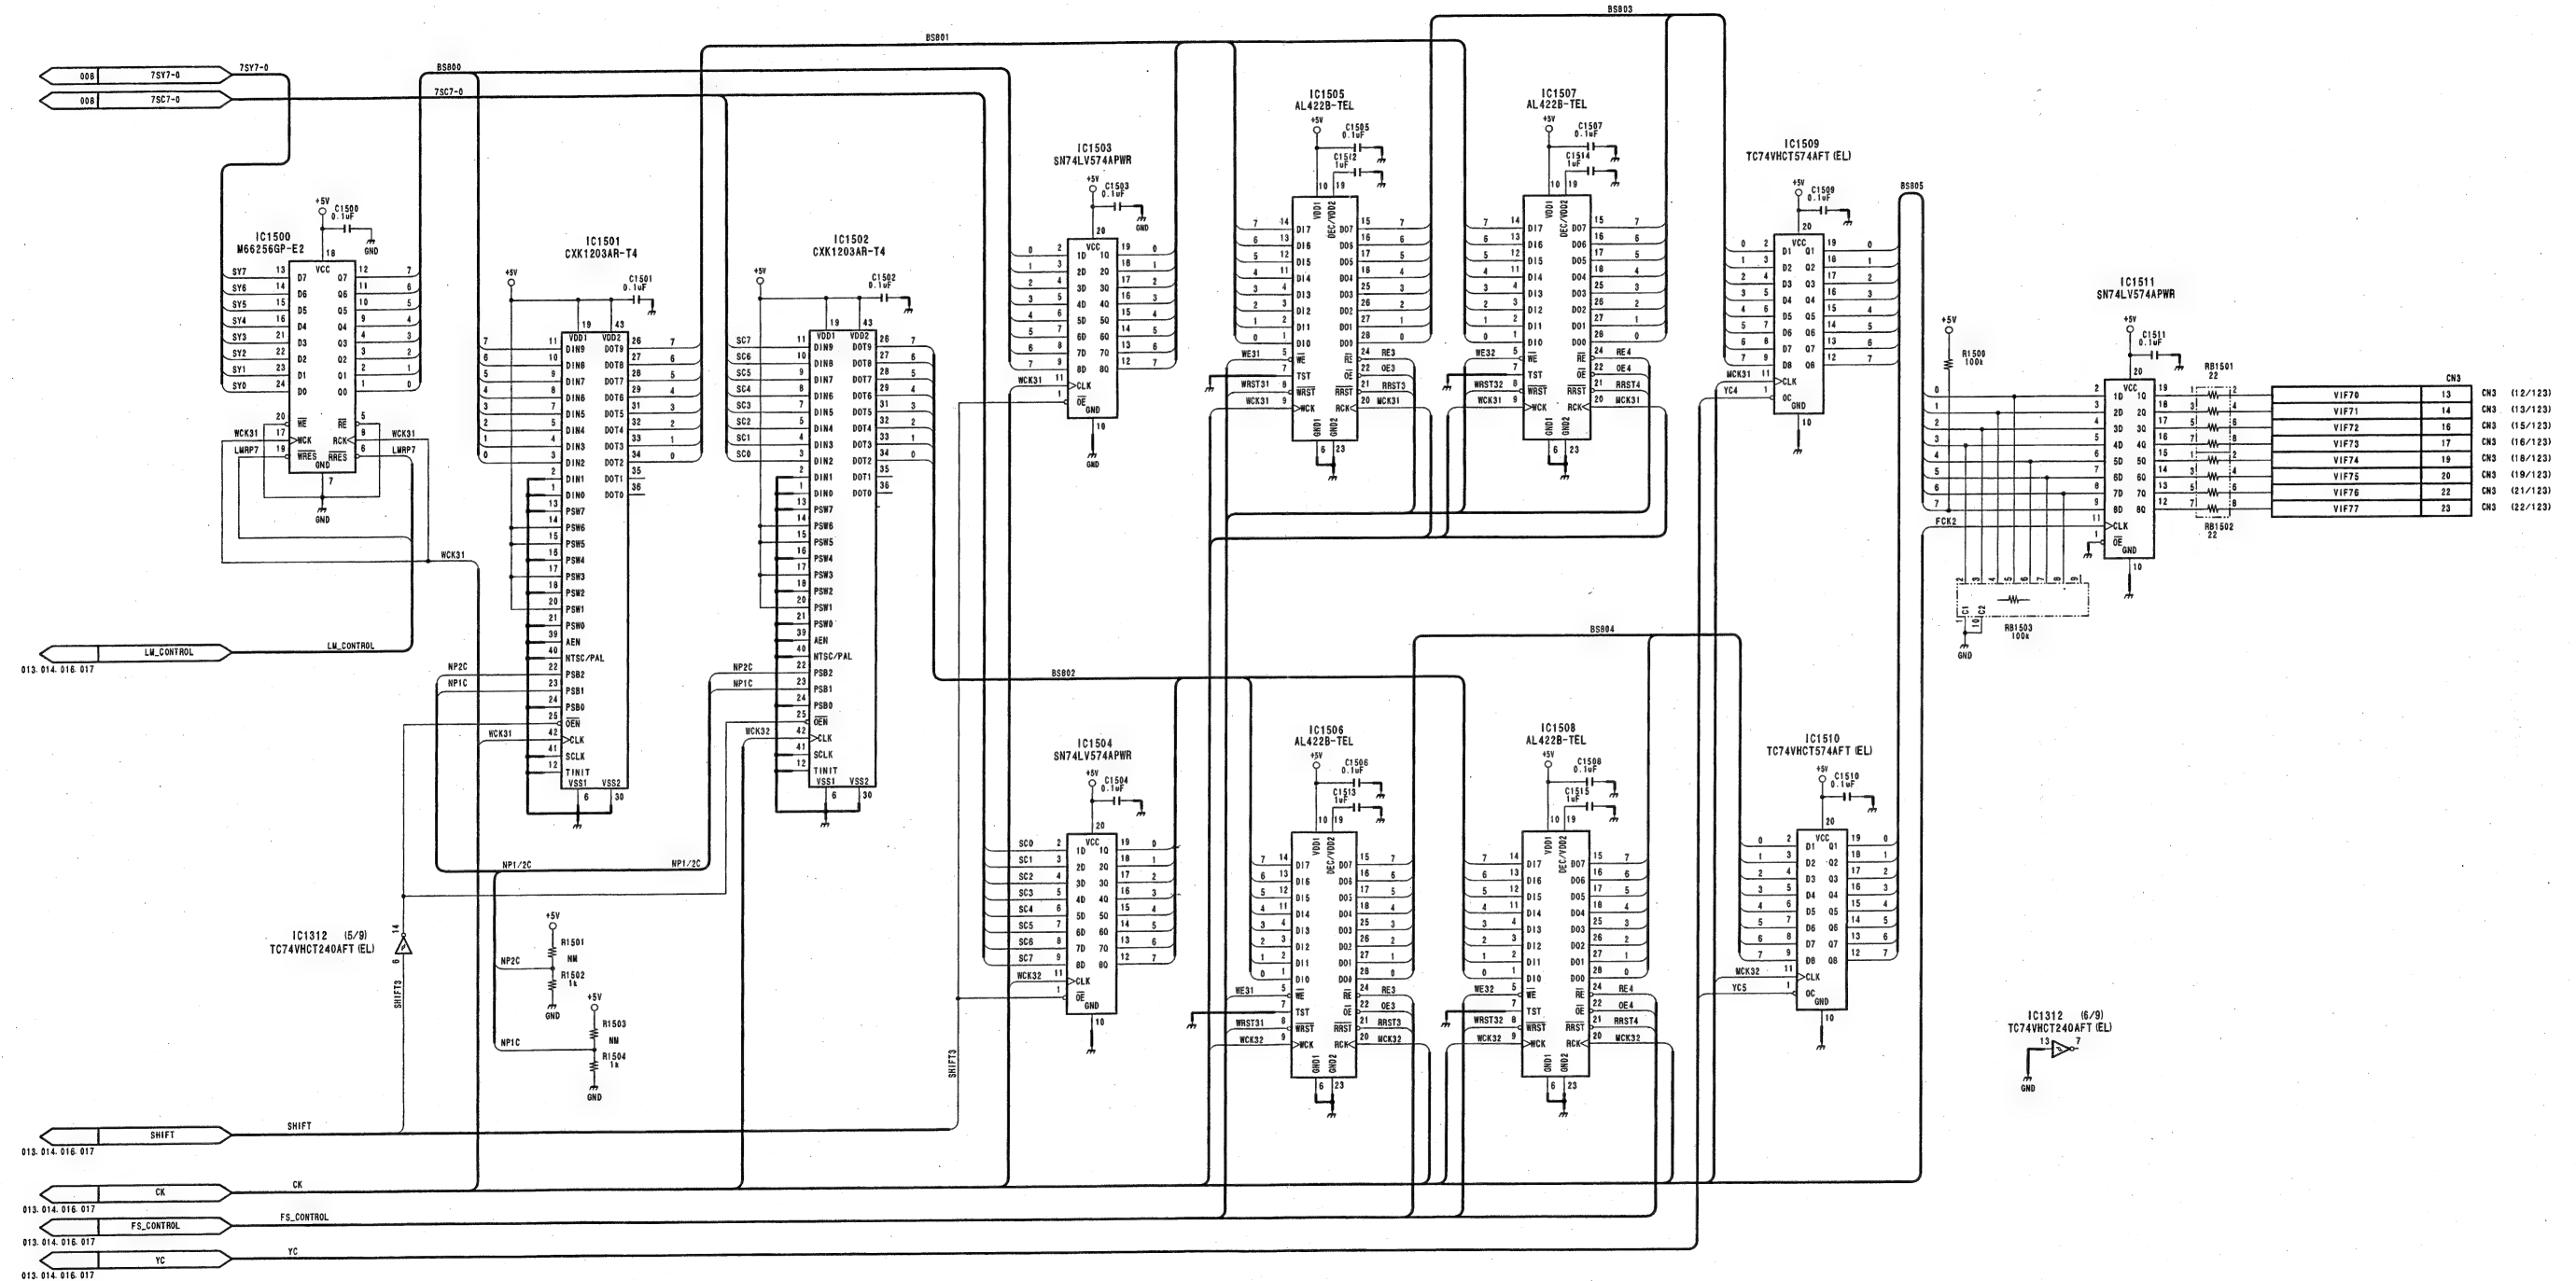


ANALOG COMPOSITE
INPUT BOARD
VIF-19 (15/17)
BOARD NO. 1-677-103-11
LOT NO. 912-002

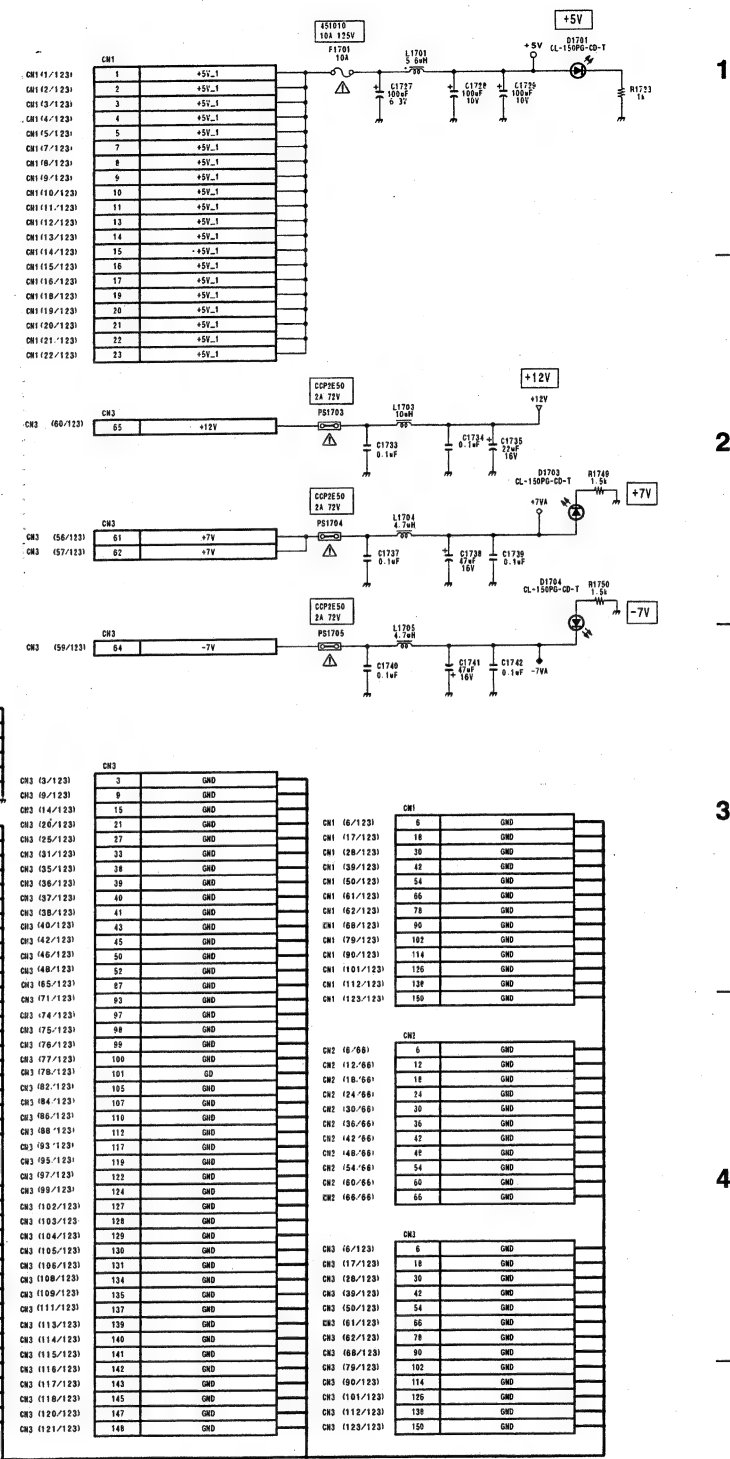


ANALOG COMPOSITE
INPUT BOARD
VIF-19 (17/17)
BOARD NO. 1-677-103-11
LOT NO. 912-002

BKDF-702P (CE): S/N 40001 through 40100

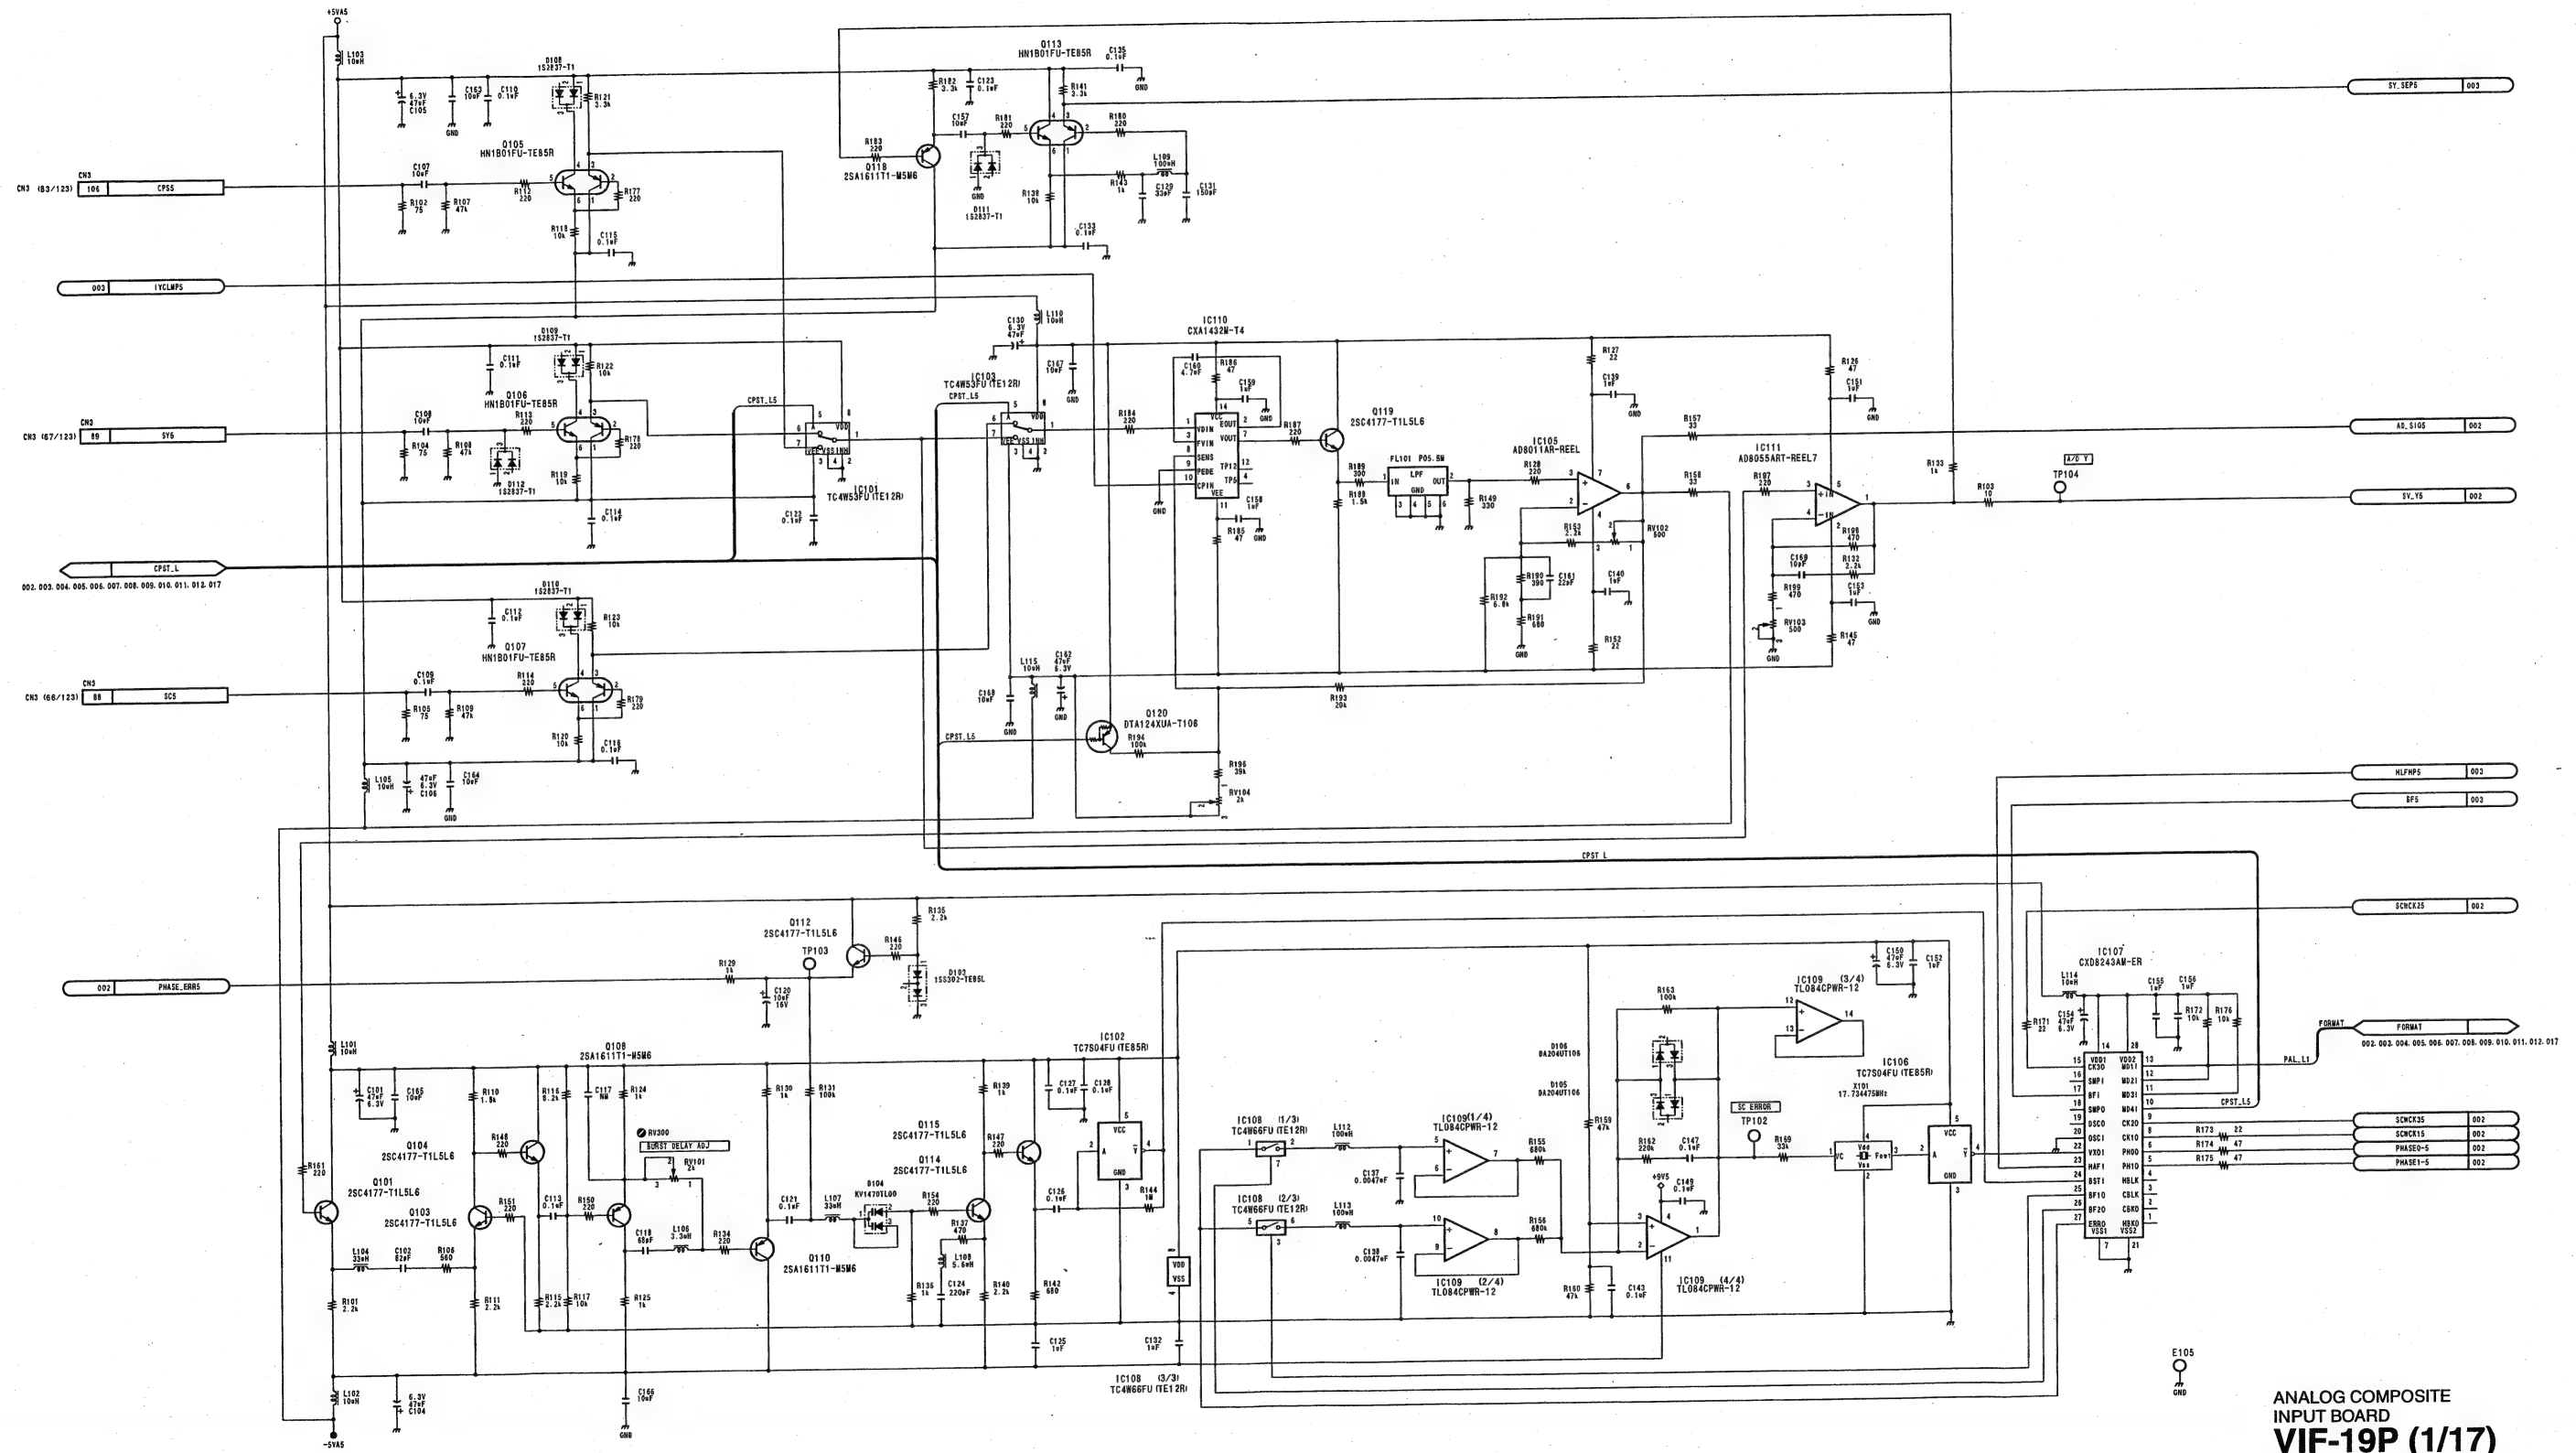

ANALOG COMPOSITE
INPUT BOARD
VIF-19P (1/17)
BOARD NO. 1-677-103-11
LOT NO. 912-002

BKDF-702P (CE): S/N 40001 through 40100

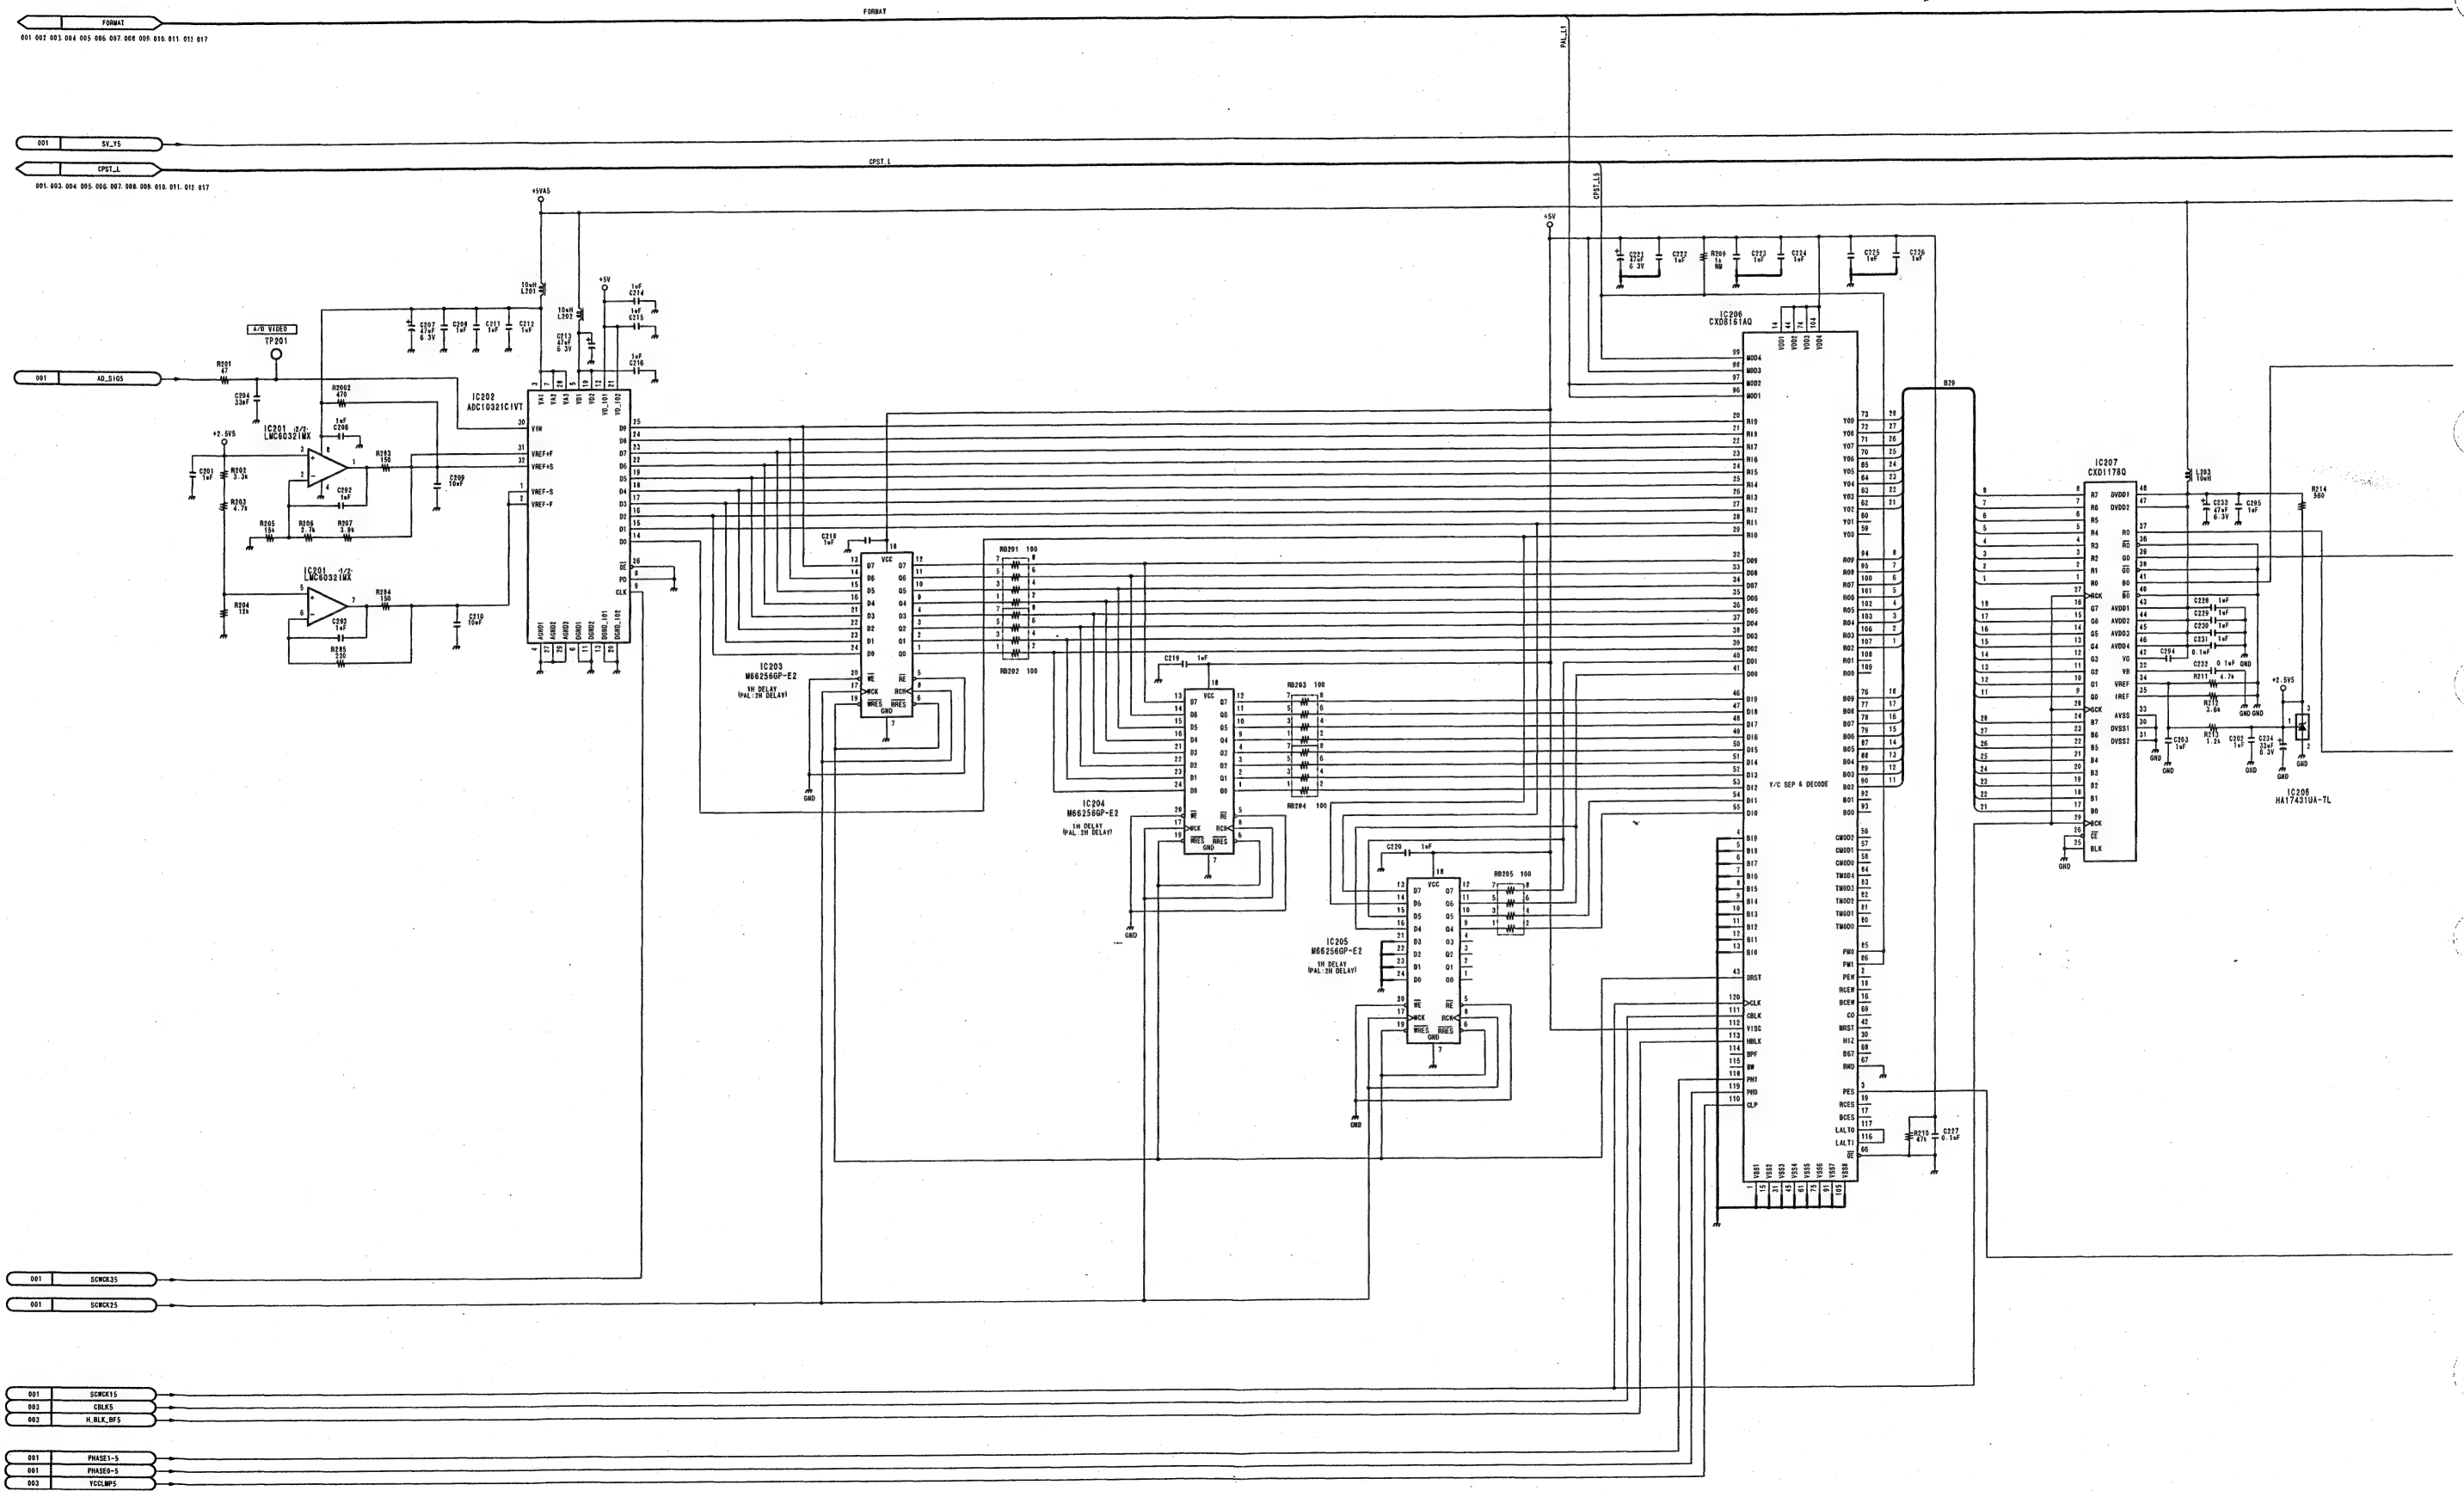





BKDF-702P (CE): S/N 40001 through 40100



BKDF-702P (CE): S/N 40001 through 40100

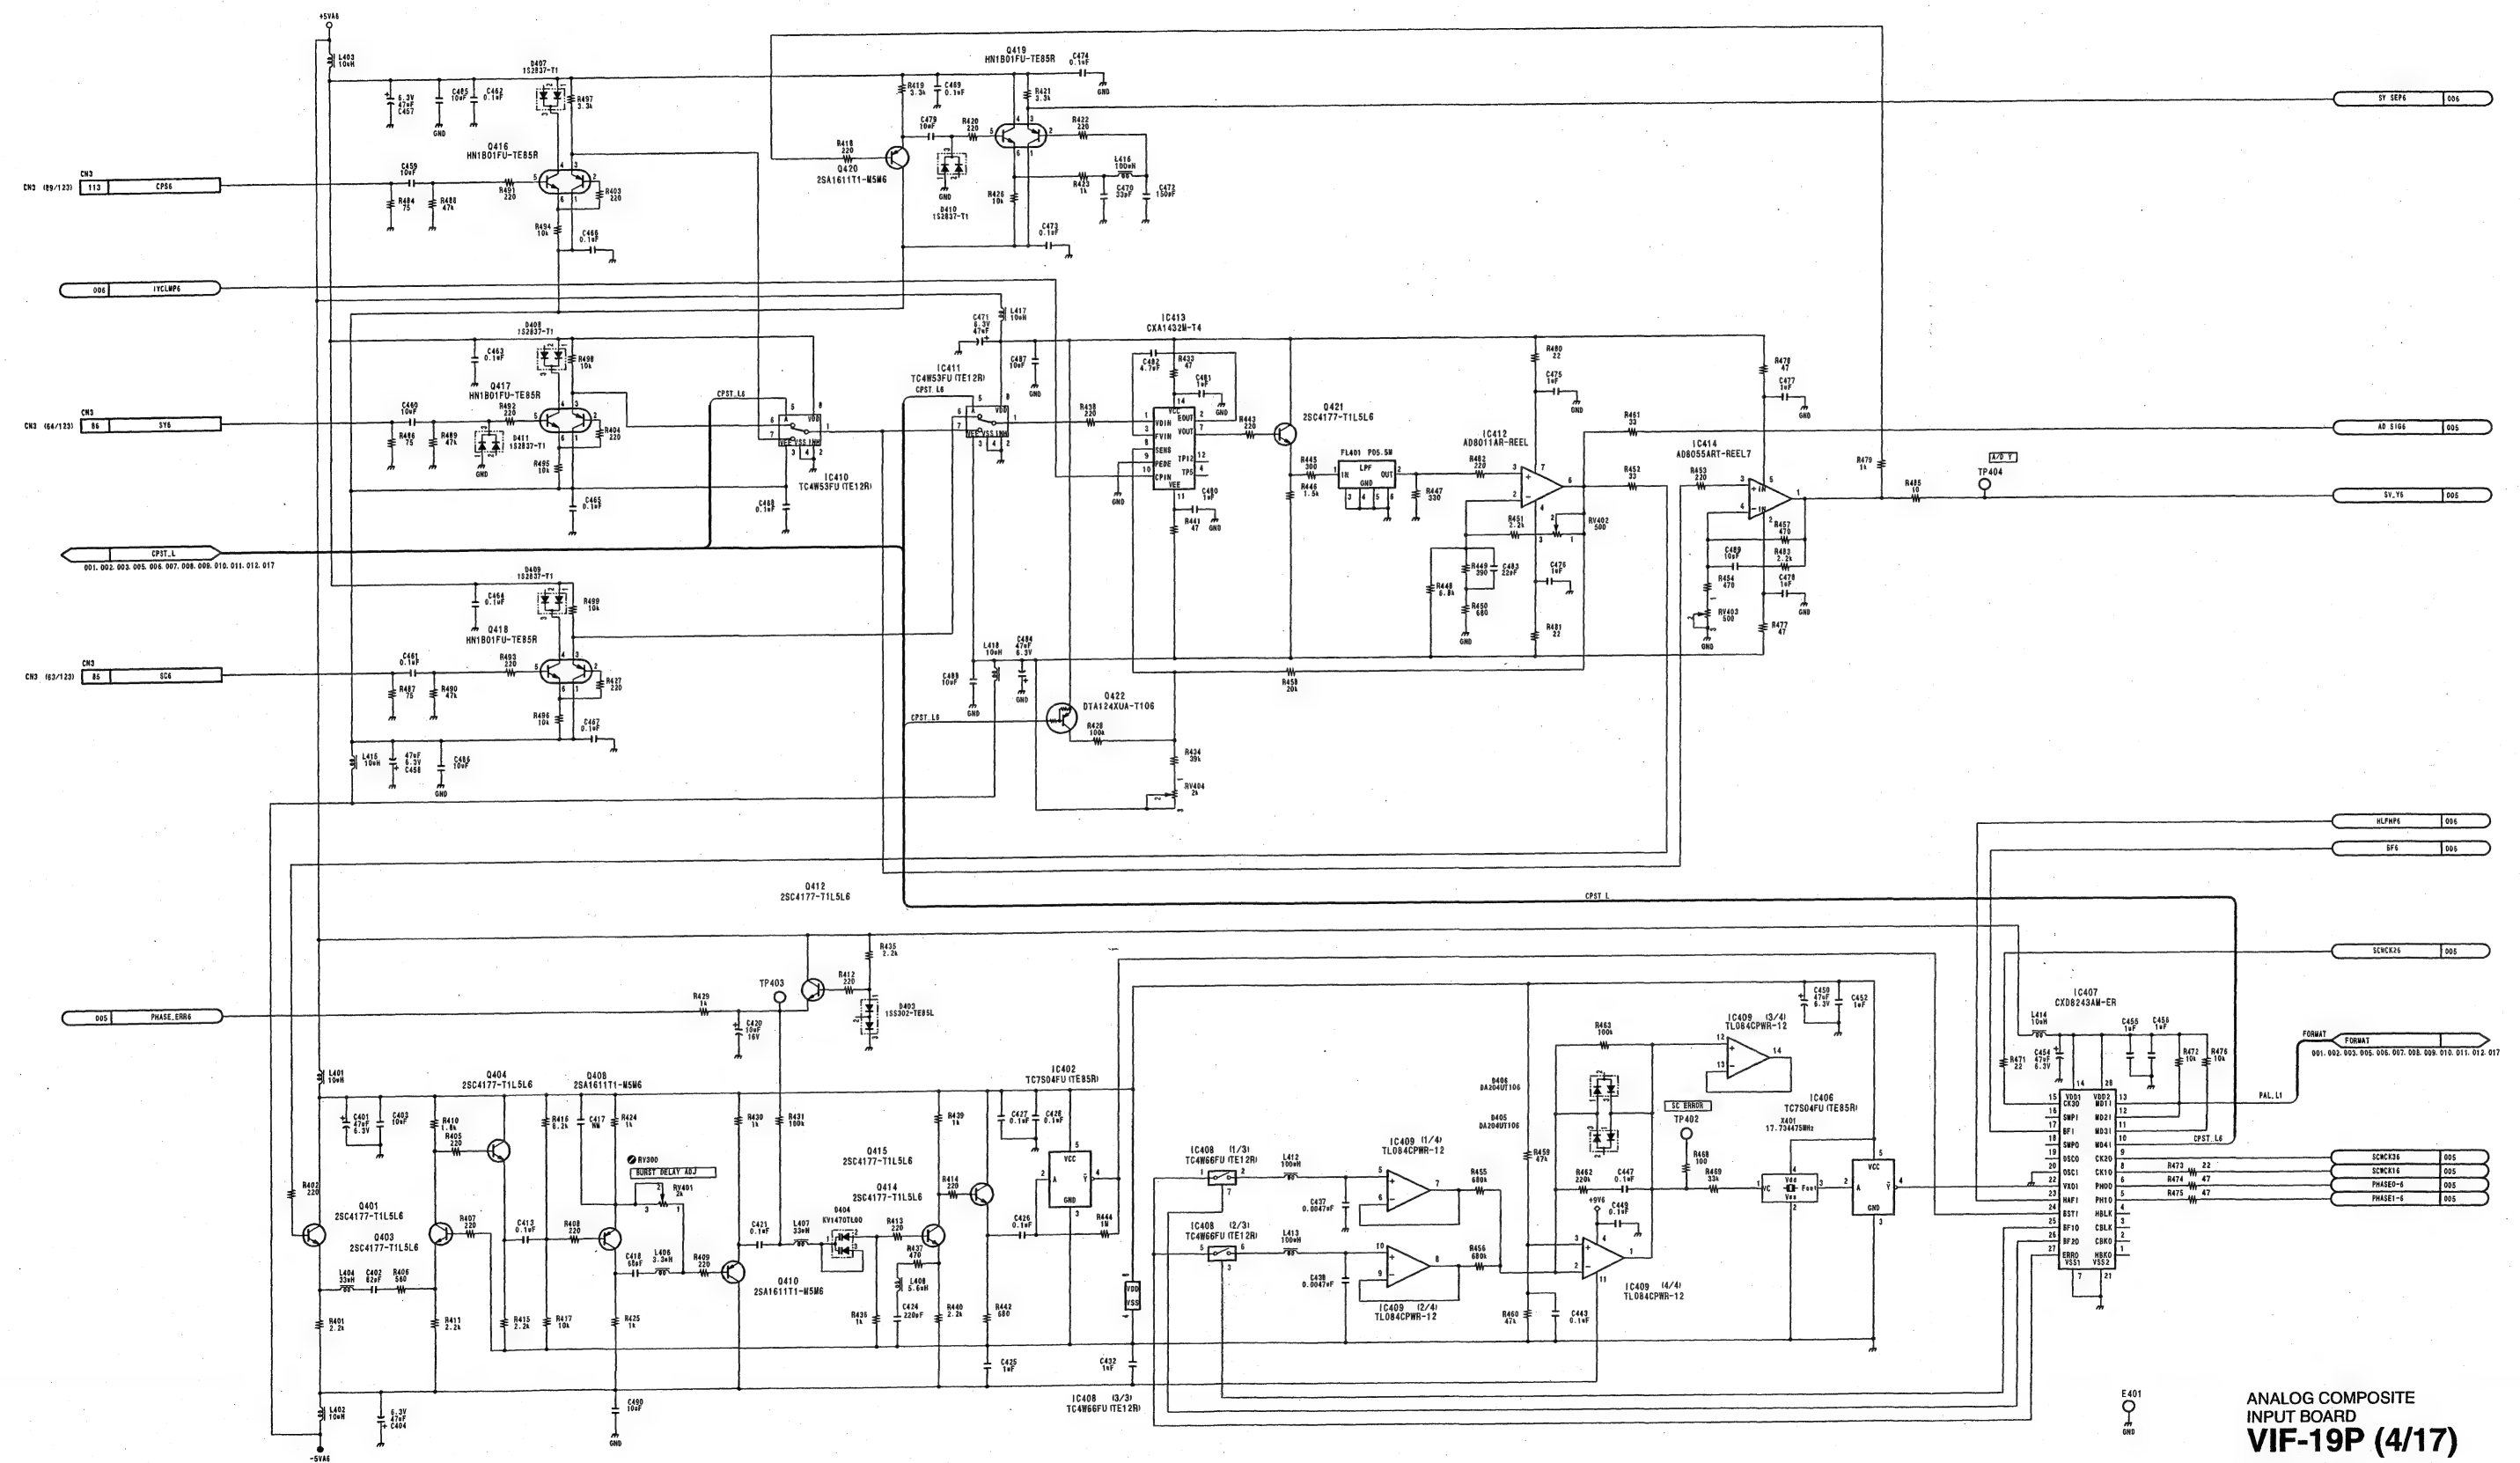

BKDF-702P (CE): S/N 40001 through 40100

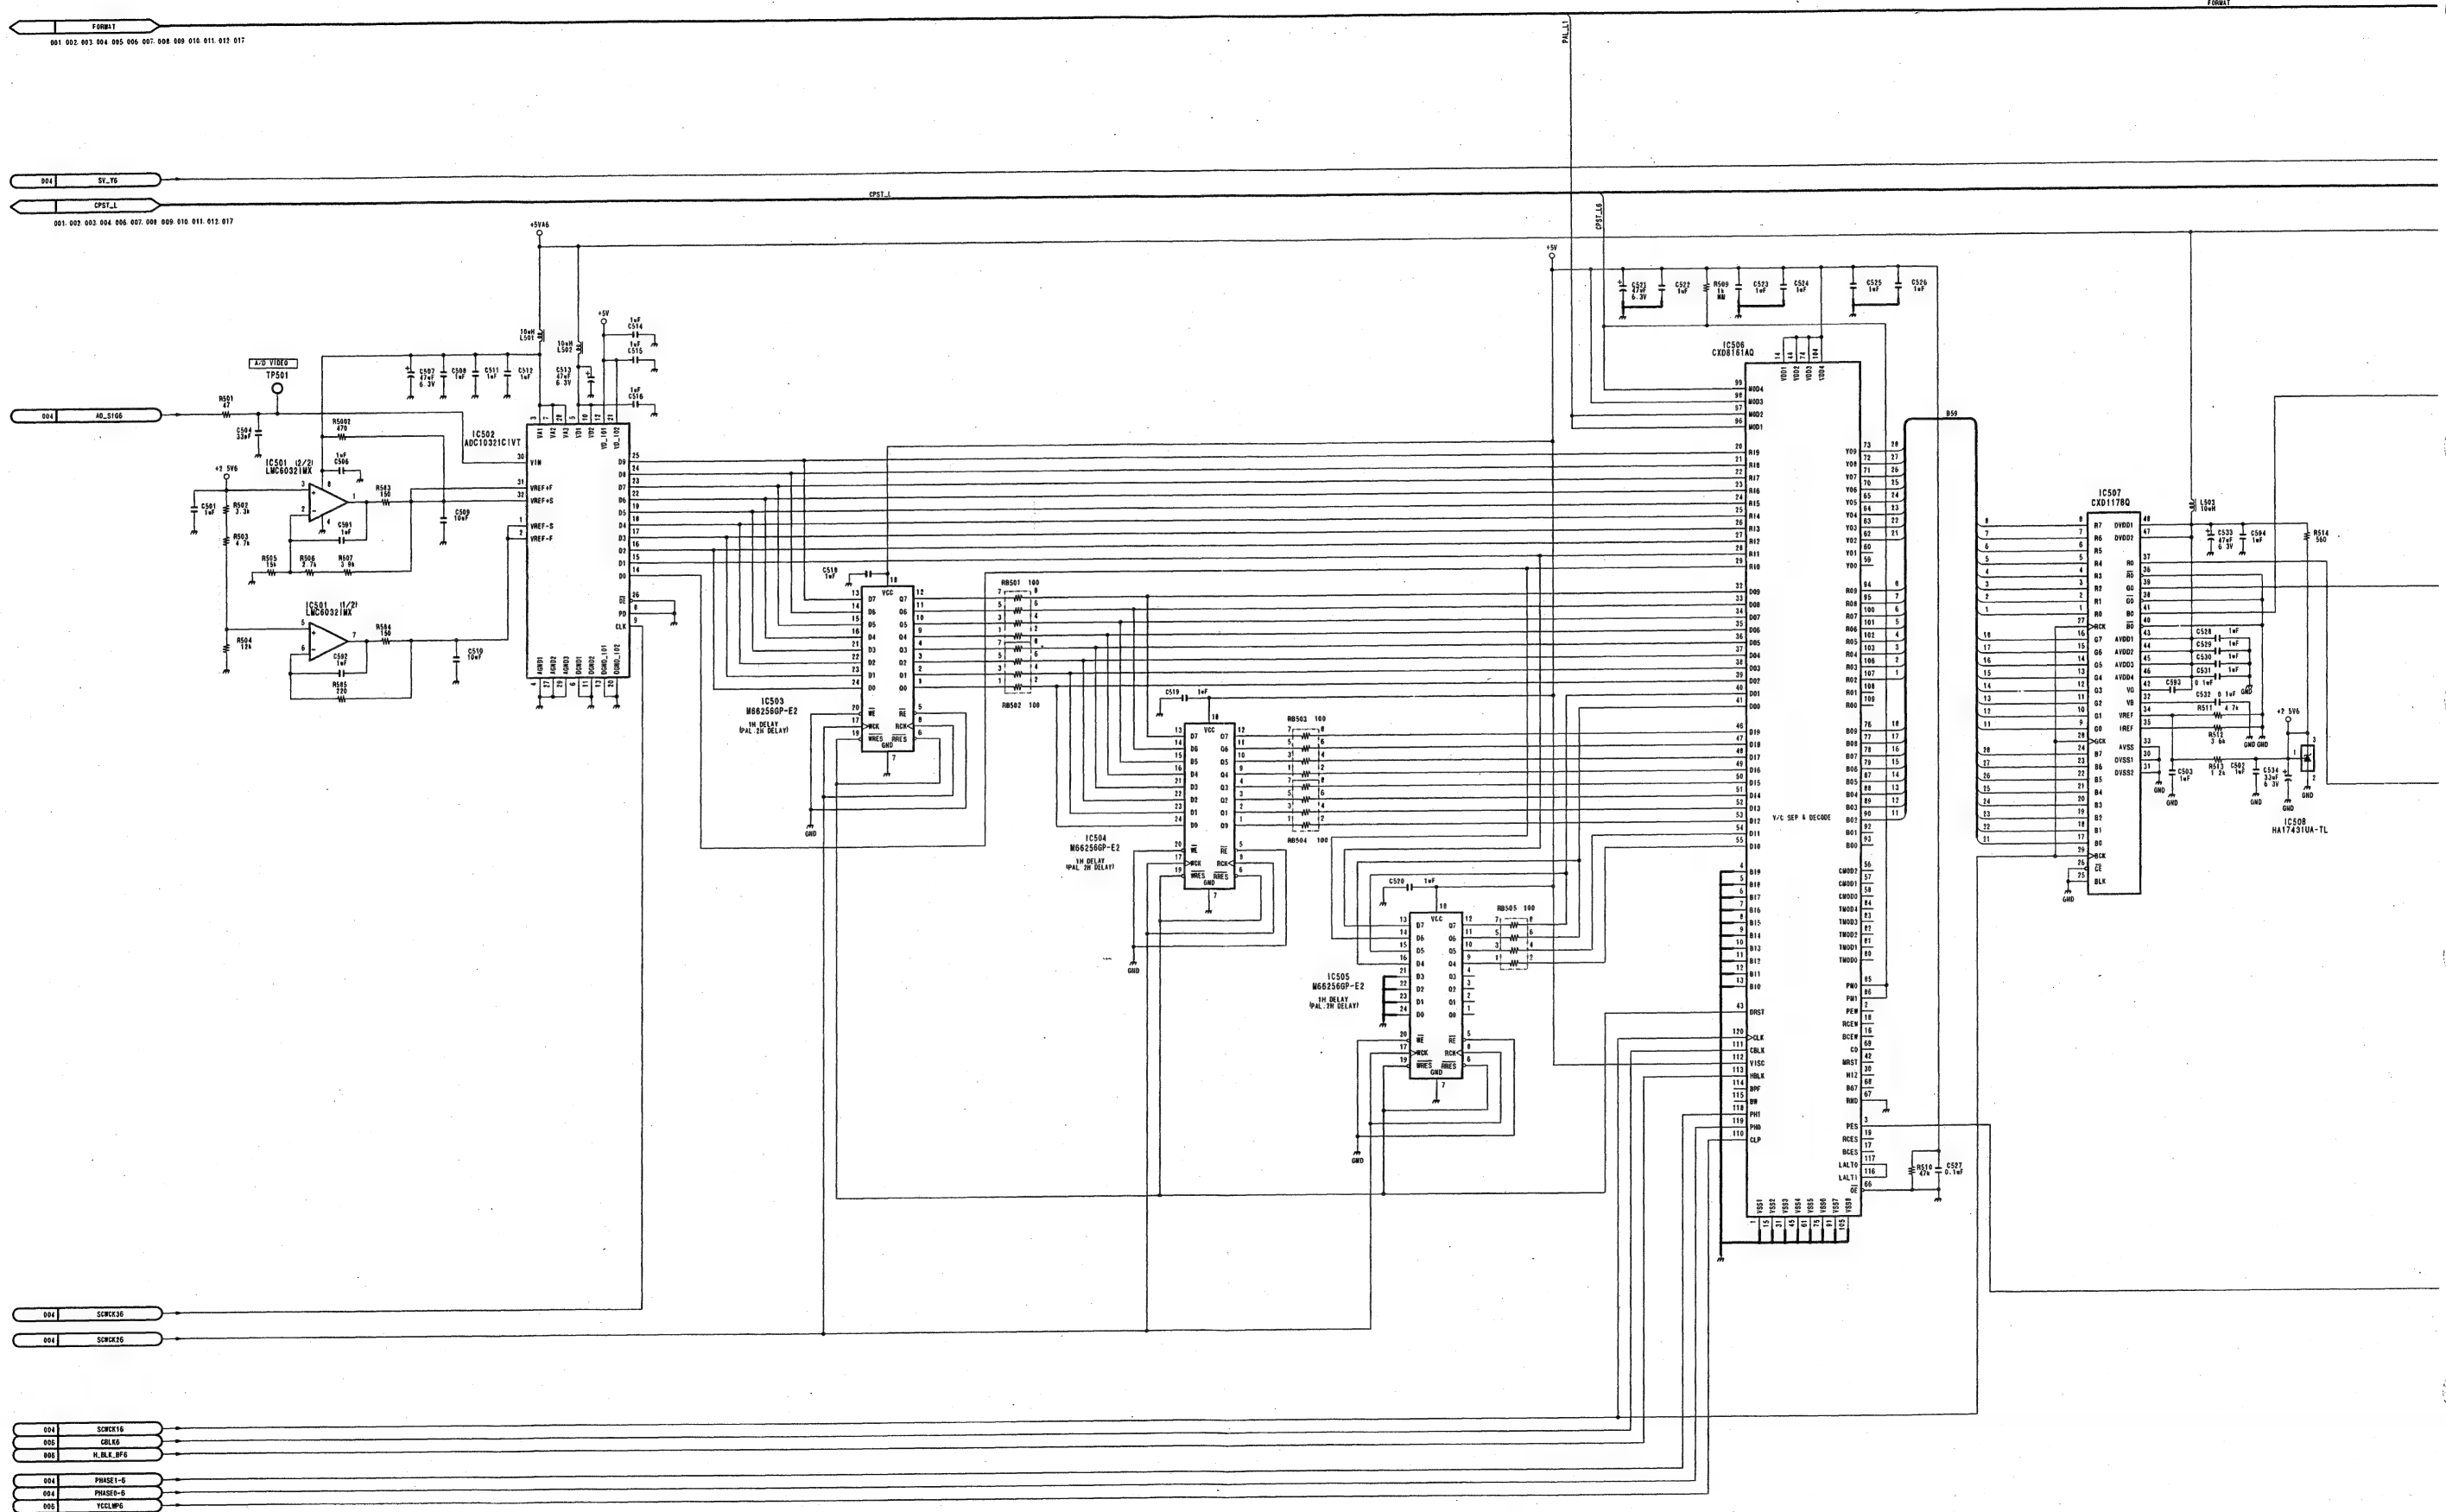

4-128

4-128

DFS-700/700P




VIF-19P (6/17)

BKDF-702P (CE): S/N 40001 through 40100



VIF-19P (7/17) VIF-19P (7/17)

BKDF-702P (CE): S/N 40001 through 40100

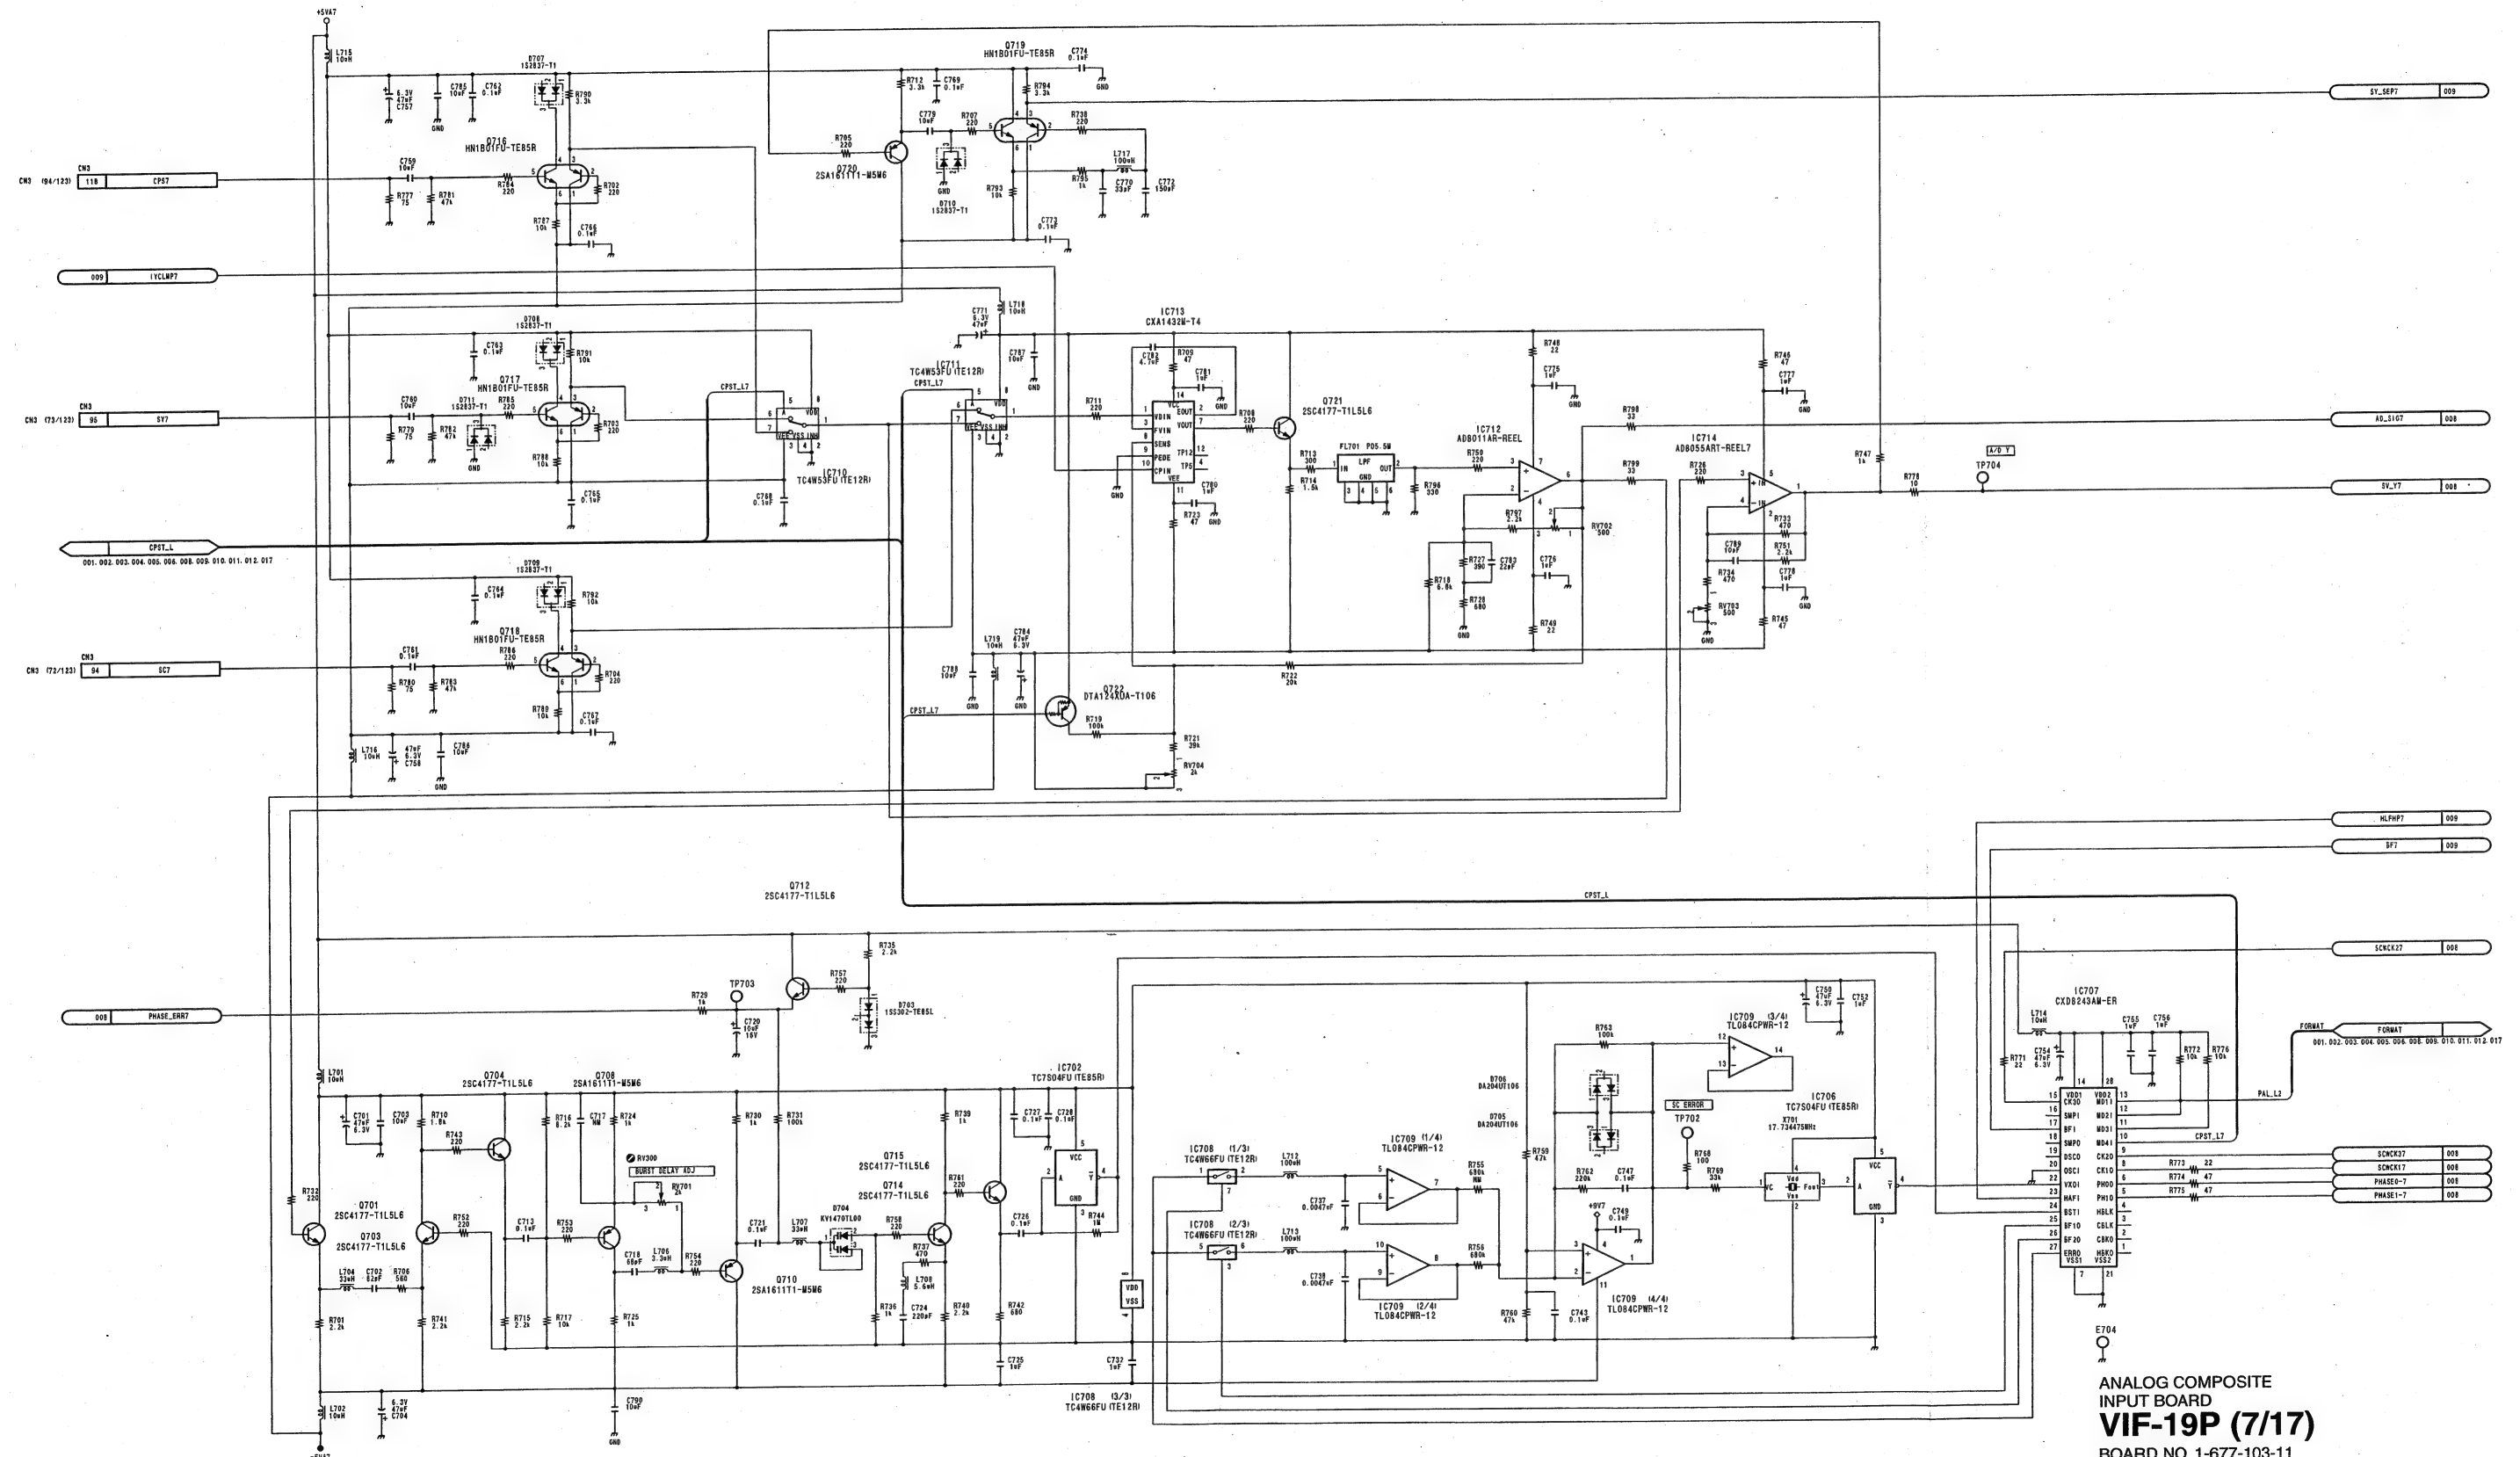


DFS-700/700P

A B C D E F G H

VIF-19P (8/17) VIF-19P (8/17)

BKDF-702P (CE): S/N 40001 through 40100

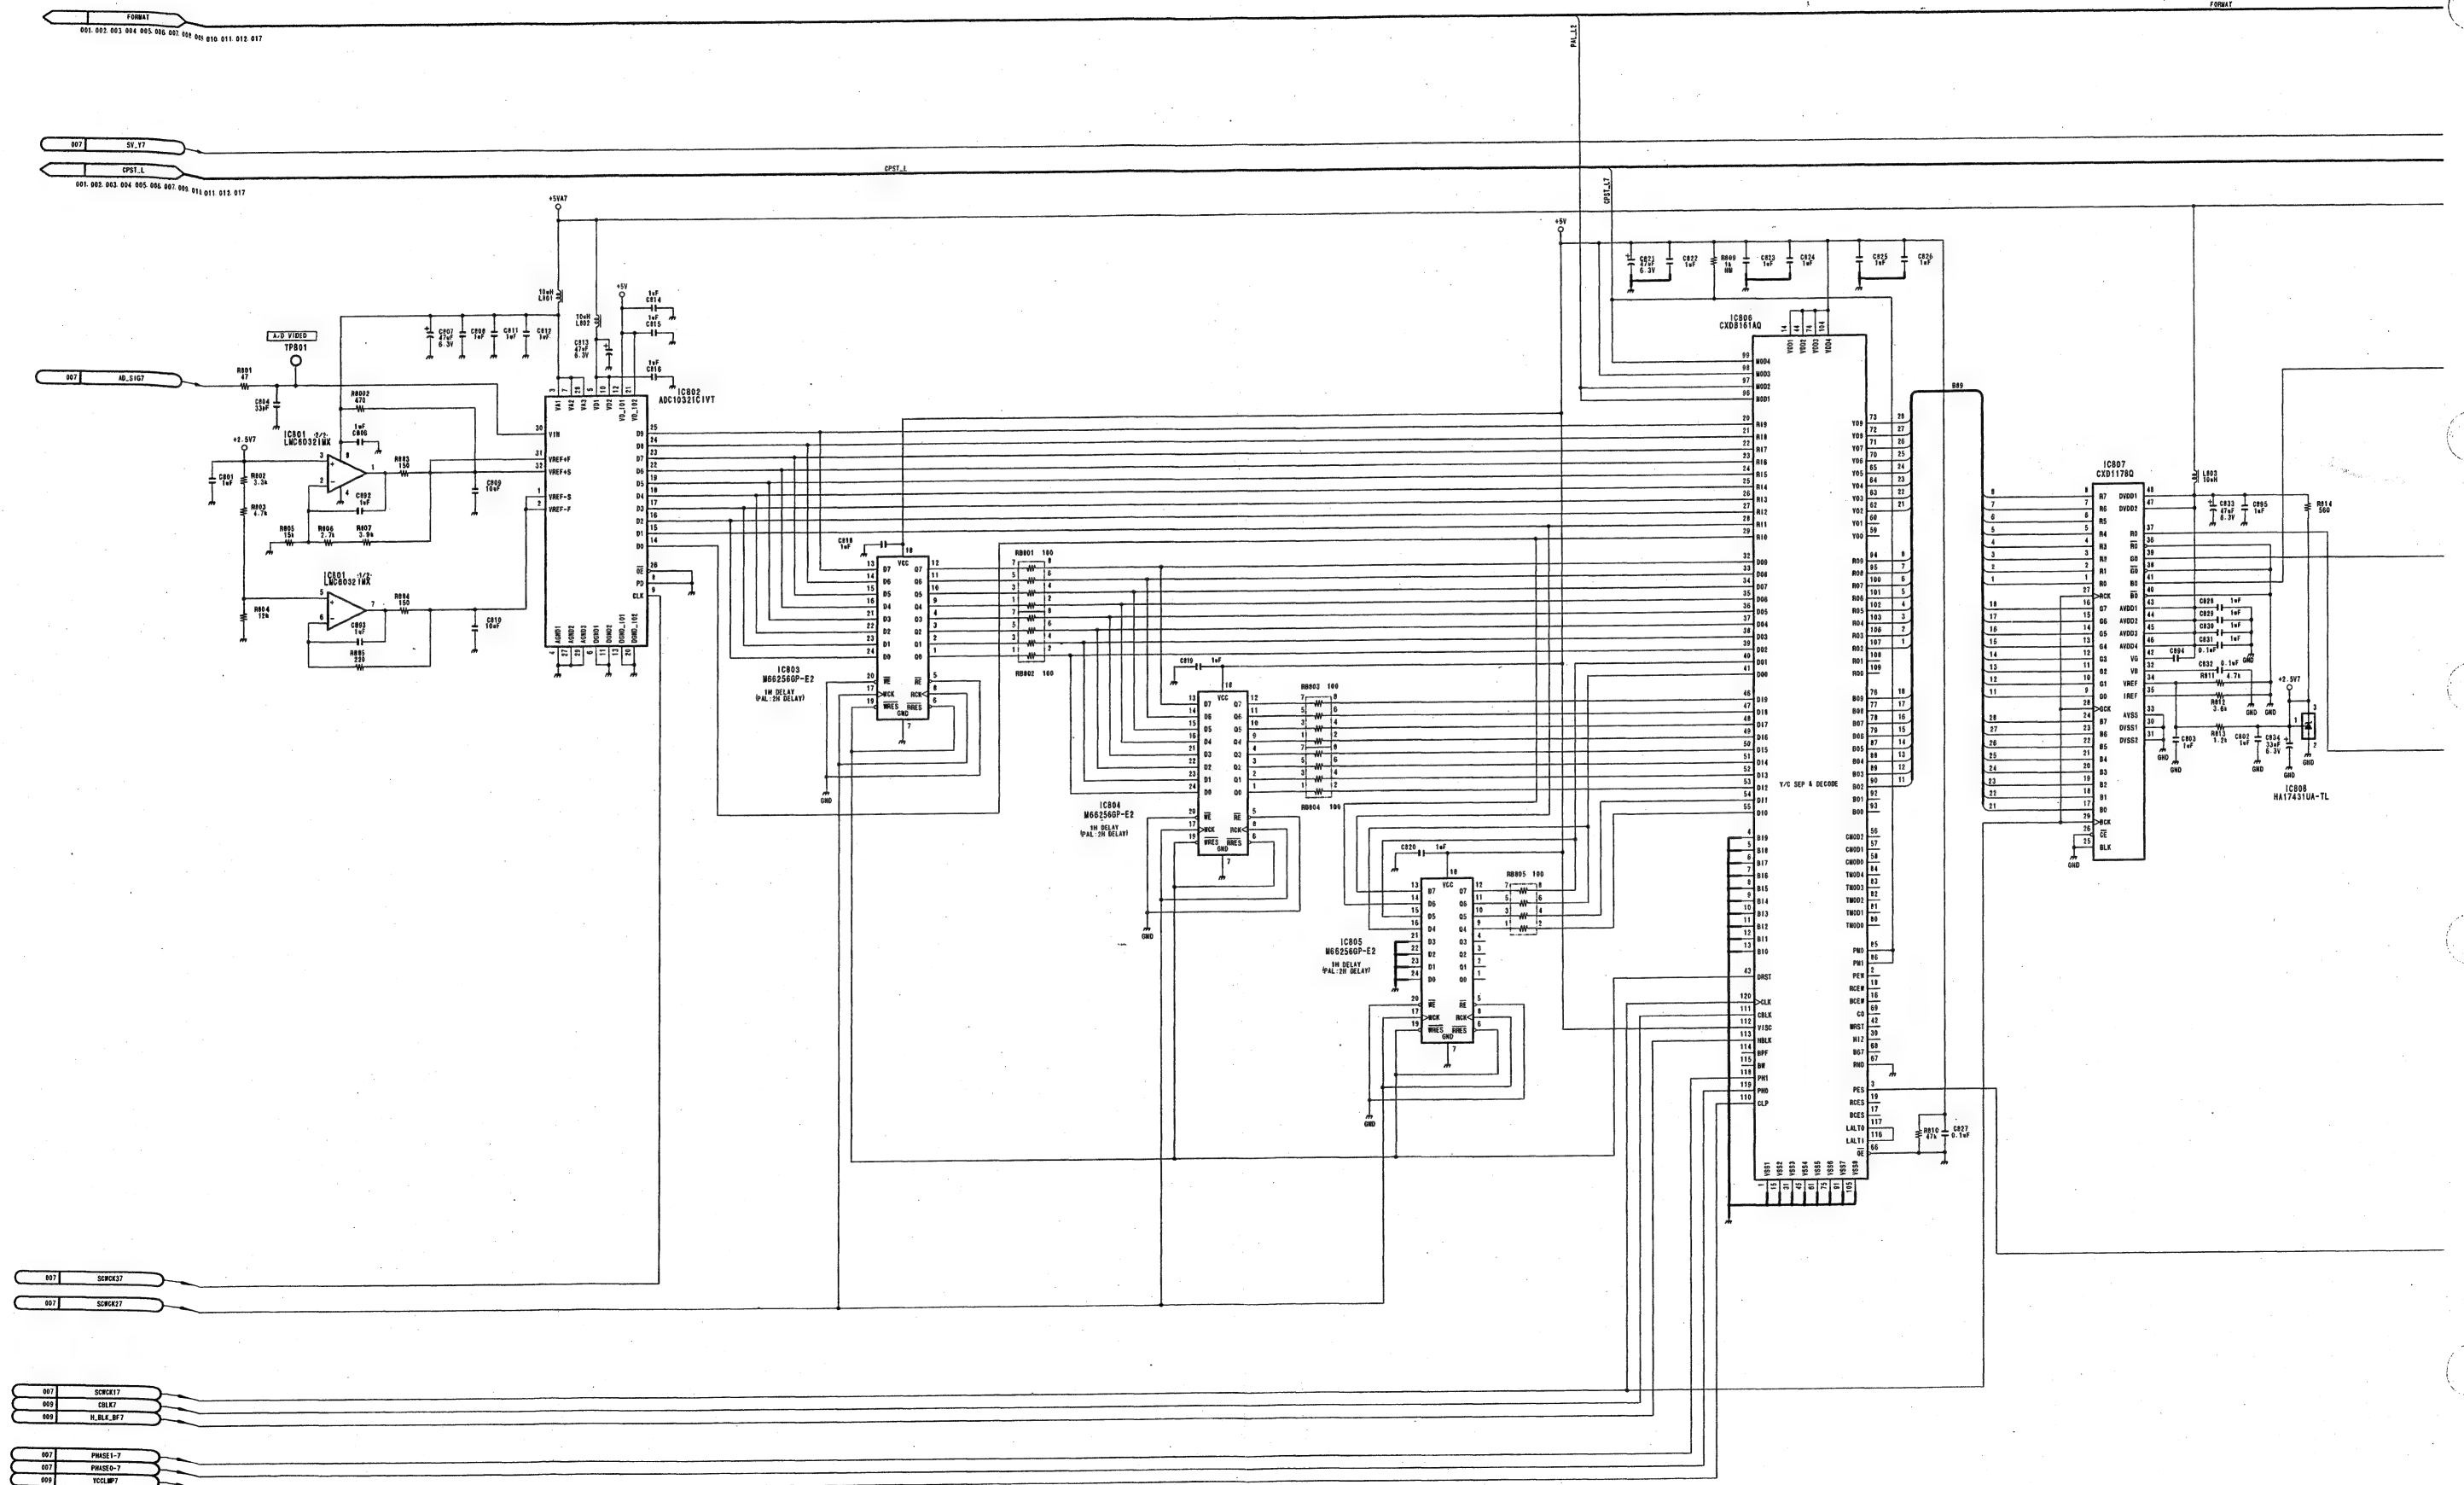



VIF-19P (9/17)

BKDF-702P (CE): S/N 40001 through 40100



1



3

1

A

B

C

D

E


F


G

H

VIF-19P (11/17)

BKDF-702P (CE): S/N 40001 through 40100

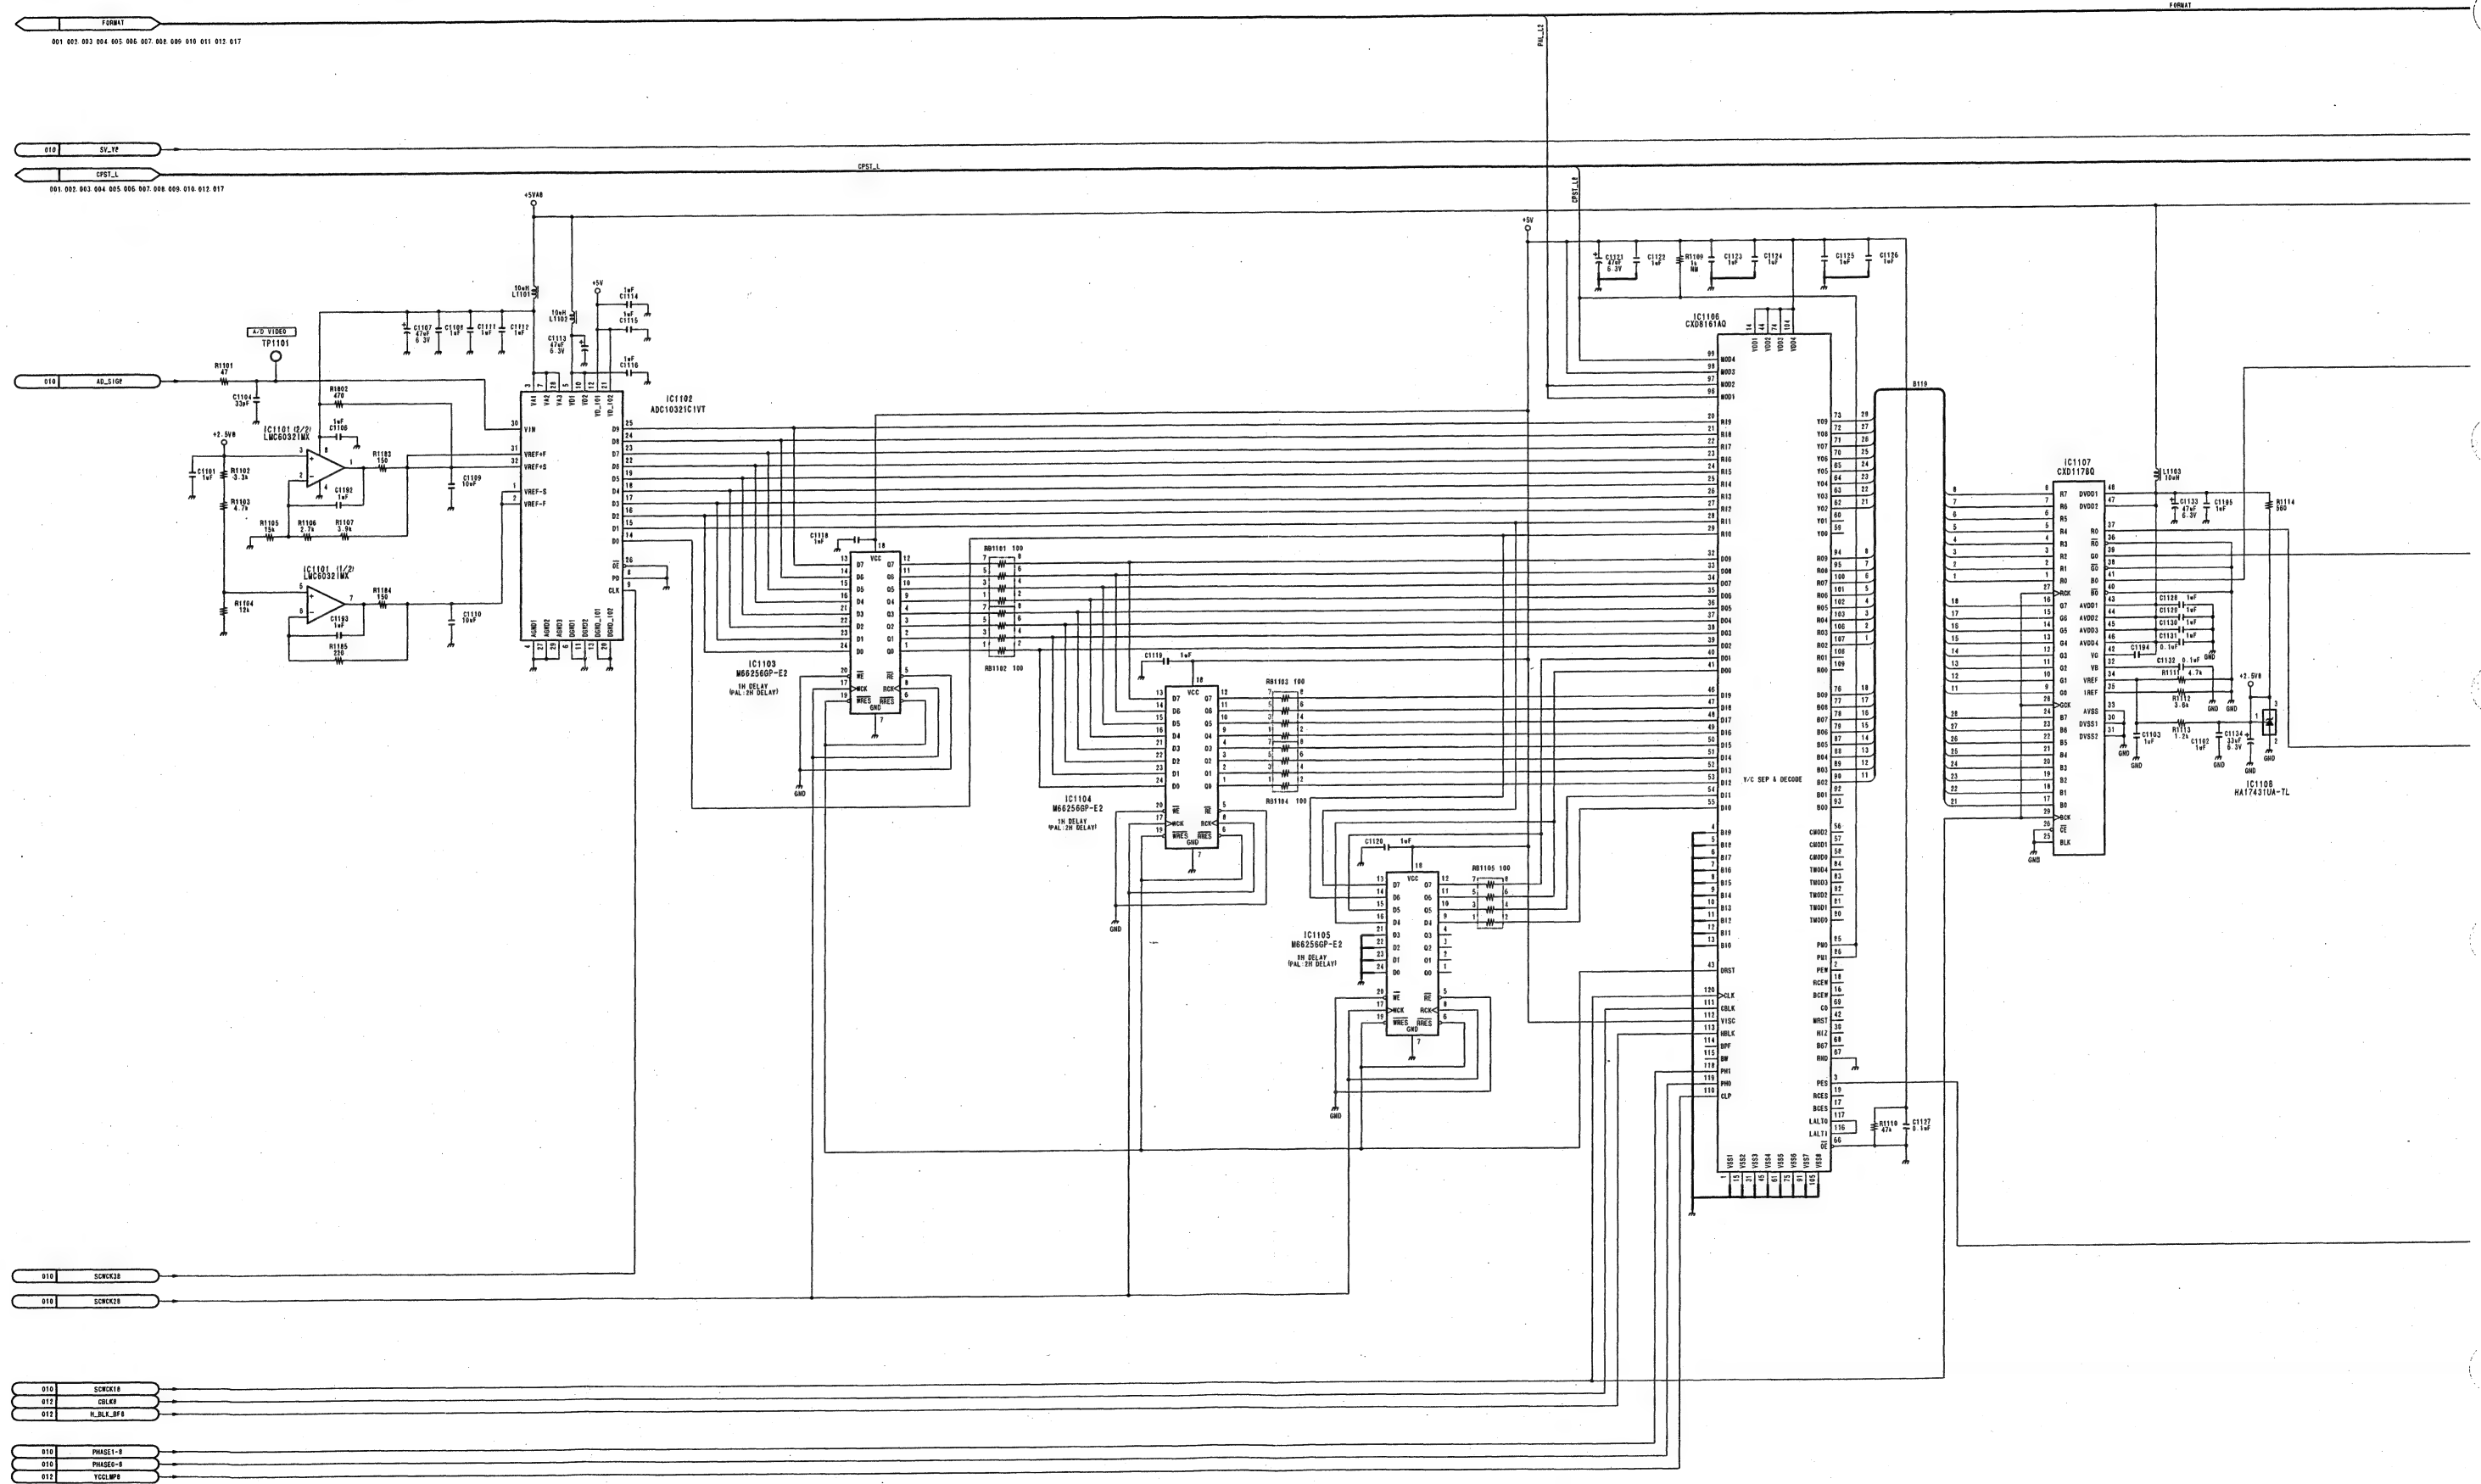

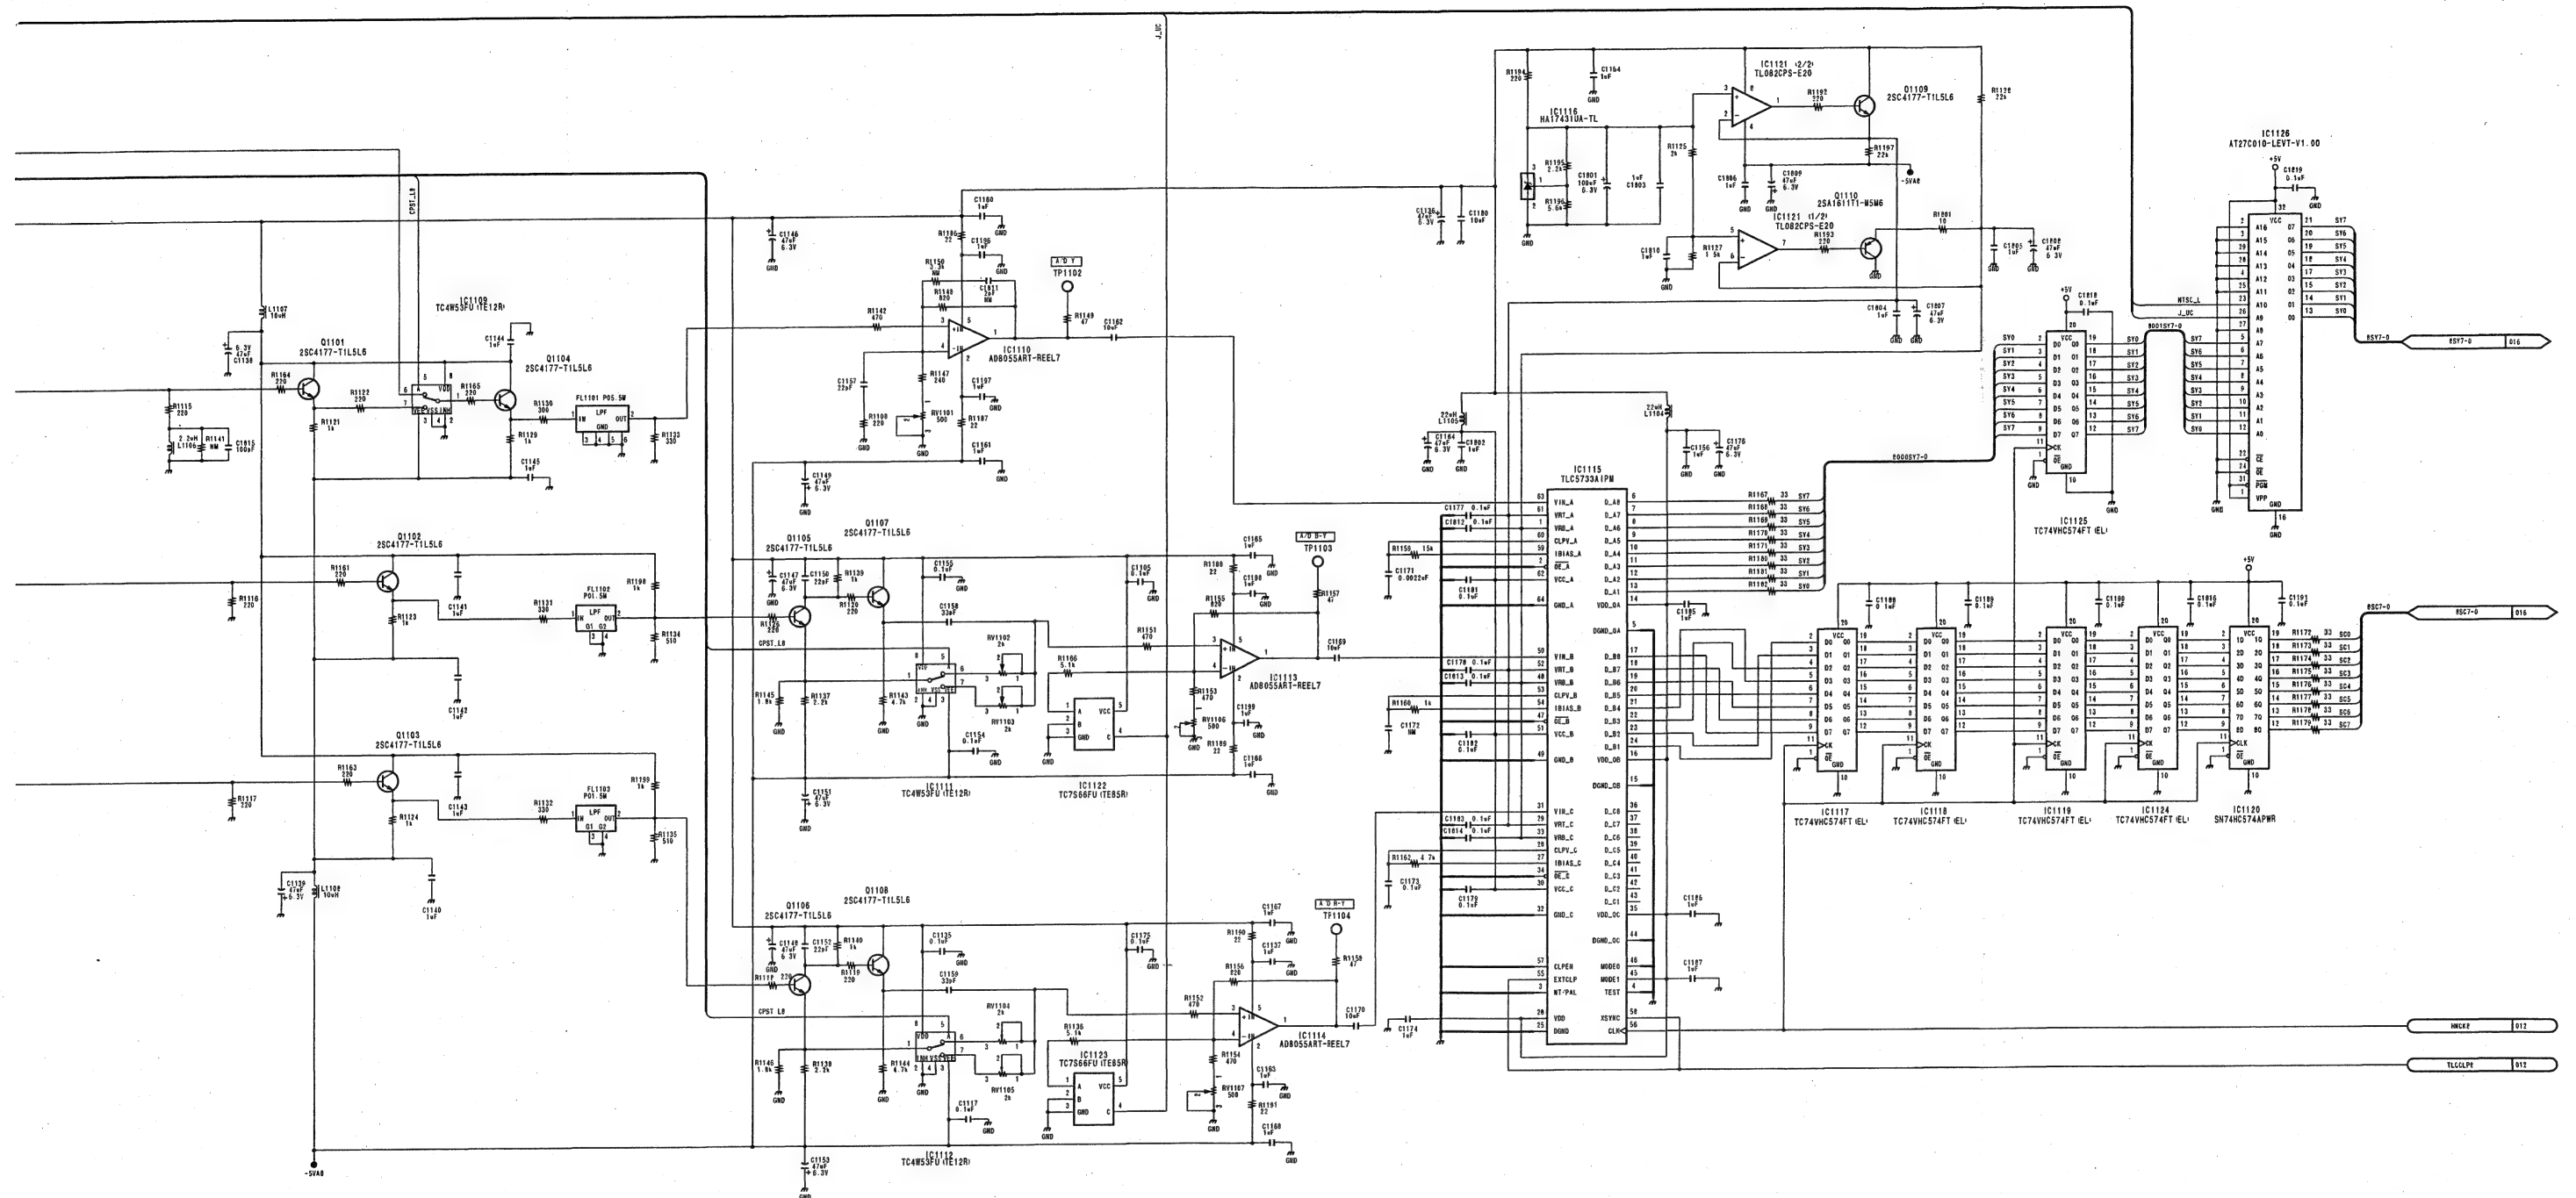

ANALOG COMPOSITE
INPUT BOARD
VIF-19P (11/17)
BOARD NO. 1-677-103-11
LOT NO. 912-002


VIF-19P (12/17)

BKDF-702P (CE): S/N 40001 through 40100



BKDF-702P (CE): S/N 40001 through 40100

FR SYNC 7

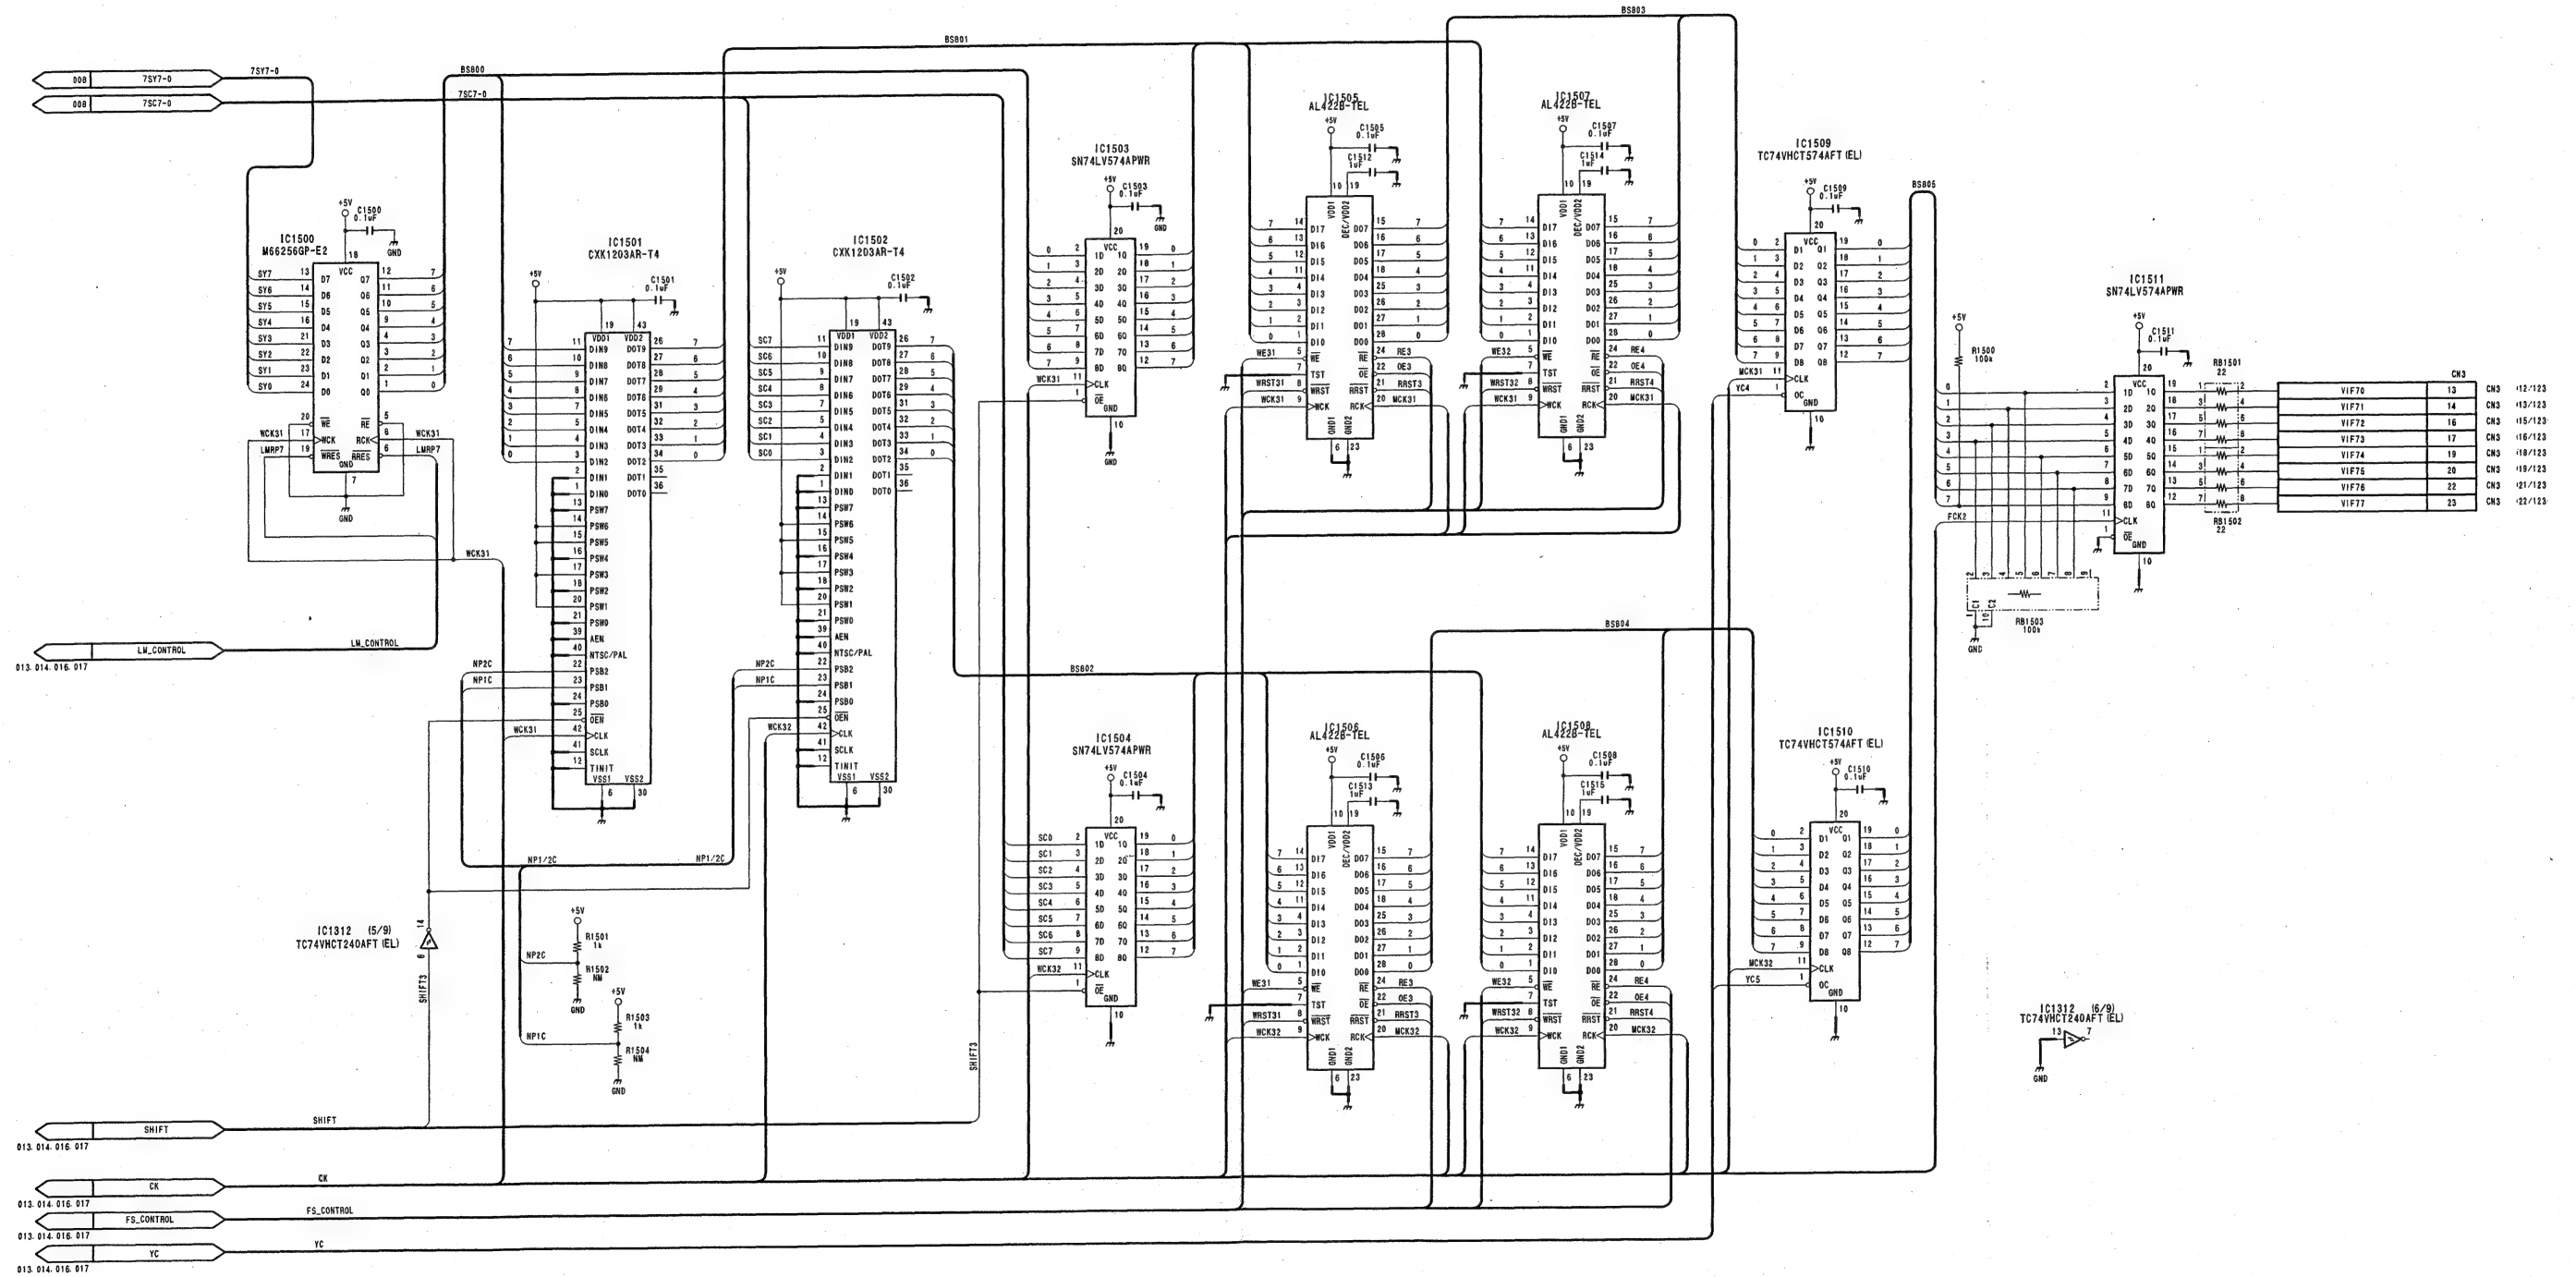


ANALOG COMPOSITE
INPUT BOARD
VIF-19P (15/17)
BOARD NO. 1-677-103-11
LOT NO. 912-002

VIF-19P (17/17)

BKDF-702P (CE): S/N 40001 through 40100

PARALLEL I/F & TIMING GEN

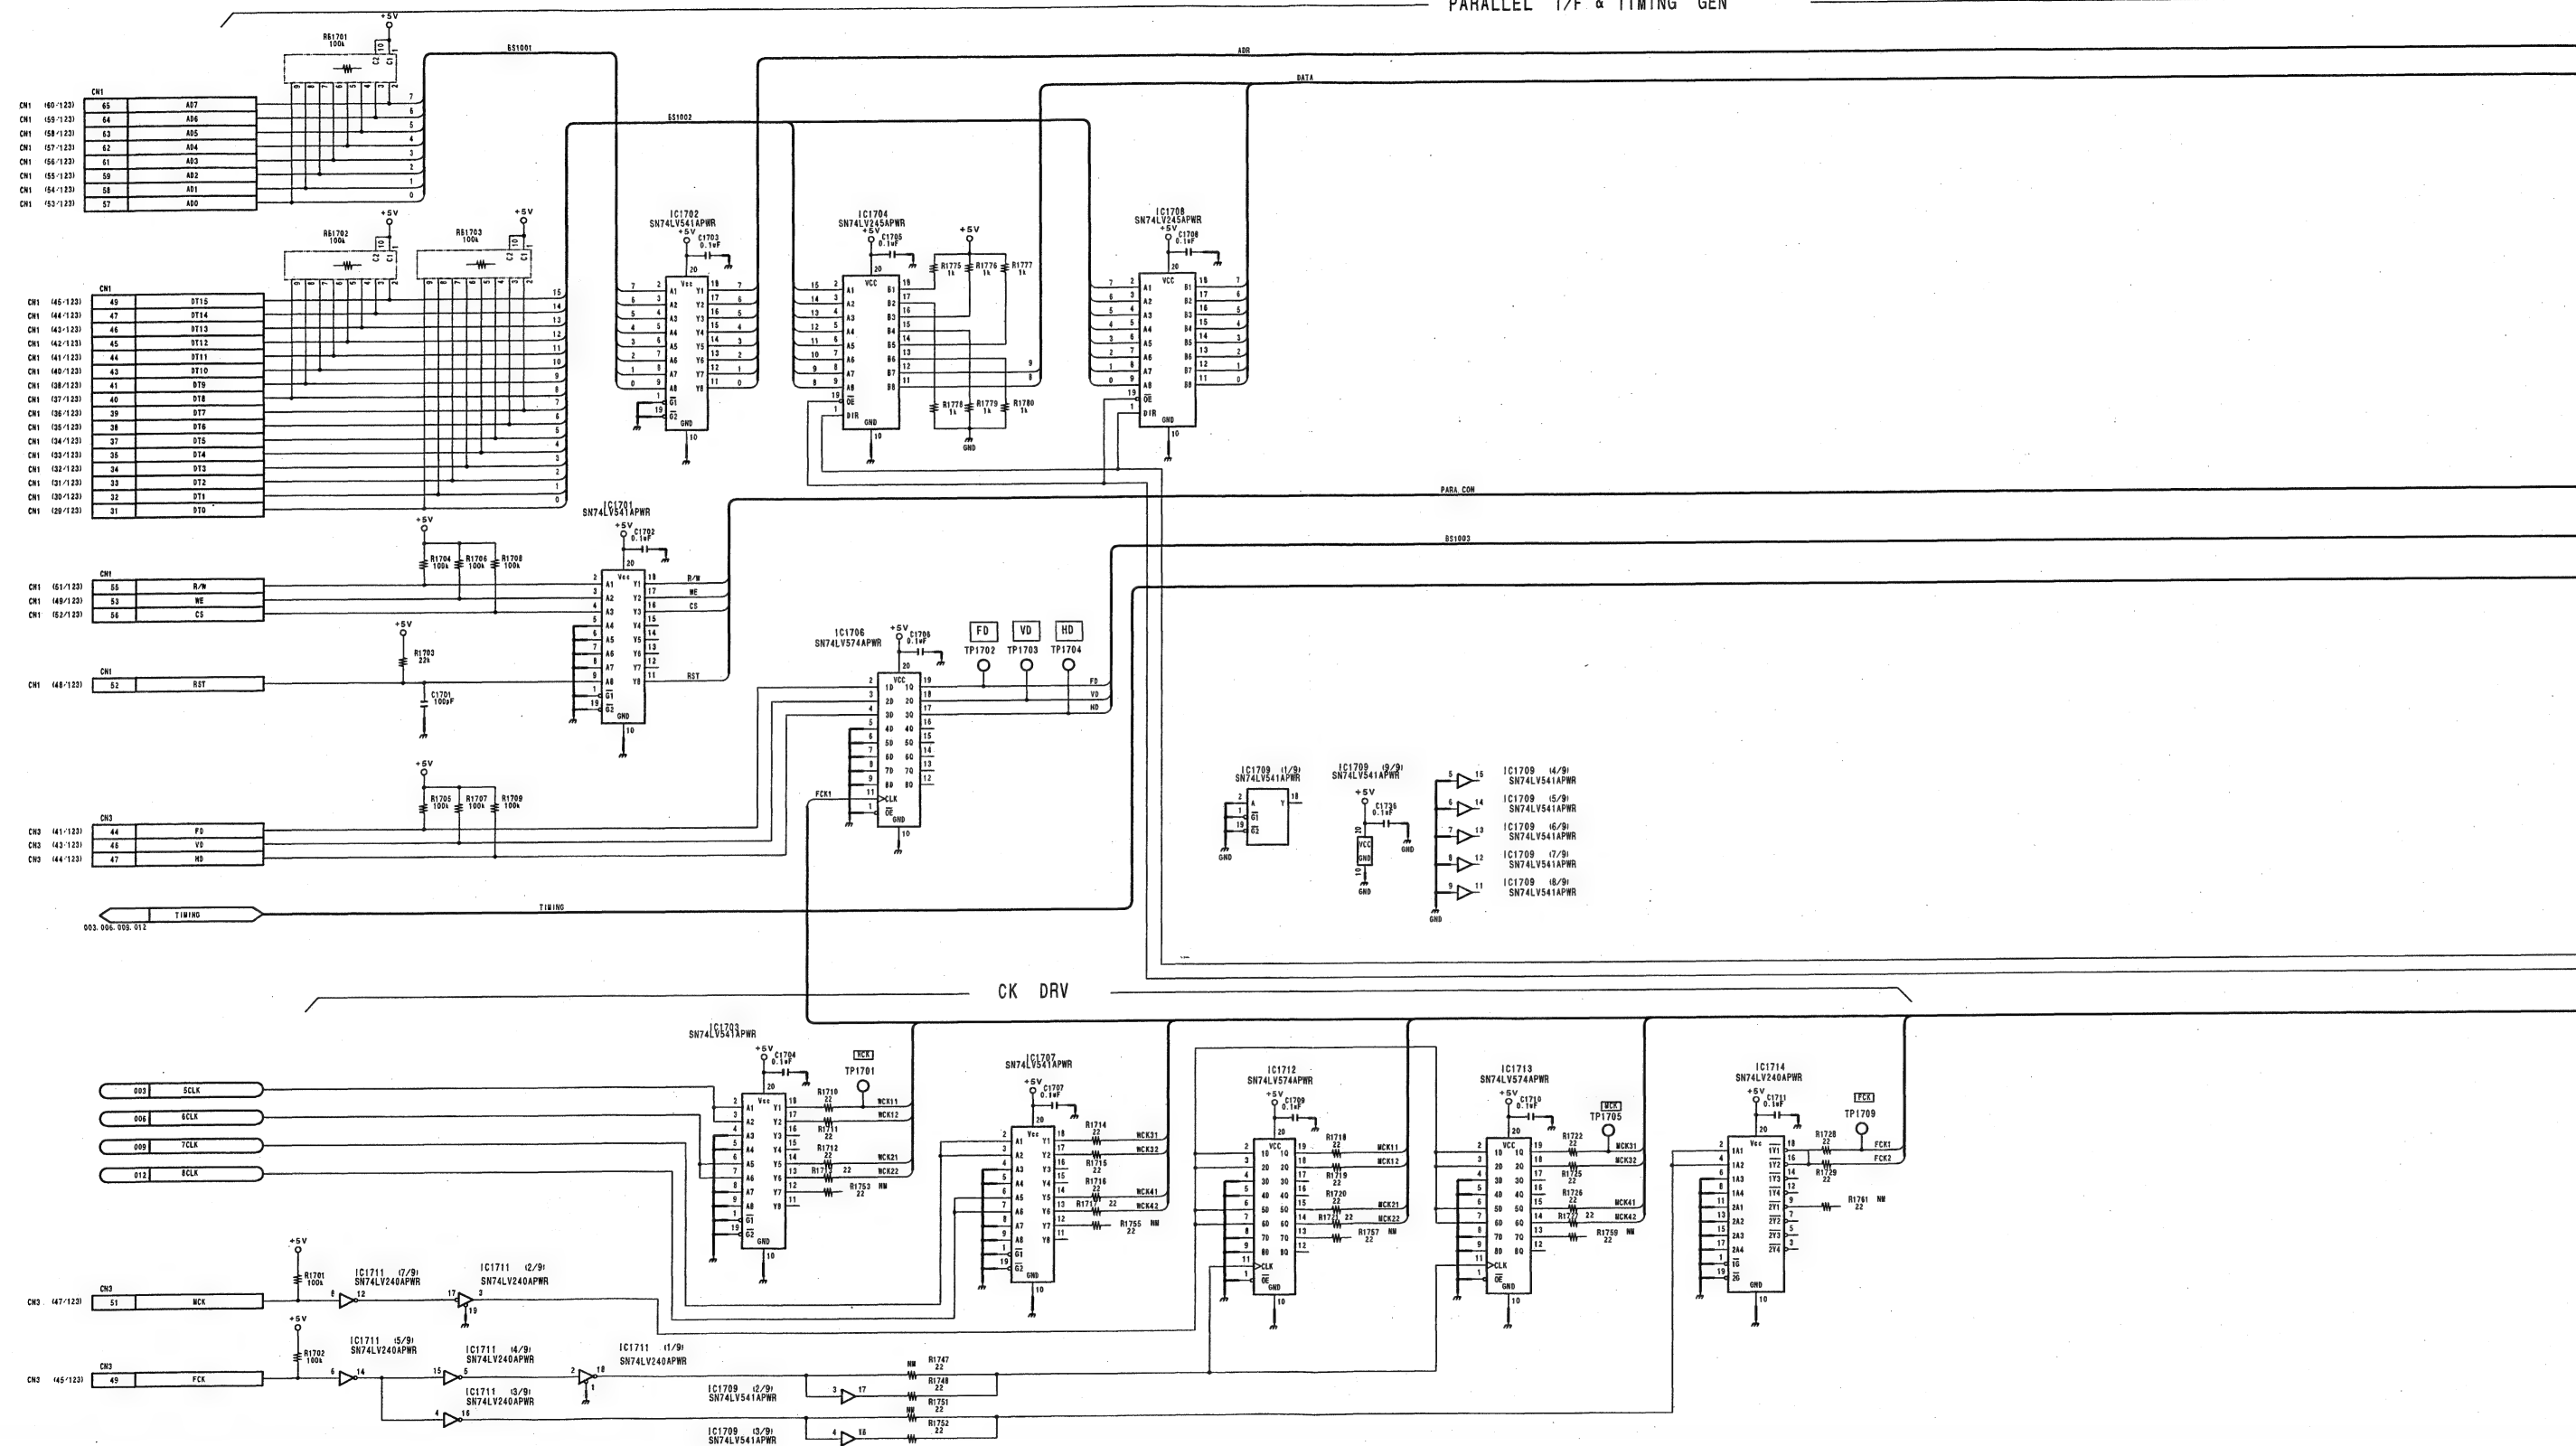

4-144

4-144

DFS-700/700P

A

B

C


D

E

F


G


1

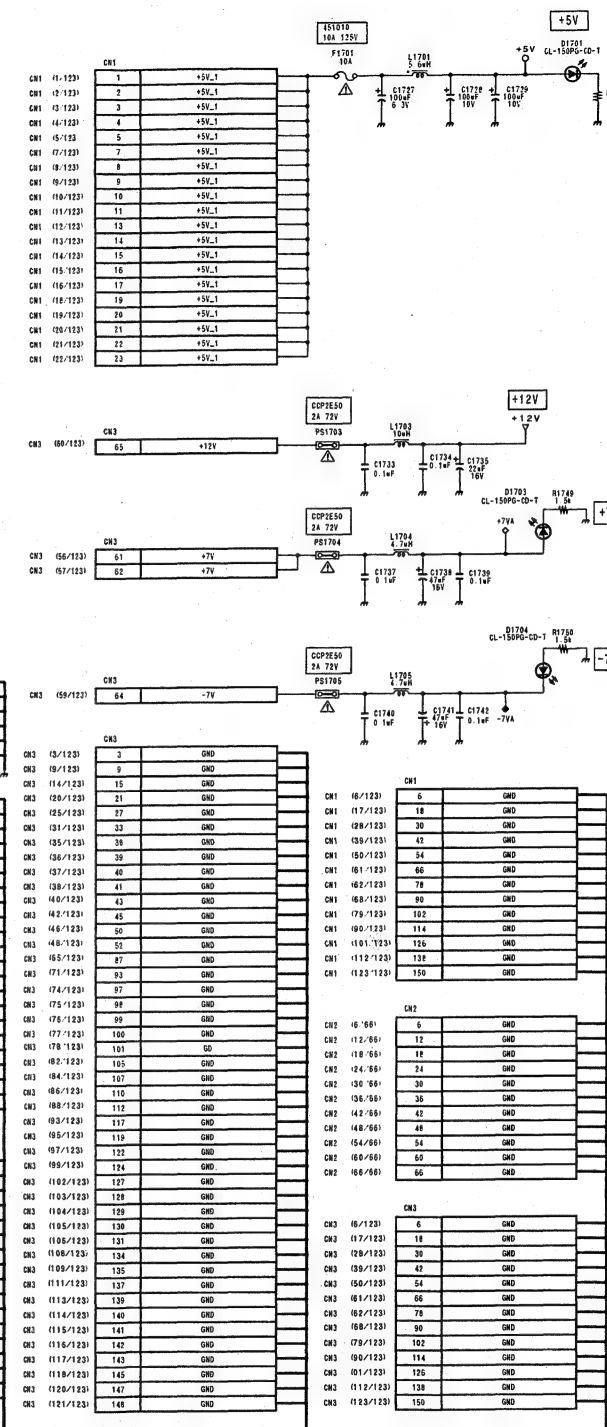


ANALOG COMPOSITE
INPUT BOARD
VIF-19P (17/17)
BOARD NO. 1-677-103-11
LOT NO. 912-002

BKDF-701 (J): S/N 30001 and Higher
 BKDF-701 (UC): S/N 10001 and Higher
 BKDF-701 (CE): S/N 40001 and Higher

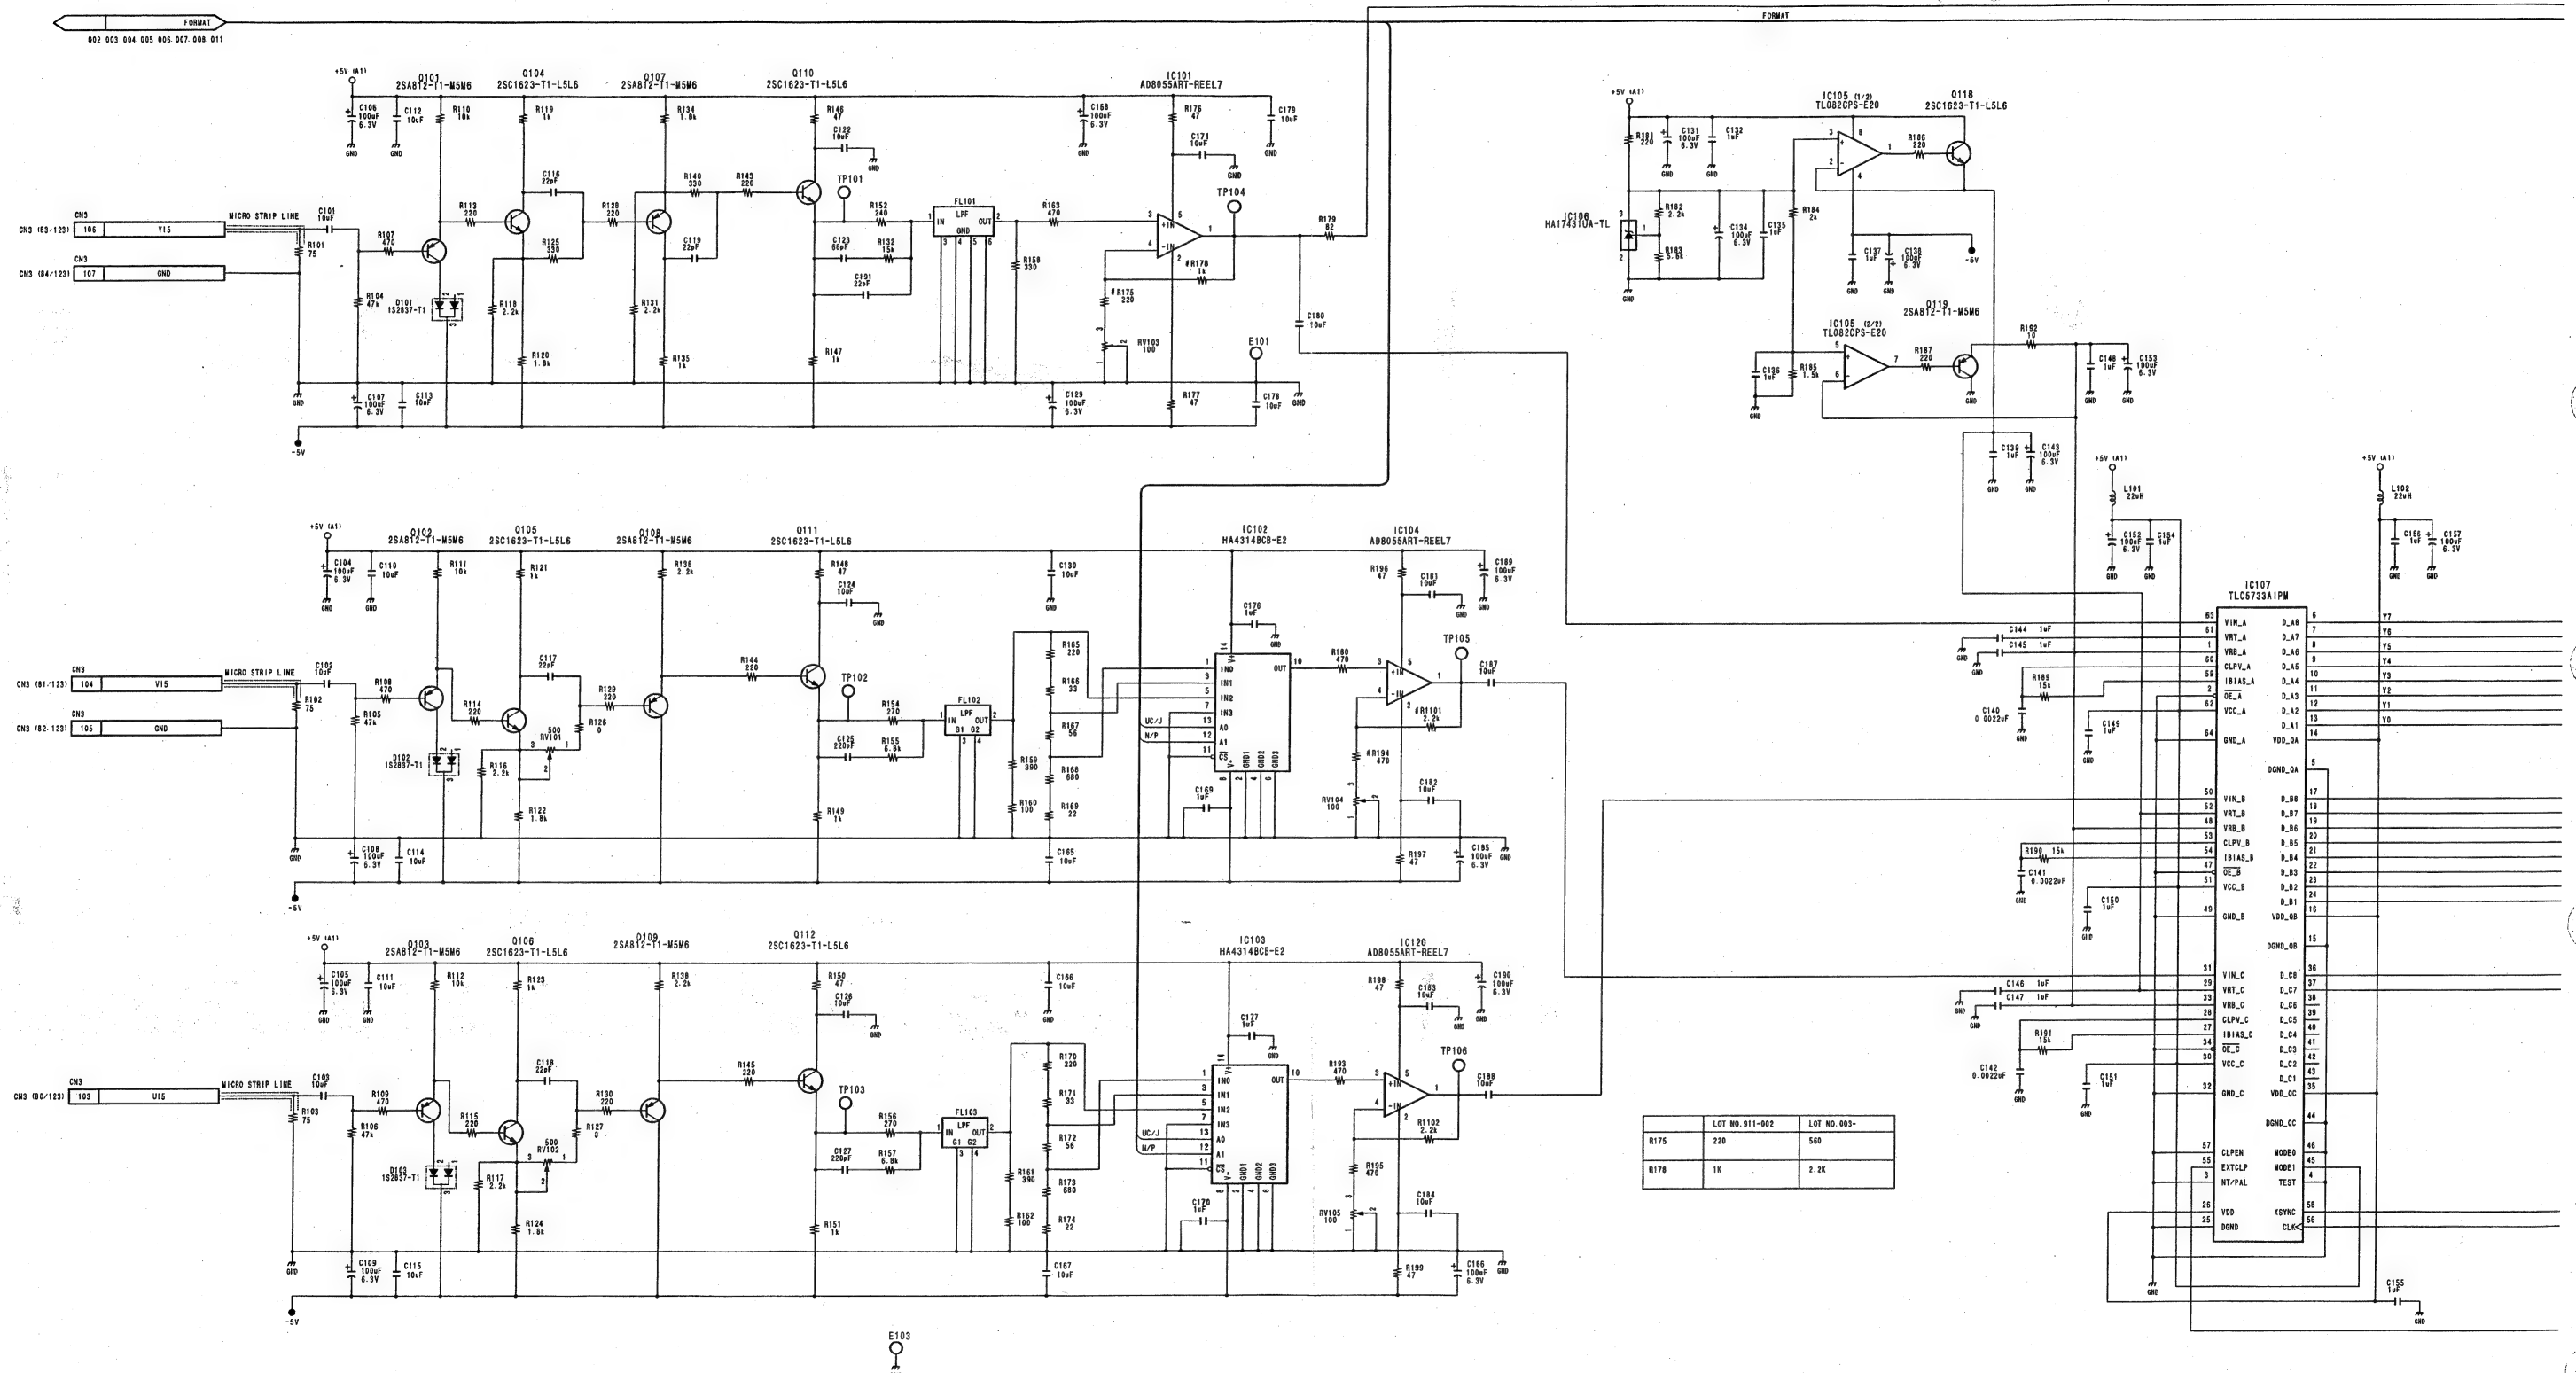





BKDF-701 (J): S/N 30001 and Higher
BKDF-701 (UC): S/N 10001 and Higher
BKDF-701 (CE): S/N 40001 and Higher

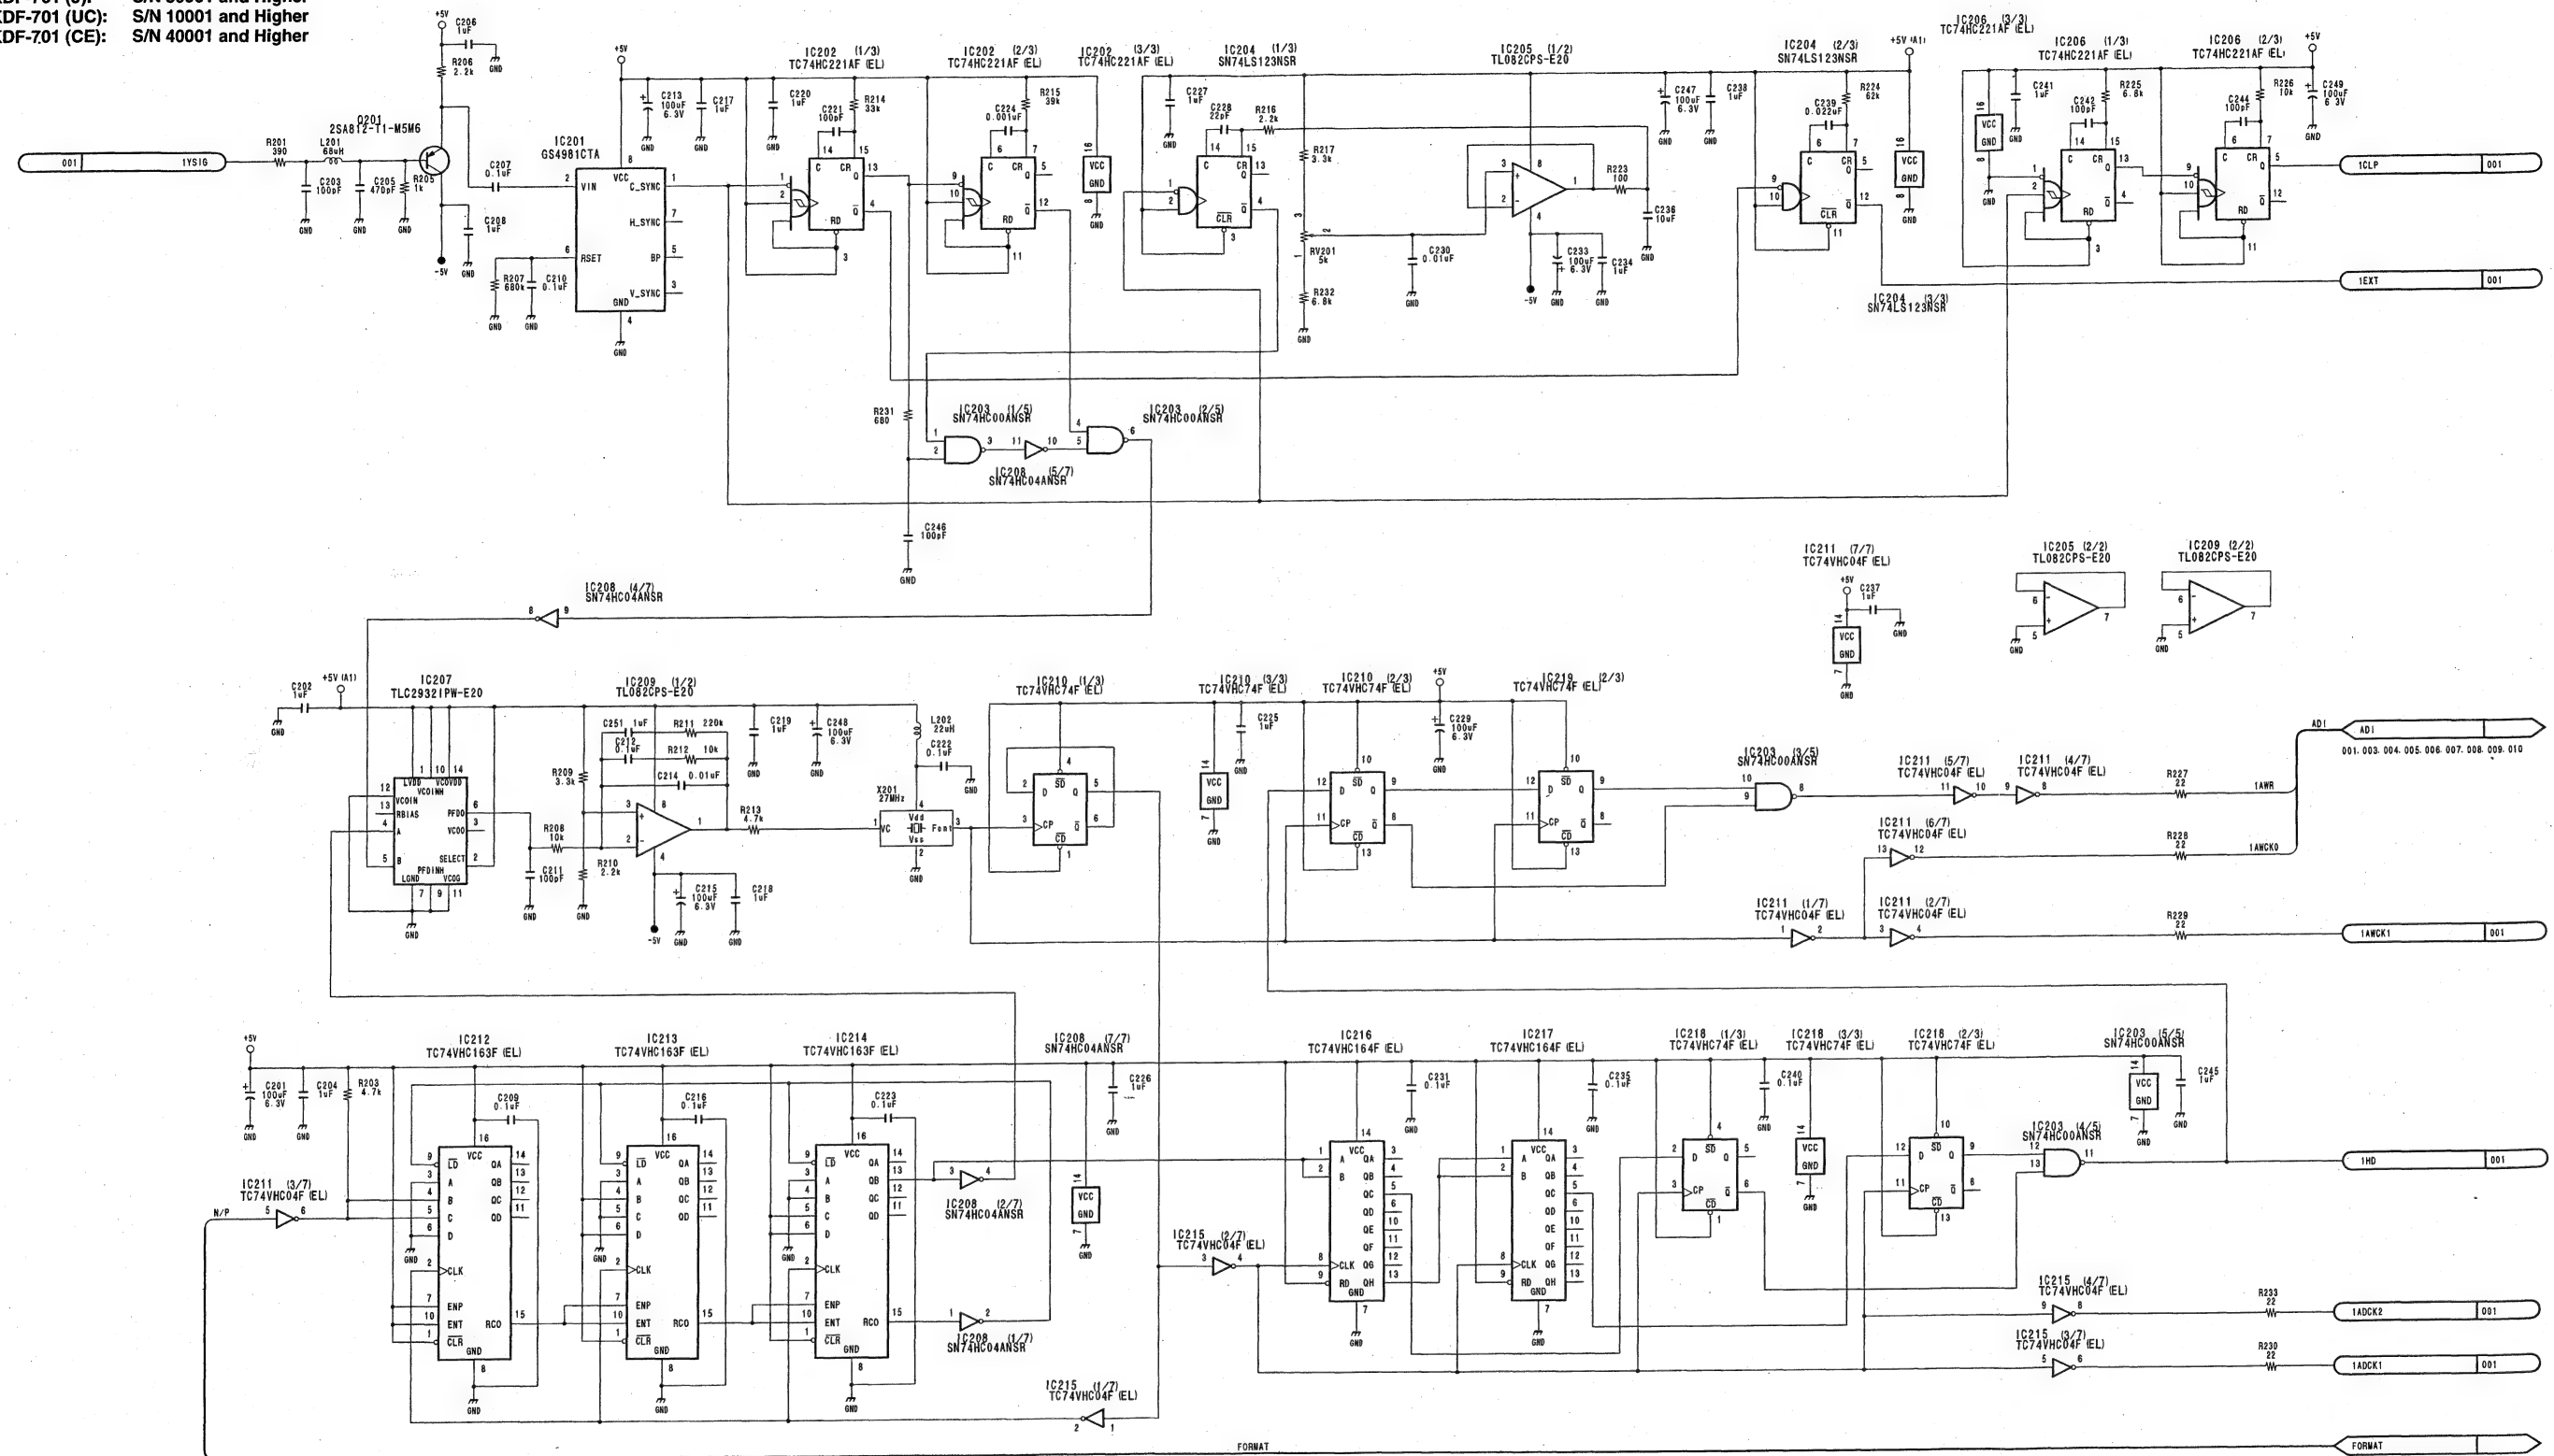

DIGITAL ANALOG INPUT
BOARD
VIF-20/20P (2/12)
BOARD NO. 1-677-102-11
LOT NO. 911-


BKDF-701 (J): S/N 30001 and Higher
 BKDF-701 (UC): S/N 10001 and Higher
 BKDF-701 (CE): S/N 40001 and Higher

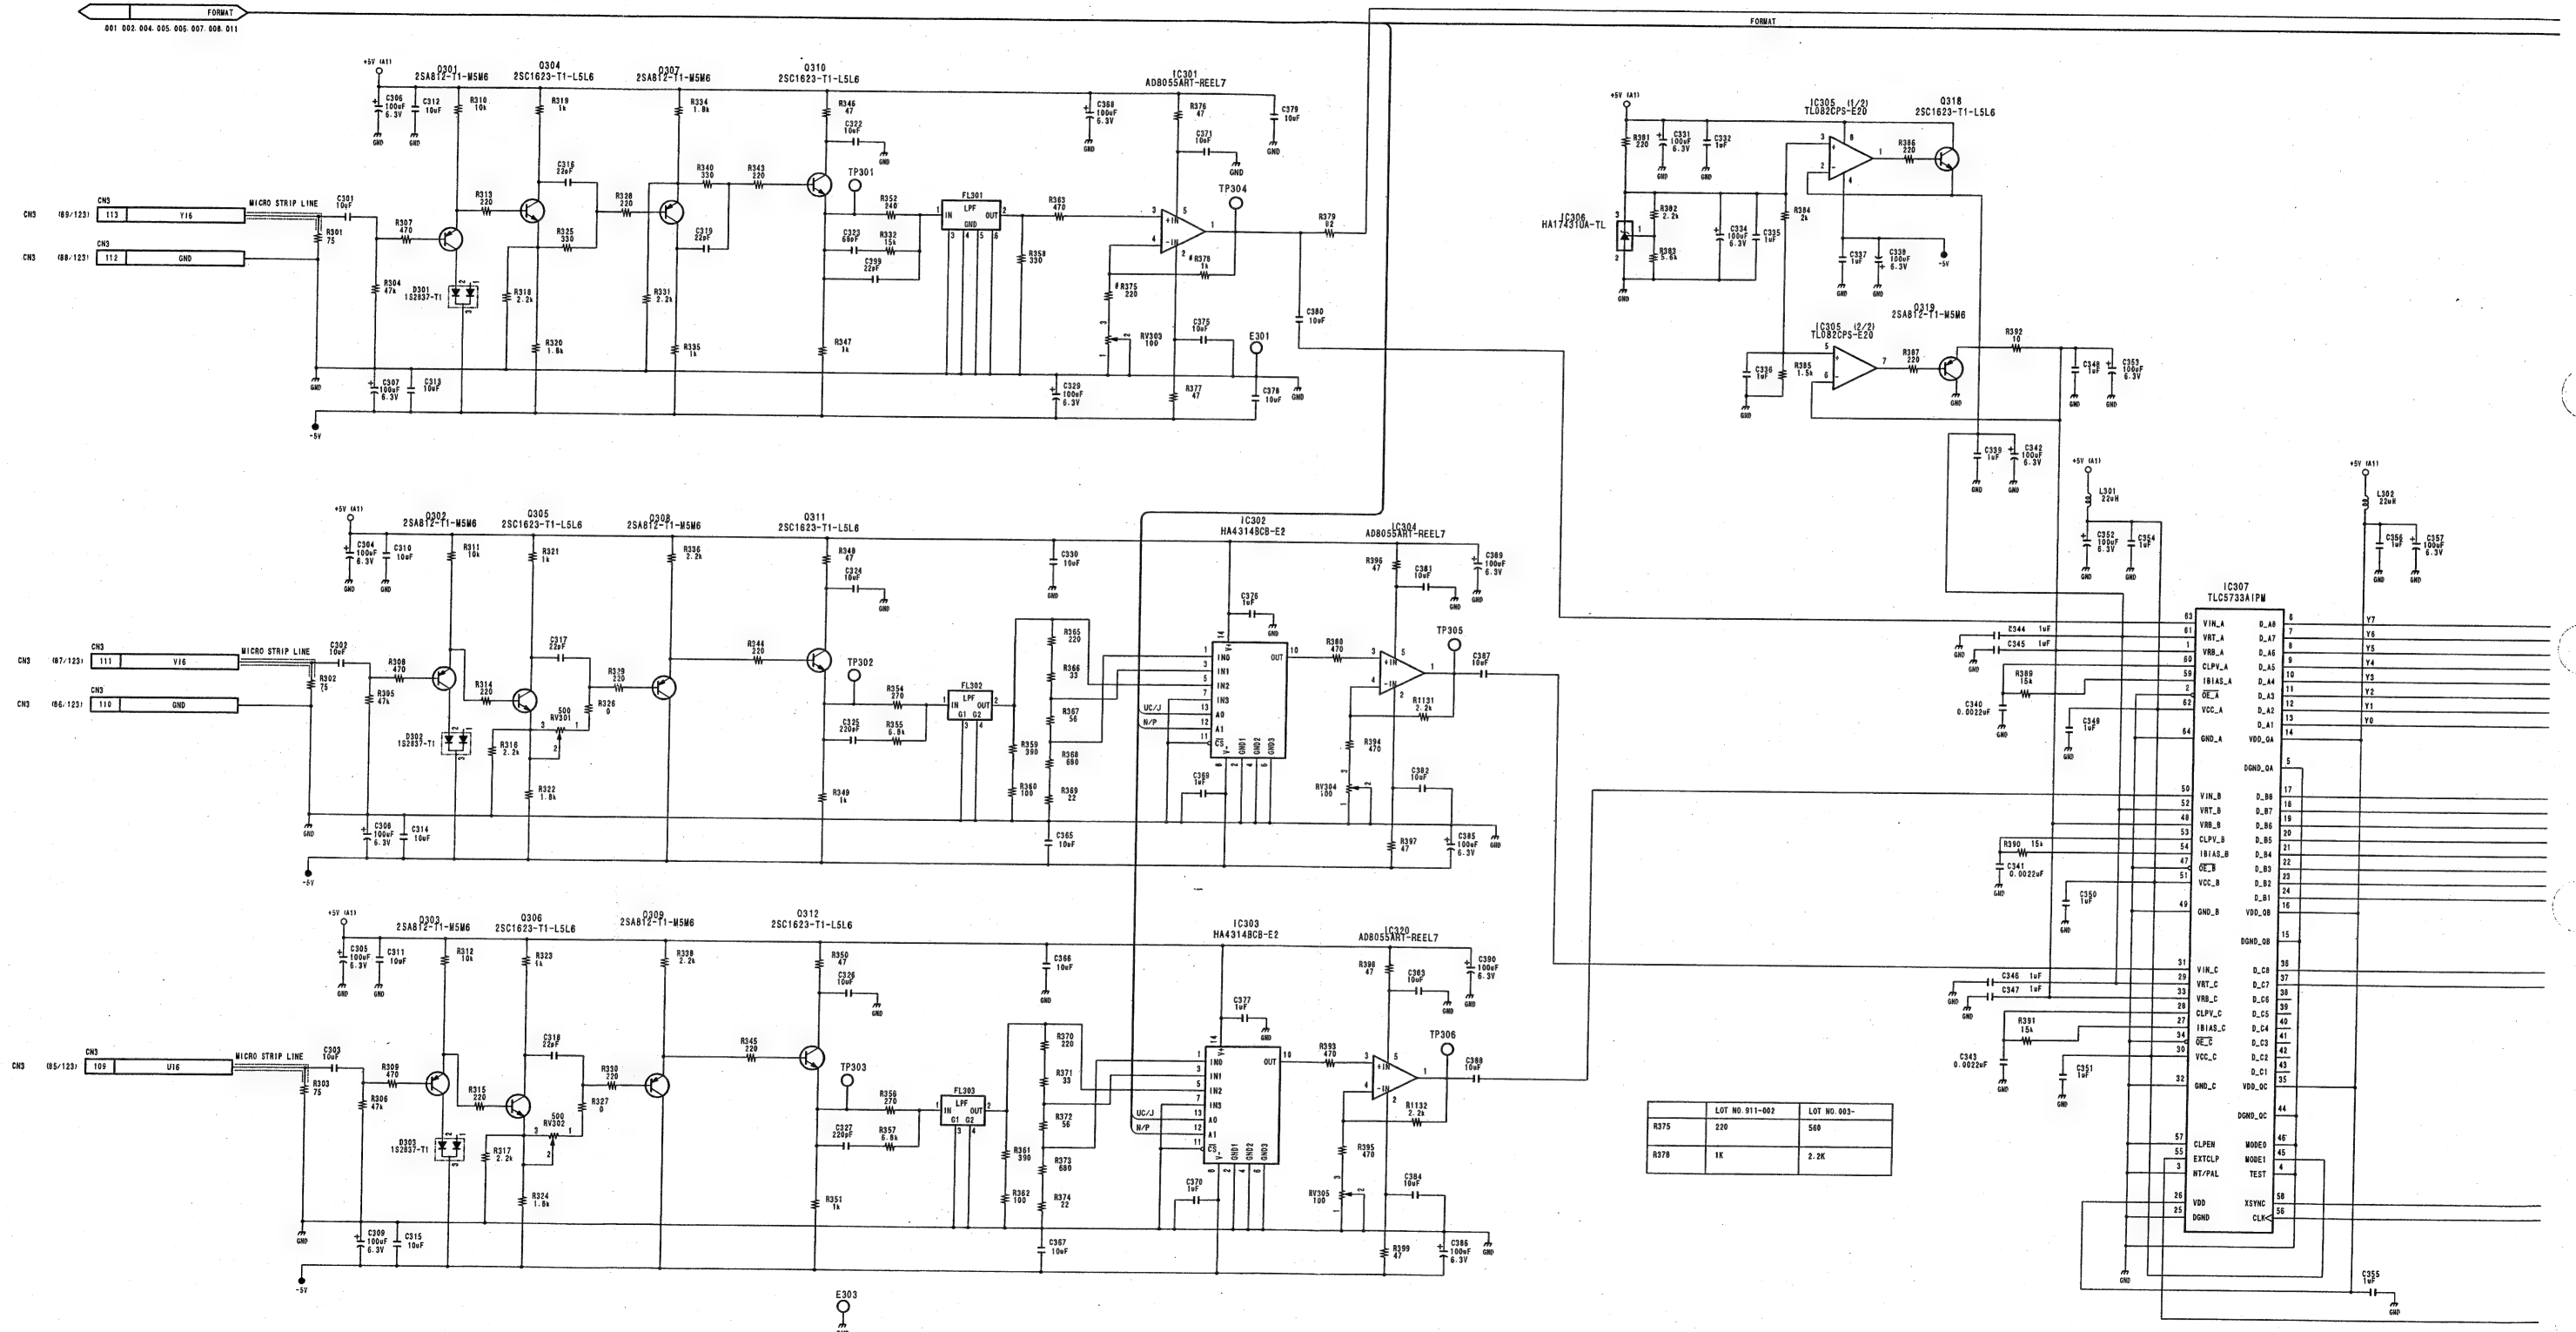




VIF-20/20P (4/12) VIF-20/20P (4/12)

BKDF-701 (J): S/N 30001 and Higher
BKDF-701 (UC): S/N 10001 and Higher
BKDF-701 (CE): S/N 40001 and Higher

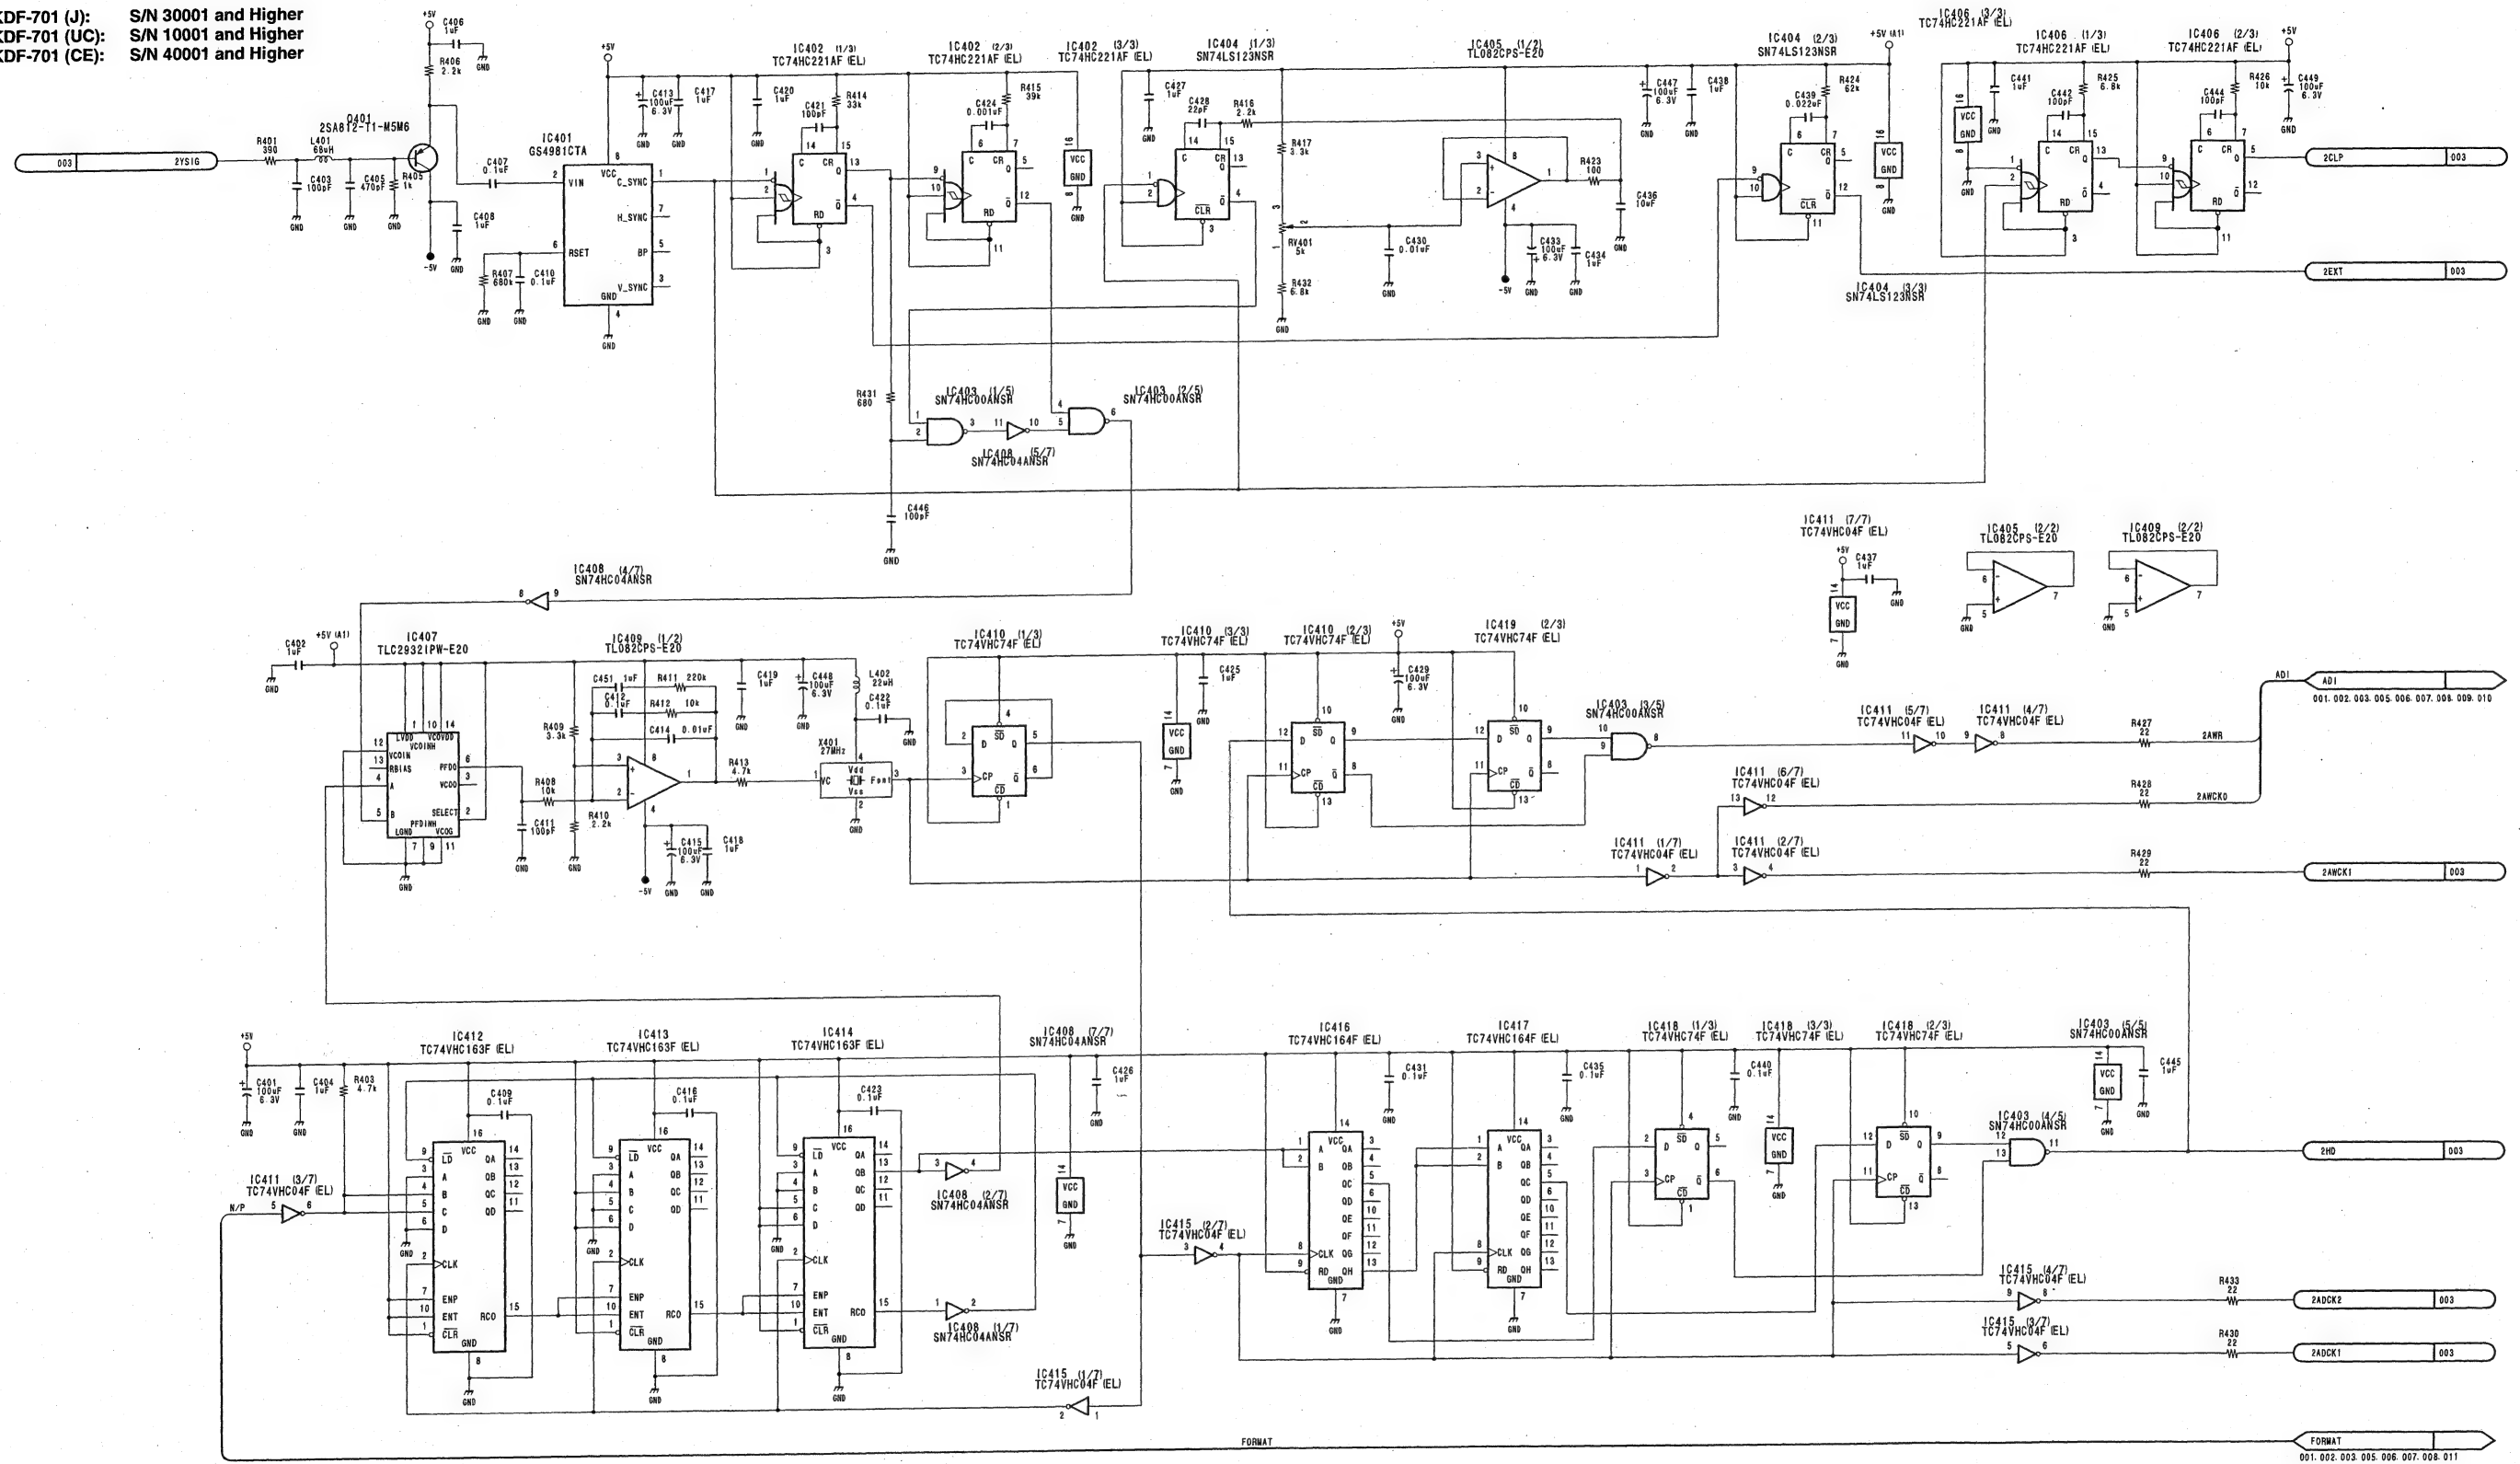

1
2
3
4
5

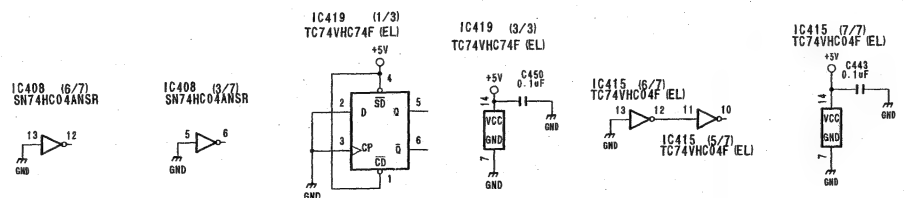


DIGITAL ANALOG INPUT
BOARD
VIF-20/20P (4/12)
BOARD NO. 1-677-102-11
LOT NO. 911-

DFS-700/700P


NY-SP1382 / DRUCK 177

BKDF-701 (J): S/N 30001 and Higher
BKDF-701 (UC): S/N 10001 and Higher
BKDF-701 (CE): S/N 40001 and Higher

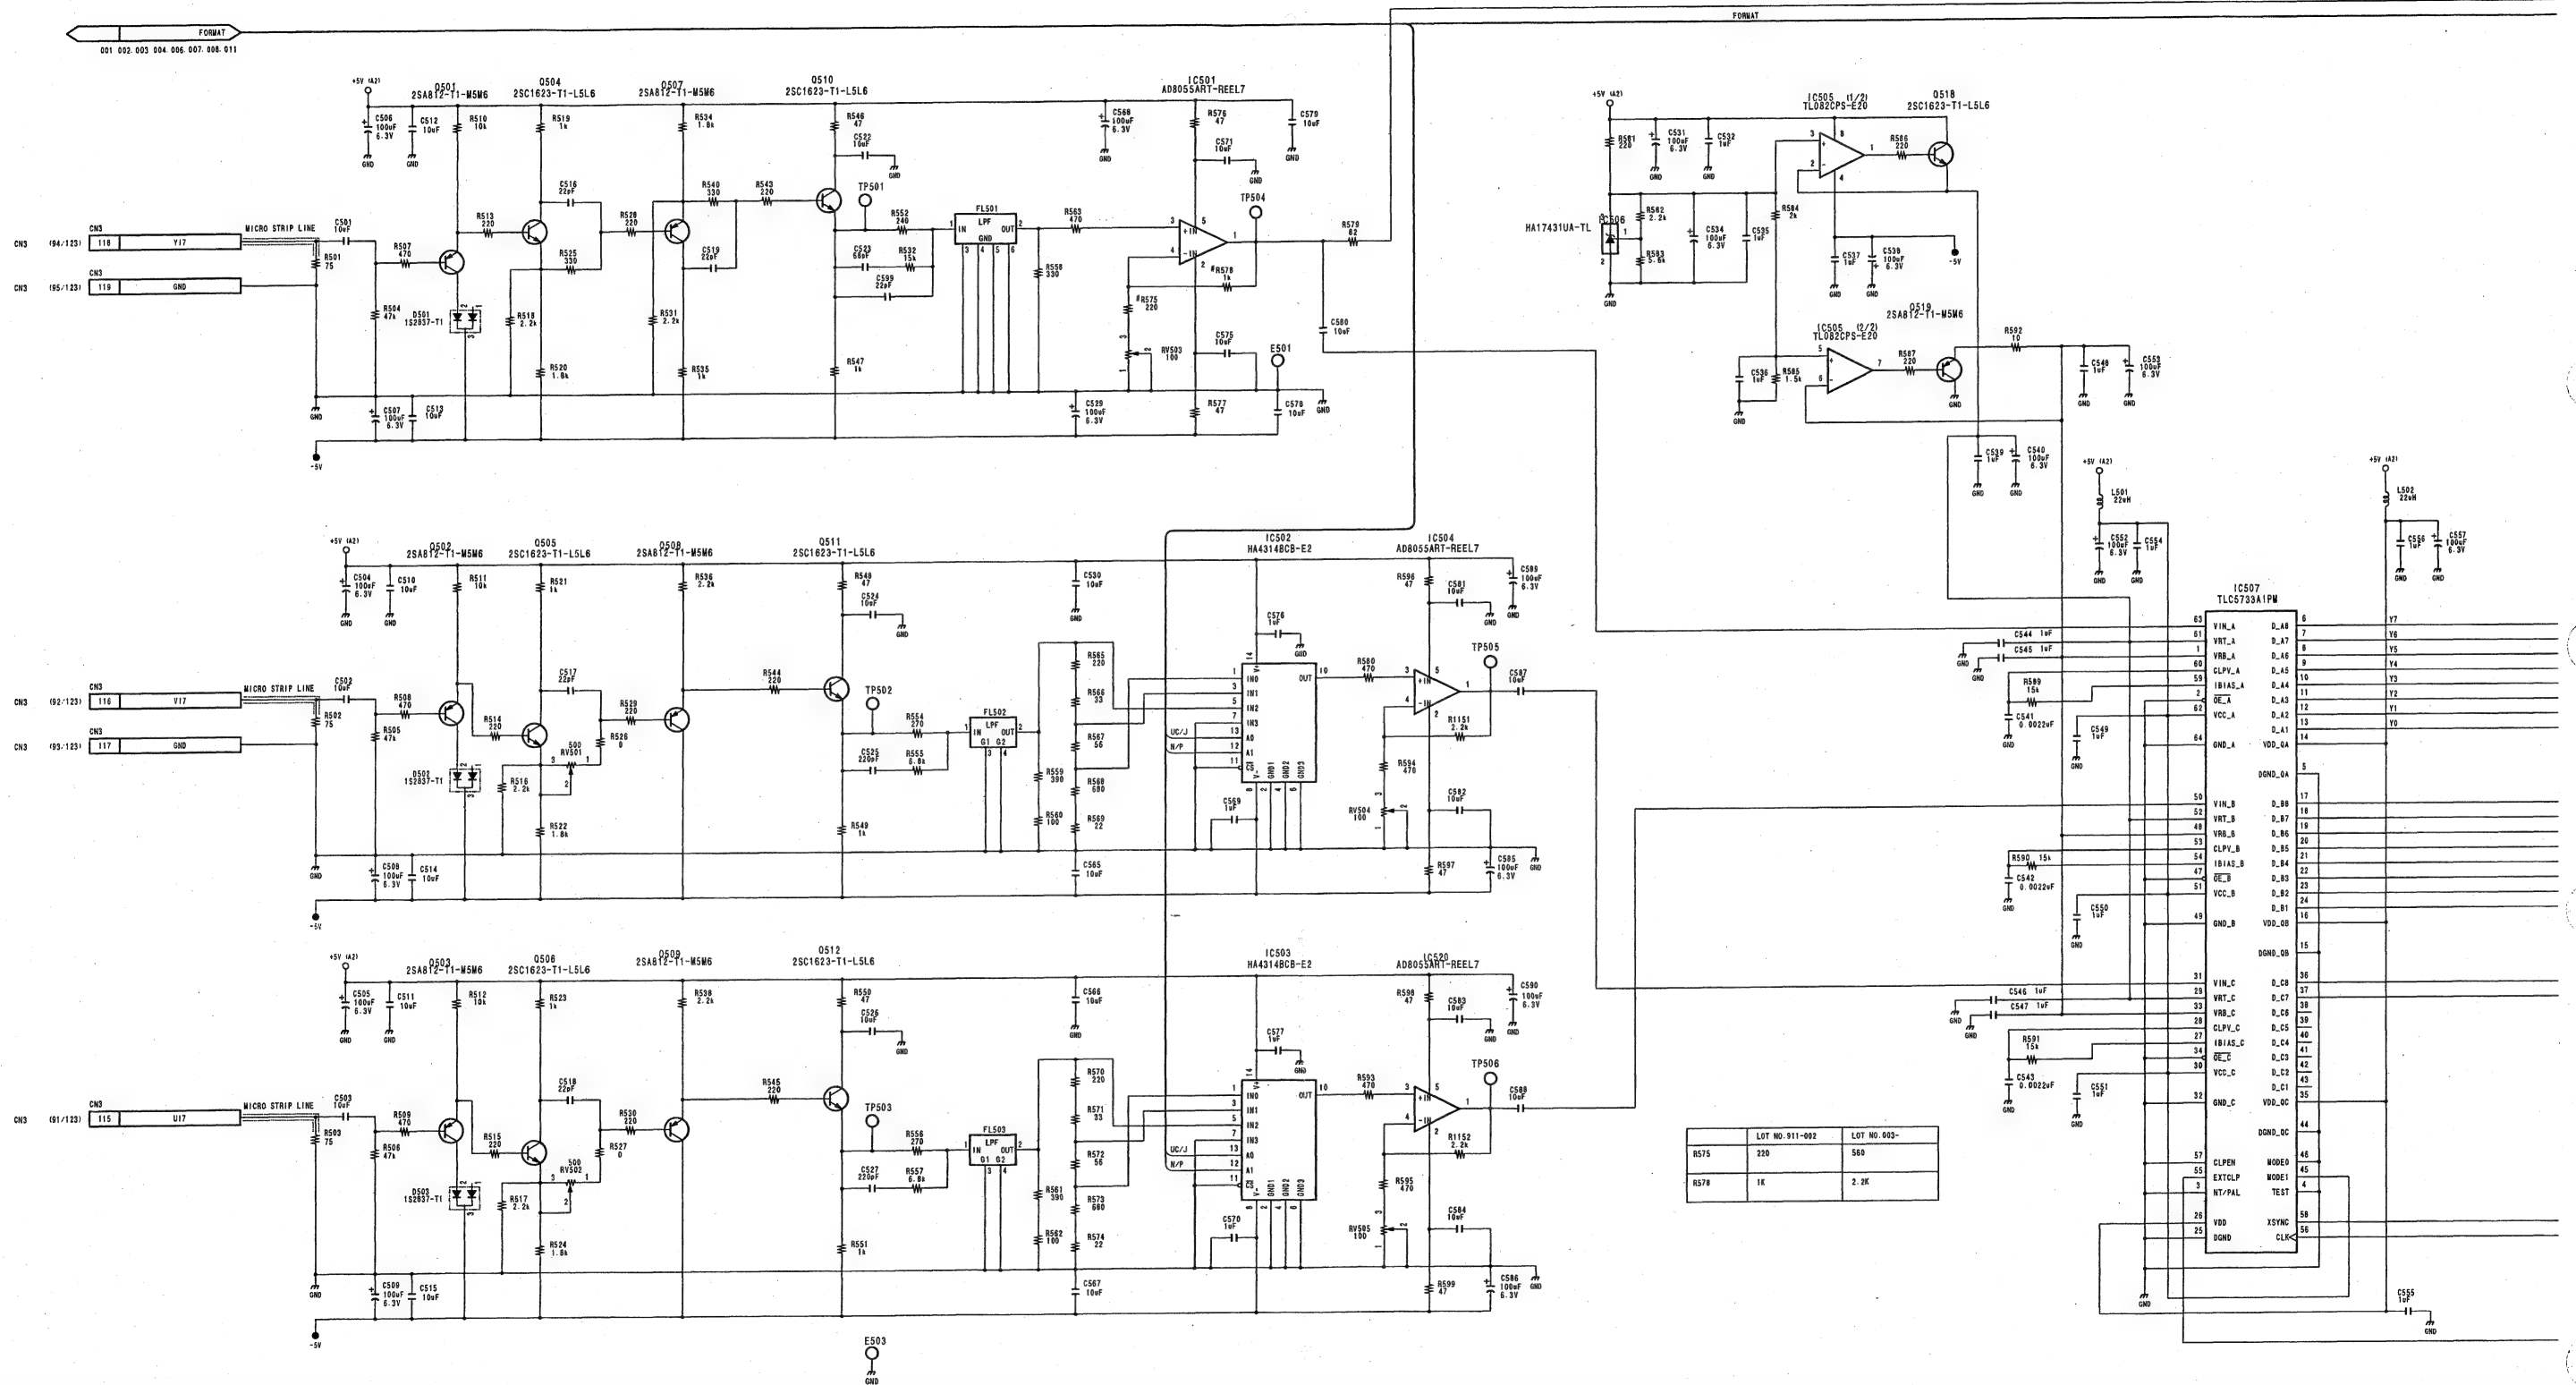


VIF-20/20P (6/12) VIF-20/20P (6/12)

BKDF-701 (J): S/N 30001 and Higher
BKDF-701 (UC): S/N 10001 and Higher
BKDF-701 (CE): S/N 40001 and Higher

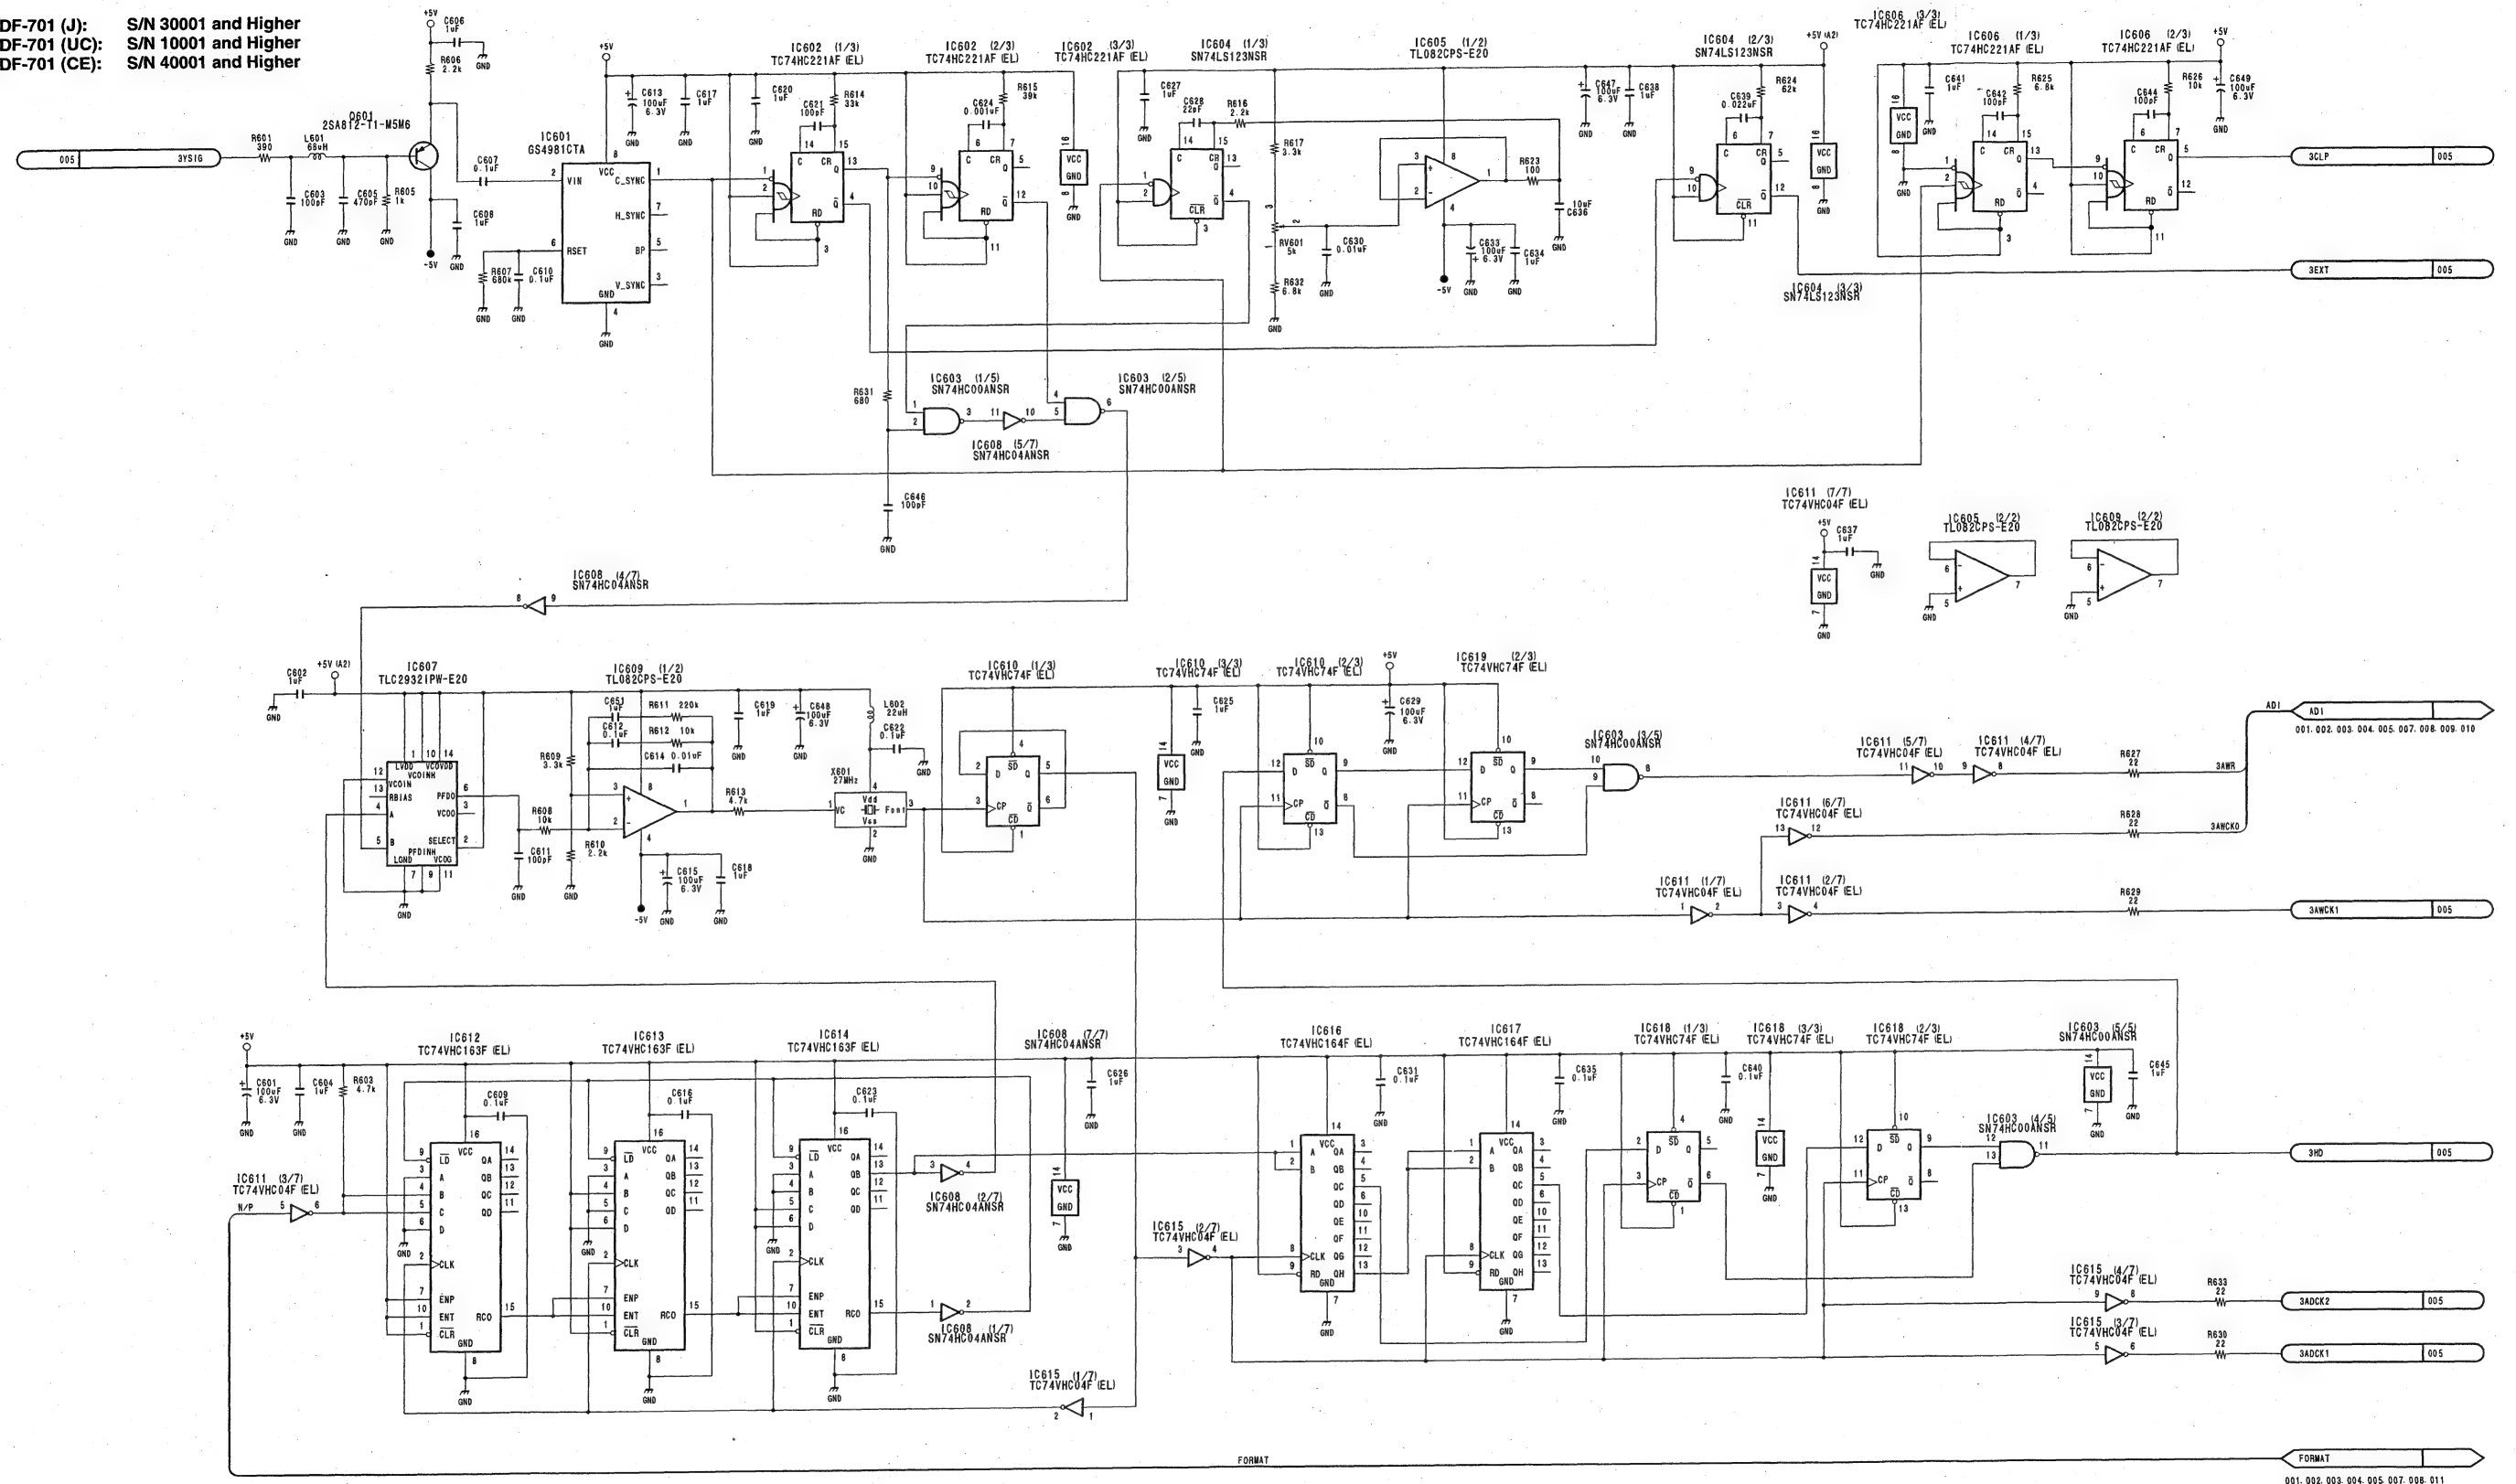

DIGITAL ANALOG INPUT
BOARD
VIF-20/20P (6/12)
BOARD NO. 1-677-102-11
LOT NO. 911-

BKDF-701 (J): S/N 30001 and Higher
BKDF-701 (UC): S/N 10001 and Higher
BKDF-701 (CE): S/N 40001 and Higher

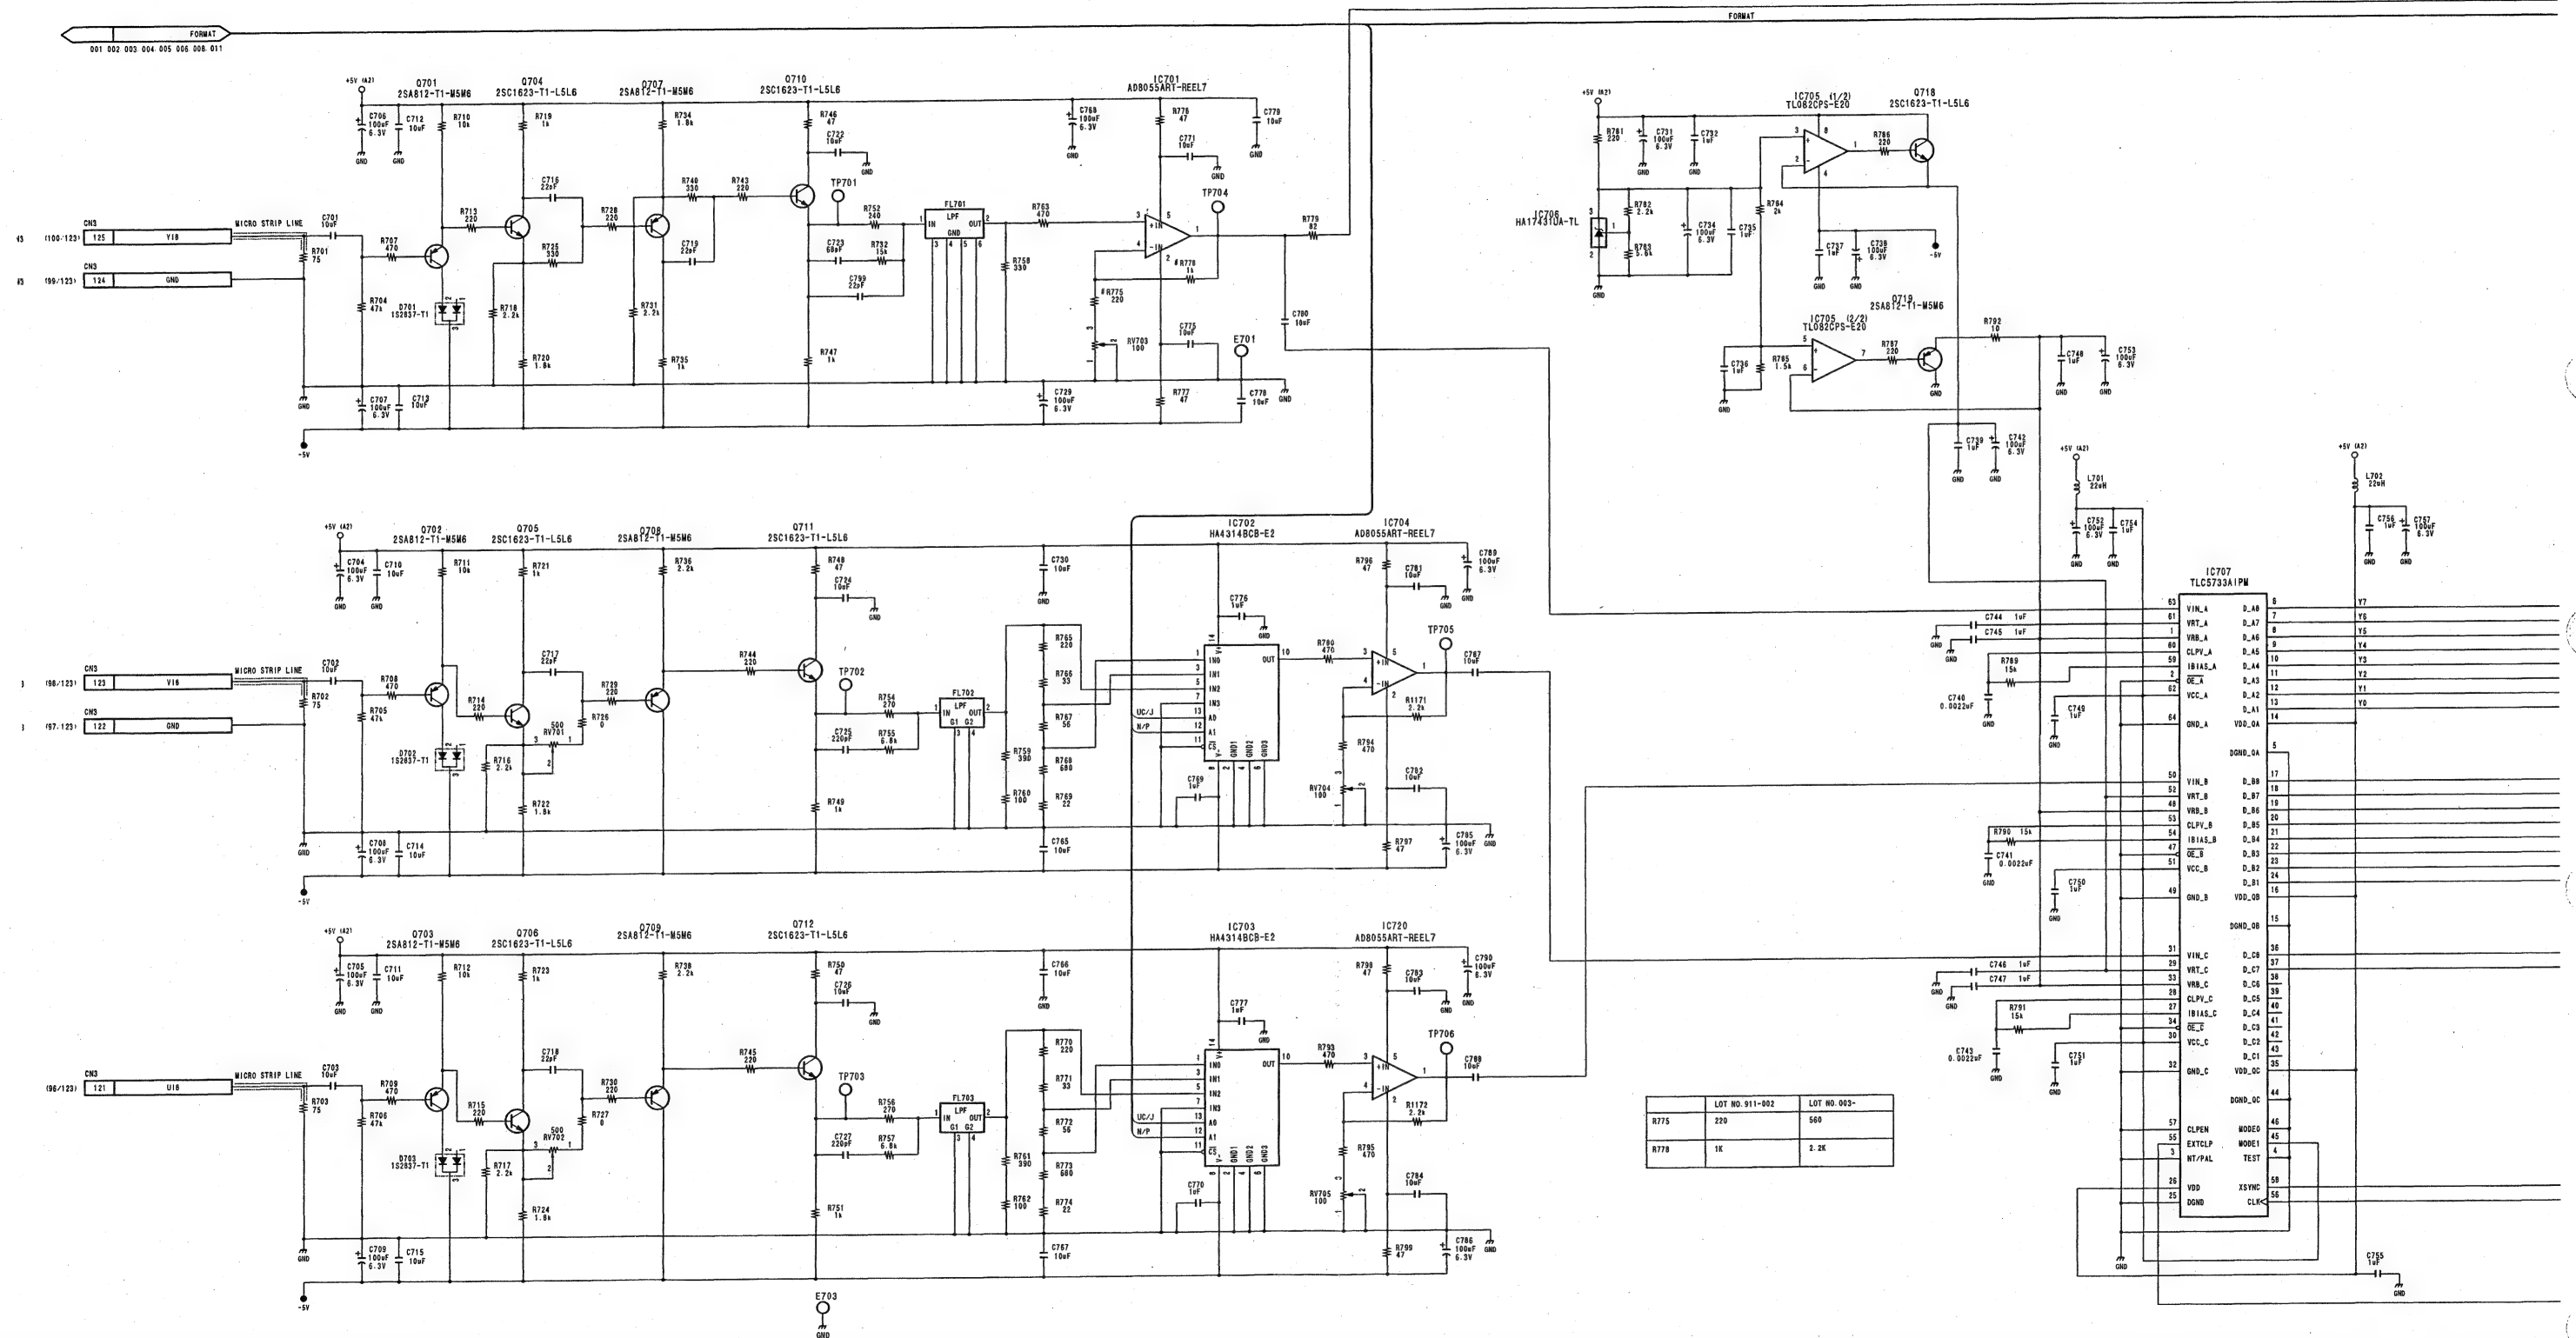



3


4

5

P


VIF-20/20P (8/12) VIF-20/20P (8/12)

BKDF-701 (J): S/N 30001 and Higher
BKDF-701 (UC): S/N 10001 and Higher
BKDF-701 (CE): S/N 40001 and Higher

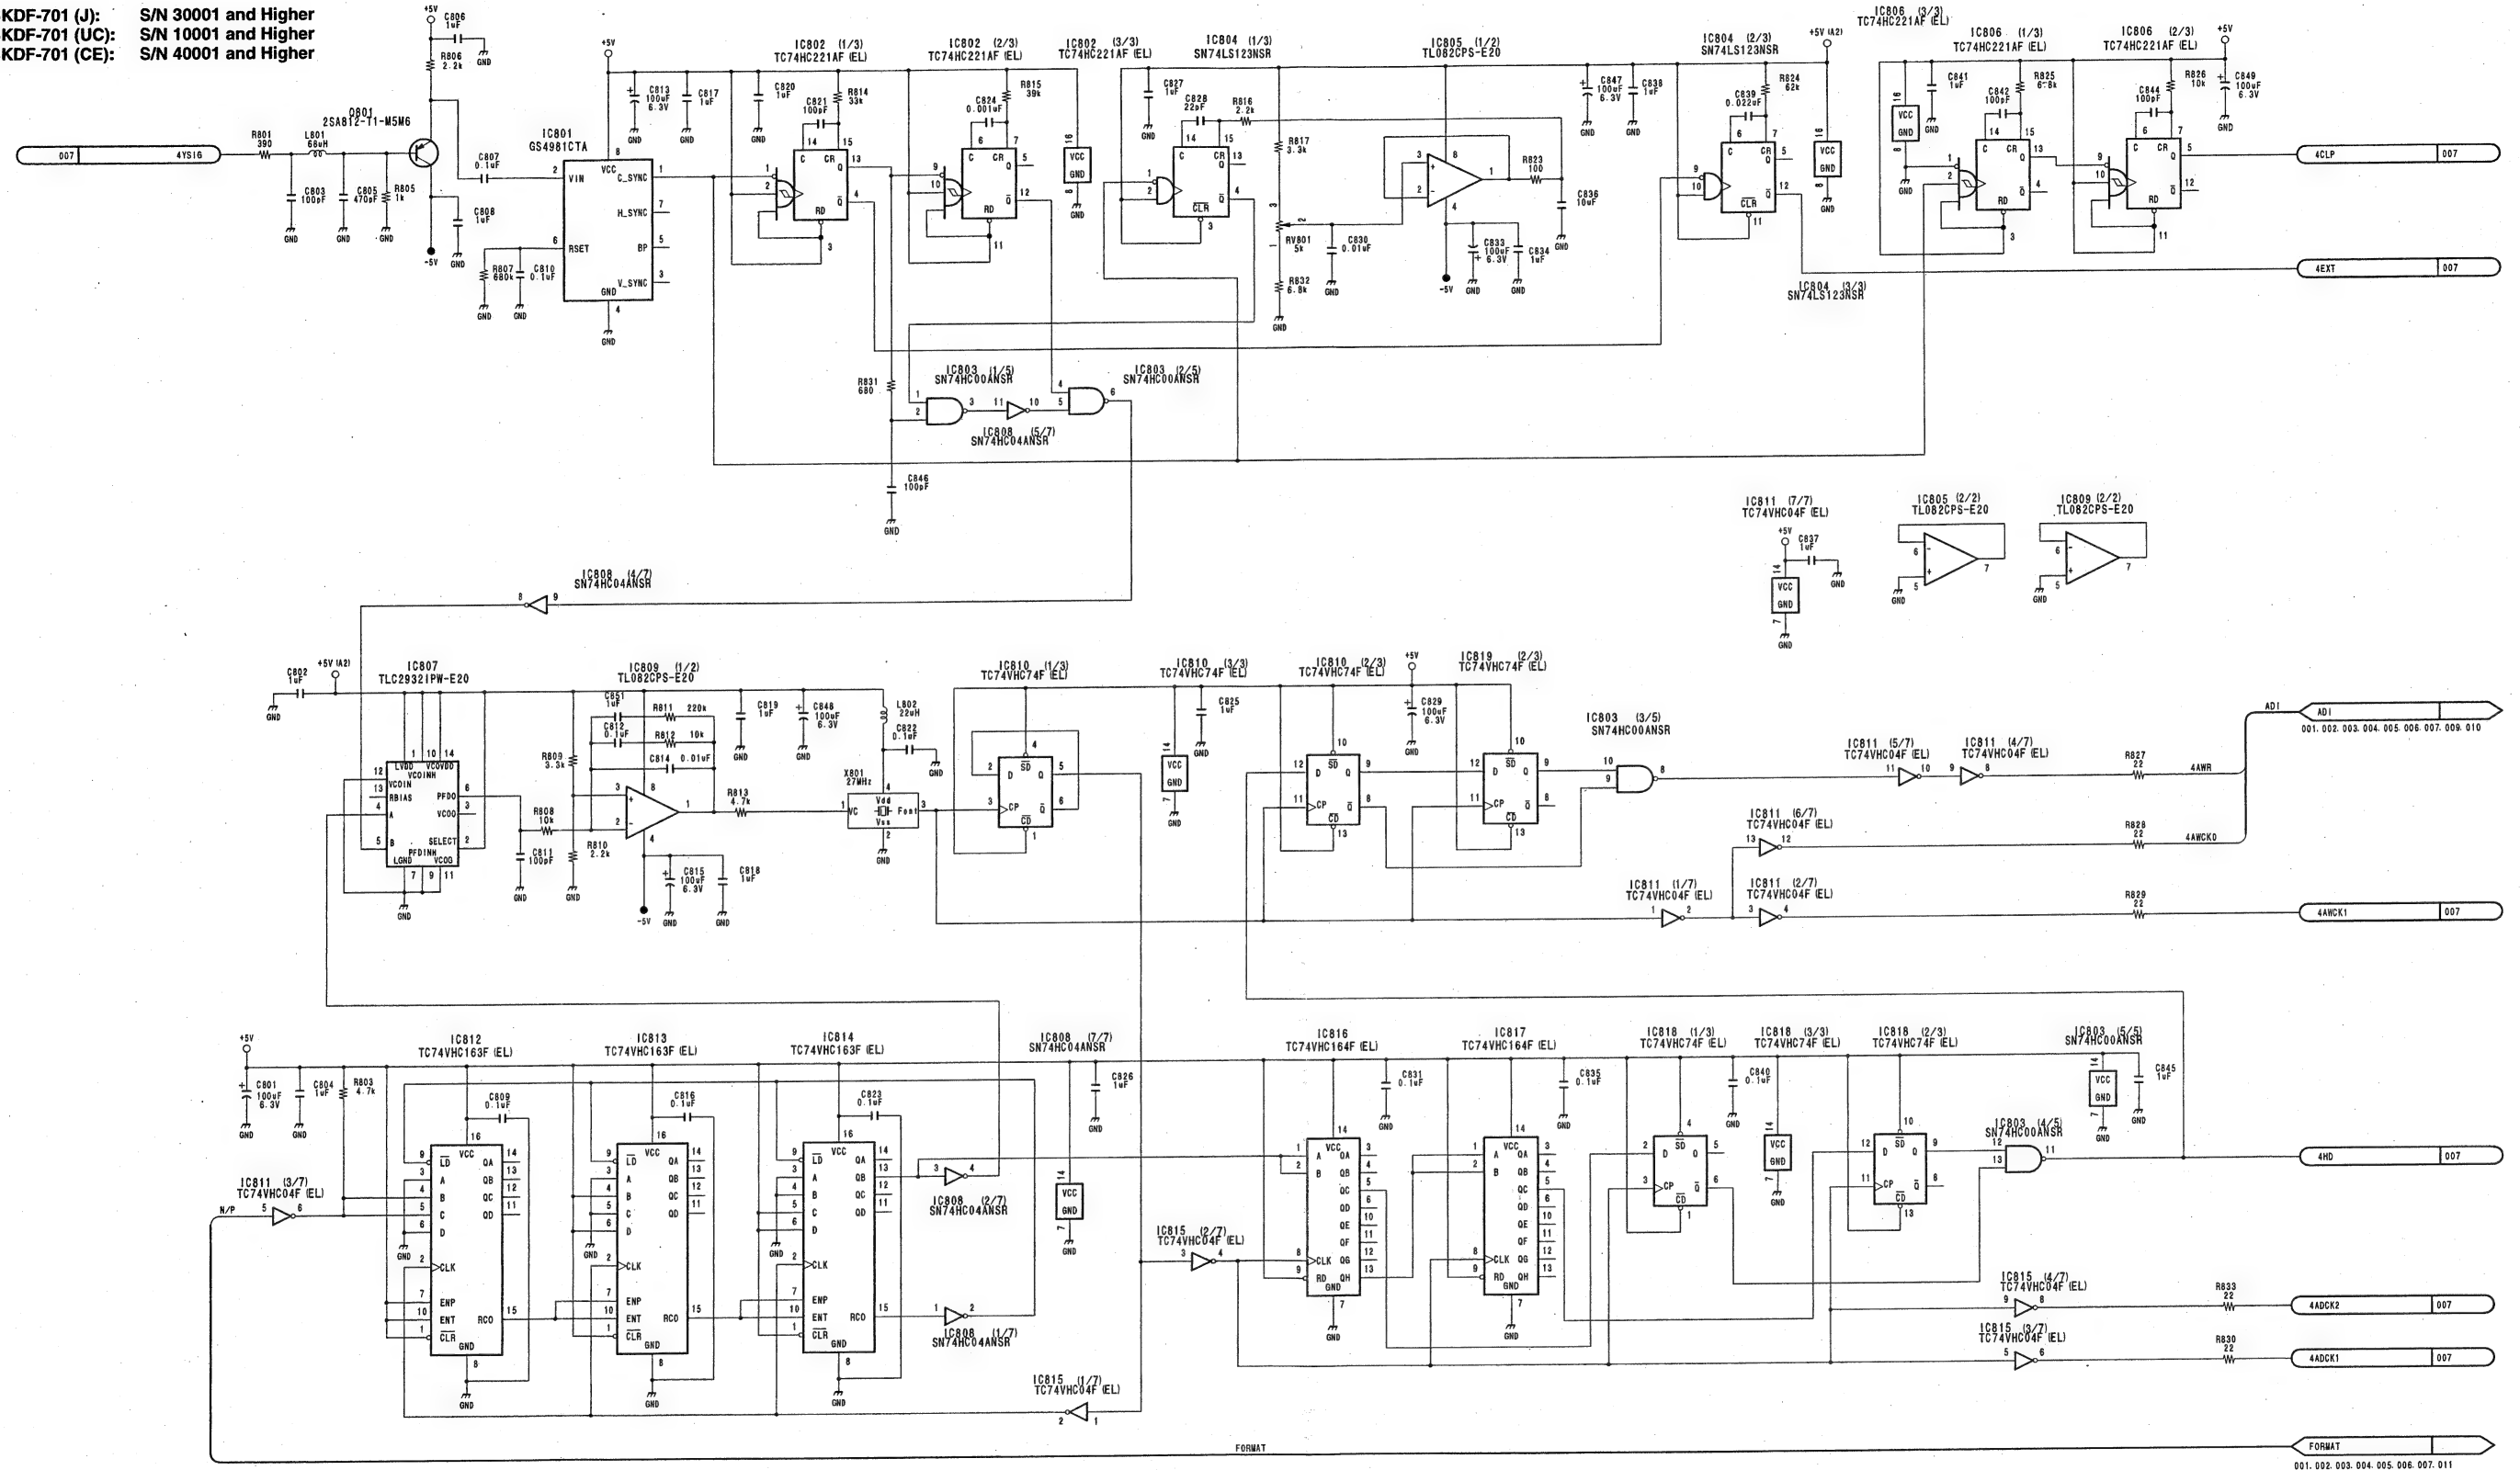


DIGITAL ANALOG INPUT
 BOARD
VIF-20/20P (8/12)
 BOARD NO. 1-677-102-11
 LOT NO. 911-

BKDF-701 (J): S/N 30001 and Higher
BKDF-701 (UC): S/N 10001 and Higher
BKDF-701 (CE): S/N 40001 and Higher

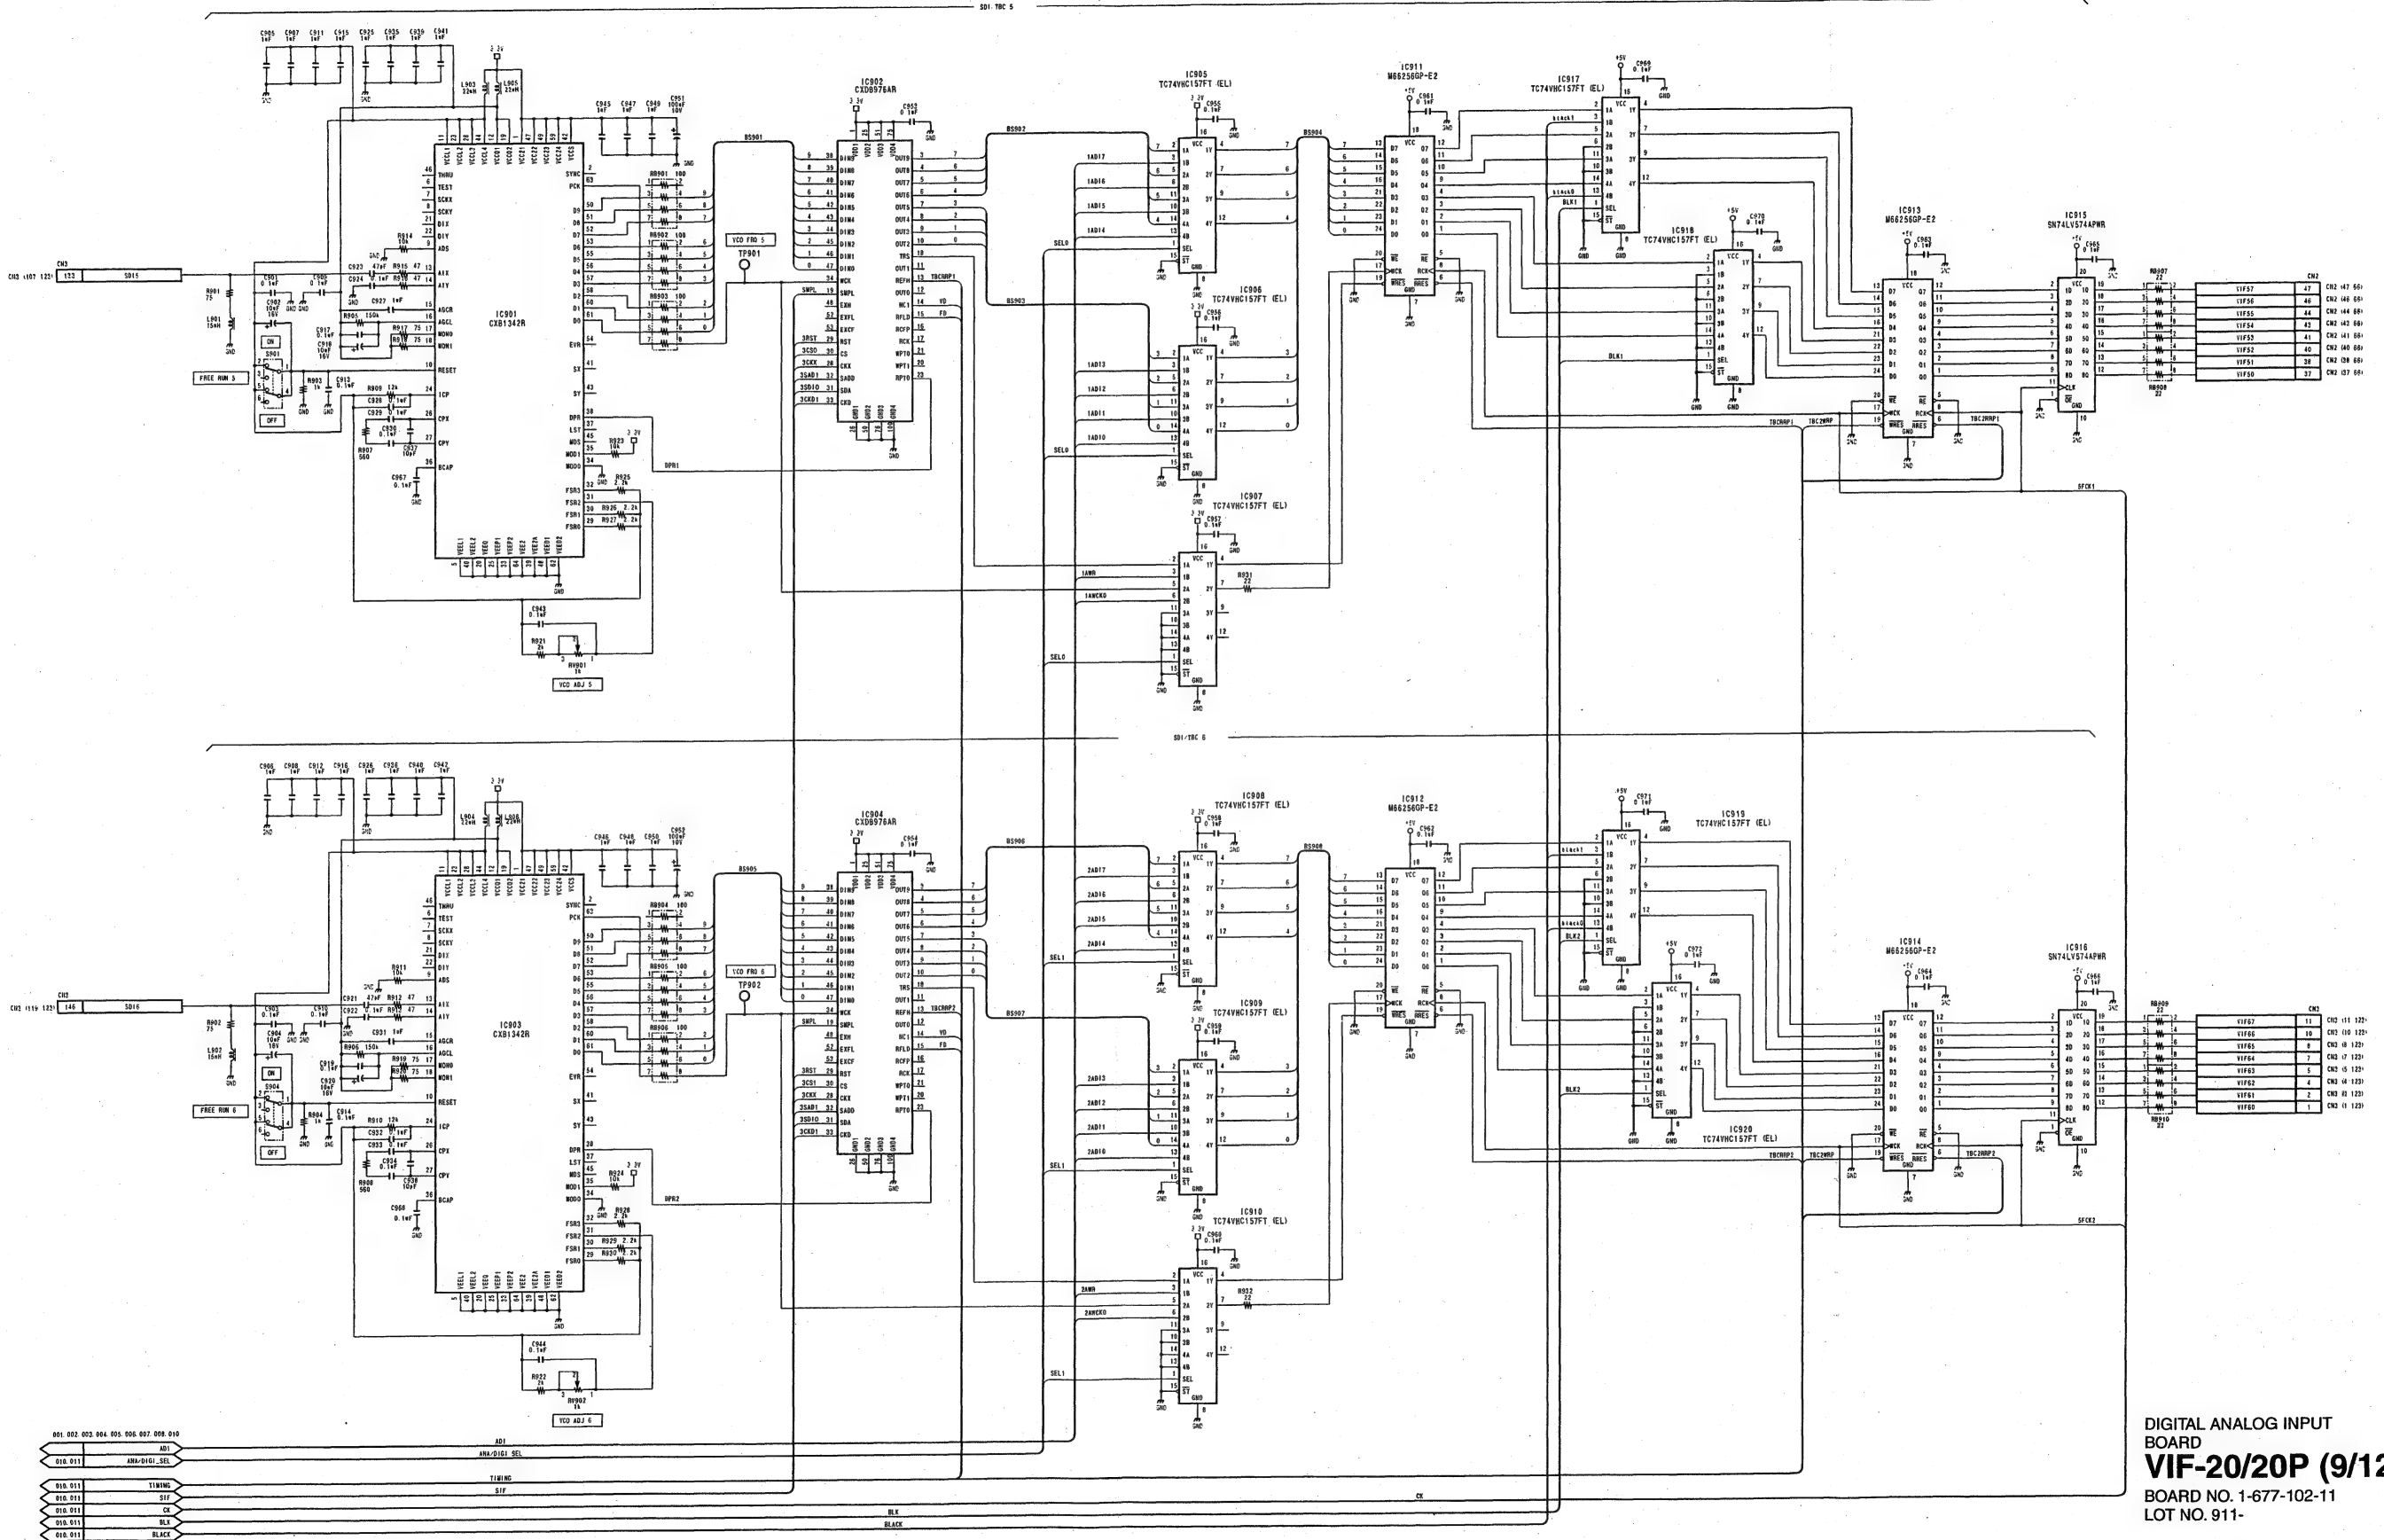



DIGITAL ANALOG INPUT
BOARD
VIF-20/20P (9/12)
BOARD NO. 1-677-102-11
LOT NO. 911-

BKDF-701 (J): S/N 30001 and Higher
BKDF-701 (UC): S/N 10001 and Higher
BKDF-701 (CE): S/N 40001 and Higher

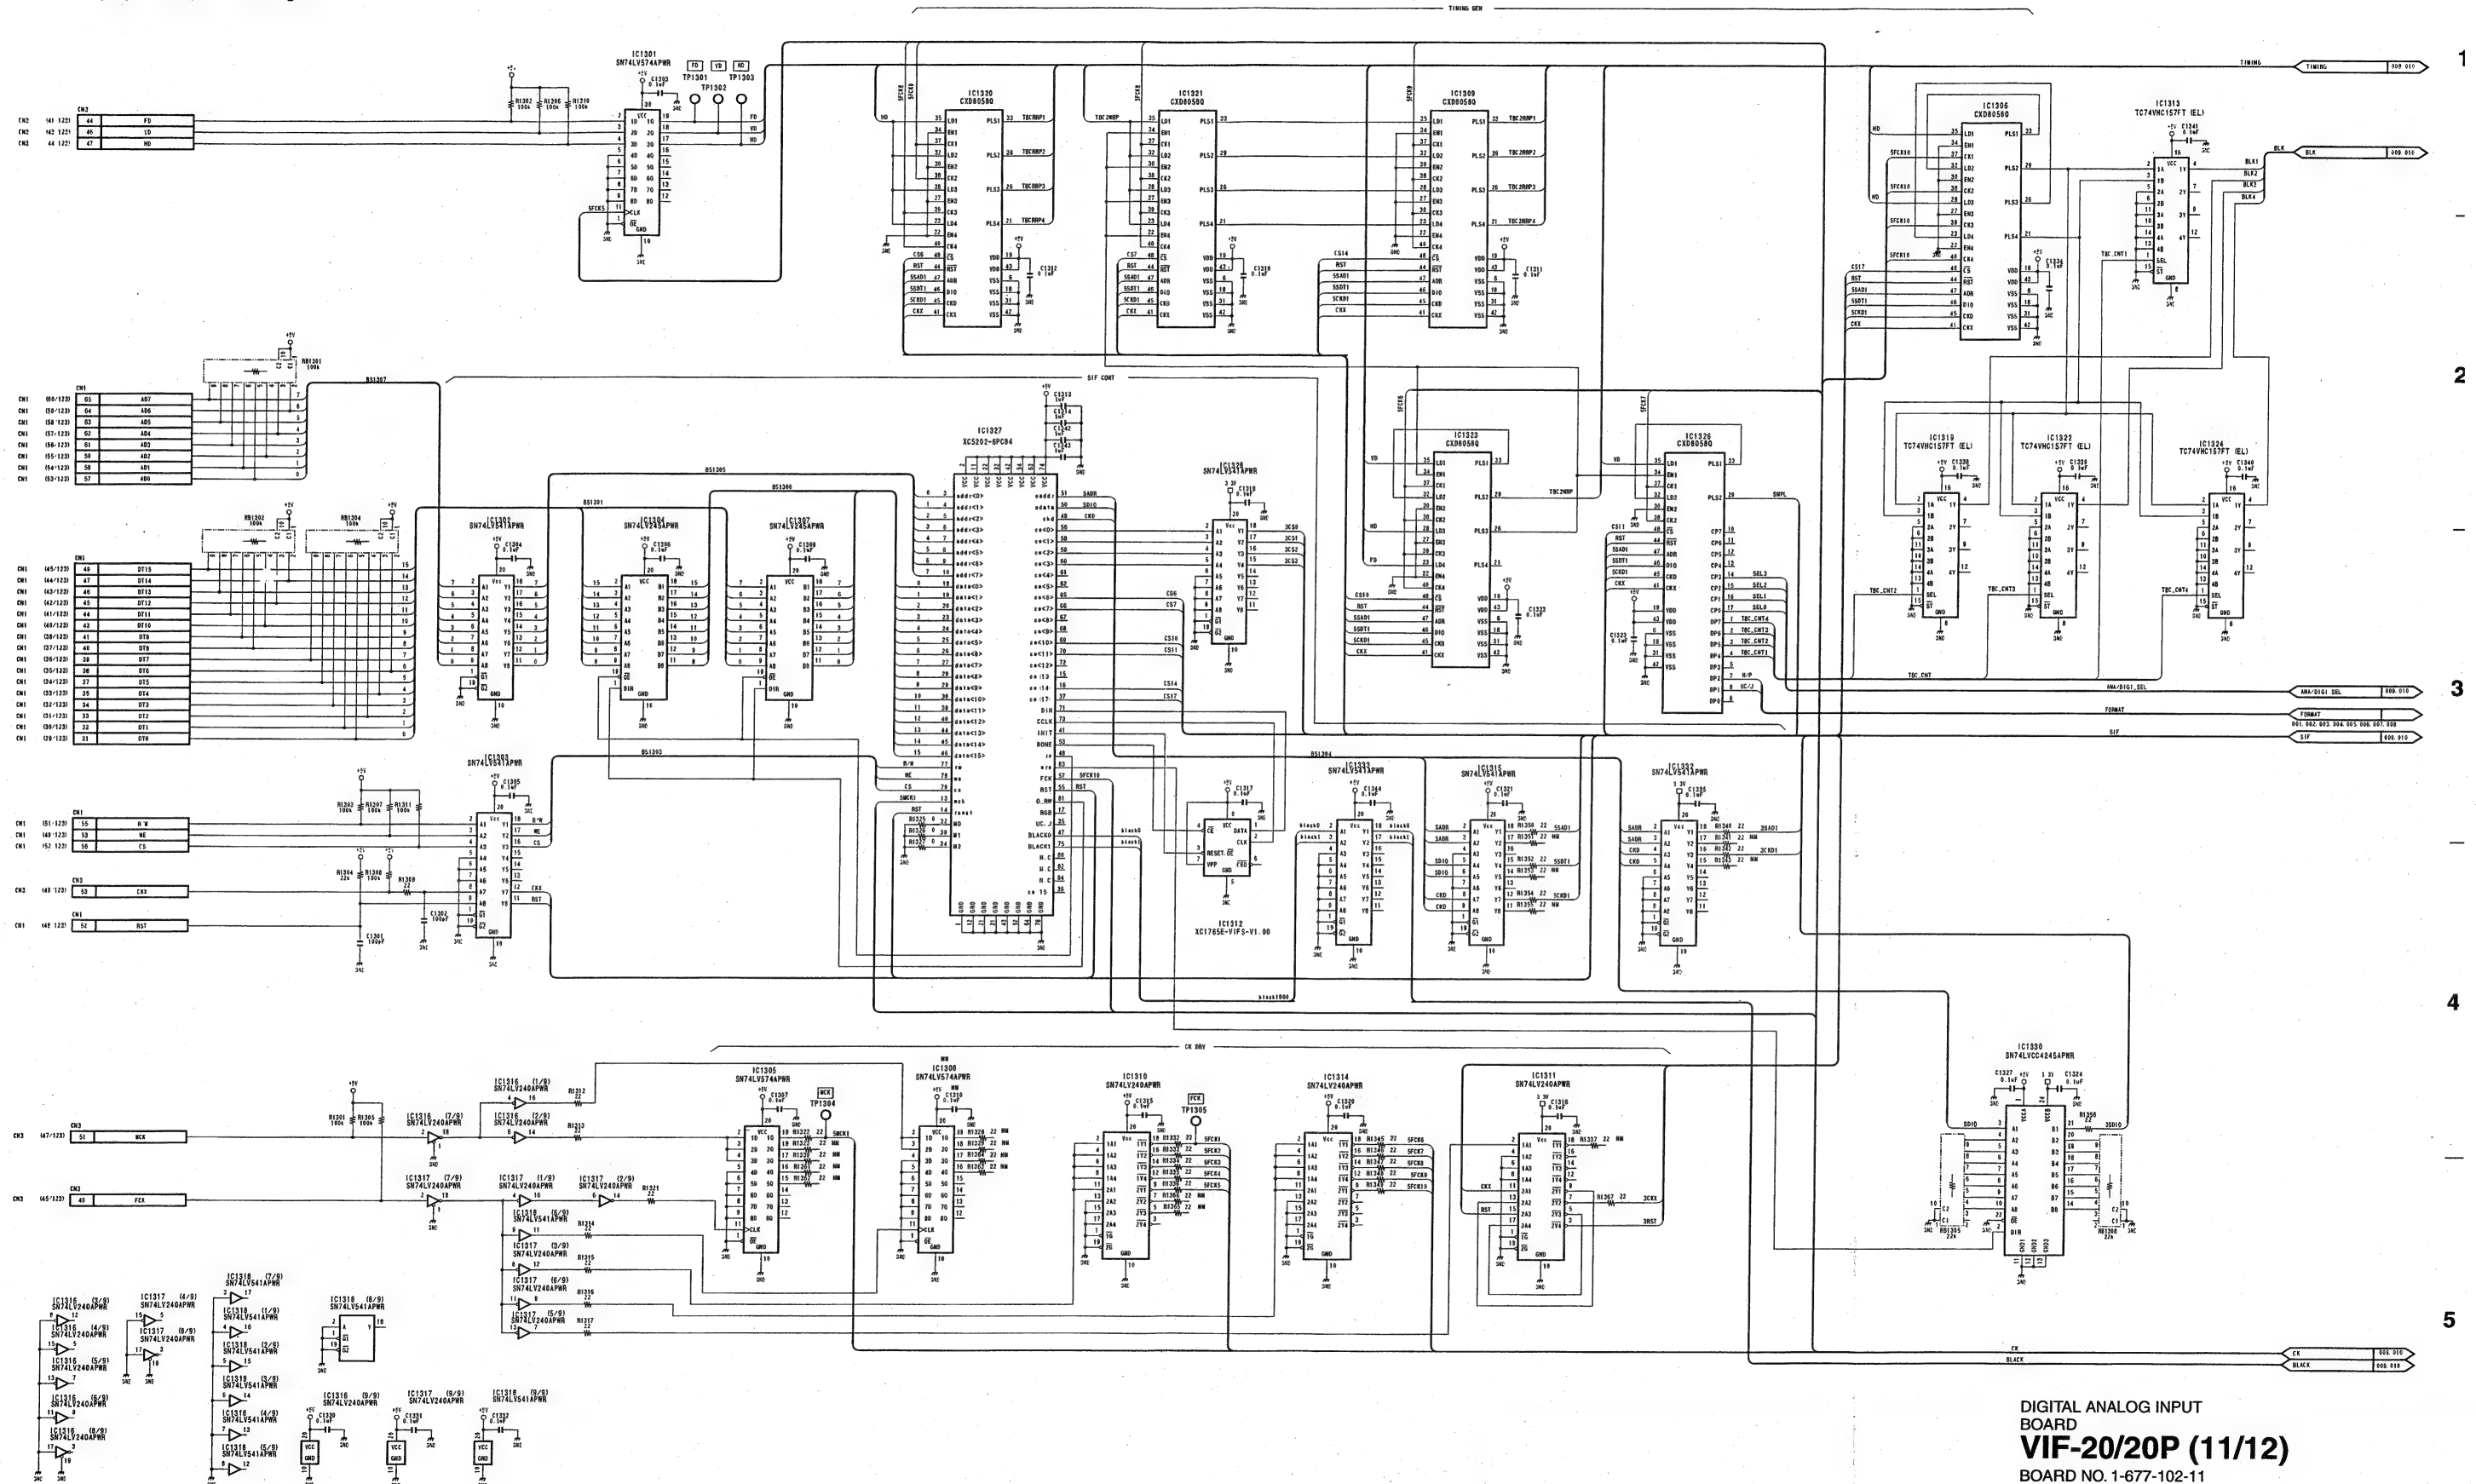

DIGITAL ANALOG INPUT
BOARD
VIF-20/20P (11/12)
BOARD NO. 1-677-102-11
LOT NO. 911-

BKDF-701 (J): S/N 30001 and Higher
 BKDF-701 (UC): S/N 10001 and Higher
 BKDF-701 (CE): S/N 40001 and Higher

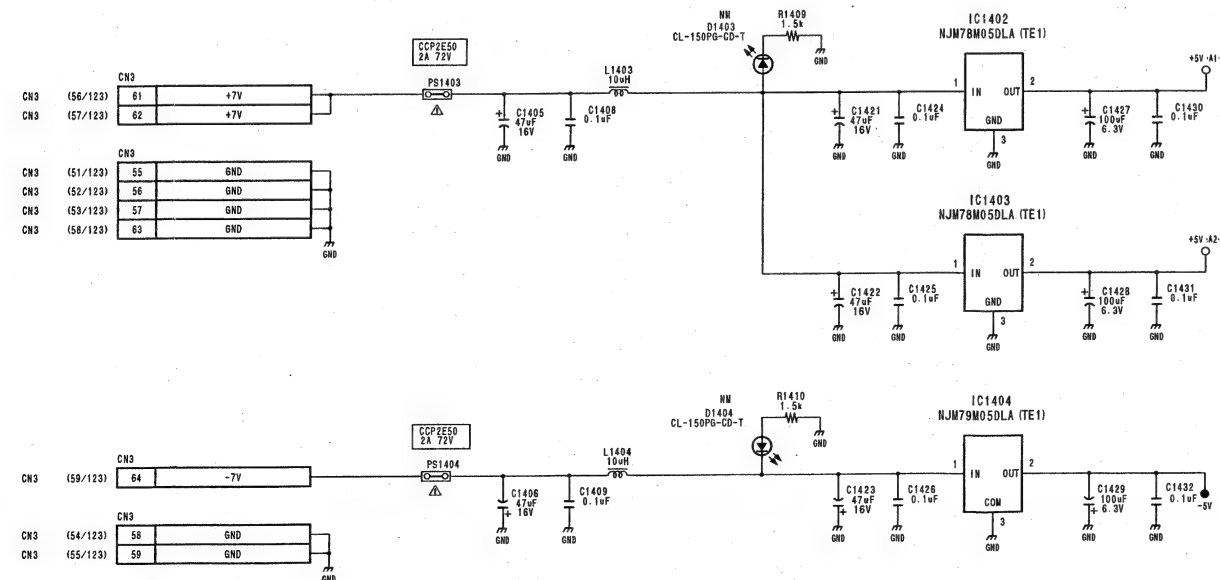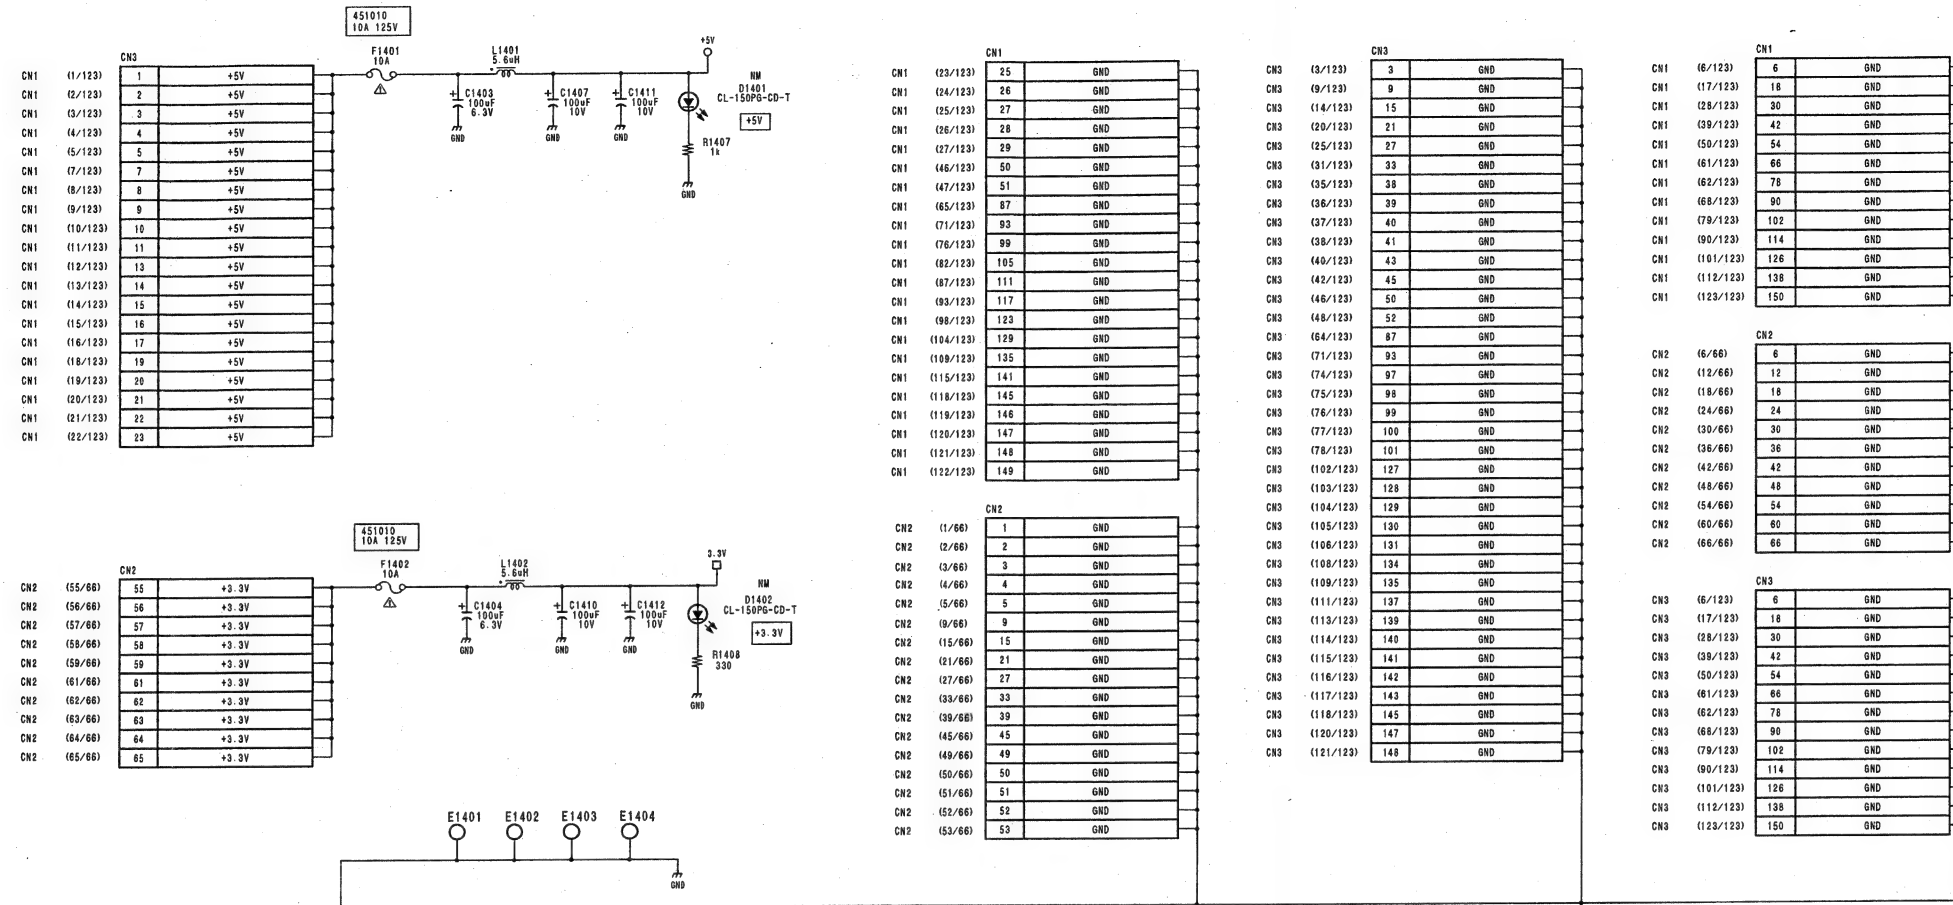



DIGITAL ANALOG INPUT
 BOARD
VIF-20/20P (12/12)
 BOARD NO. 1-677-102-11
 LOT NO. 911-

VR-263 VR-264

DFS-700 (J): S/N 30001 and Higher
DFS-700 (UC): S/N 10001 and Higher
DFS-700P (CE): S/N 40001 and Higher

DFS-700 (J): S/N 30001 and Higher
DFS-700 (UC): S/N 10001 and Higher
DFS-700P (CE): S/N 40001 and Higher

KY-466
CN103

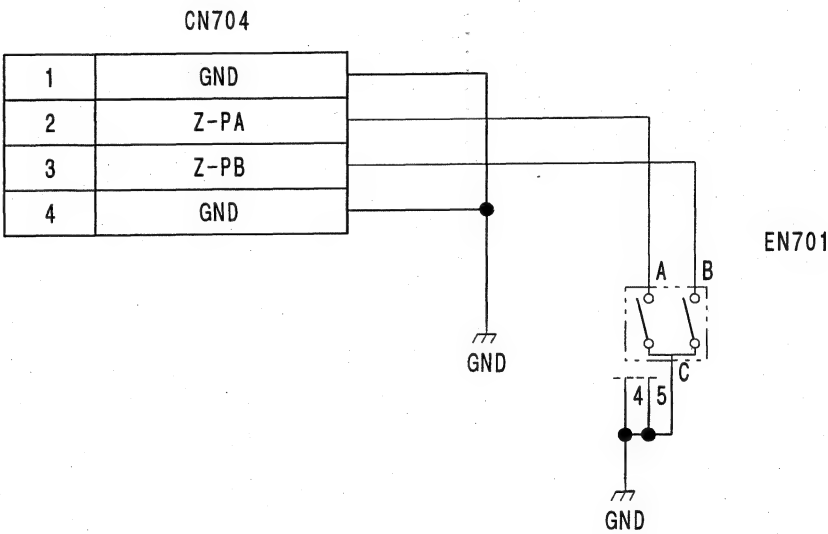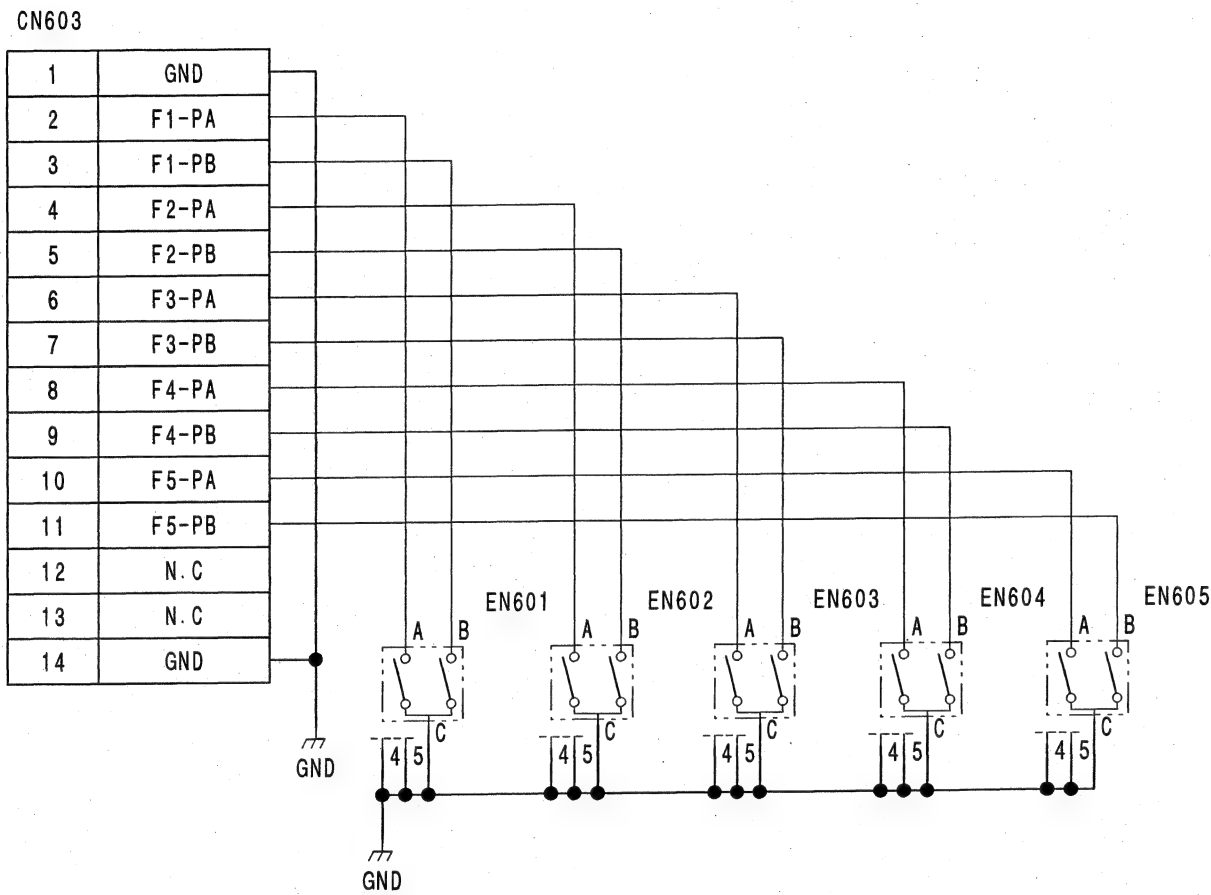


VOLUME BOARD
VR-263
BOARD NO. 1-675-962-11
LOT NO. 911-


VOLUME BOARD
VR-264
BOARD NO. 1-675-963-11
LOT NO. 911-

VSE-36 (1/7)

BKDF-712 (J): S/N 30001 and Higher
BKDF-712 (UC): S/N 10001 and Higher
BKDF-712 (CE): S/N 40001 and Higher

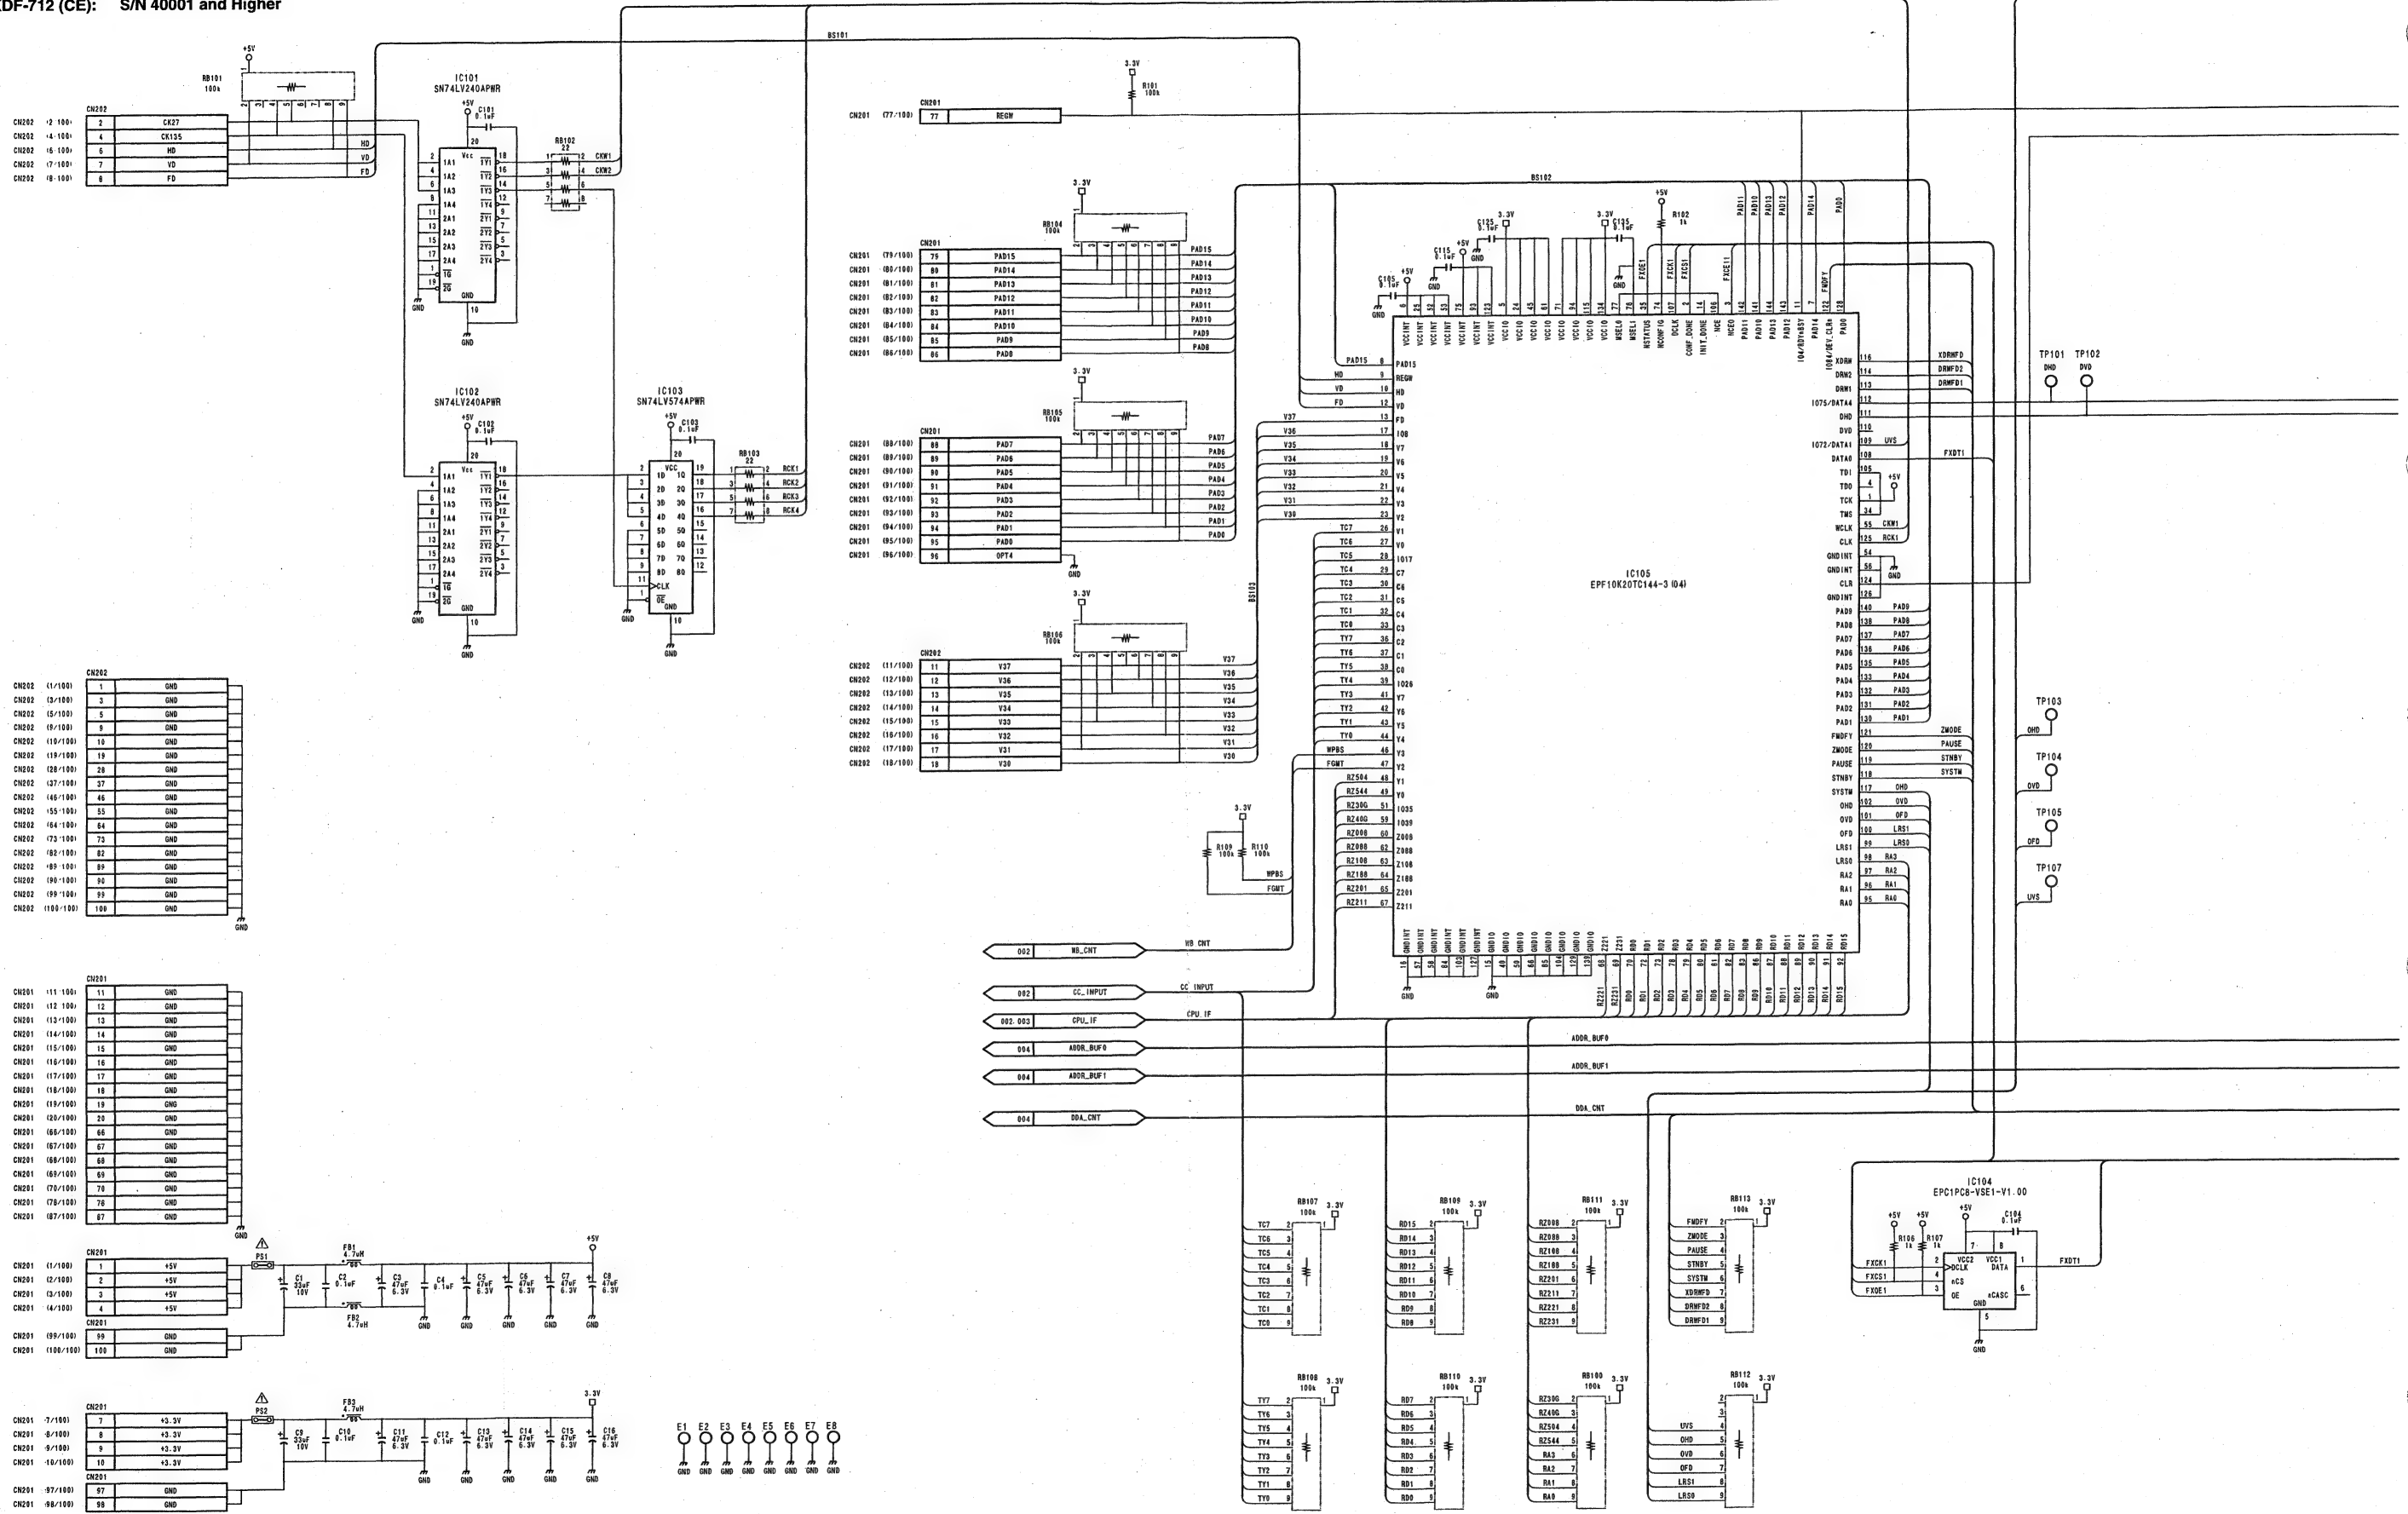


VSE-36 (1/7) VSE-36 (1/7)

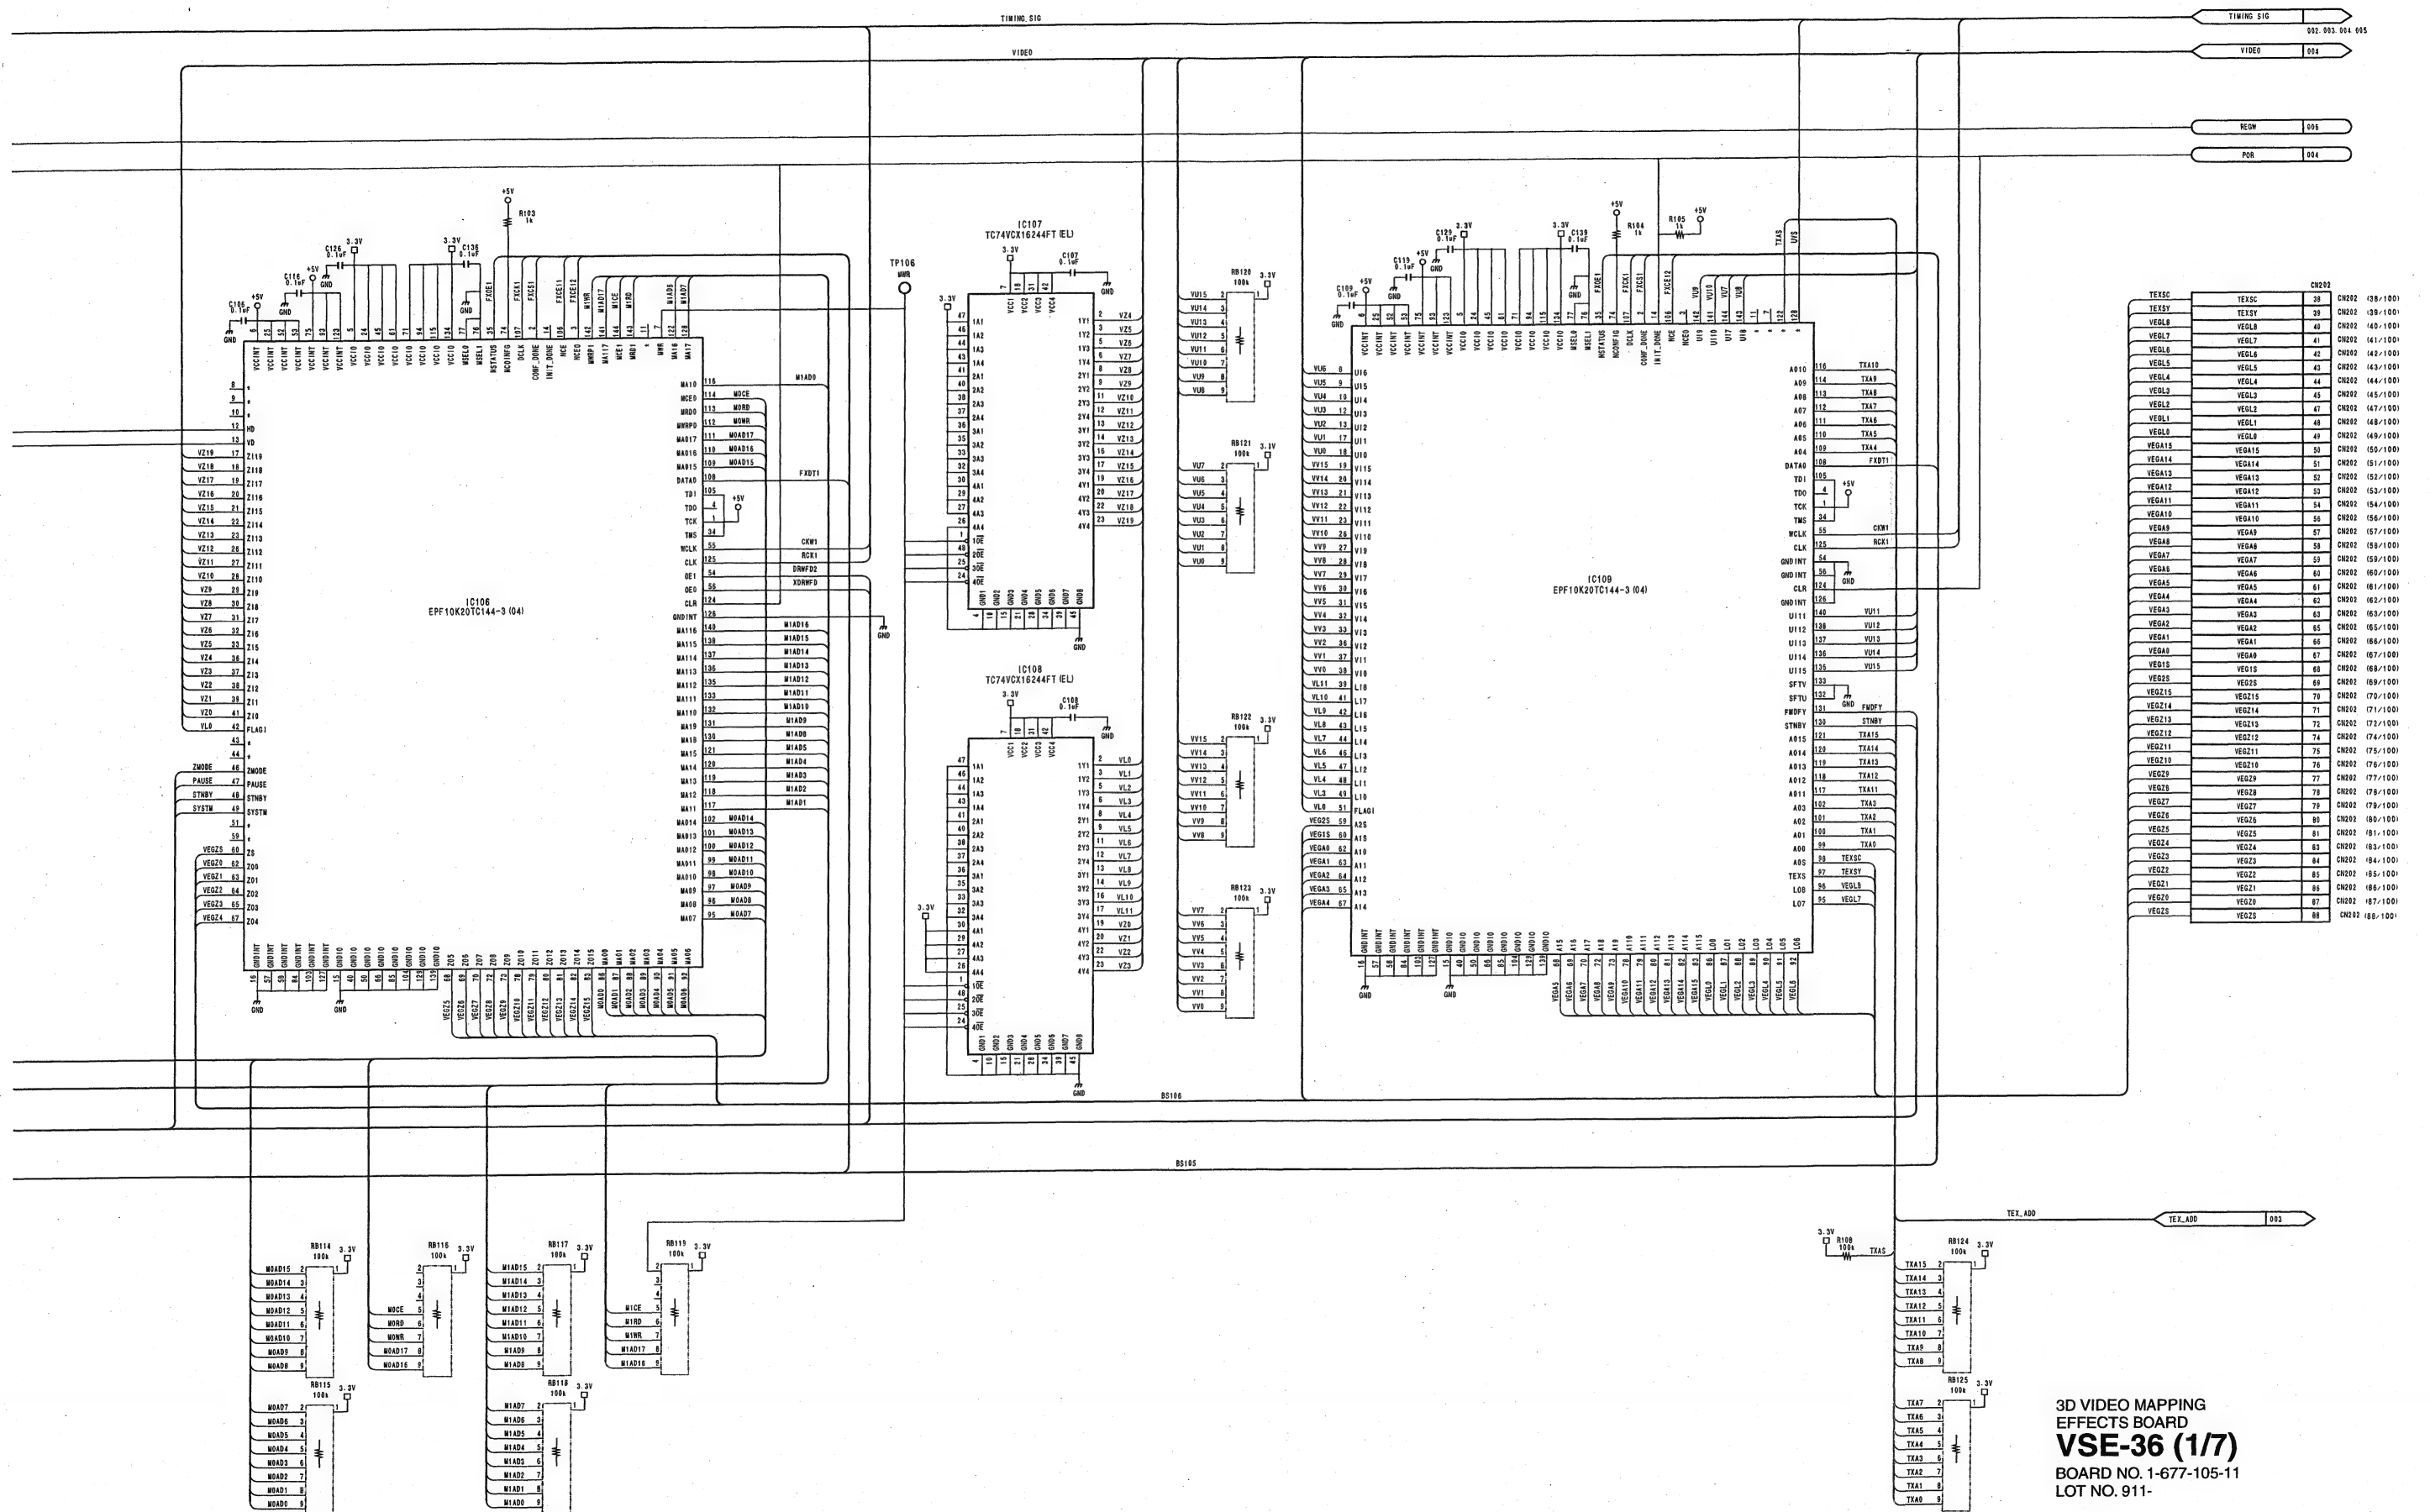


3D VIDEO MAPPING
EFFECTS BOARD
VSE-36 (1/7)
BOARD NO. 1-677-105-11
LOT NO. 911-

4-168


DFS-700/700P




BKDF-712 (J): S/N 30001 and Higher
BKDF-712 (UC): S/N 10001 and Higher
BKDF-712 (CE): S/N 40001 and Higher

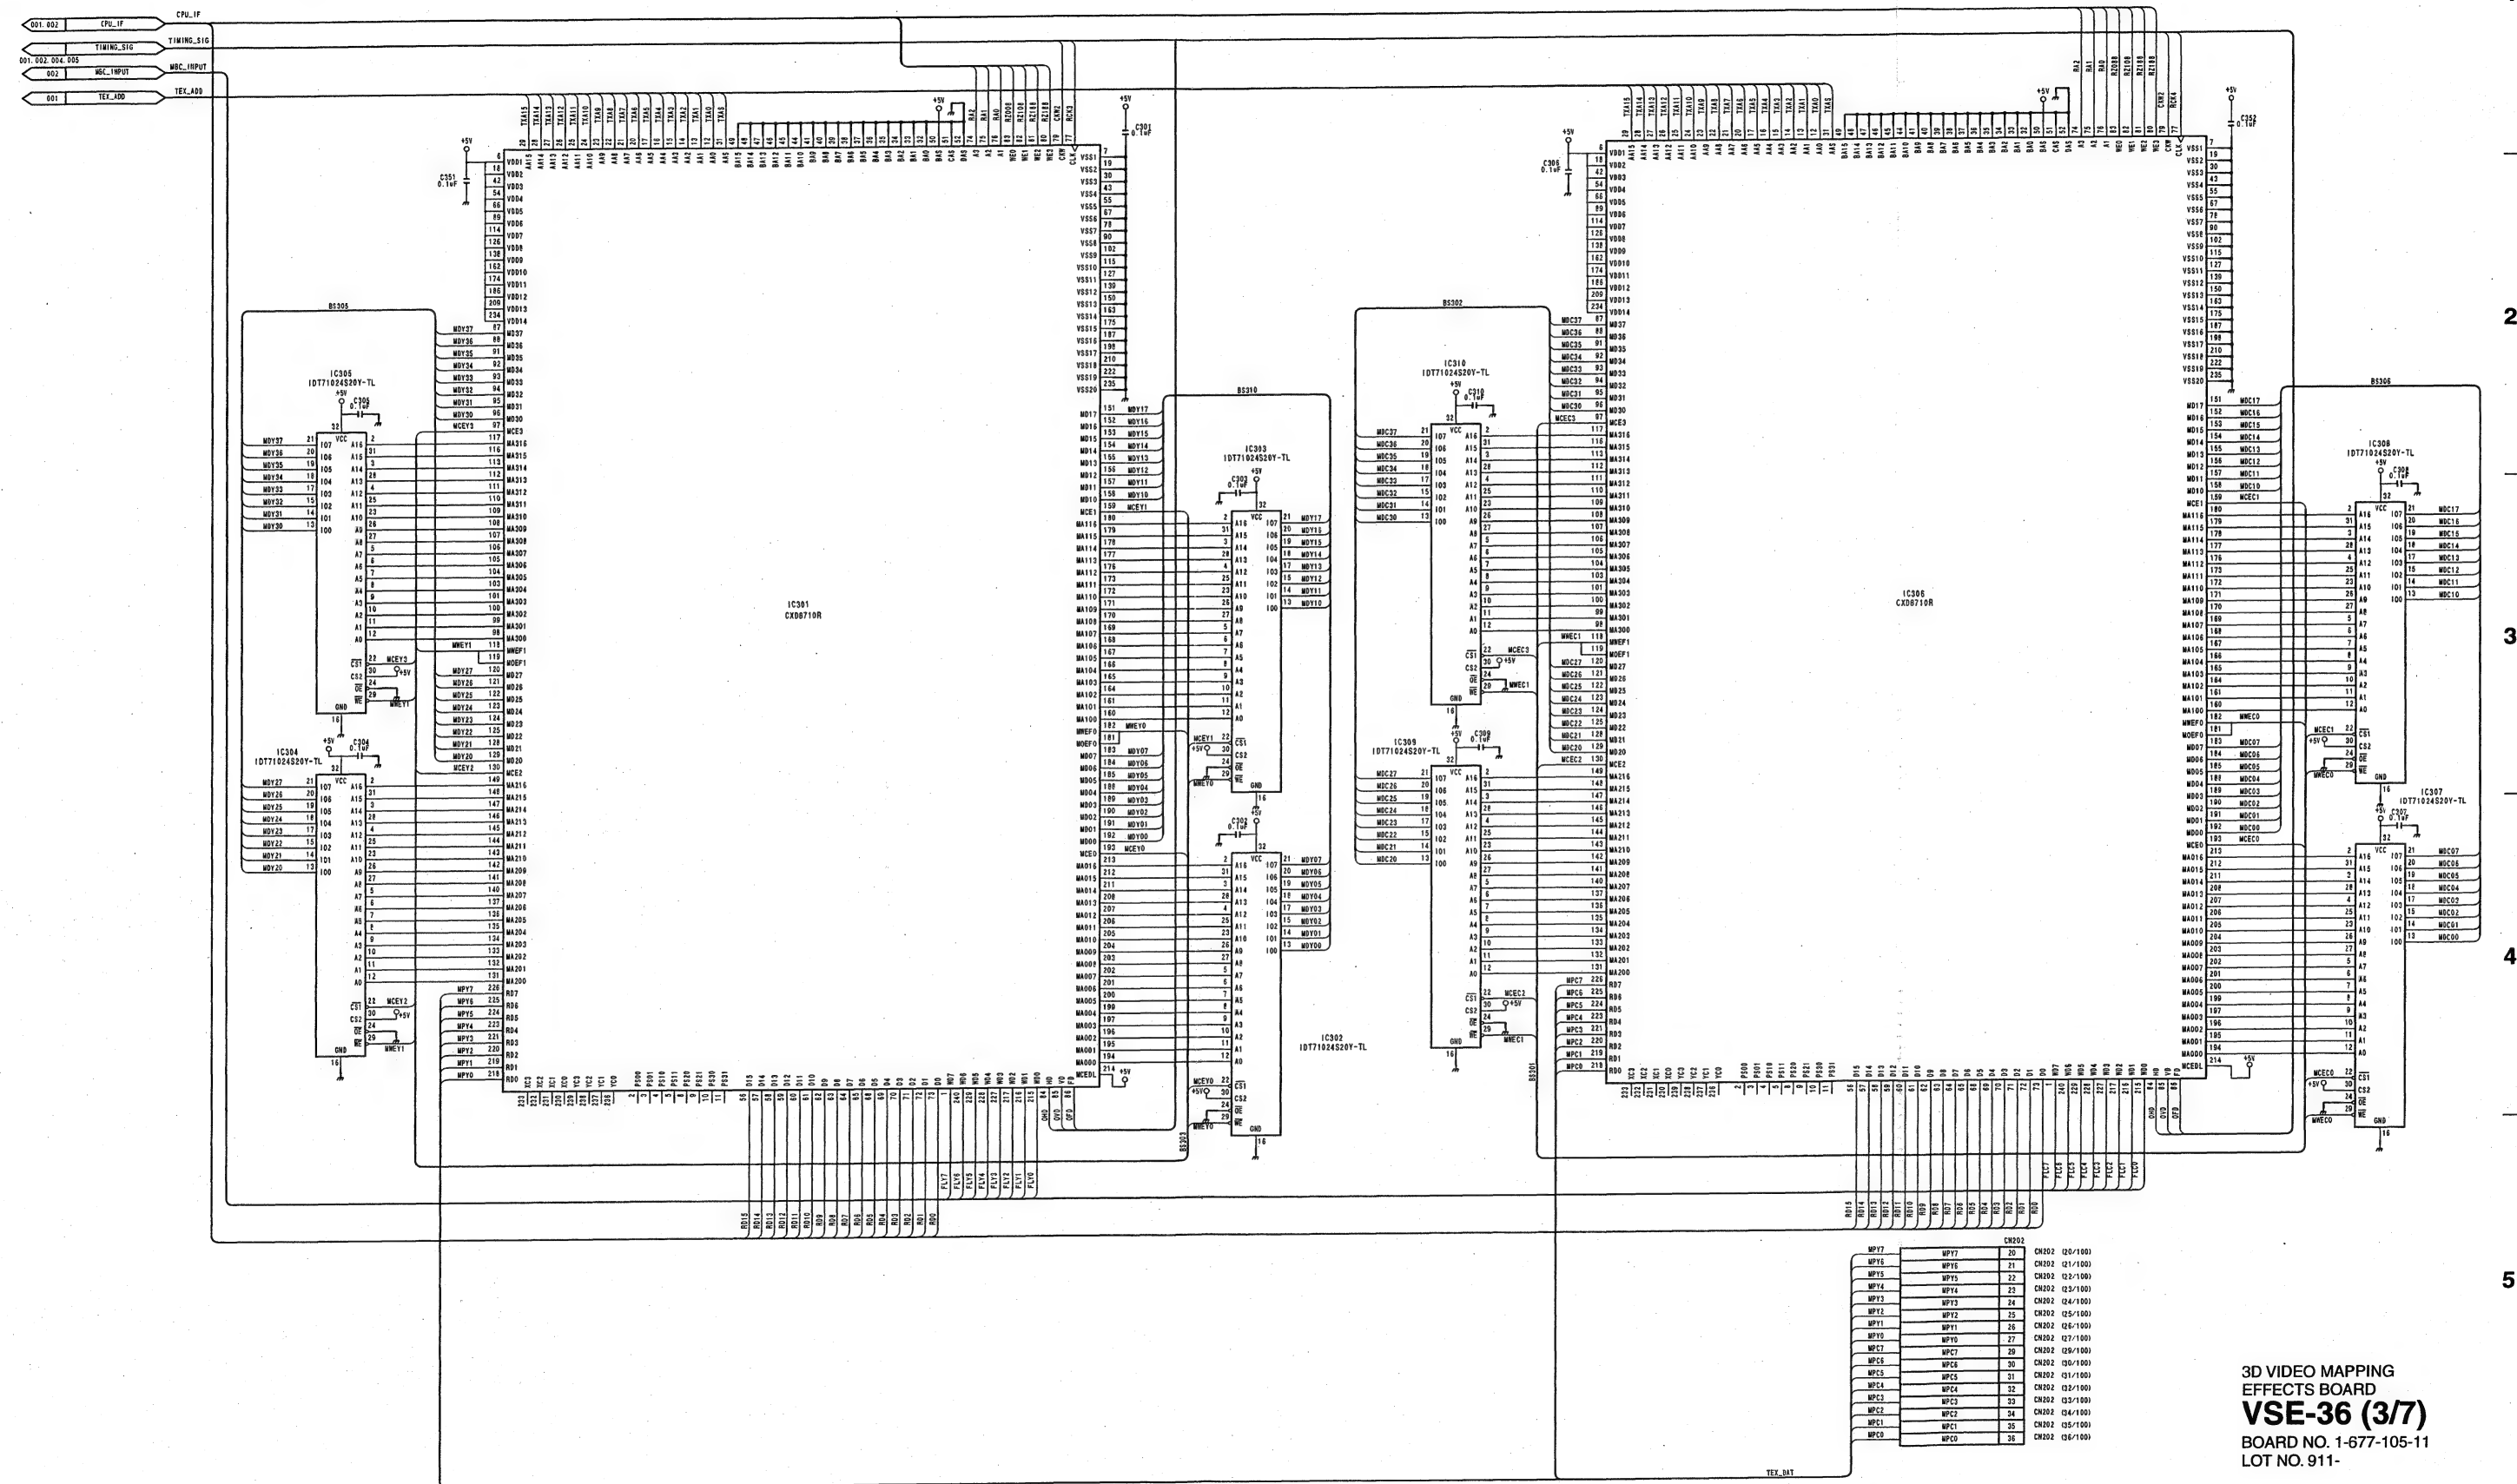

BKDF-712 (J): S/N 30001 and Higher
 BKDF-712 (UC): S/N 10001 and Higher
 BKDF-712 (CE): S/N 40001 and Higher

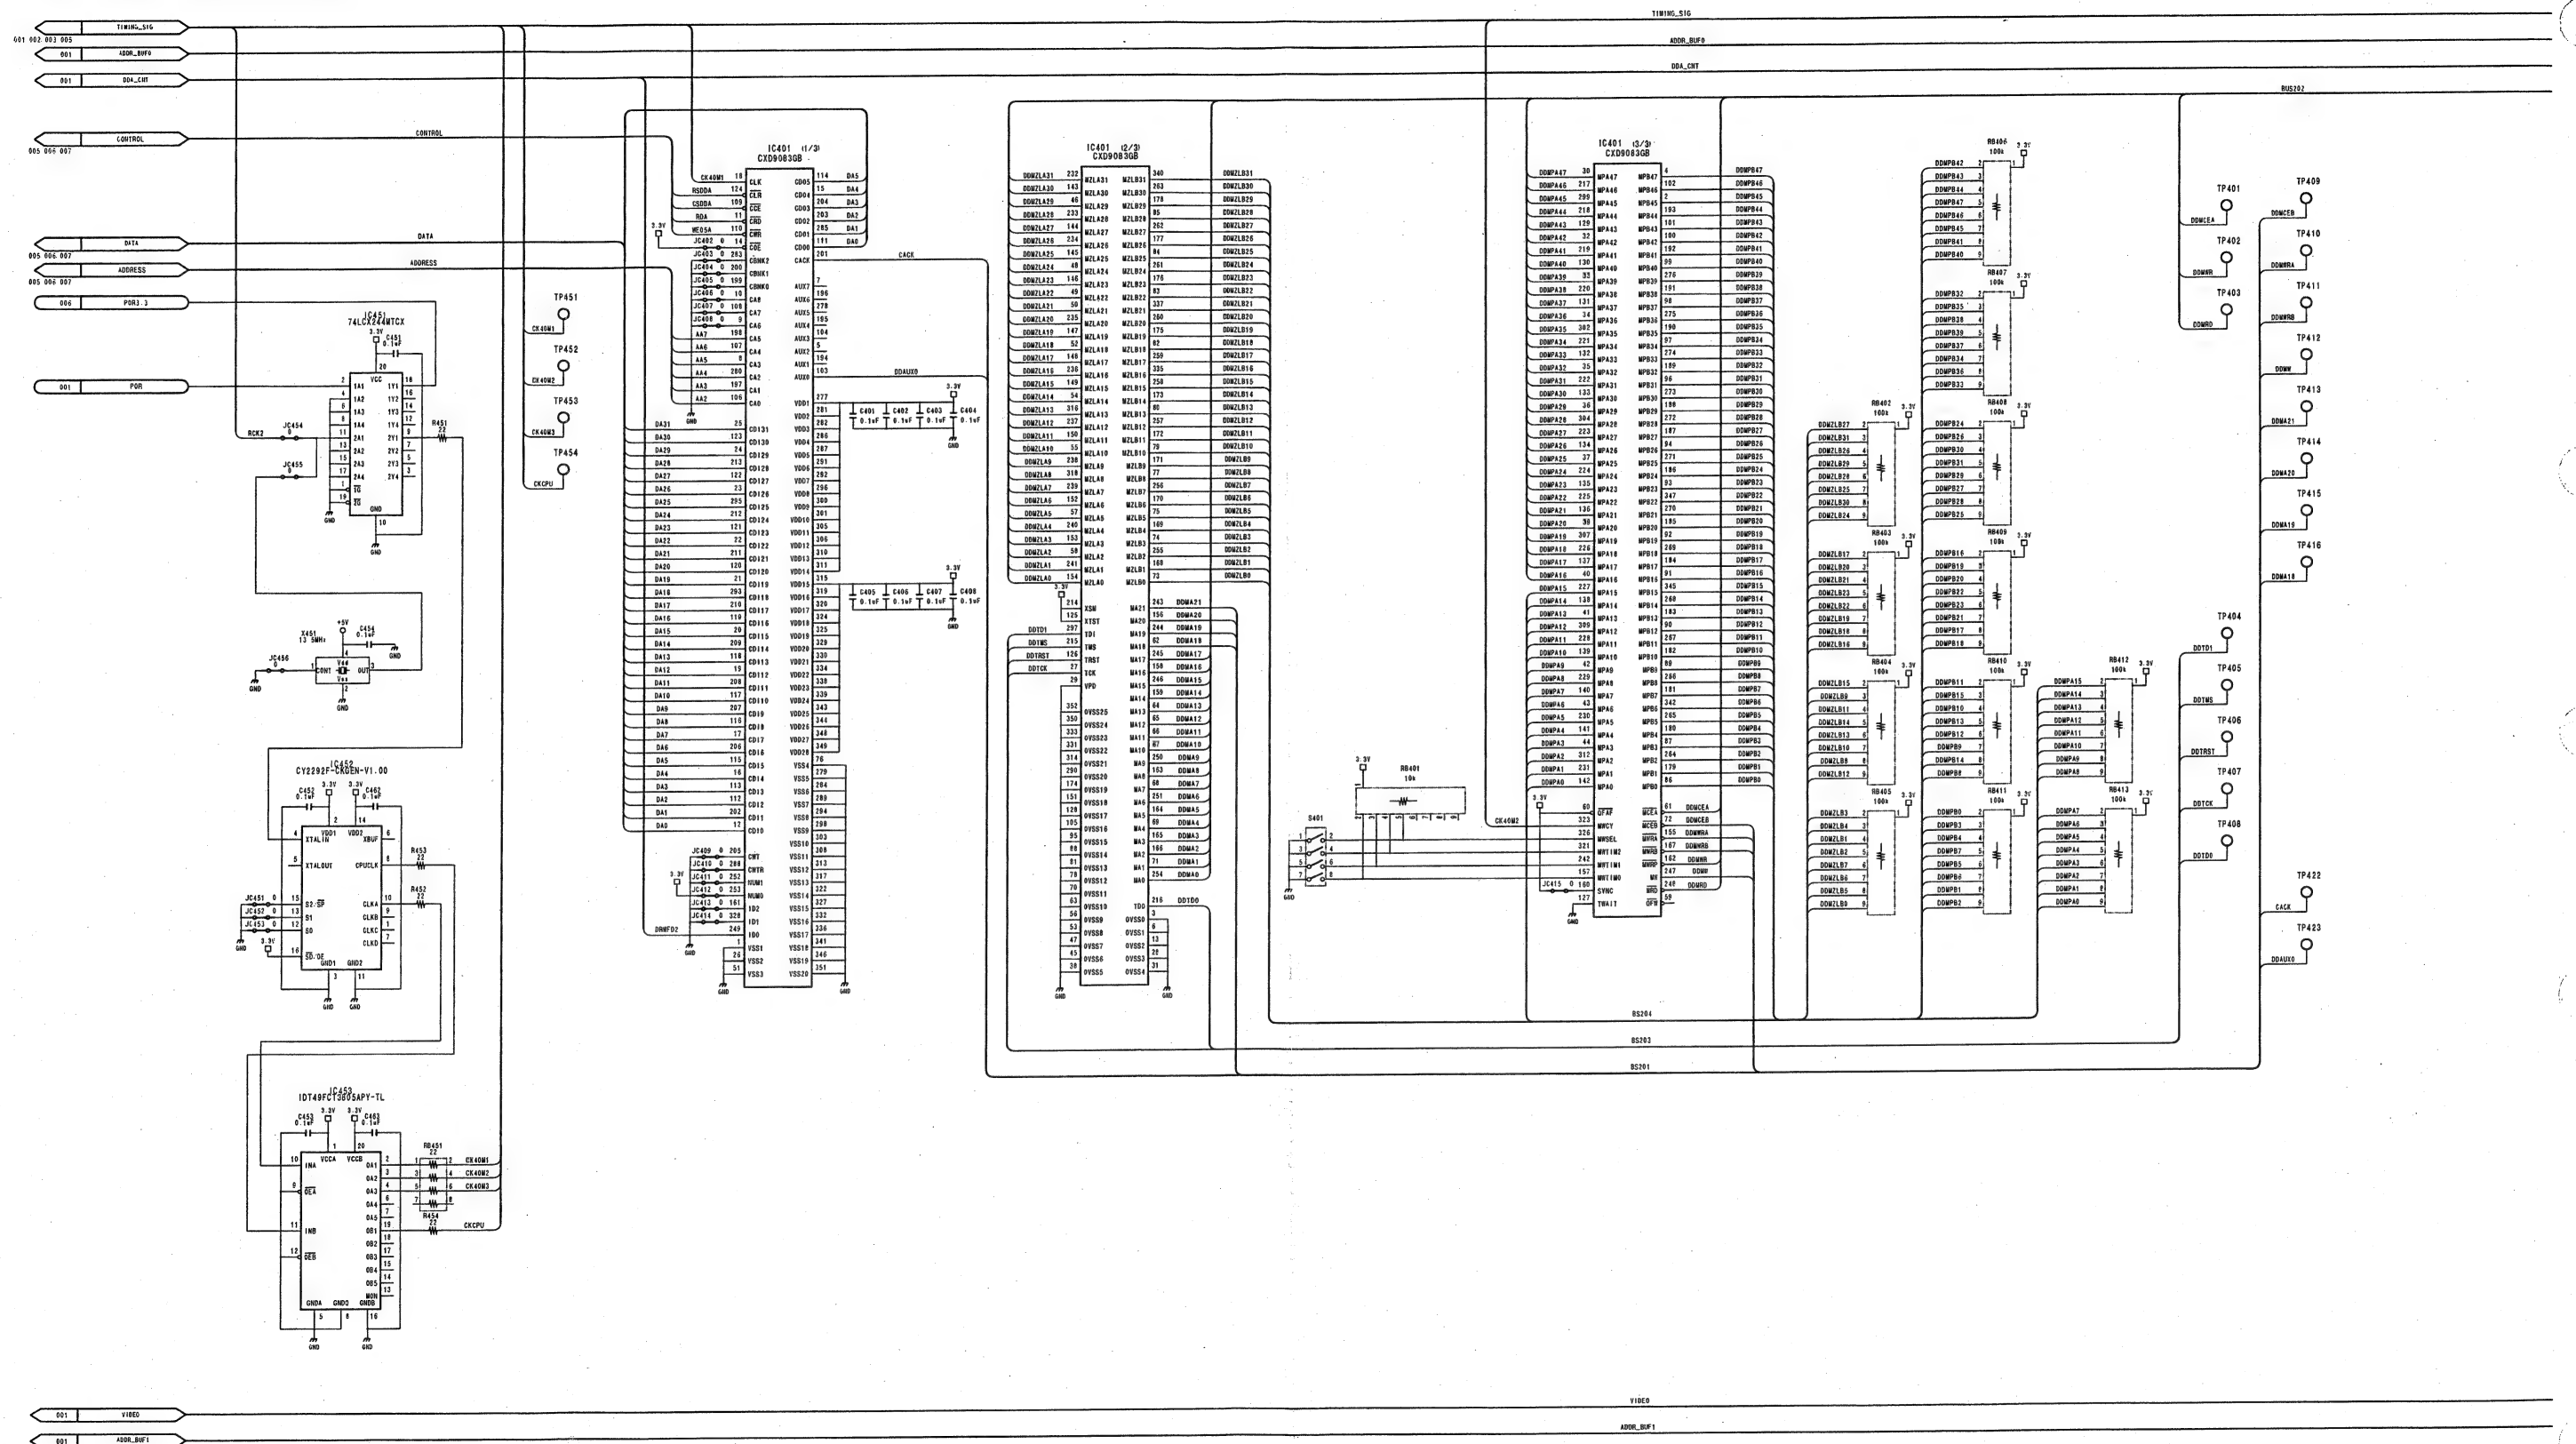


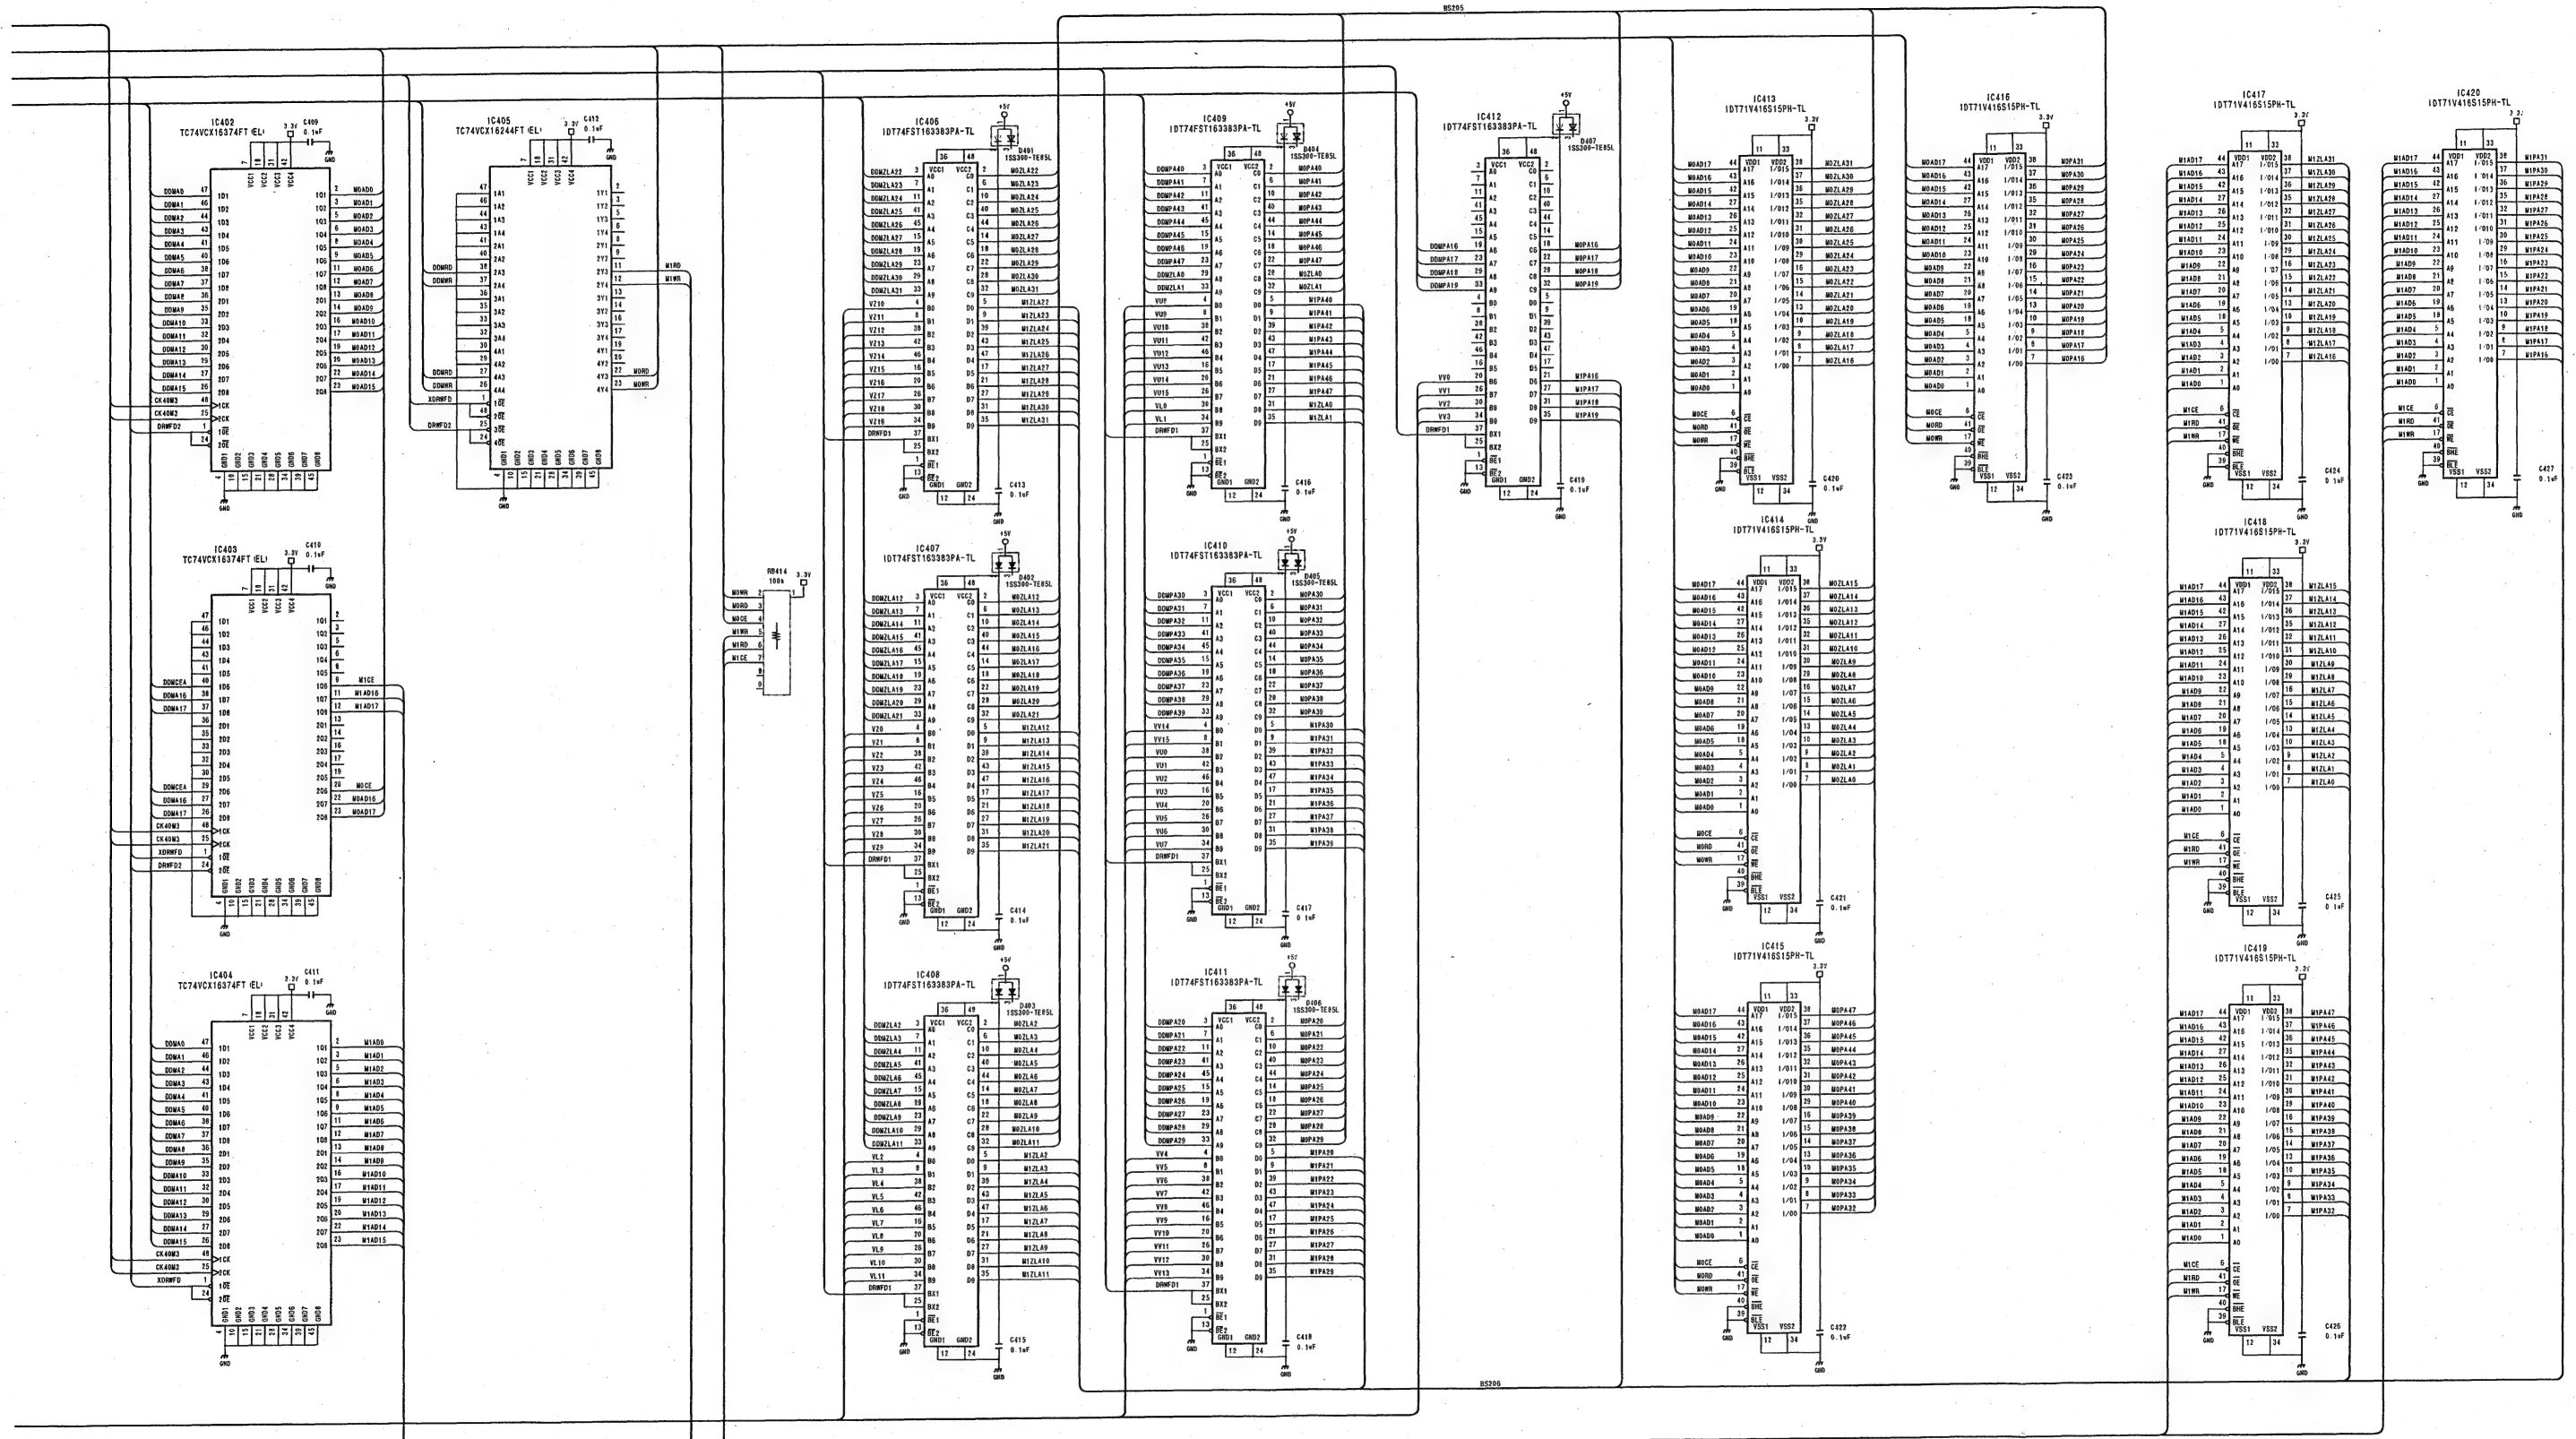

3D VIDEO MAPPING
EFFECTS BOARD
VSE-36 (4/7)
BOARD NO. 1-677-105-11
LOT NO. 911-

VSE-36 (5/7) VSE-36 (5/7)


BKDF-712 (J): S/N 30001 and Higher
 BKDF-712 (UC): S/N 10001 and Higher
 BKDF-712 (CE): S/N 40001 and Higher

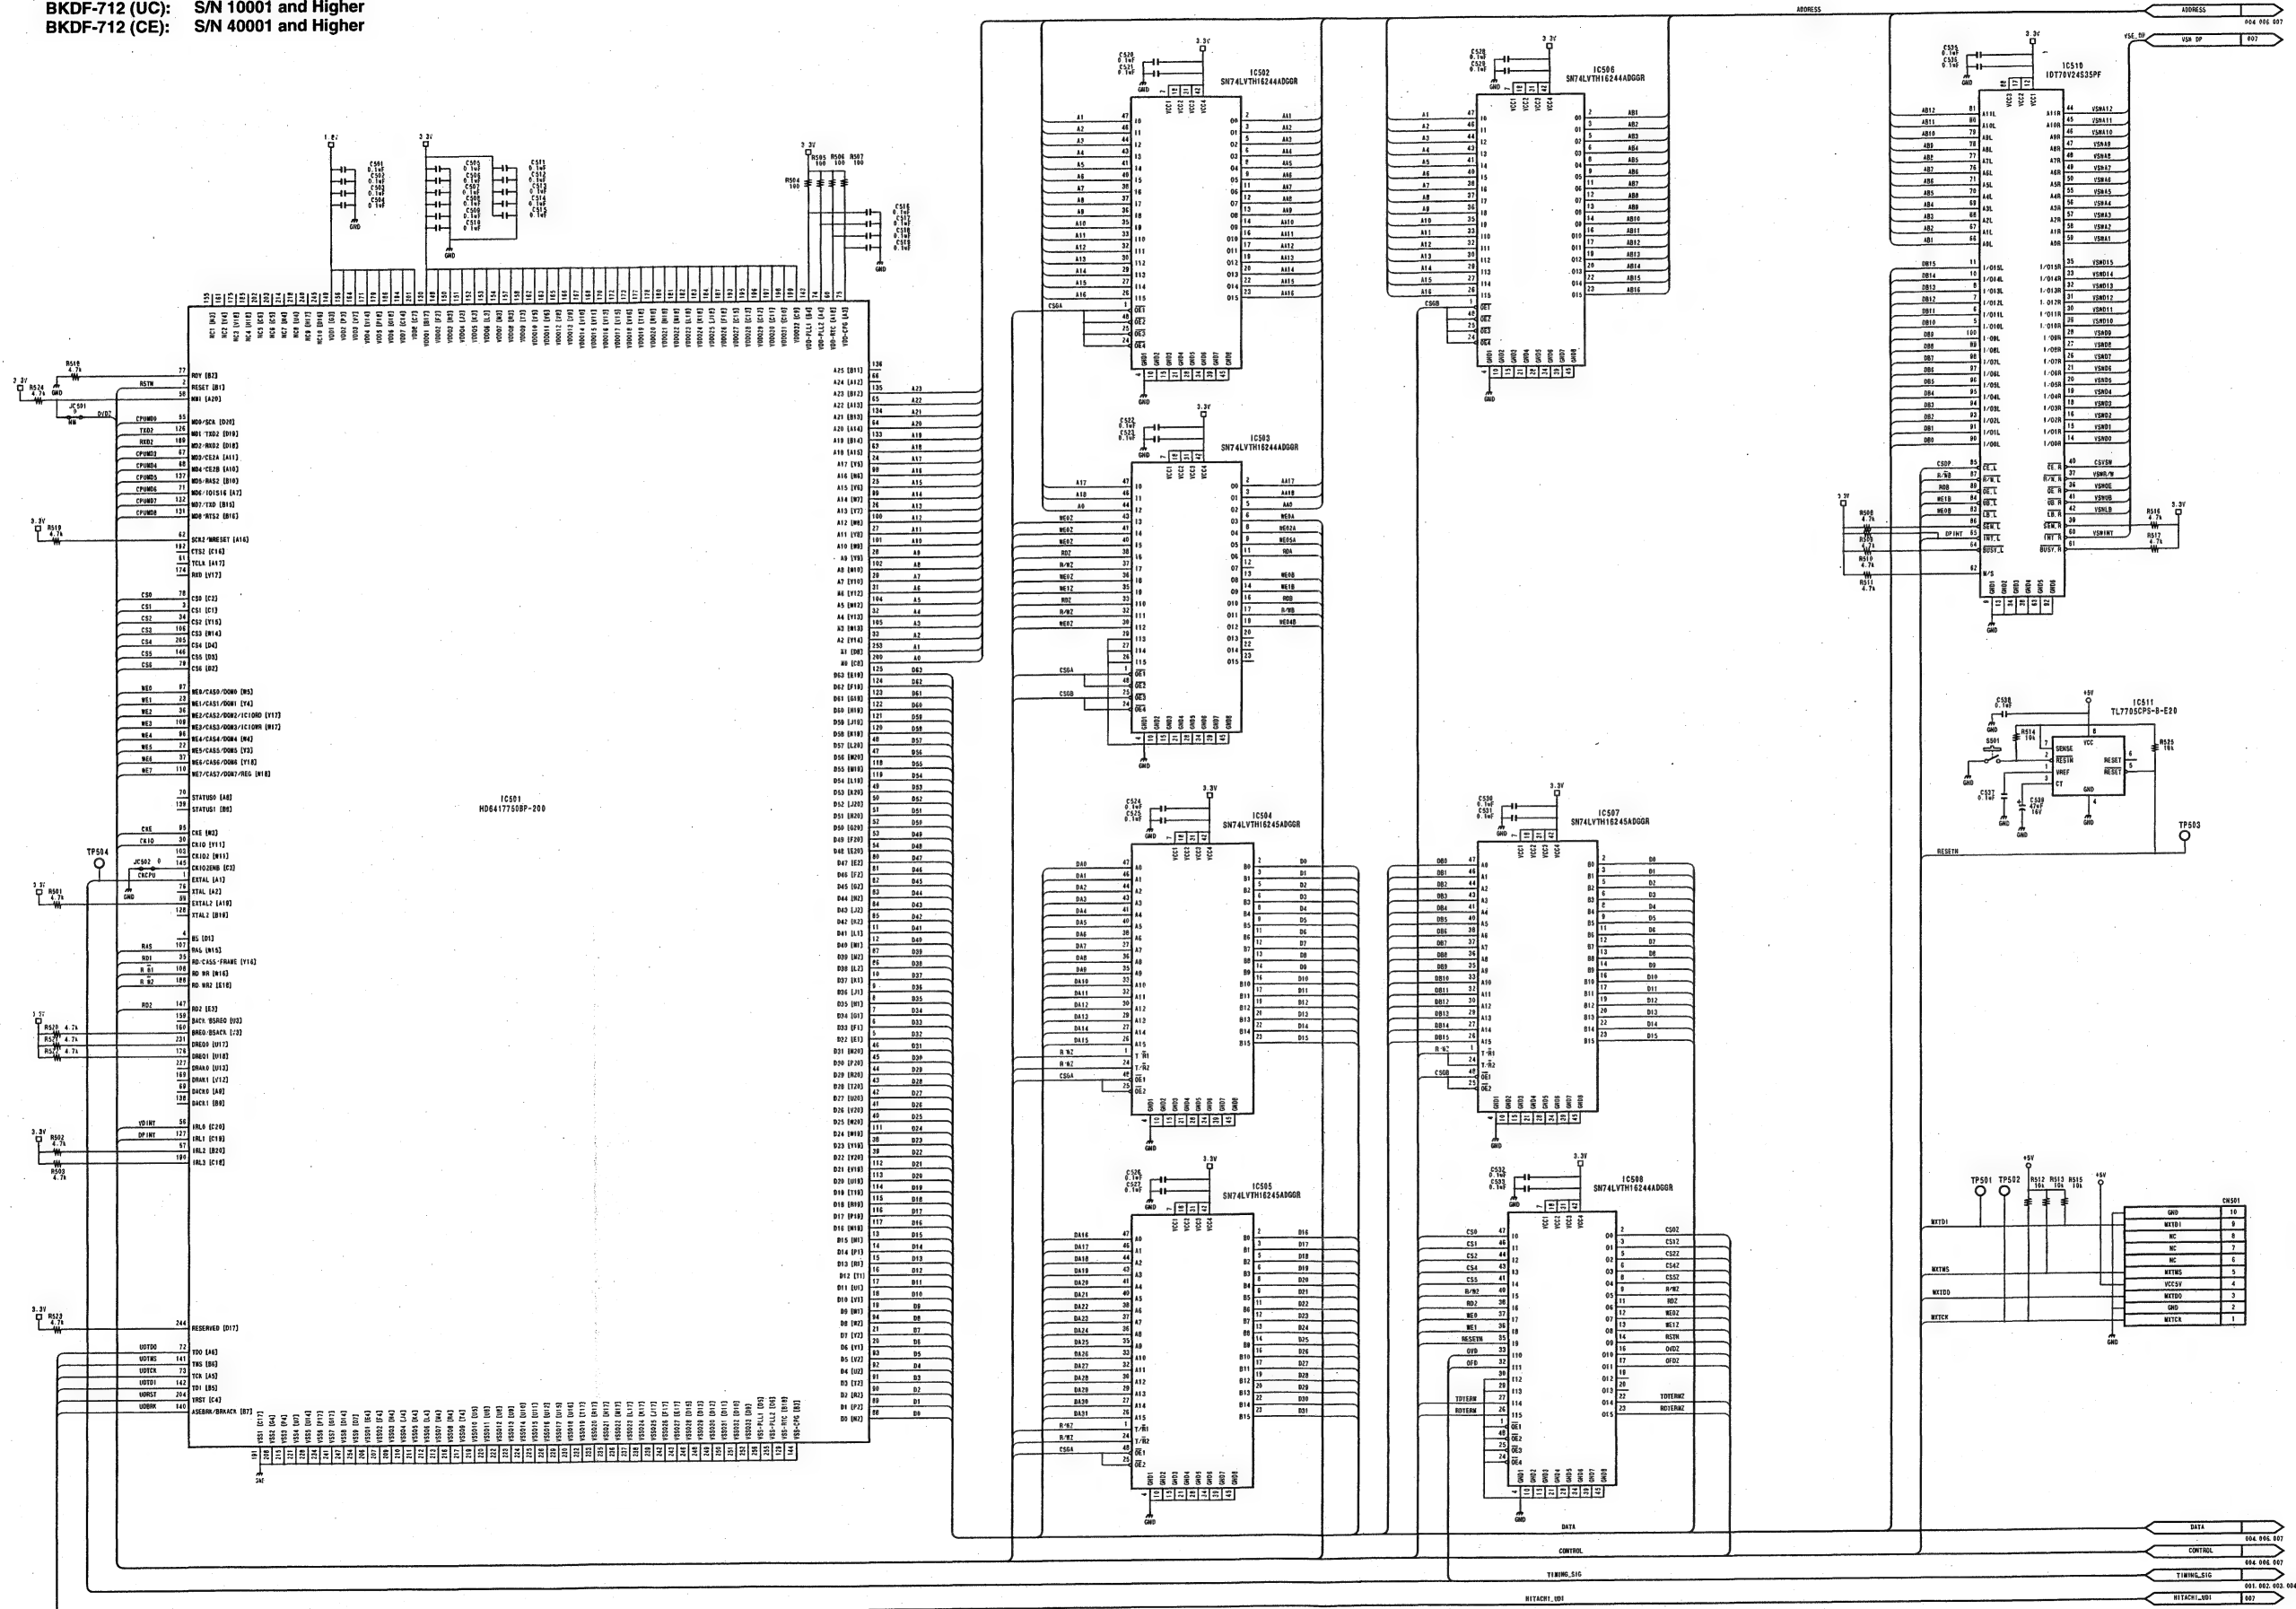

3D VIDEO MAPPING
 EFFECTS BOARD
VSE-36 (5/7)
 BOARD NO. 1-677-105-11
 LOT NO. 911-

VSE-36 (6/7)









BKDF-712 (J): S/N 30001 and Higher
BKDF-712 (UC): S/N 10001 and Higher
BKDF-712 (CE): S/N 40001 and Higher

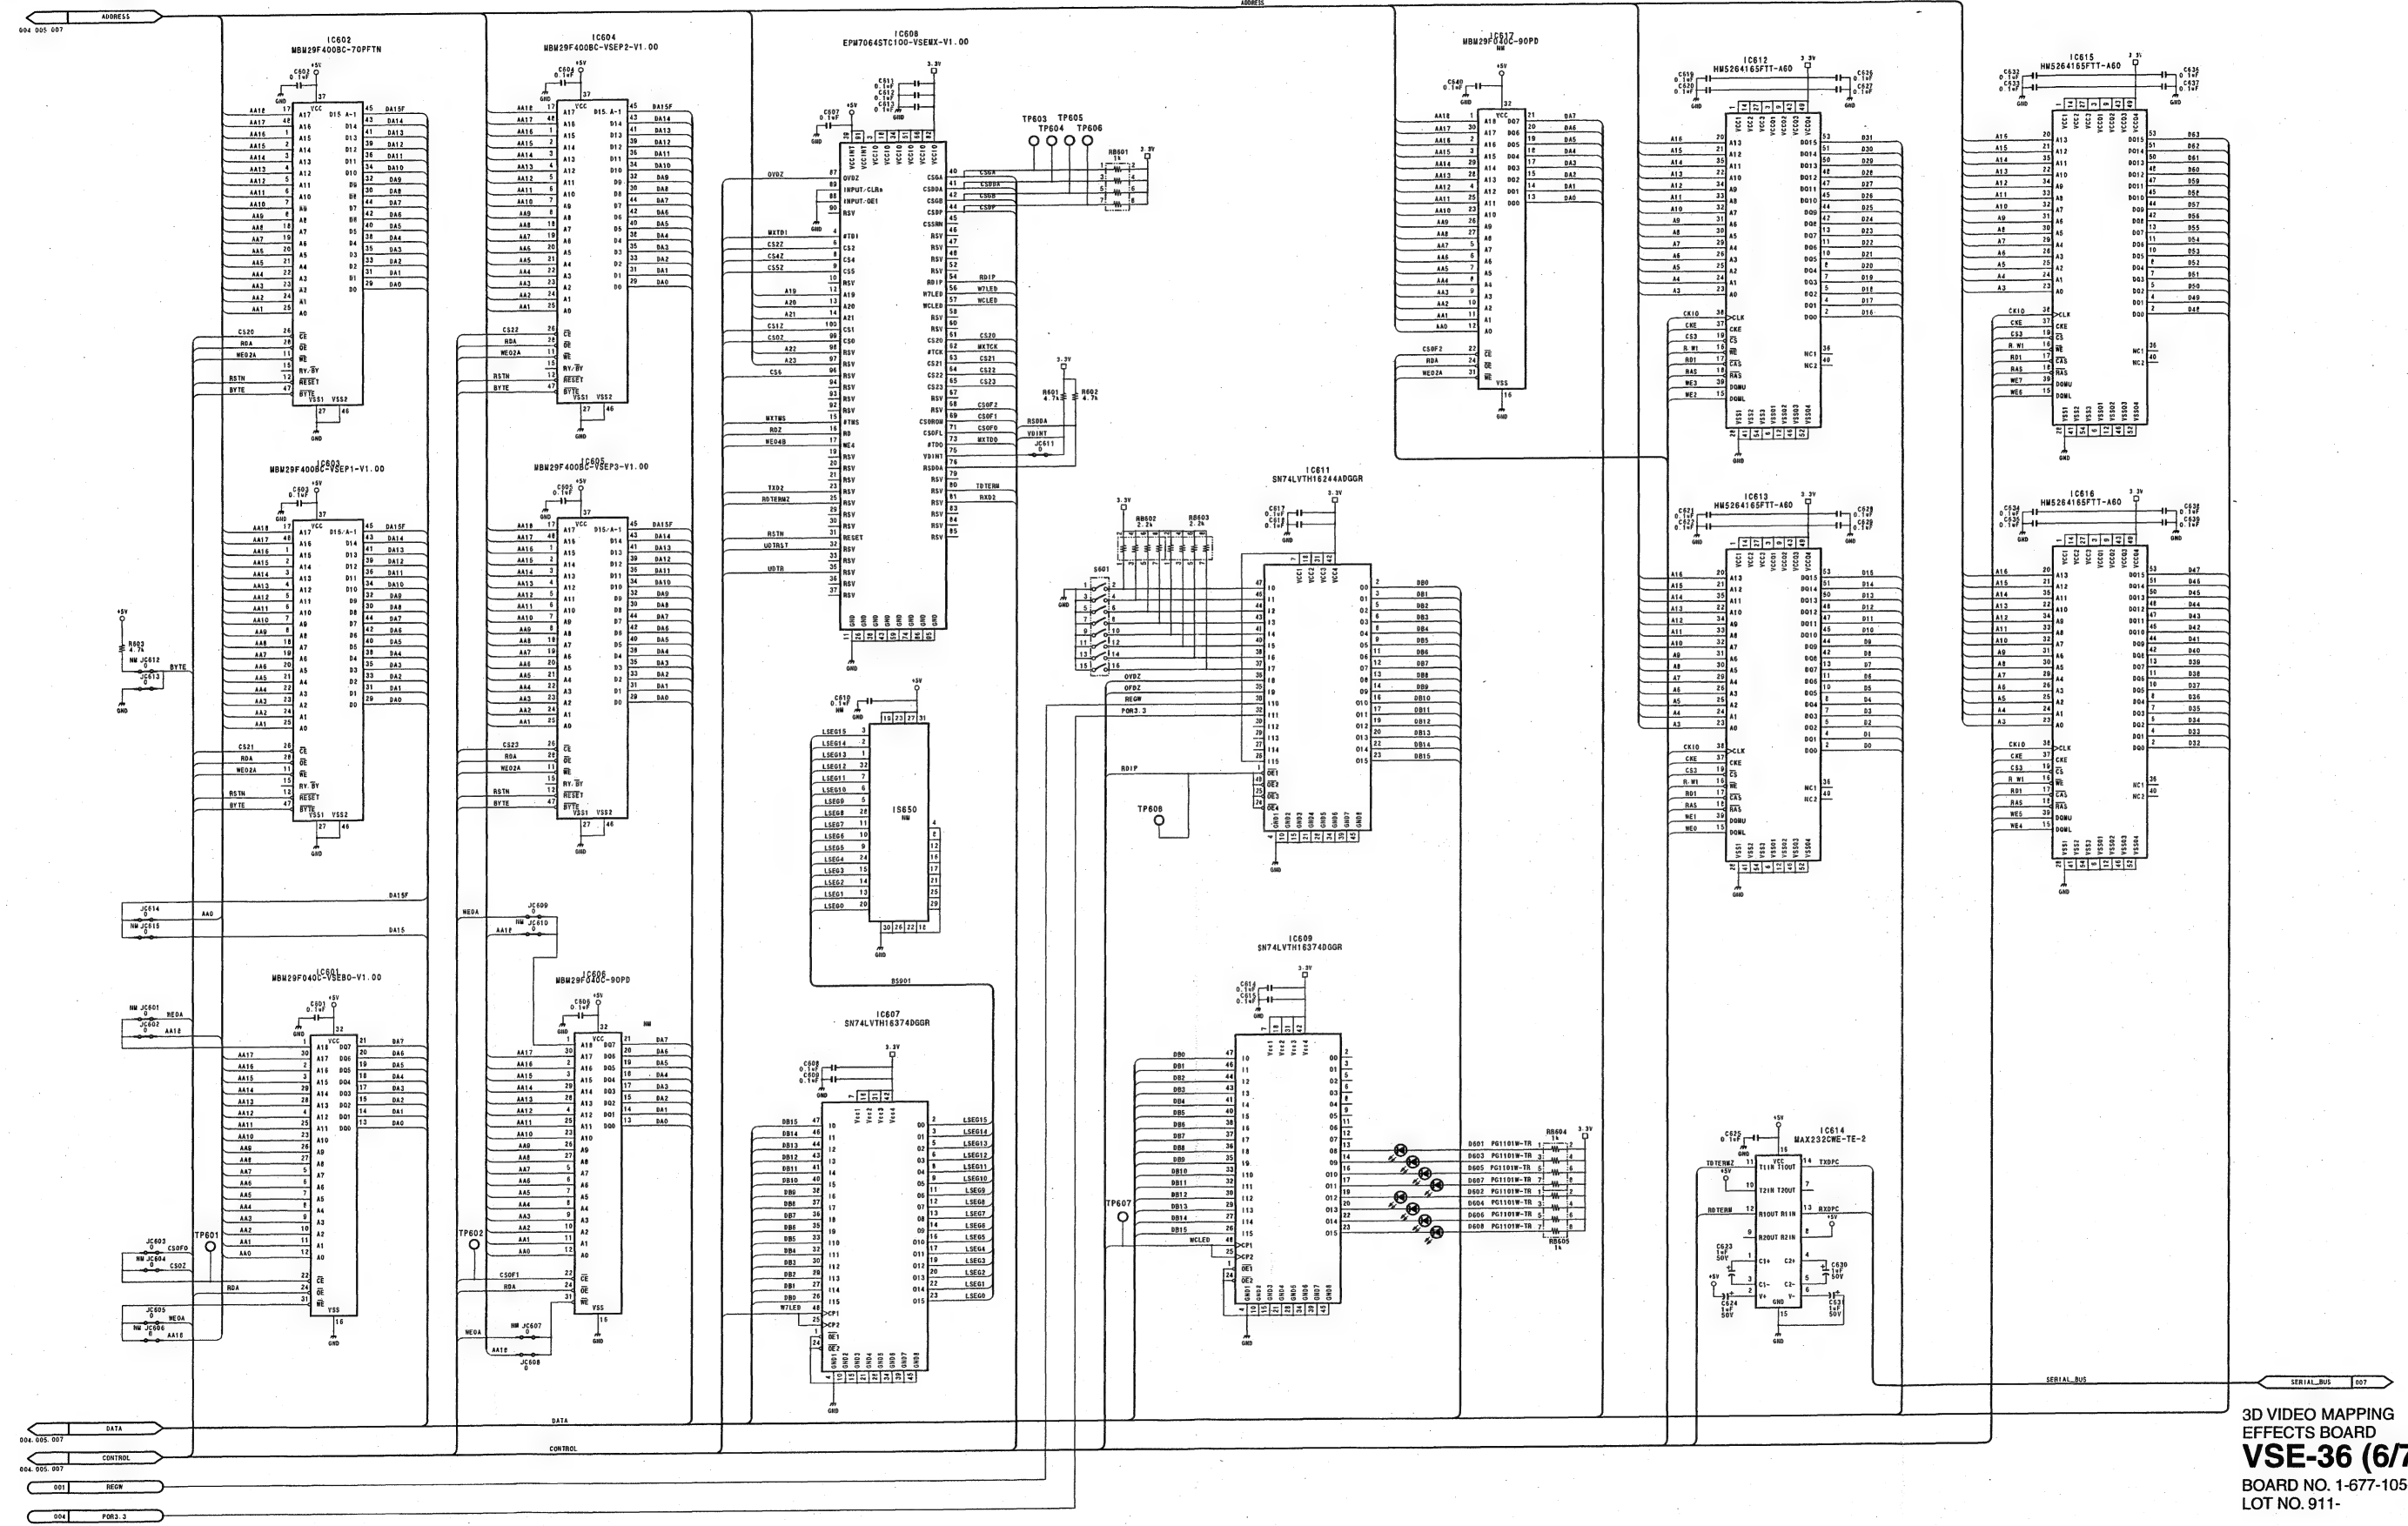


3D VIDEO MAPPING
EFFECTS BOARD
VSE-36 (6/7)
BOARD NO. 1-677-105-11
LOT NO. 911-

VSE-36 (7/7) VSE-36 (7/7)


BKDF-712 (J): S/N 30001 and Higher
BKDF-712 (UC): S/N 10001 and Higher
BKDF-712 (CE): S/N 40001 and Higher

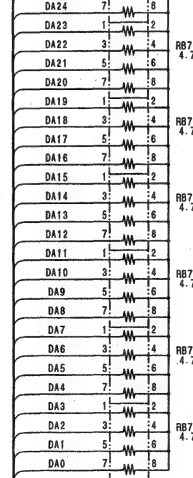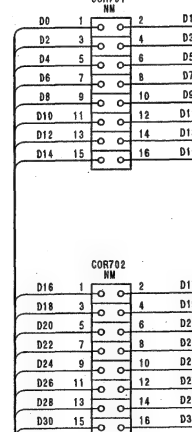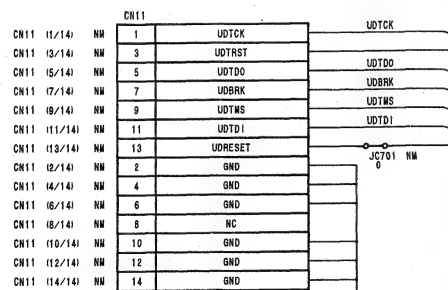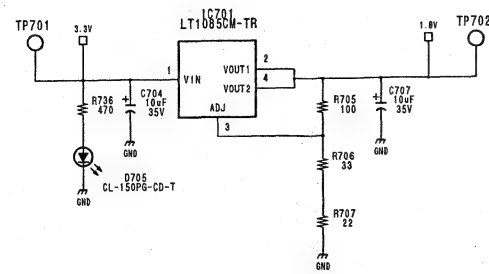

DFS-700/700P




DFS-700 (J): S/N 30001 and Higher
DFS-700 (UC): S/N 10001 and Higher
DFS-700P (CE): S/N 40001 and Higher

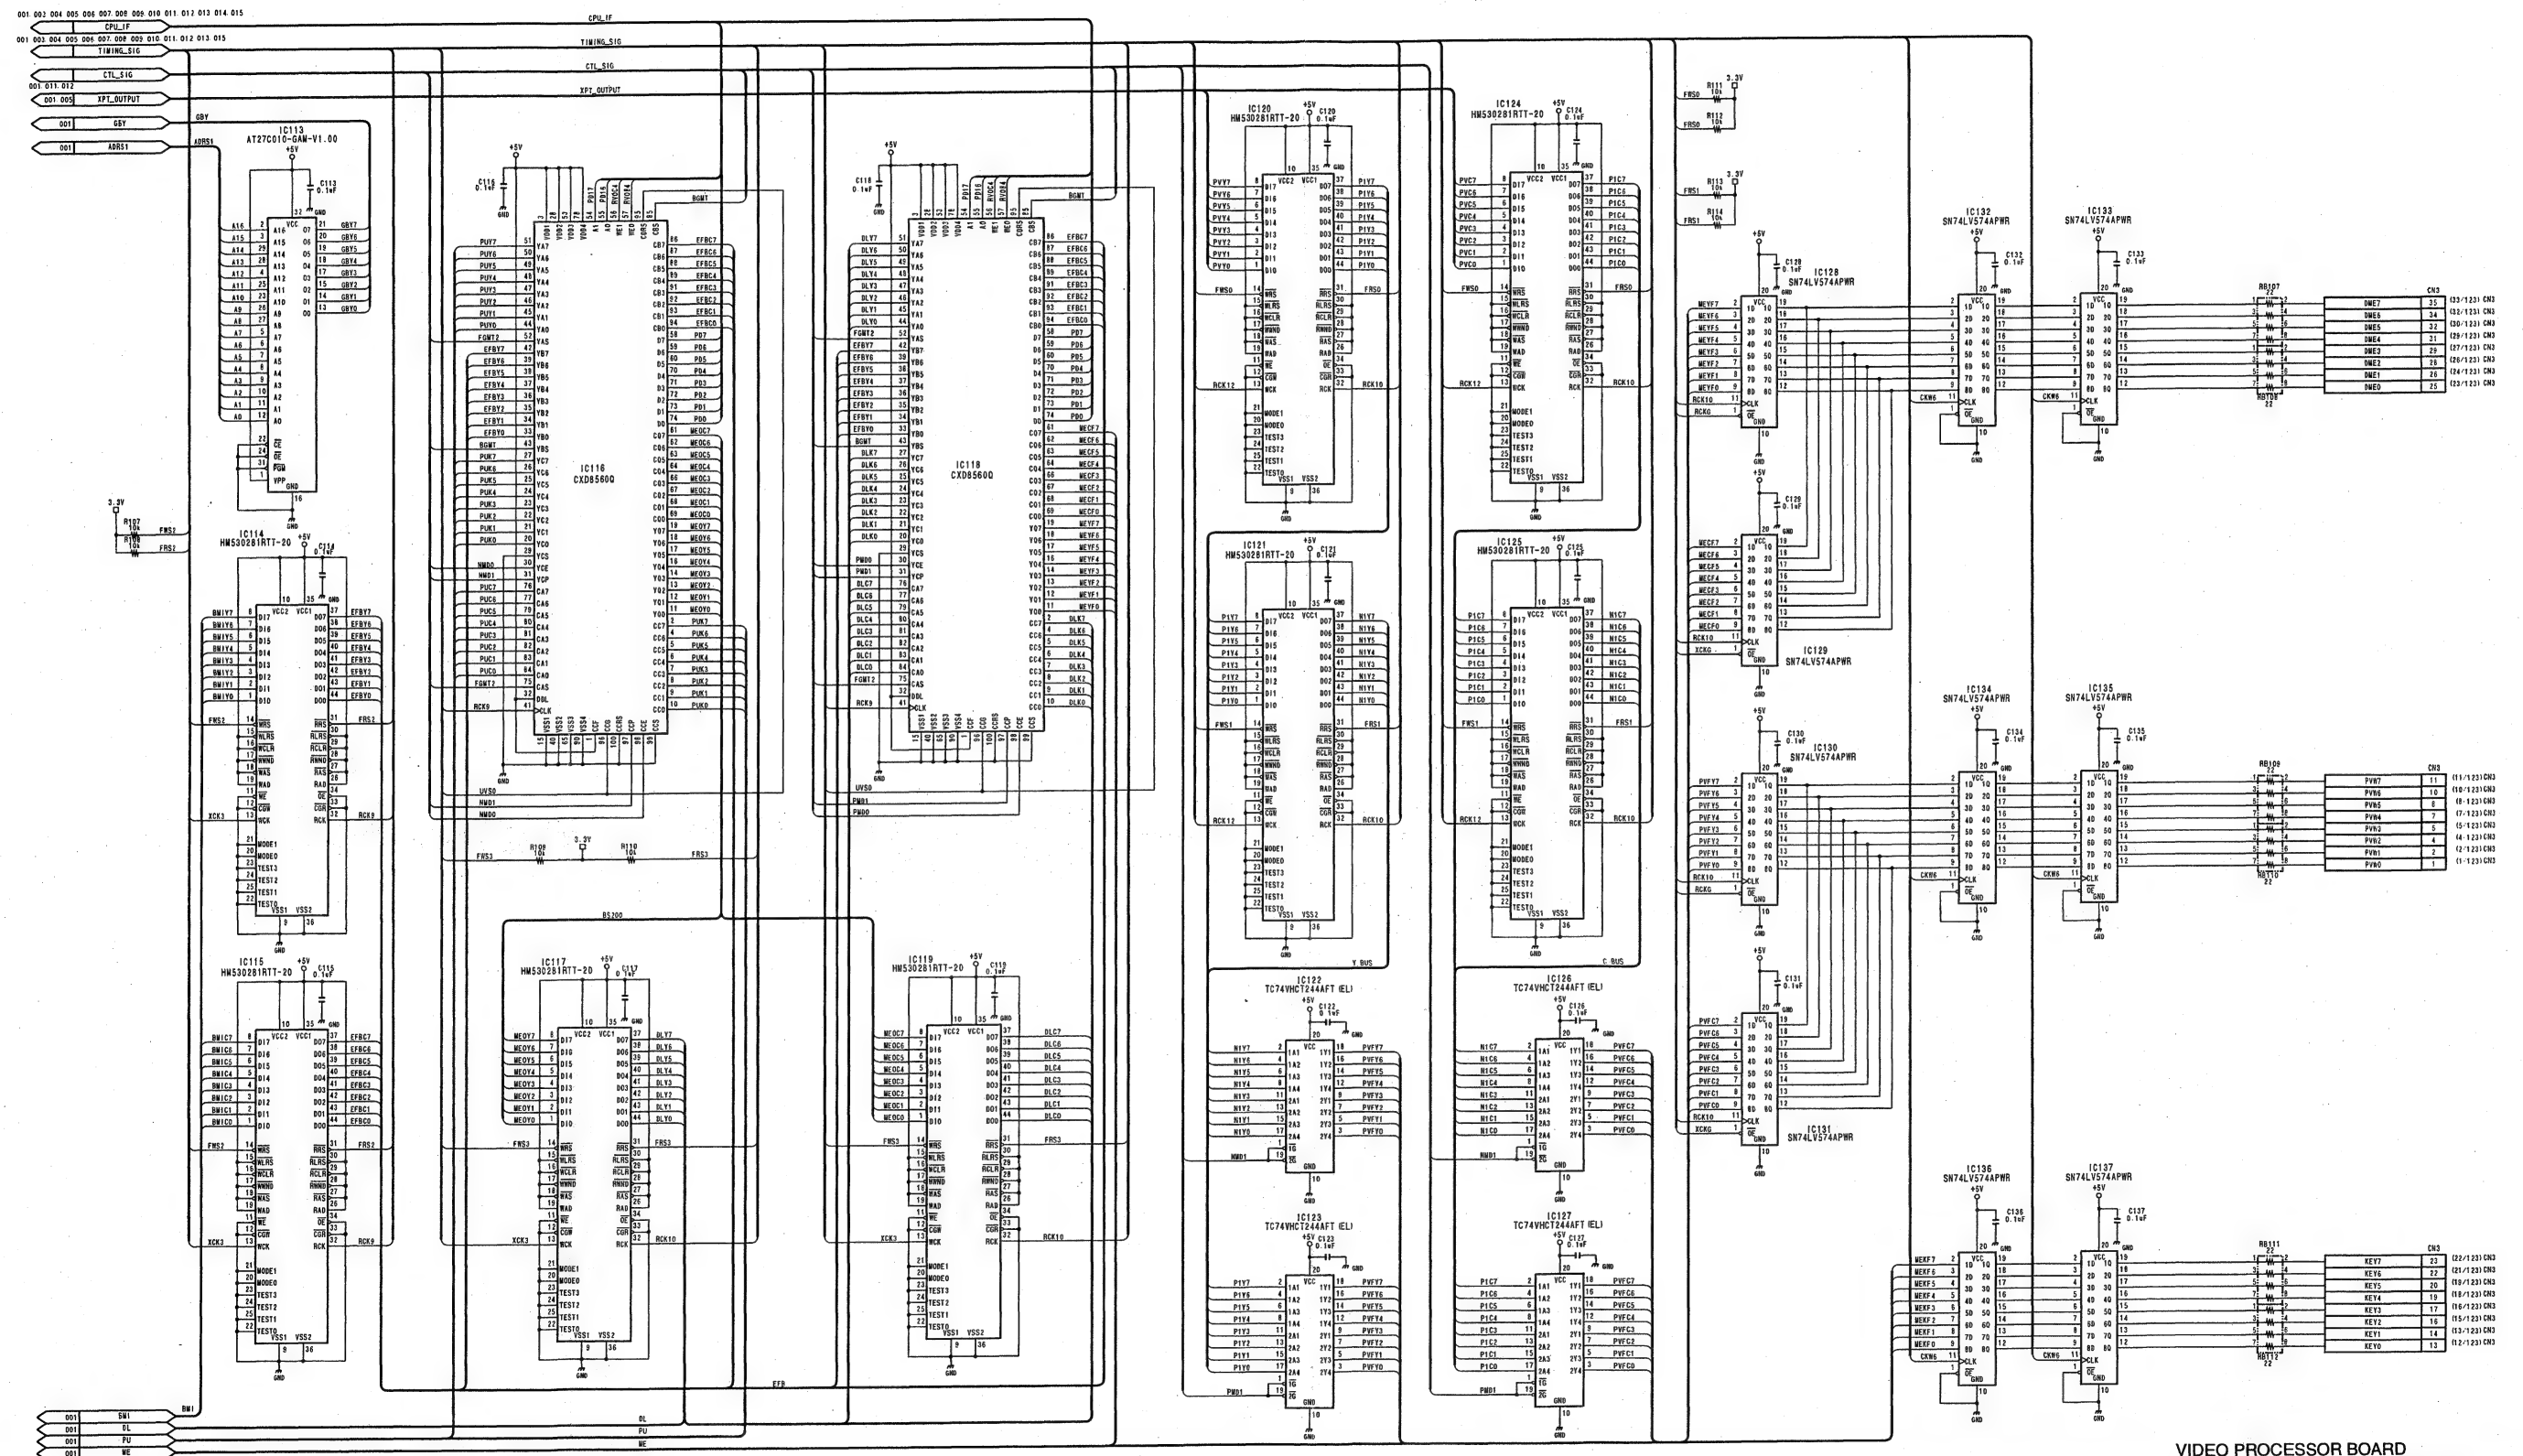


VIDEO PROCESSOR BOARD
VSW-69/69P (2/16)

BOARD NO. 1-677-096-11
LOT NO. 911-

DFS-700 (J): S/N 30001 and Higher
 DFS-700 (UC): S/N 10001 and Higher
 DFS-700P (CE): S/N 40001 and Higher

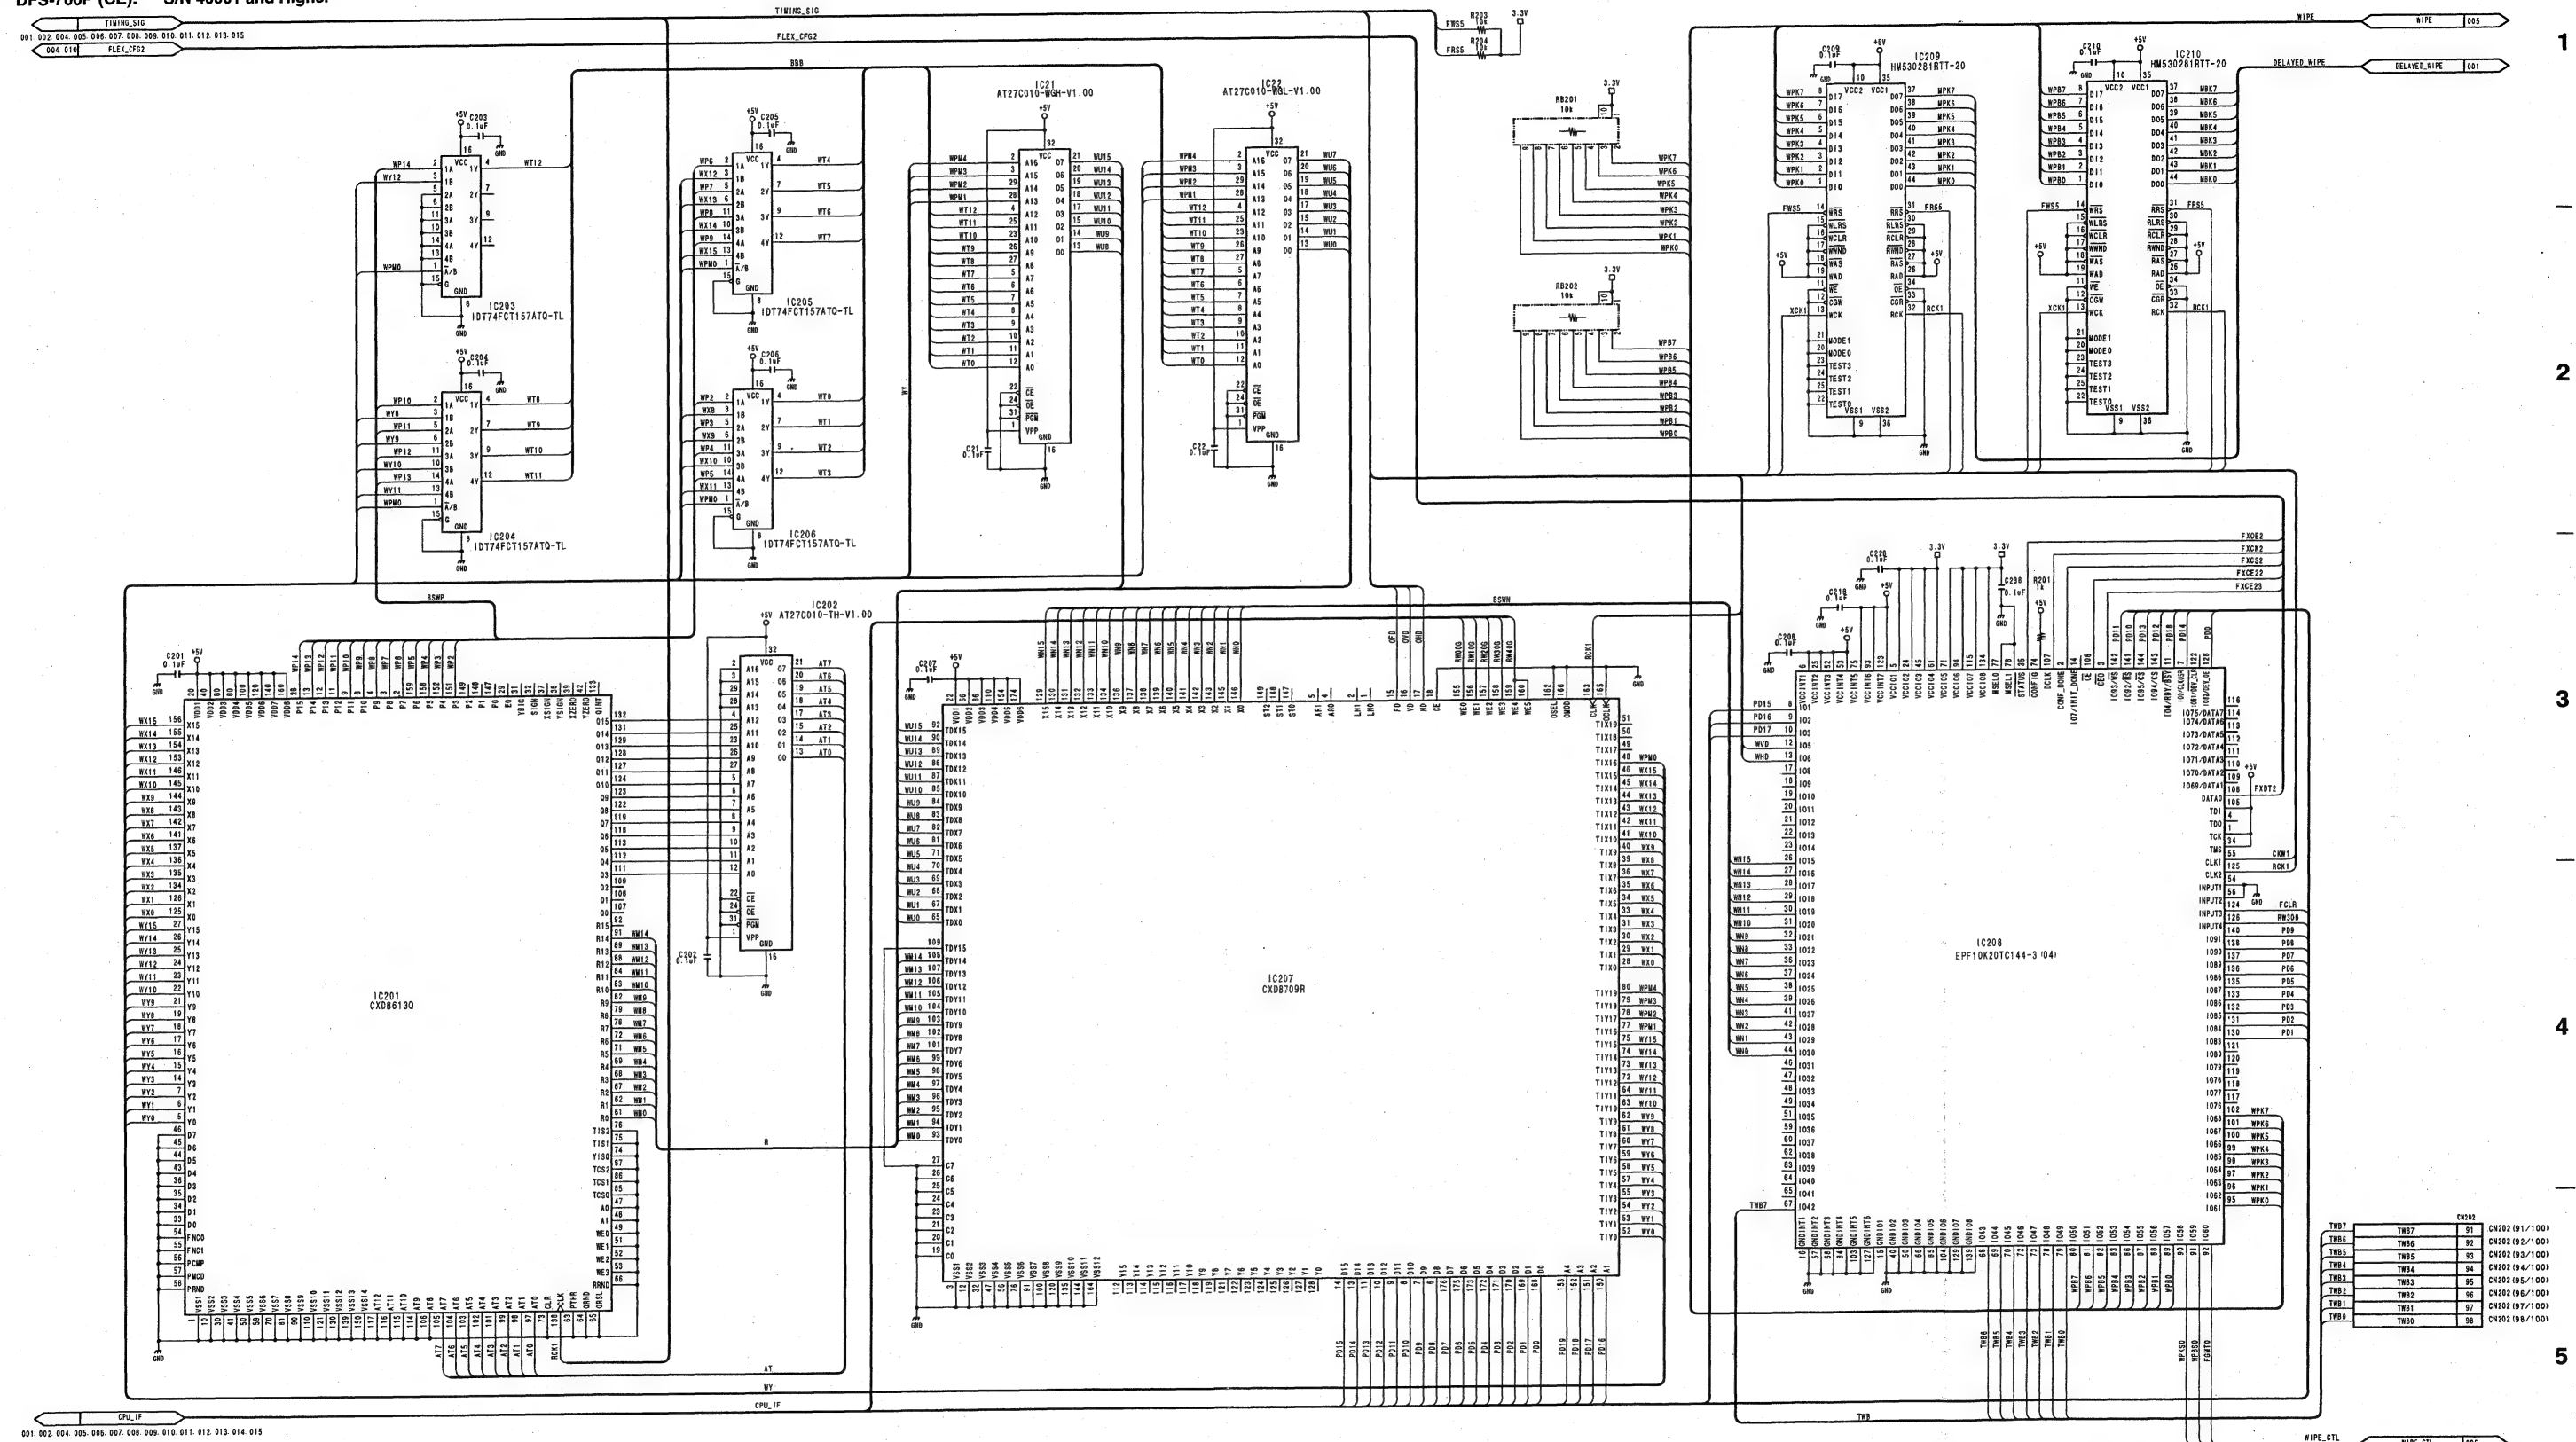

DFS-700 (J): S/N 30001 and Higher
 DFS-700 (UC): S/N 10001 and Higher
 DFS-700P (CE): S/N 40001 and Higher

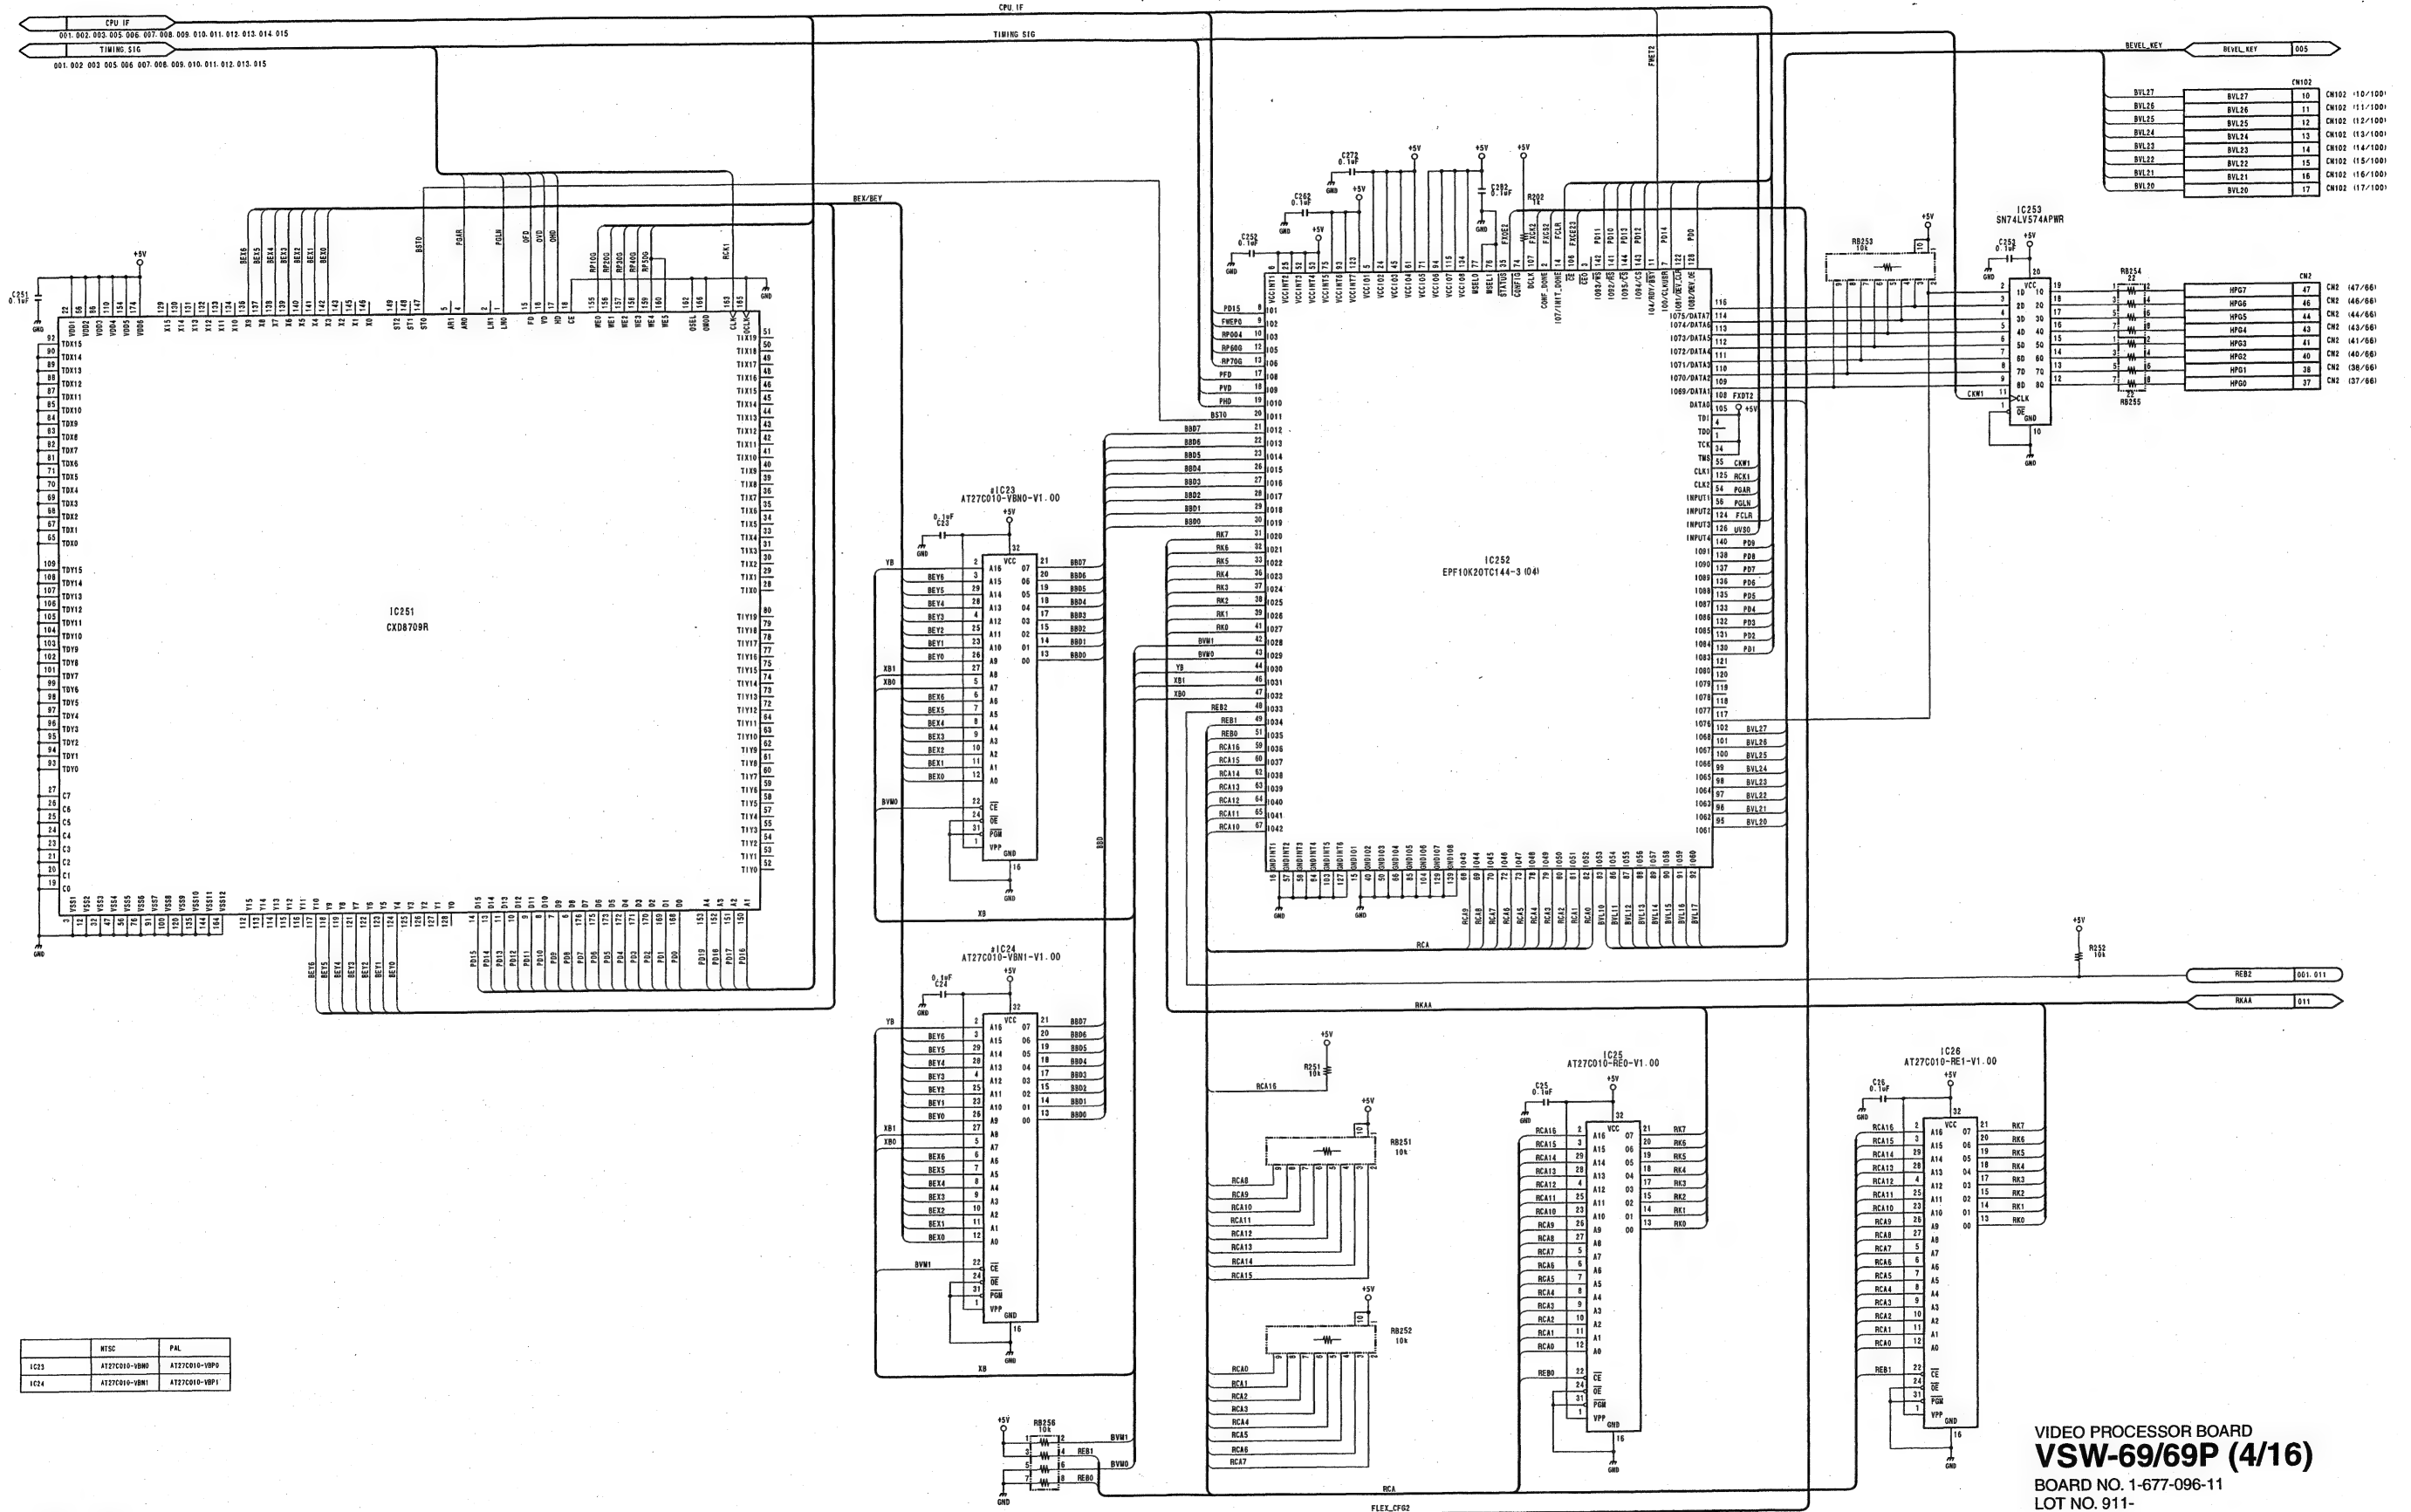


VSW-69/69P (5/16)

DFS-700/700P




5

DFS-700 (J): S/N 30001 and Higher
DFS-700 (UC): S/N 10001 and Higher
DFS-700P (CE): S/N 40001 and Higher

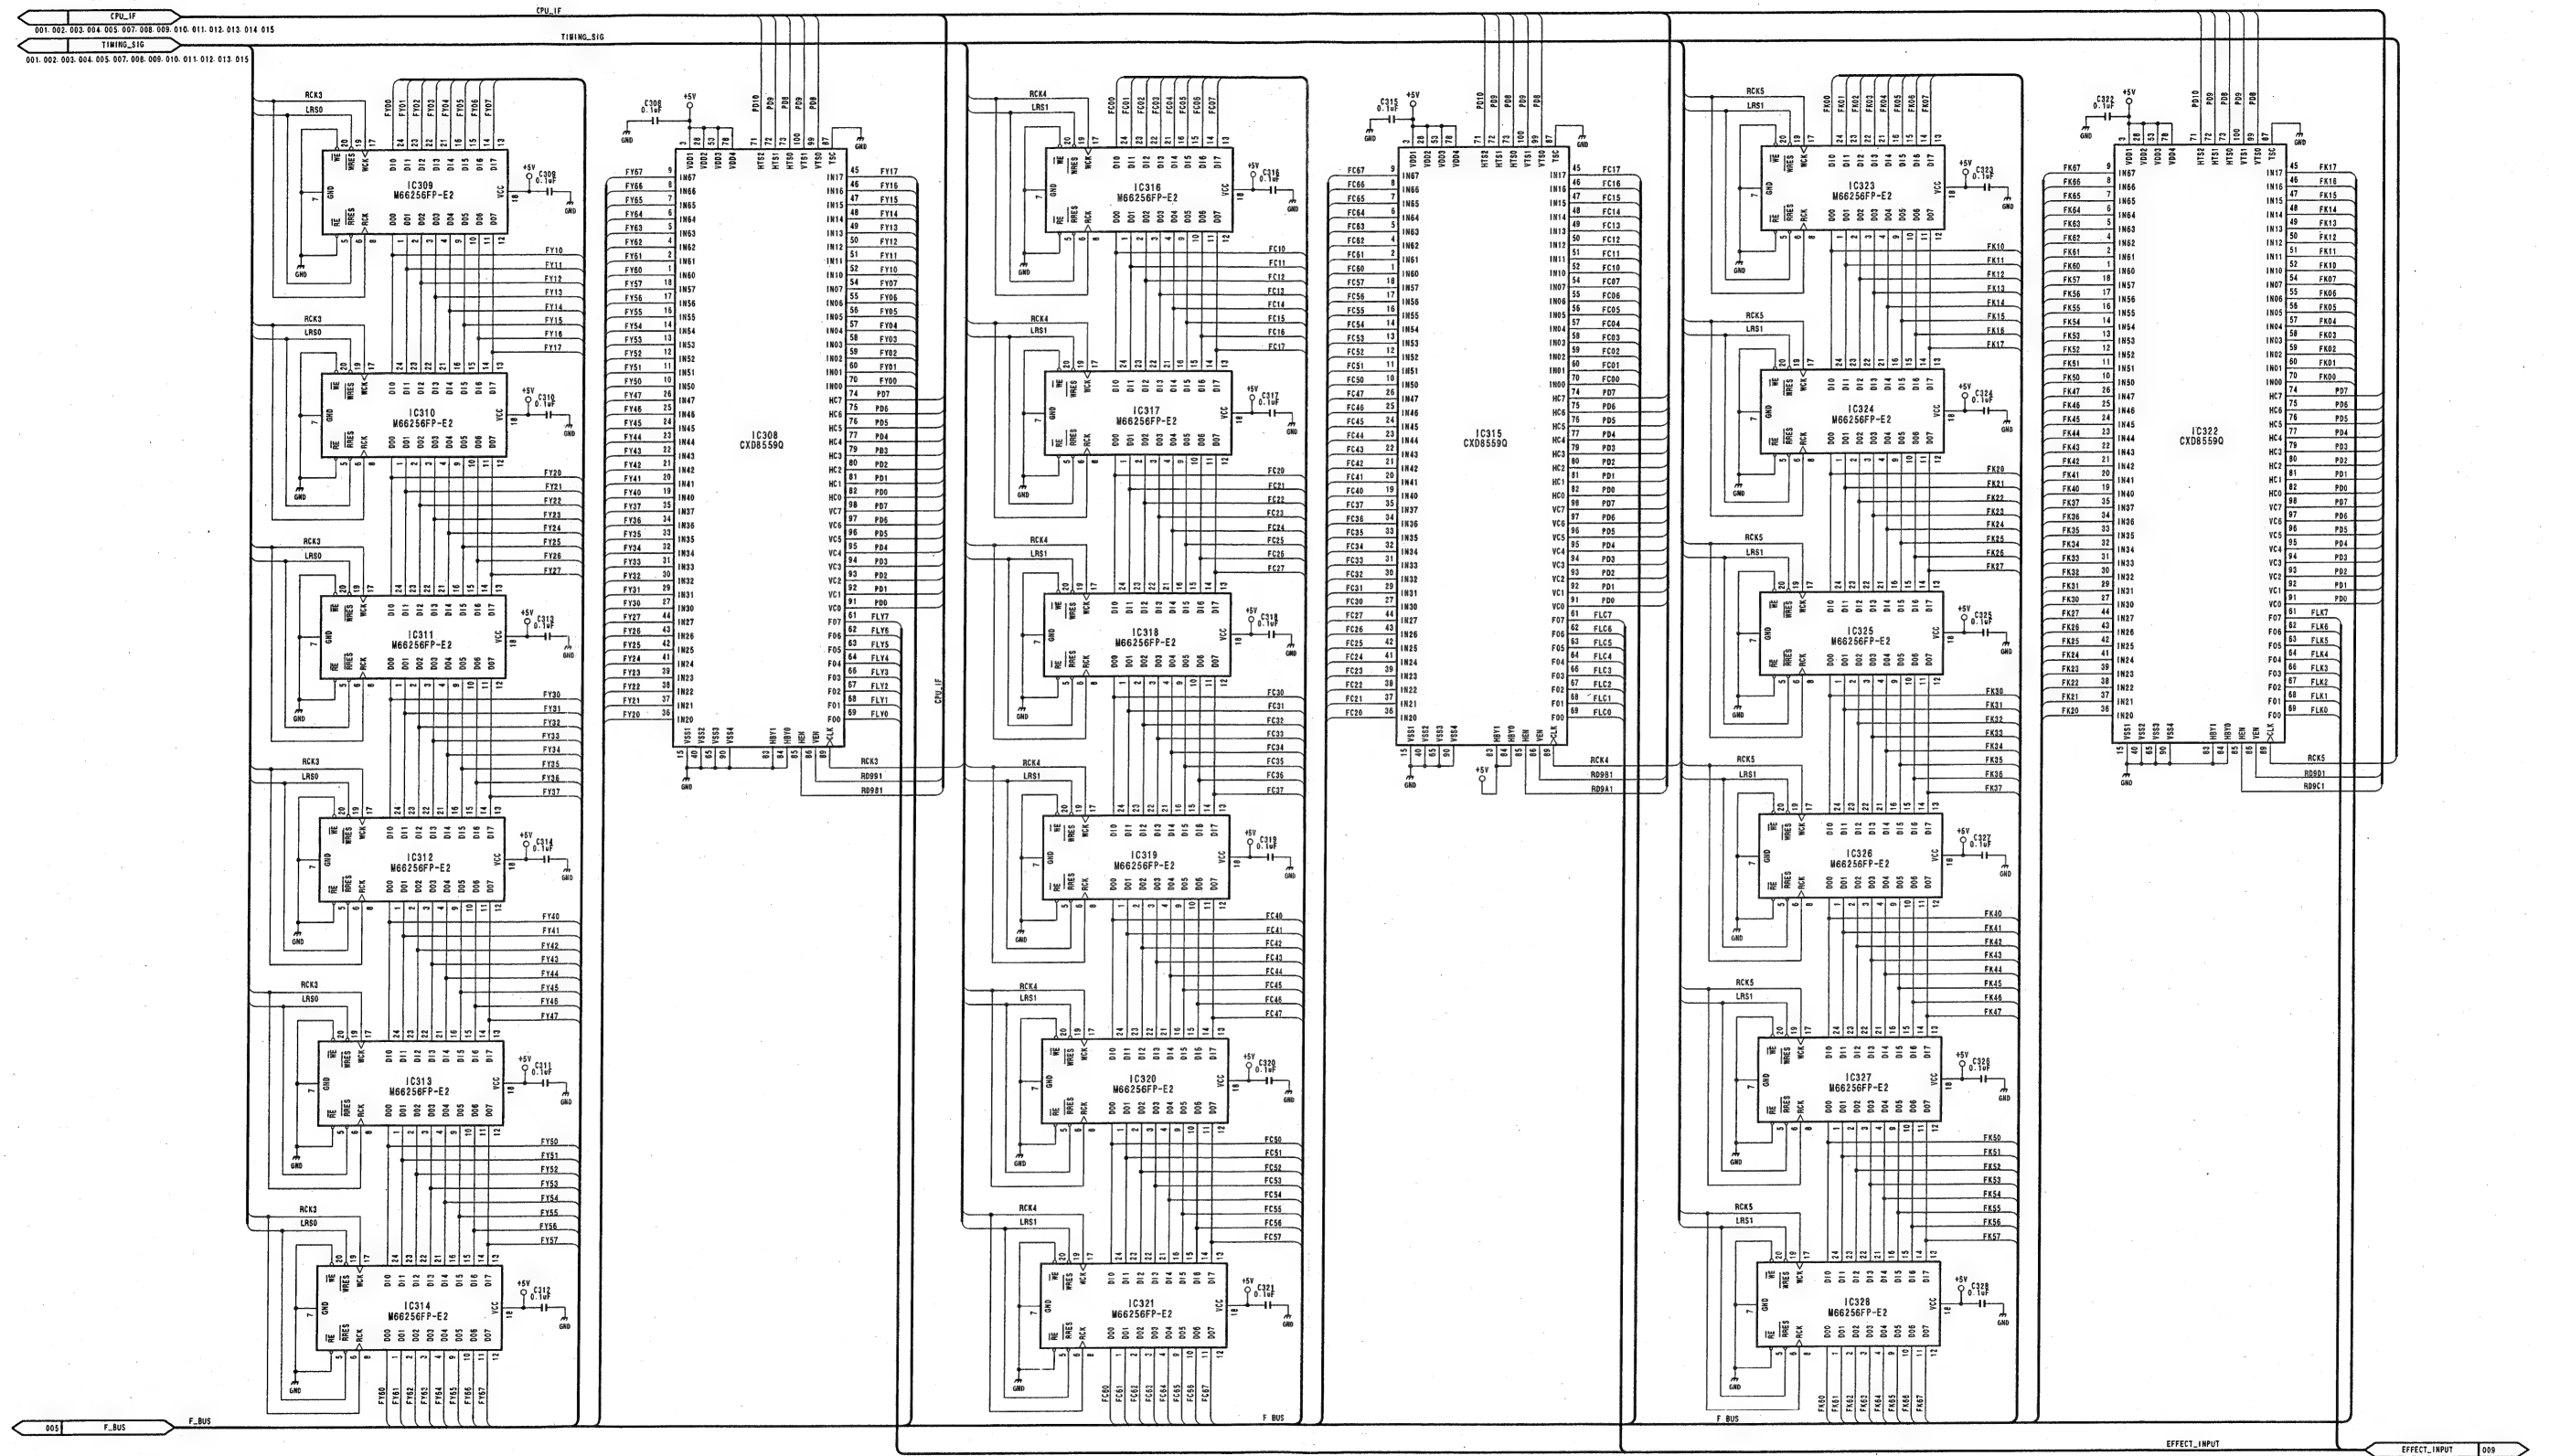


VIDEO PROCESSOR BOARD
VSW-69/69P (6/16)
BOARD NO. 1-677-096-11
LOT NO. 911-

DFS-700 (J): S/N 30001 and Higher
DFS-700 (UC): S/N 10001 and Higher
DFS-700P (CE): S/N 40001 and Higher

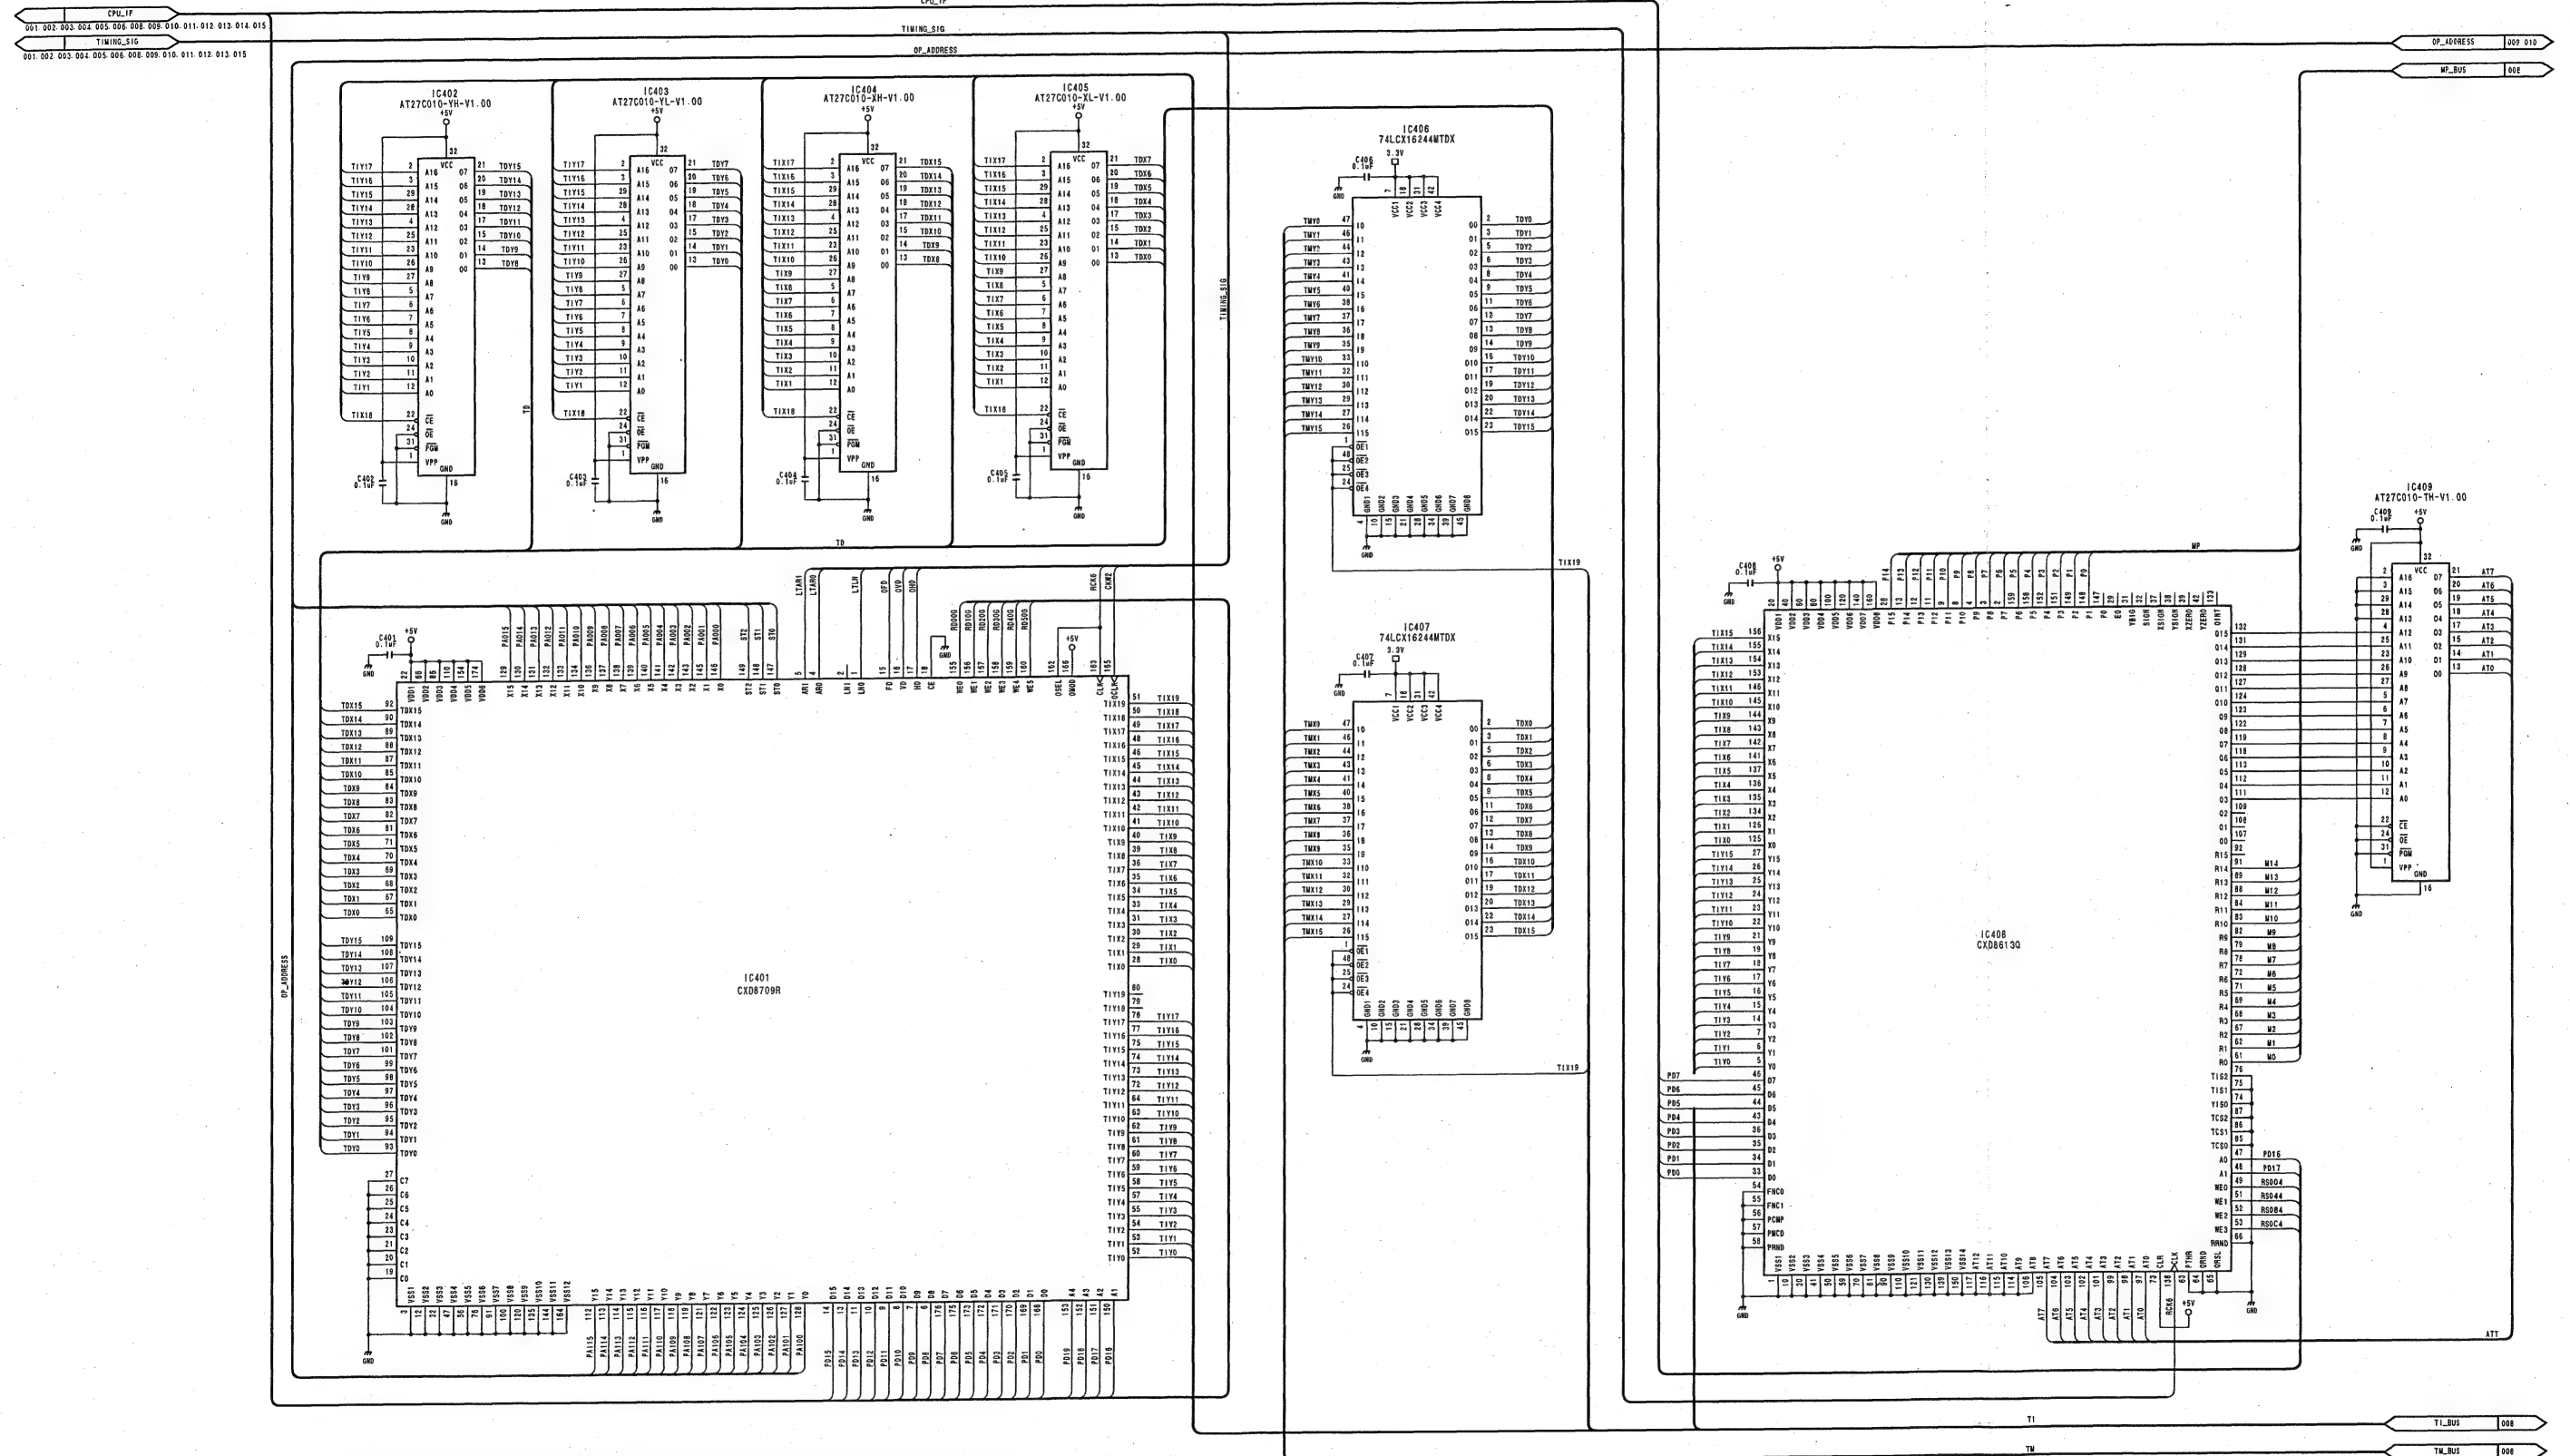

VIDEO PROCESSOR BOARD
VSW-69/69P (7/16)
BOARD NO. 1-677-096-11
LOT NO. 911-

DFS-700 (J): S/N 30001 and Higher
DFS-700 (UC): S/N 10001 and Higher
DFS-700P (CE): S/N 40001 and Higher

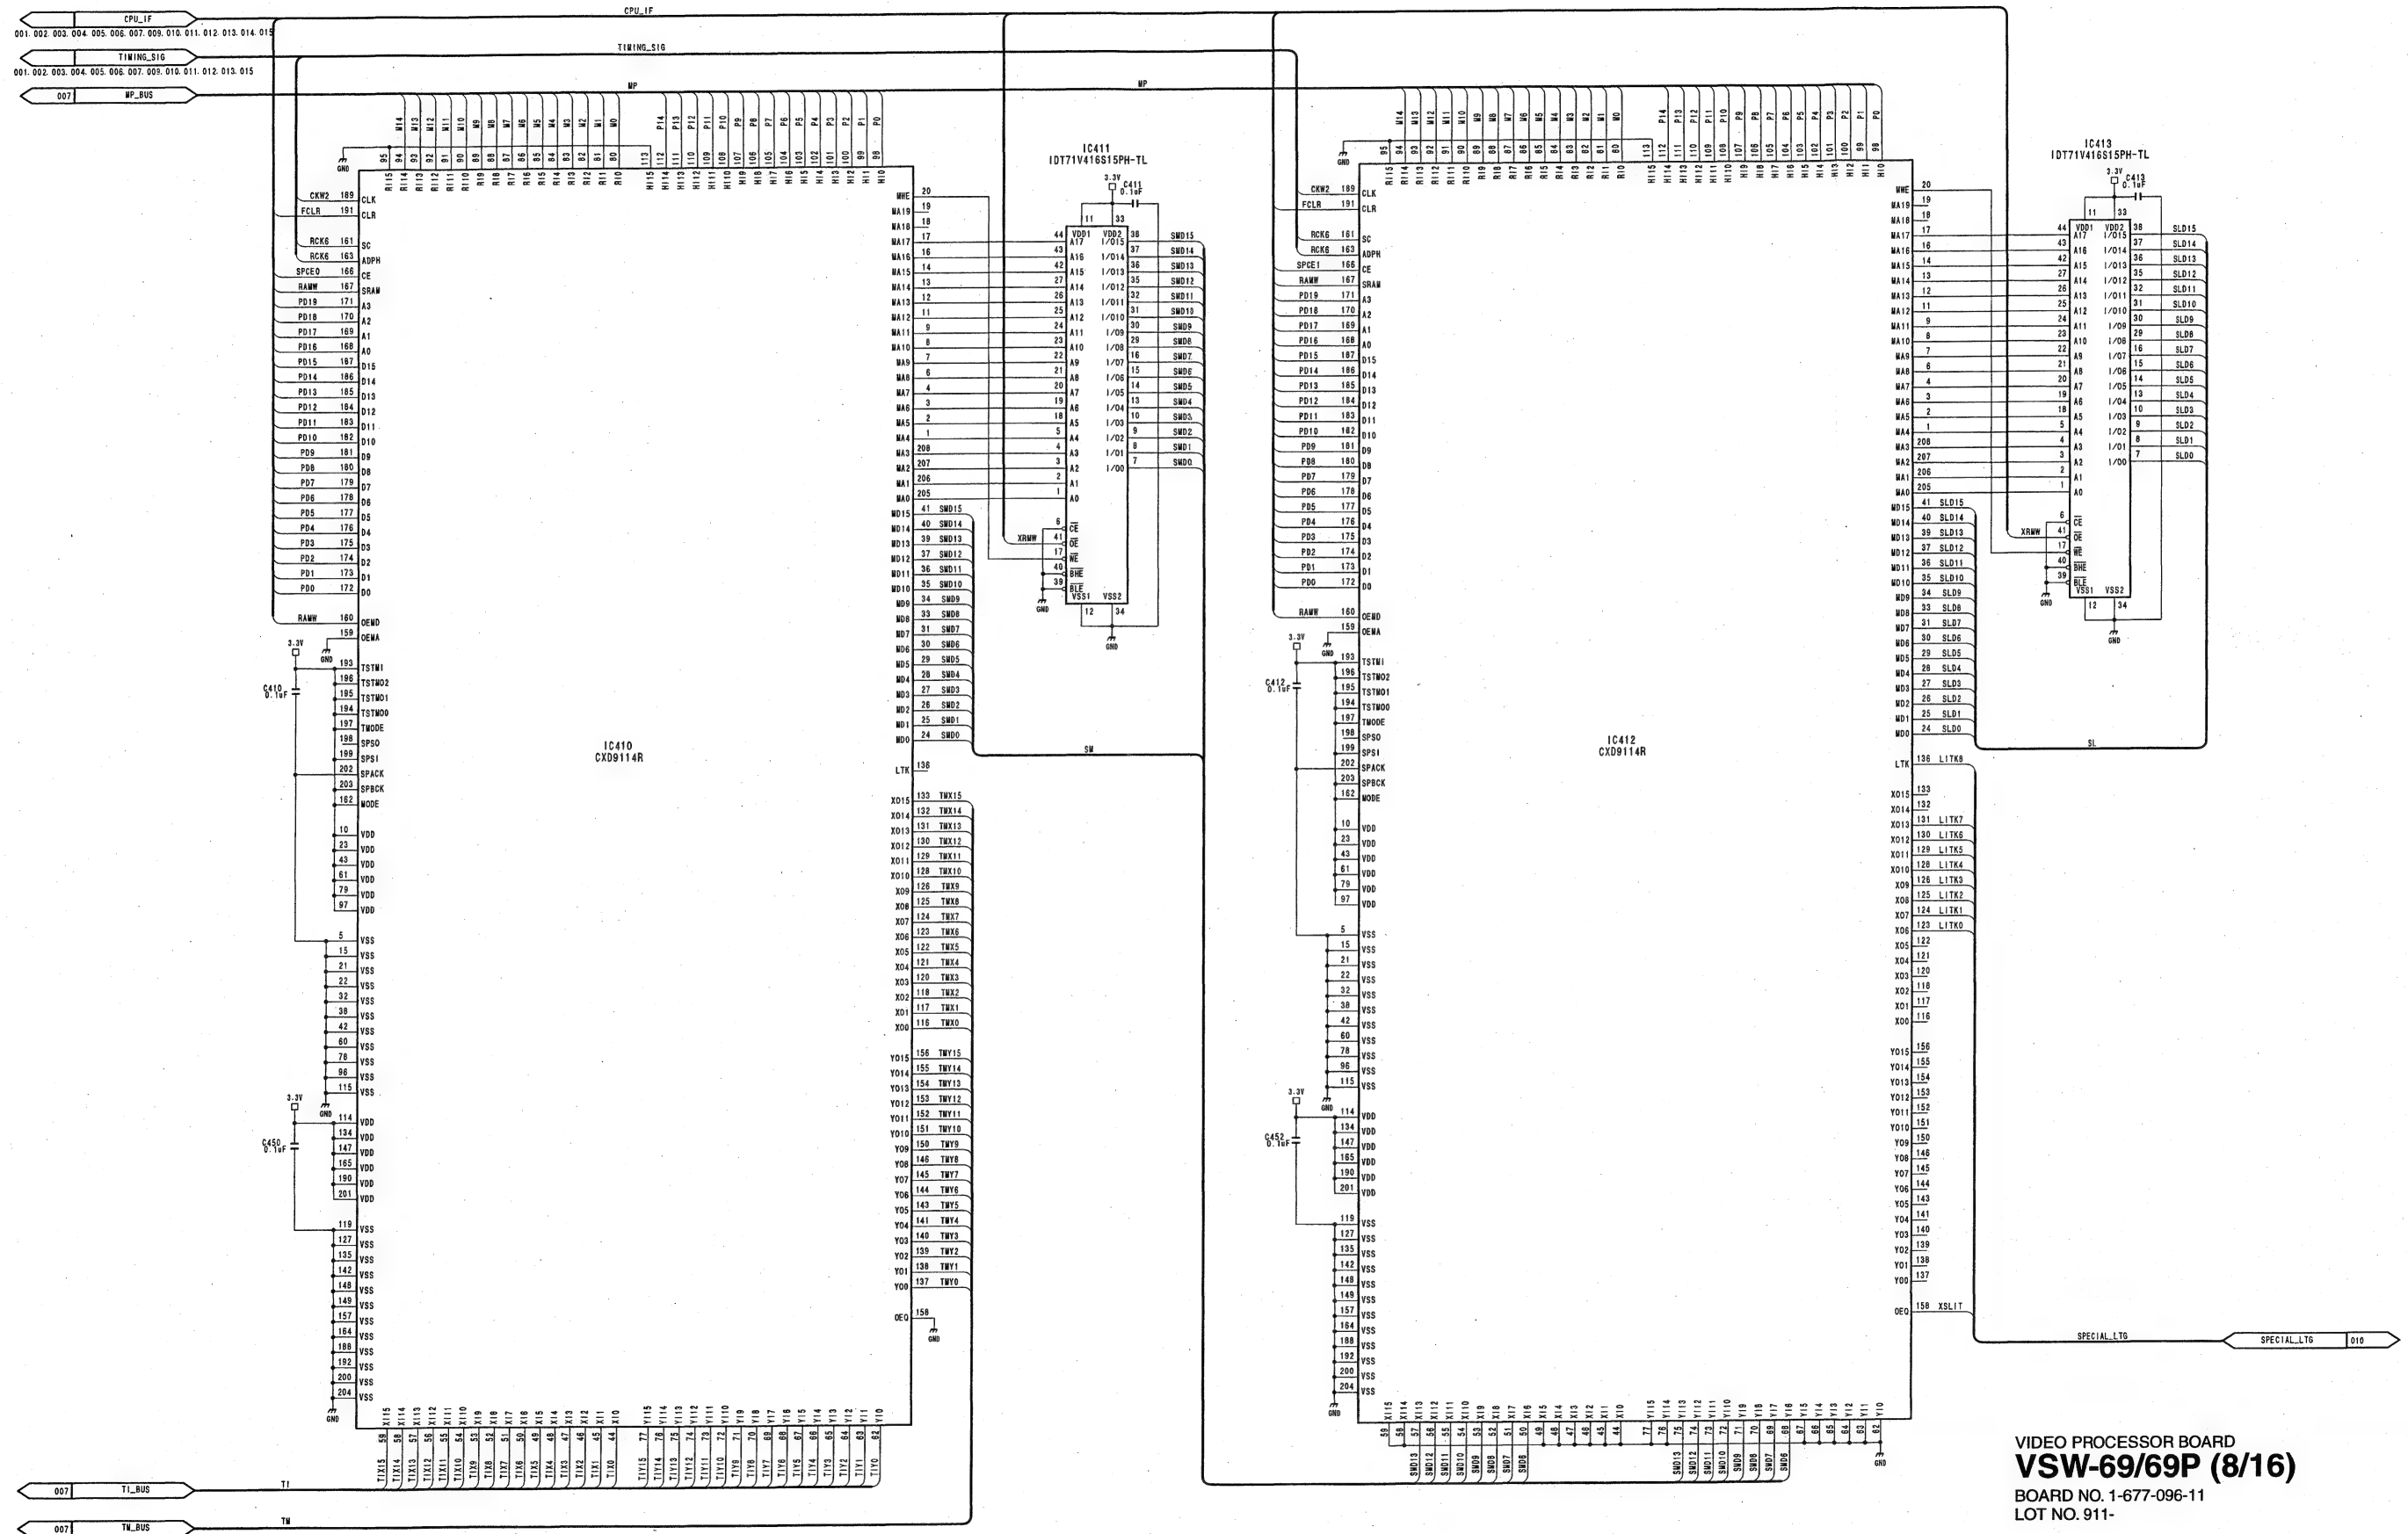

DFS-700/700P


4-183

4-183

A | B | C | D | E | F | G | H


VSW-69/69P (9/16)


DFS-700 (J): S/N 30001 and Higher
DFS-700 (UC): S/N 10001 and Higher
DFS-700P (CE): S/N 40001 and Higher

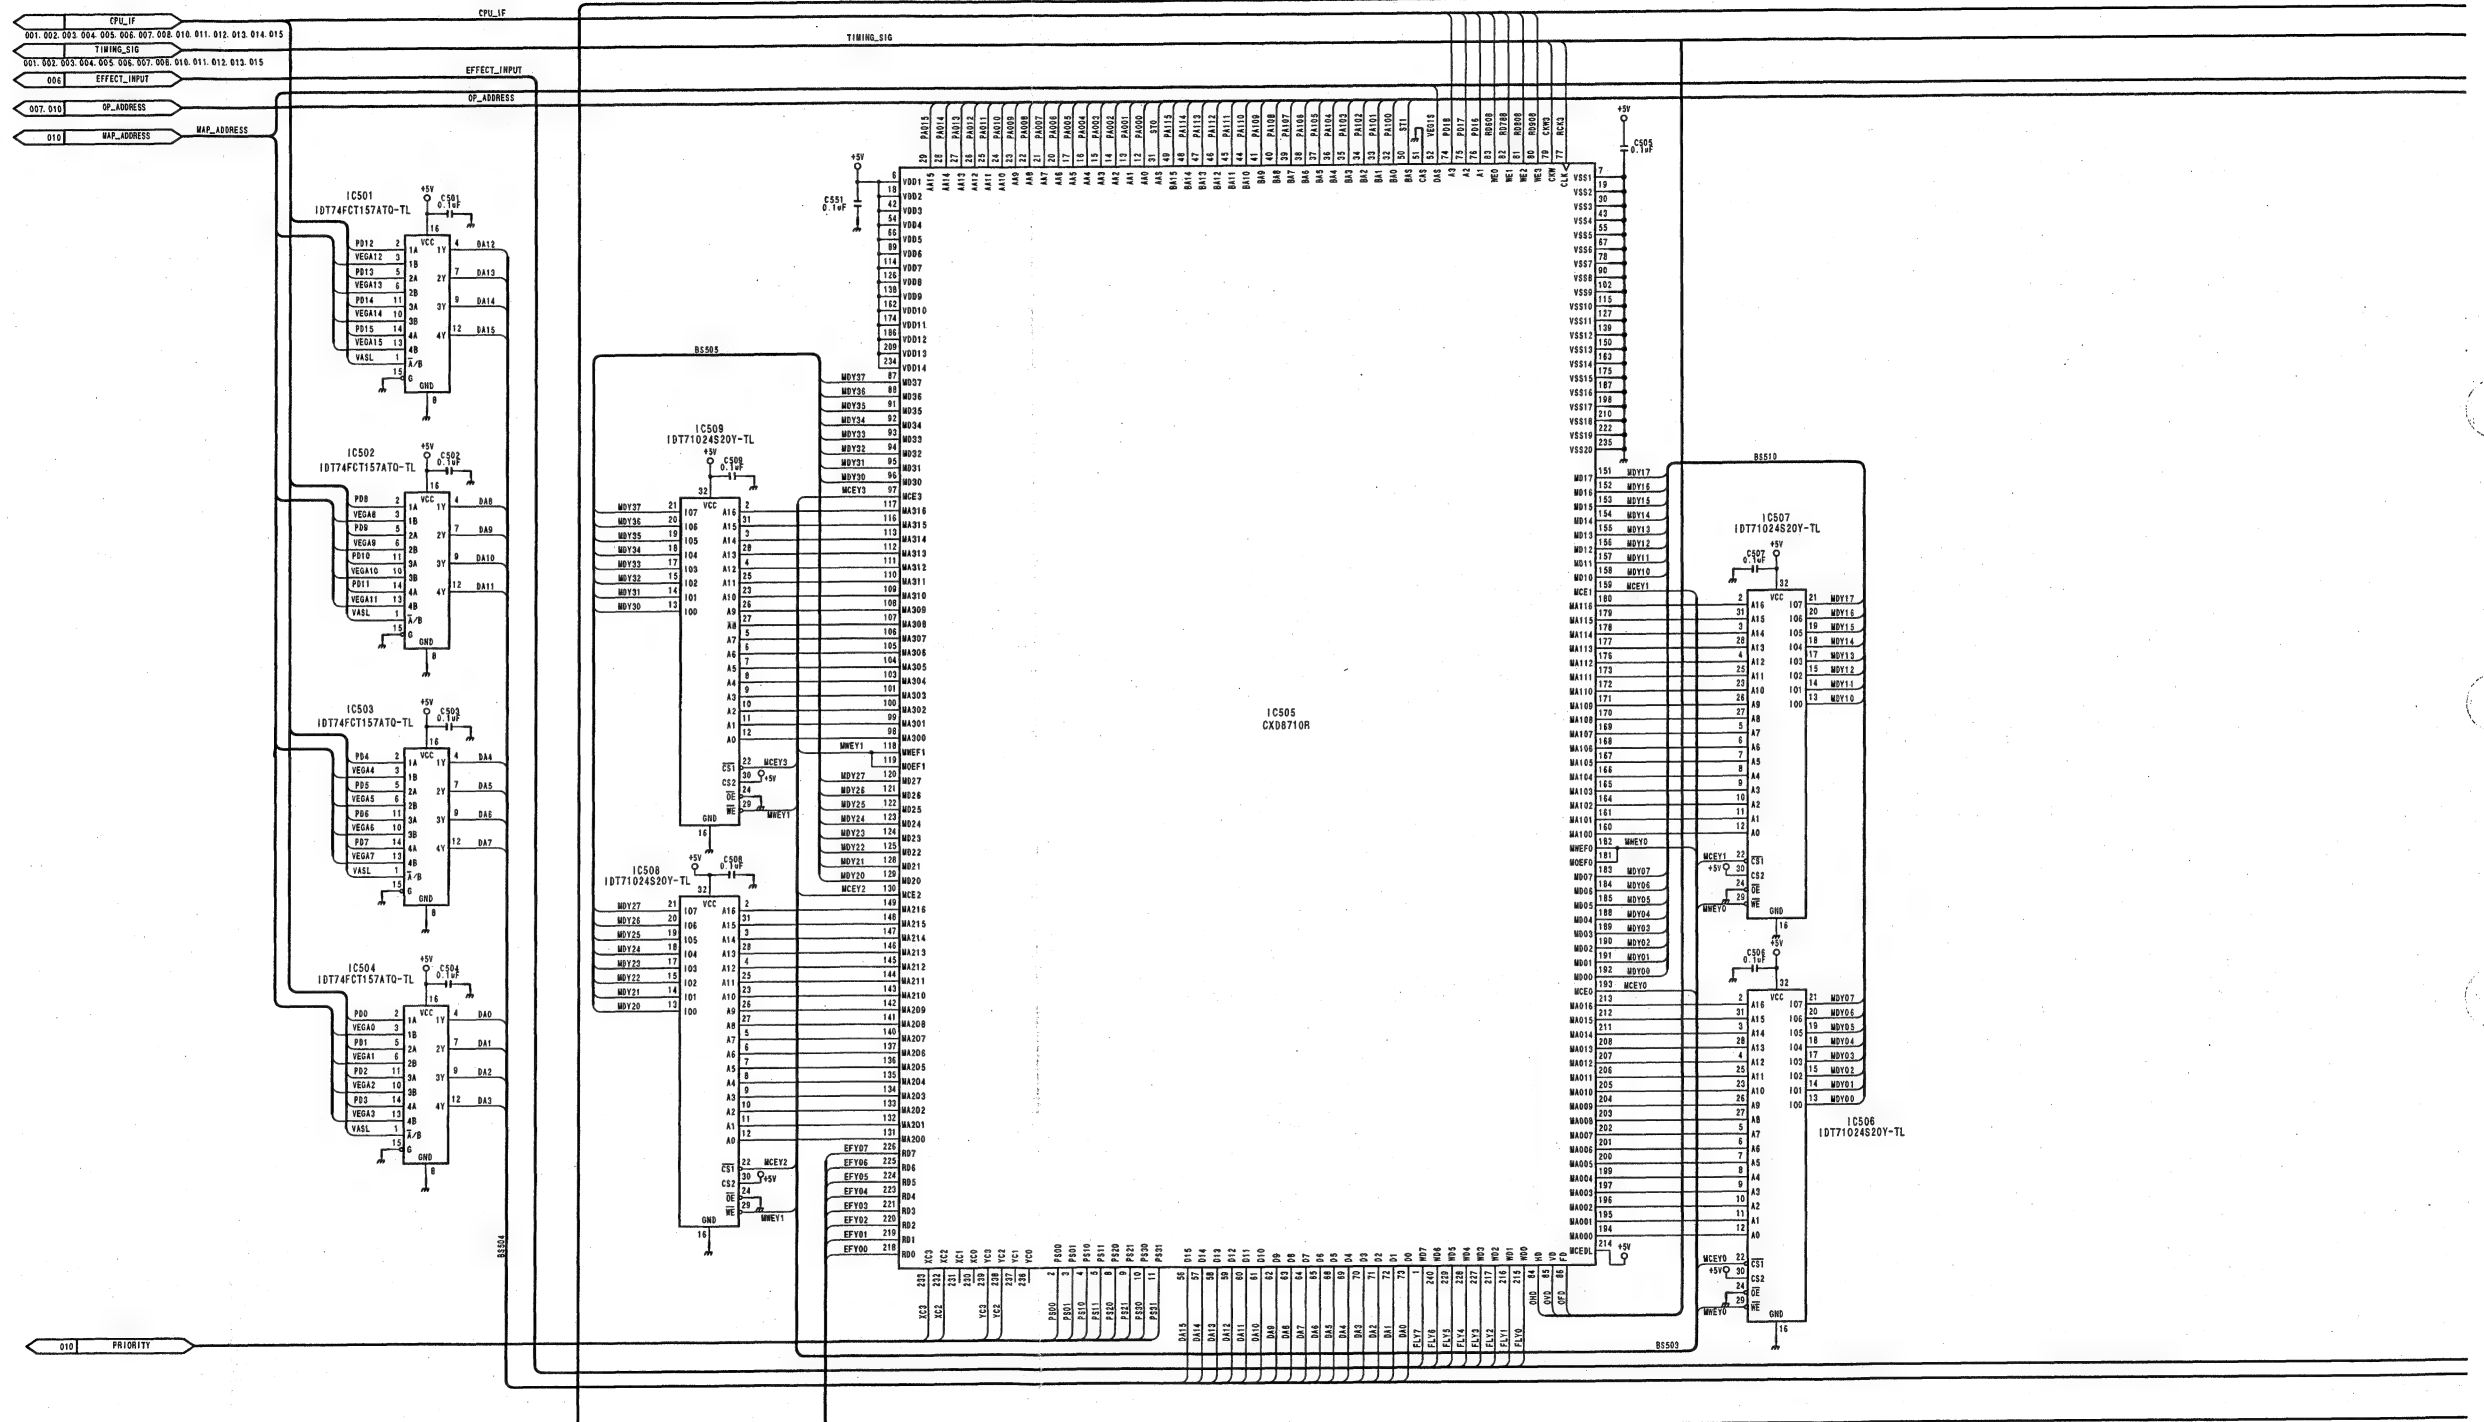




DFS-700 (J): S/N 30001 and Higher
DFS-700 (UC): S/N 10001 and Higher
DFS-700P (CE): S/N 40001 and Higher

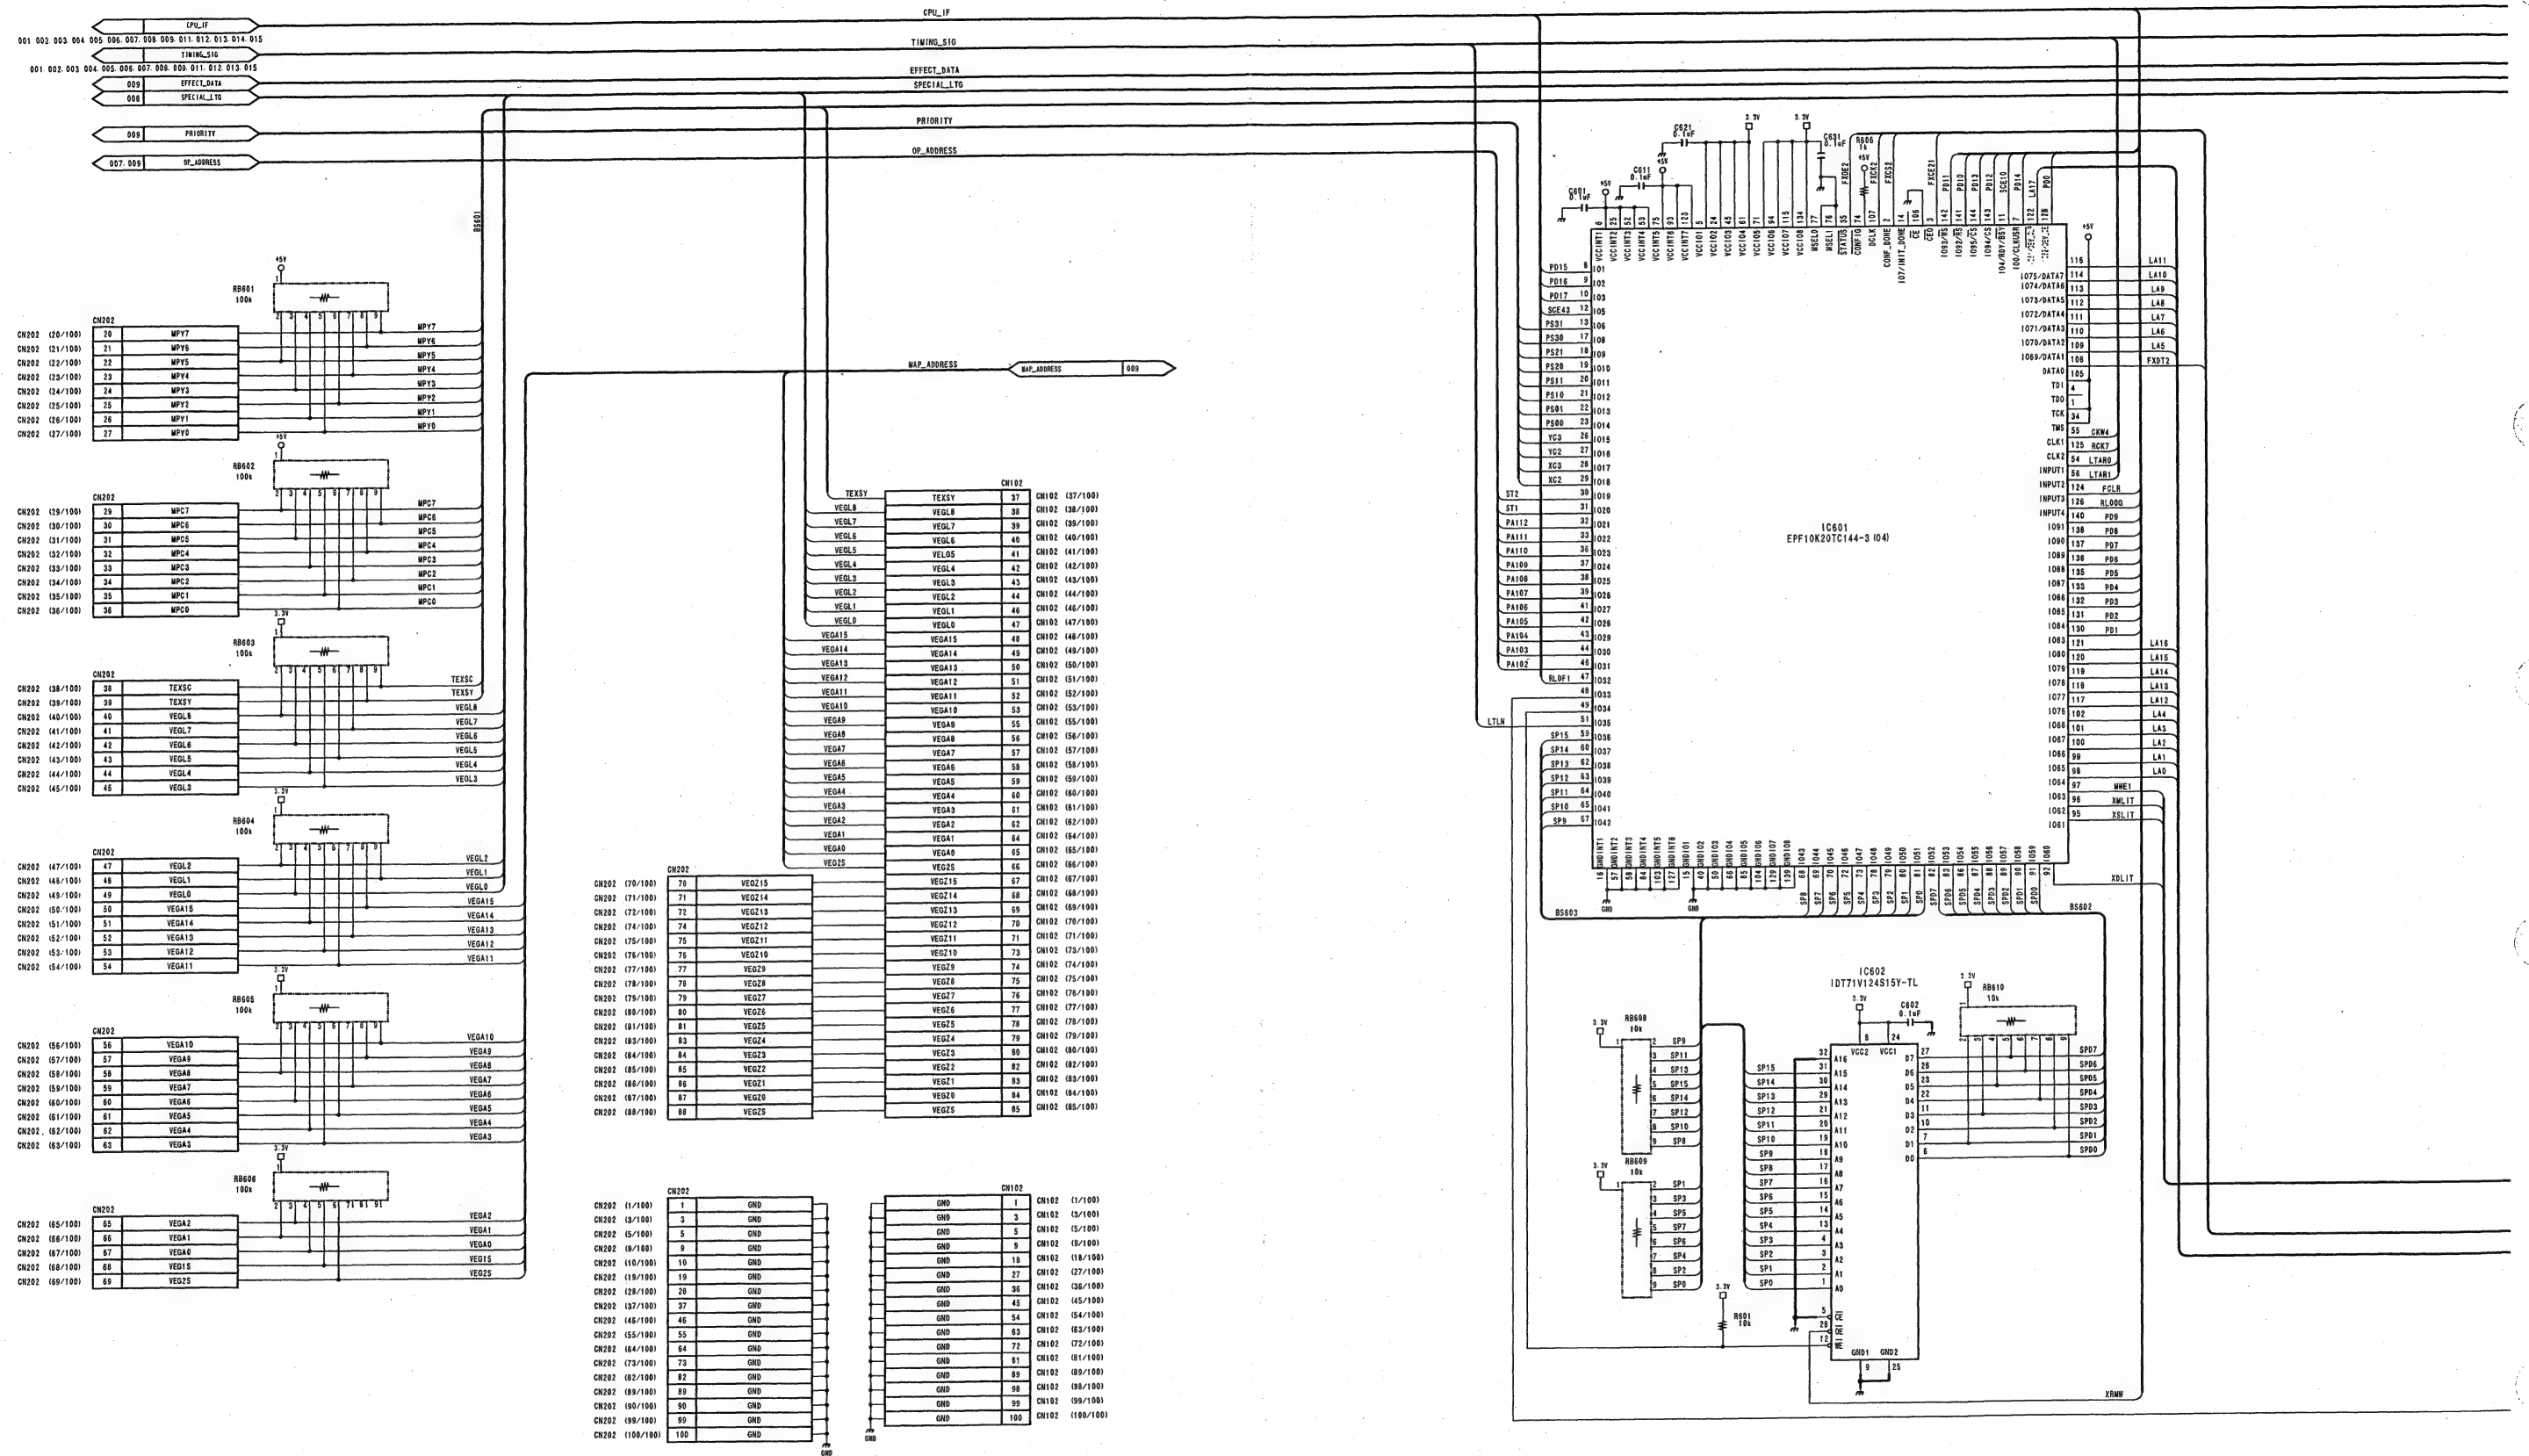

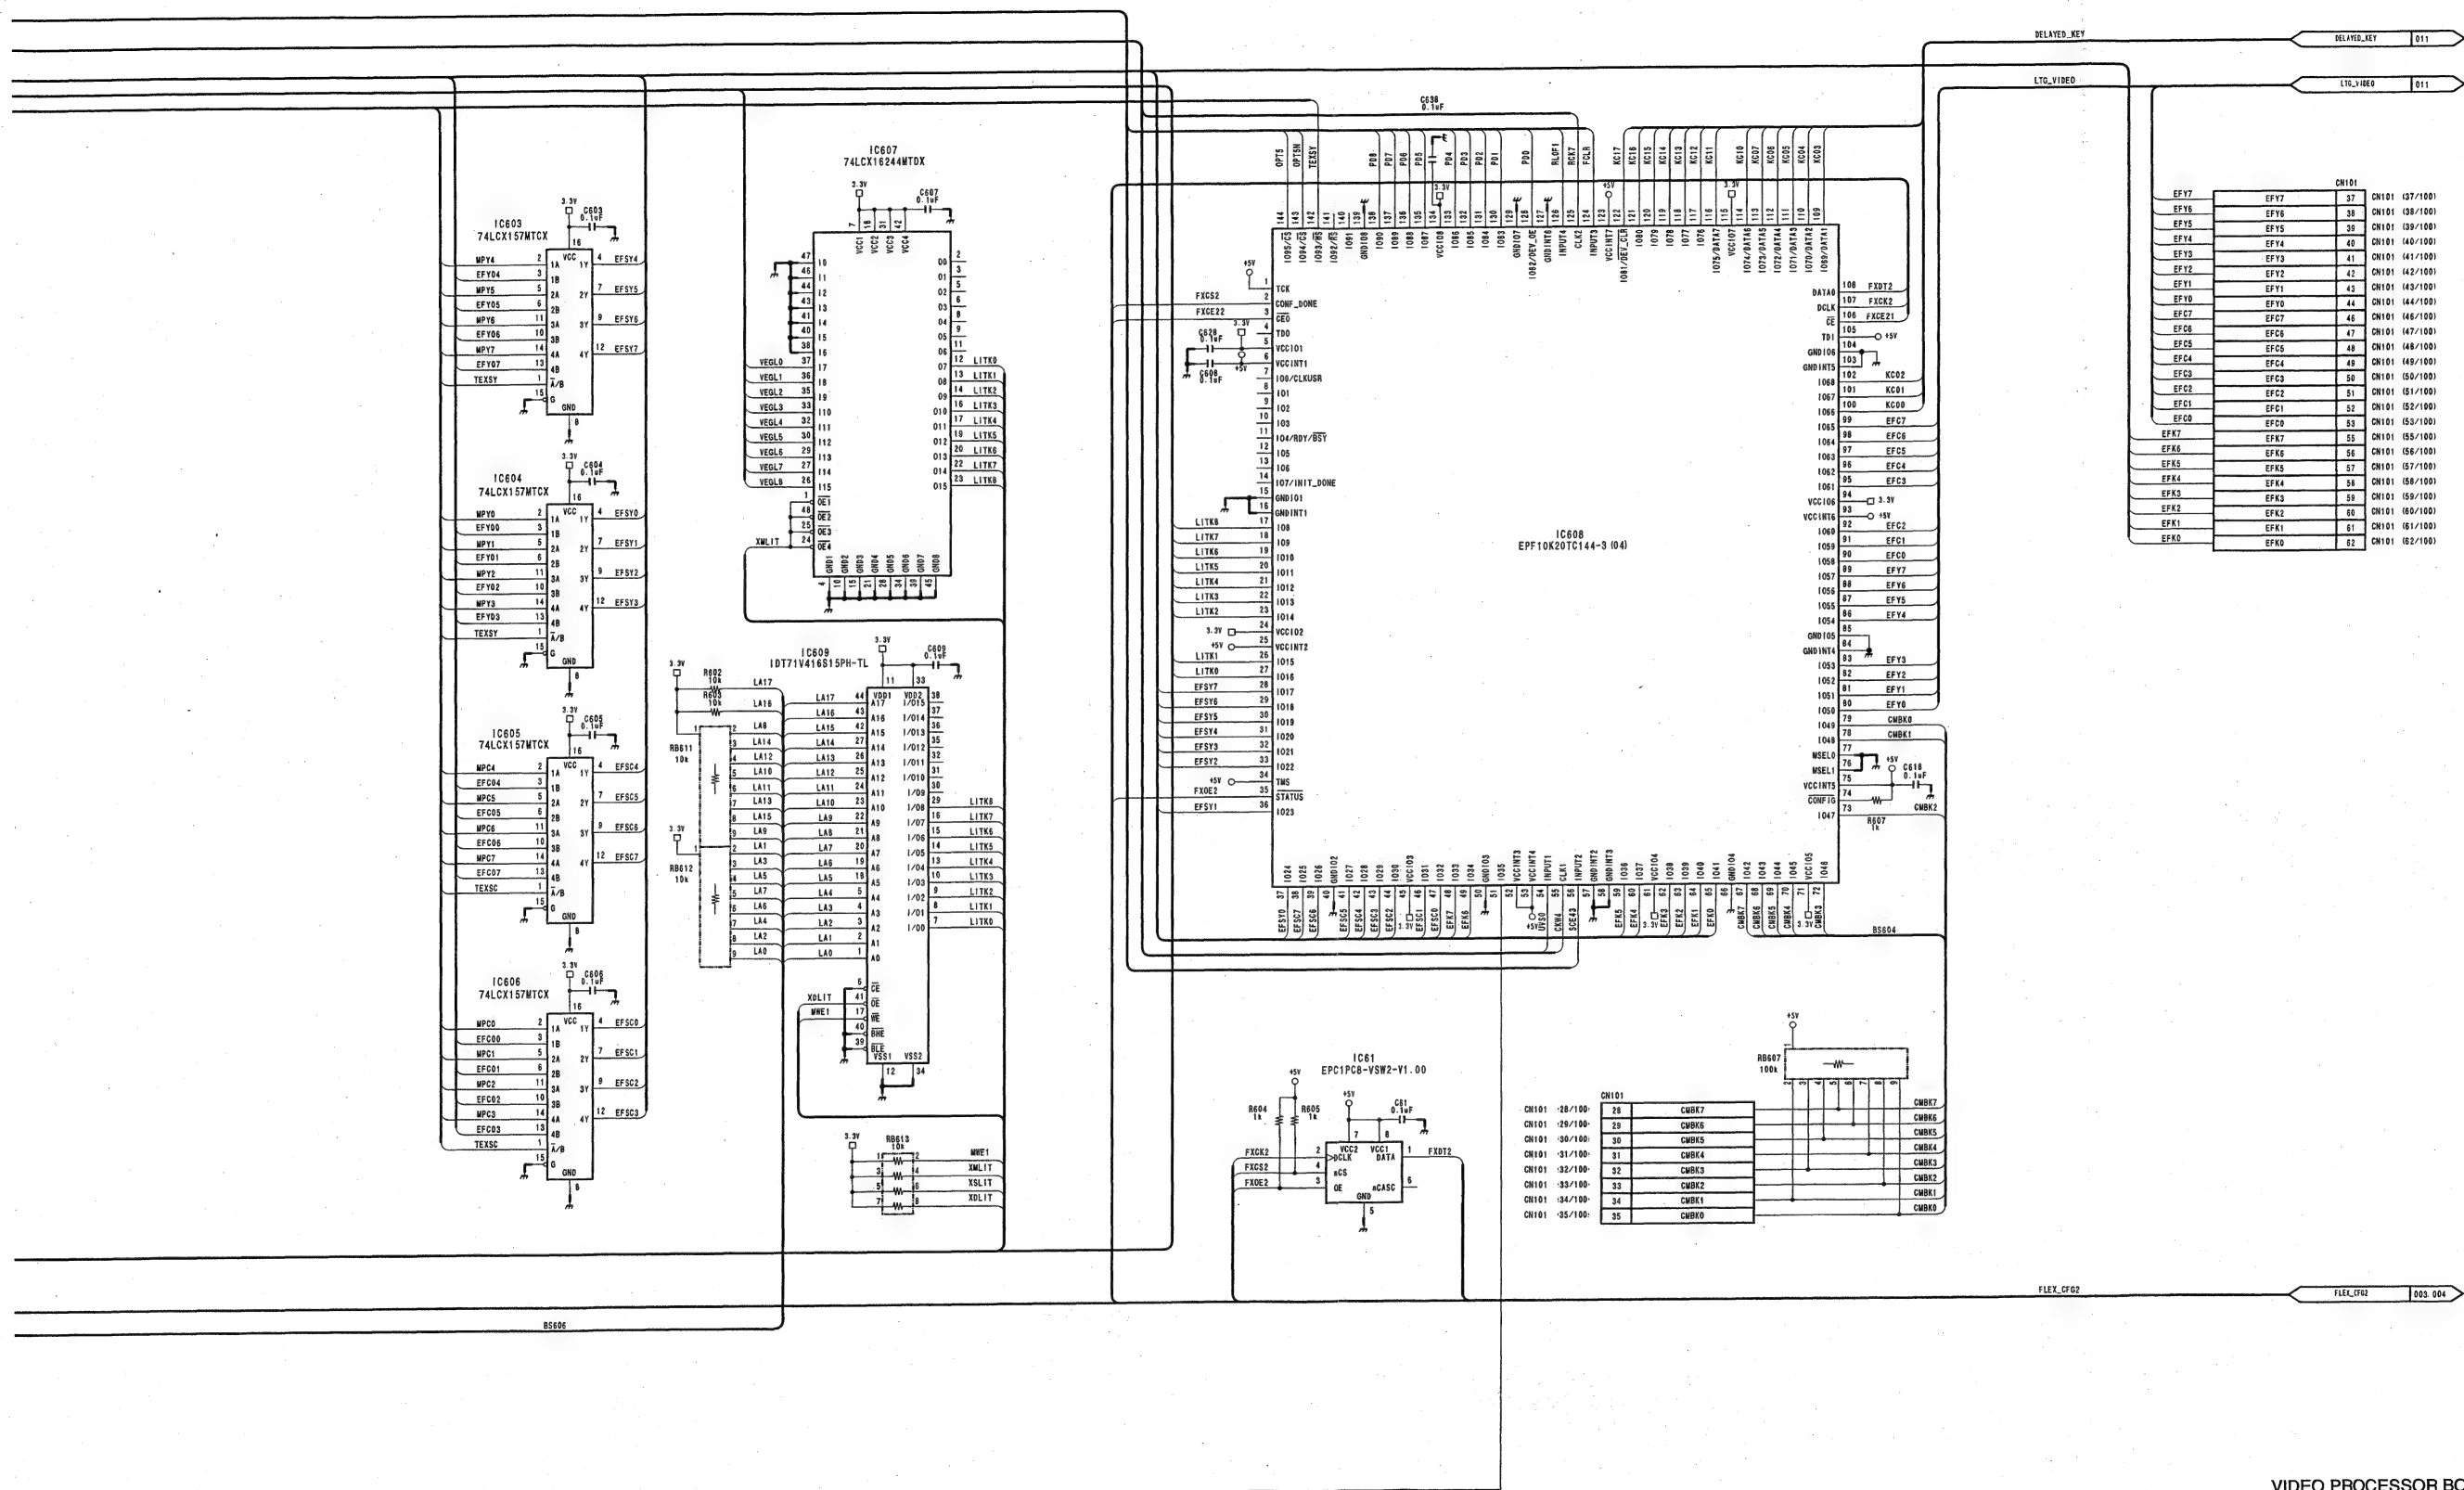

VIDEO PROCESSOR BOARD
VSW-69/69P (10/16)
BOARD NO. 1-677-096-11
LOT NO. 911-

DFS-700 (J): S/N 30001 and Higher
DFS-700 (UC): S/N 10001 and Higher
DFS-700P (CE): S/N 40001 and Higher

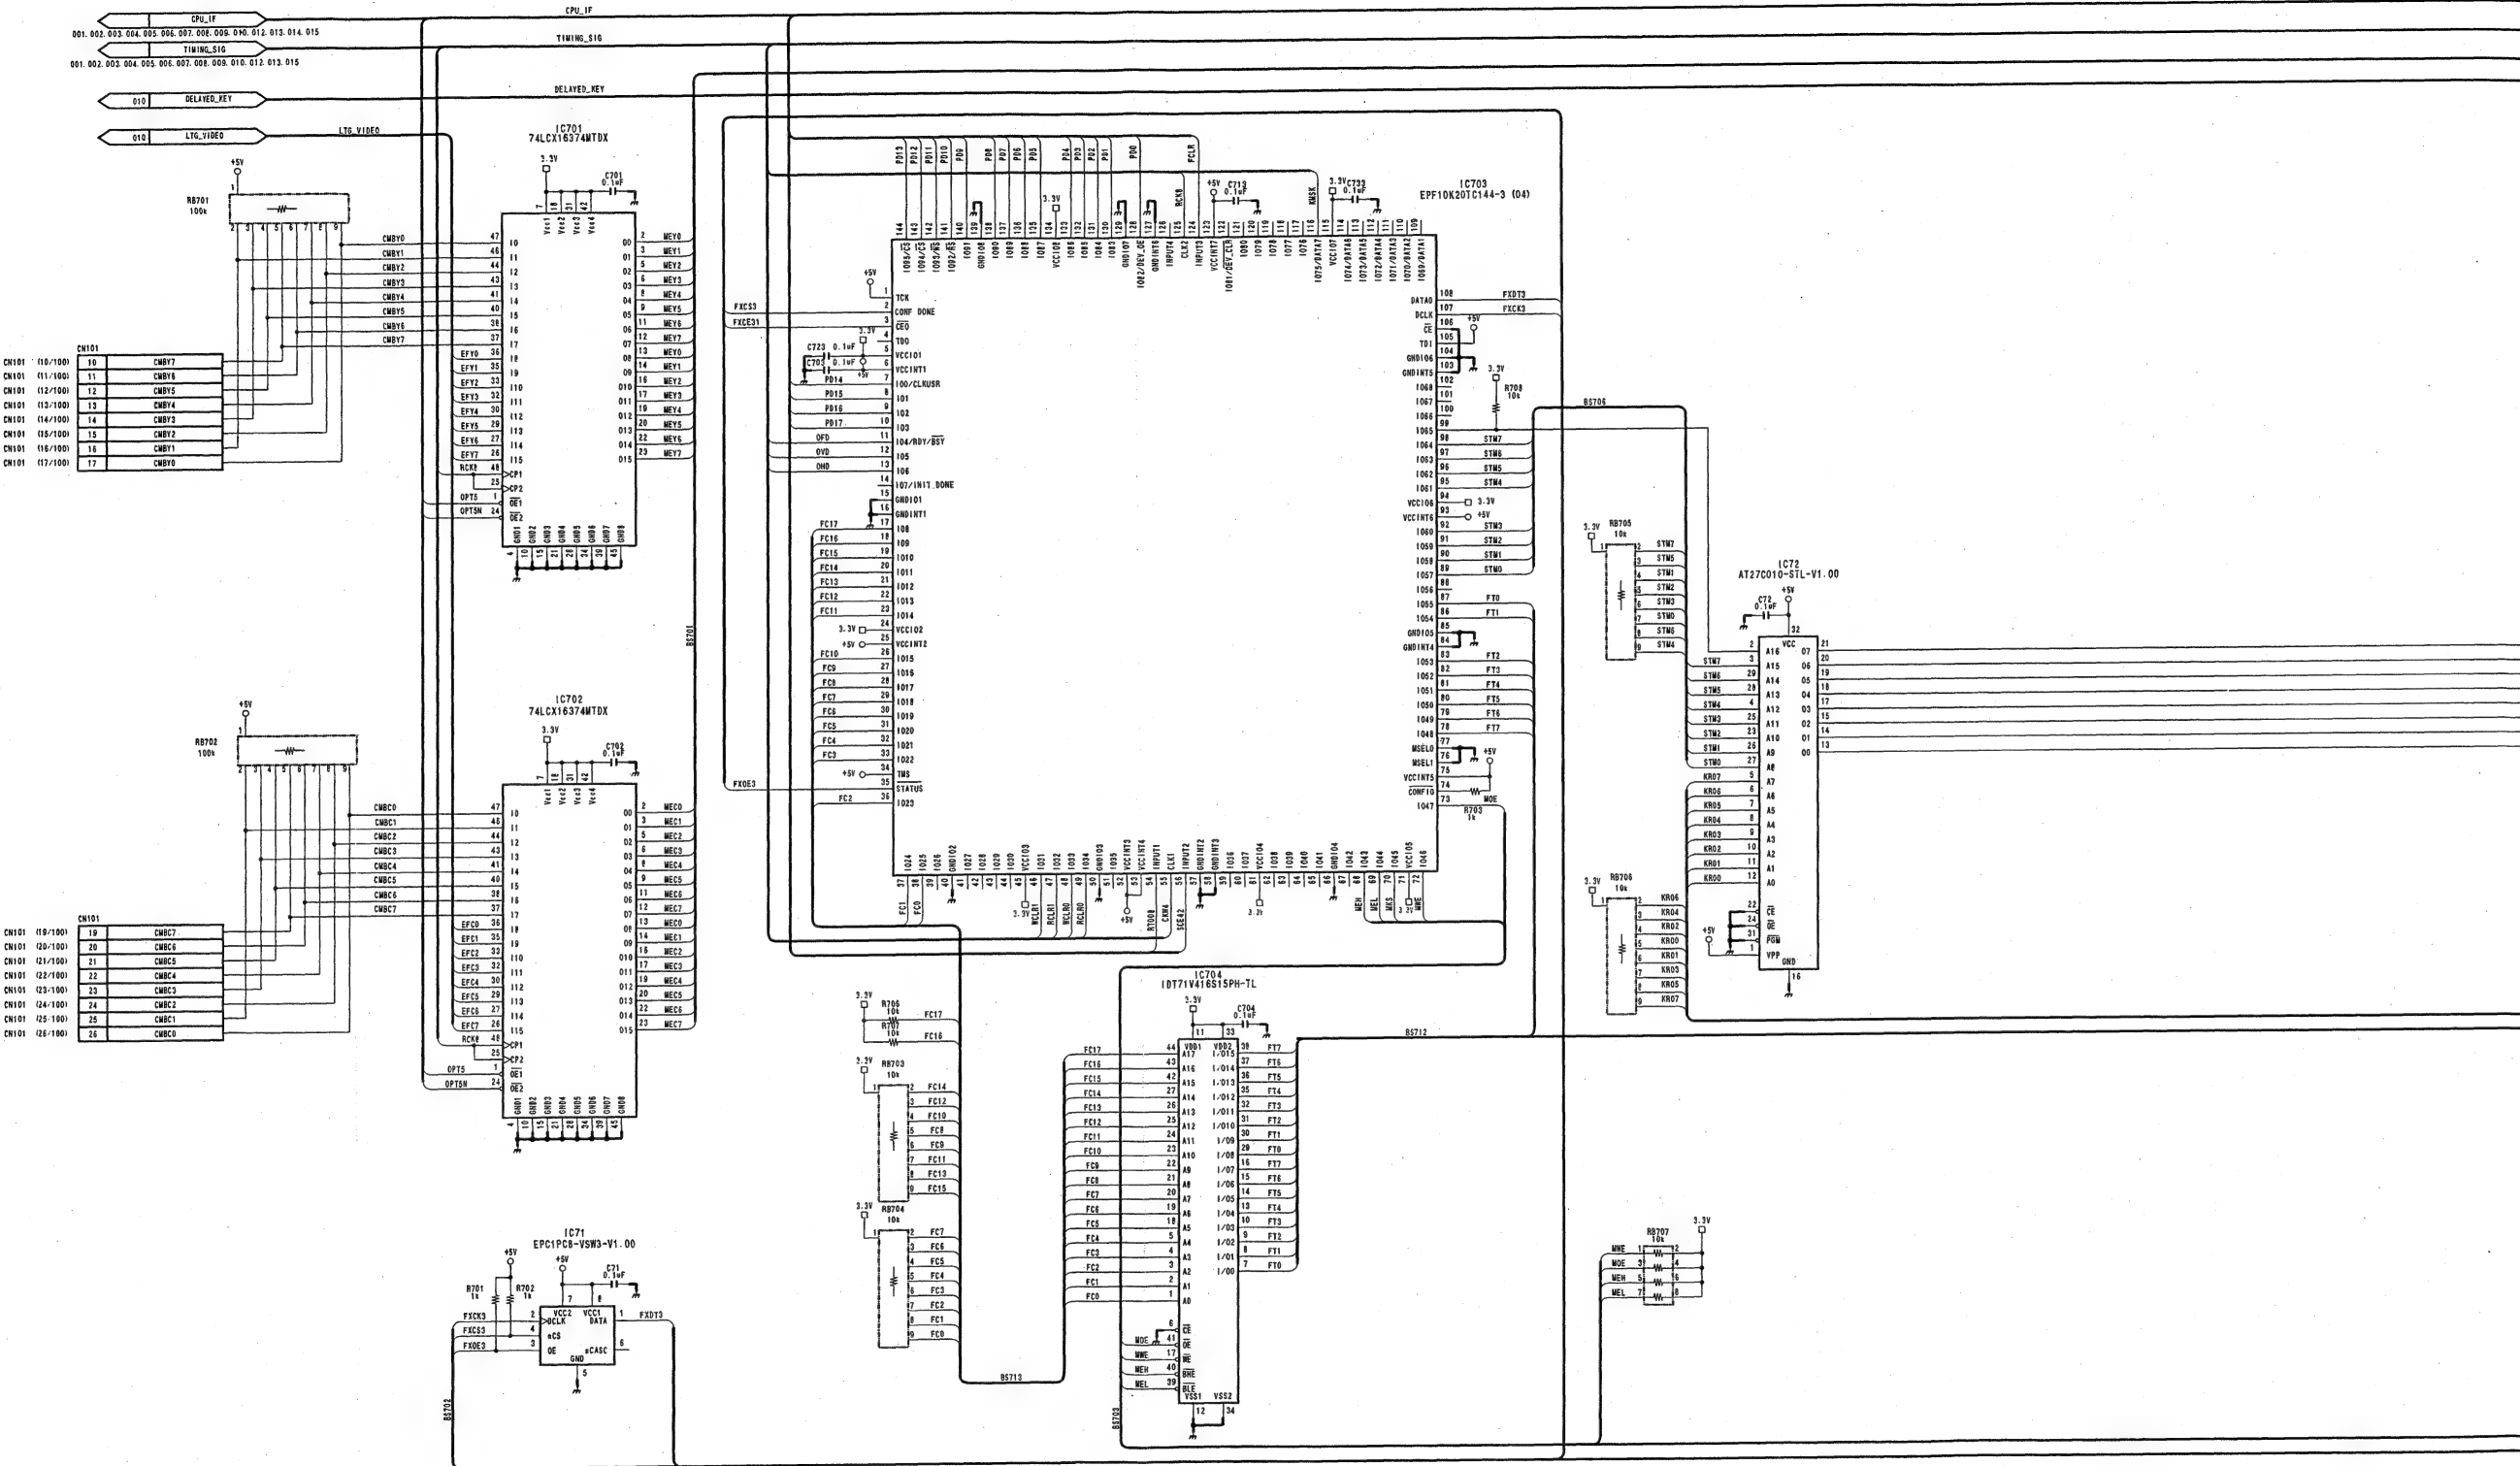




P

4-190

A



G

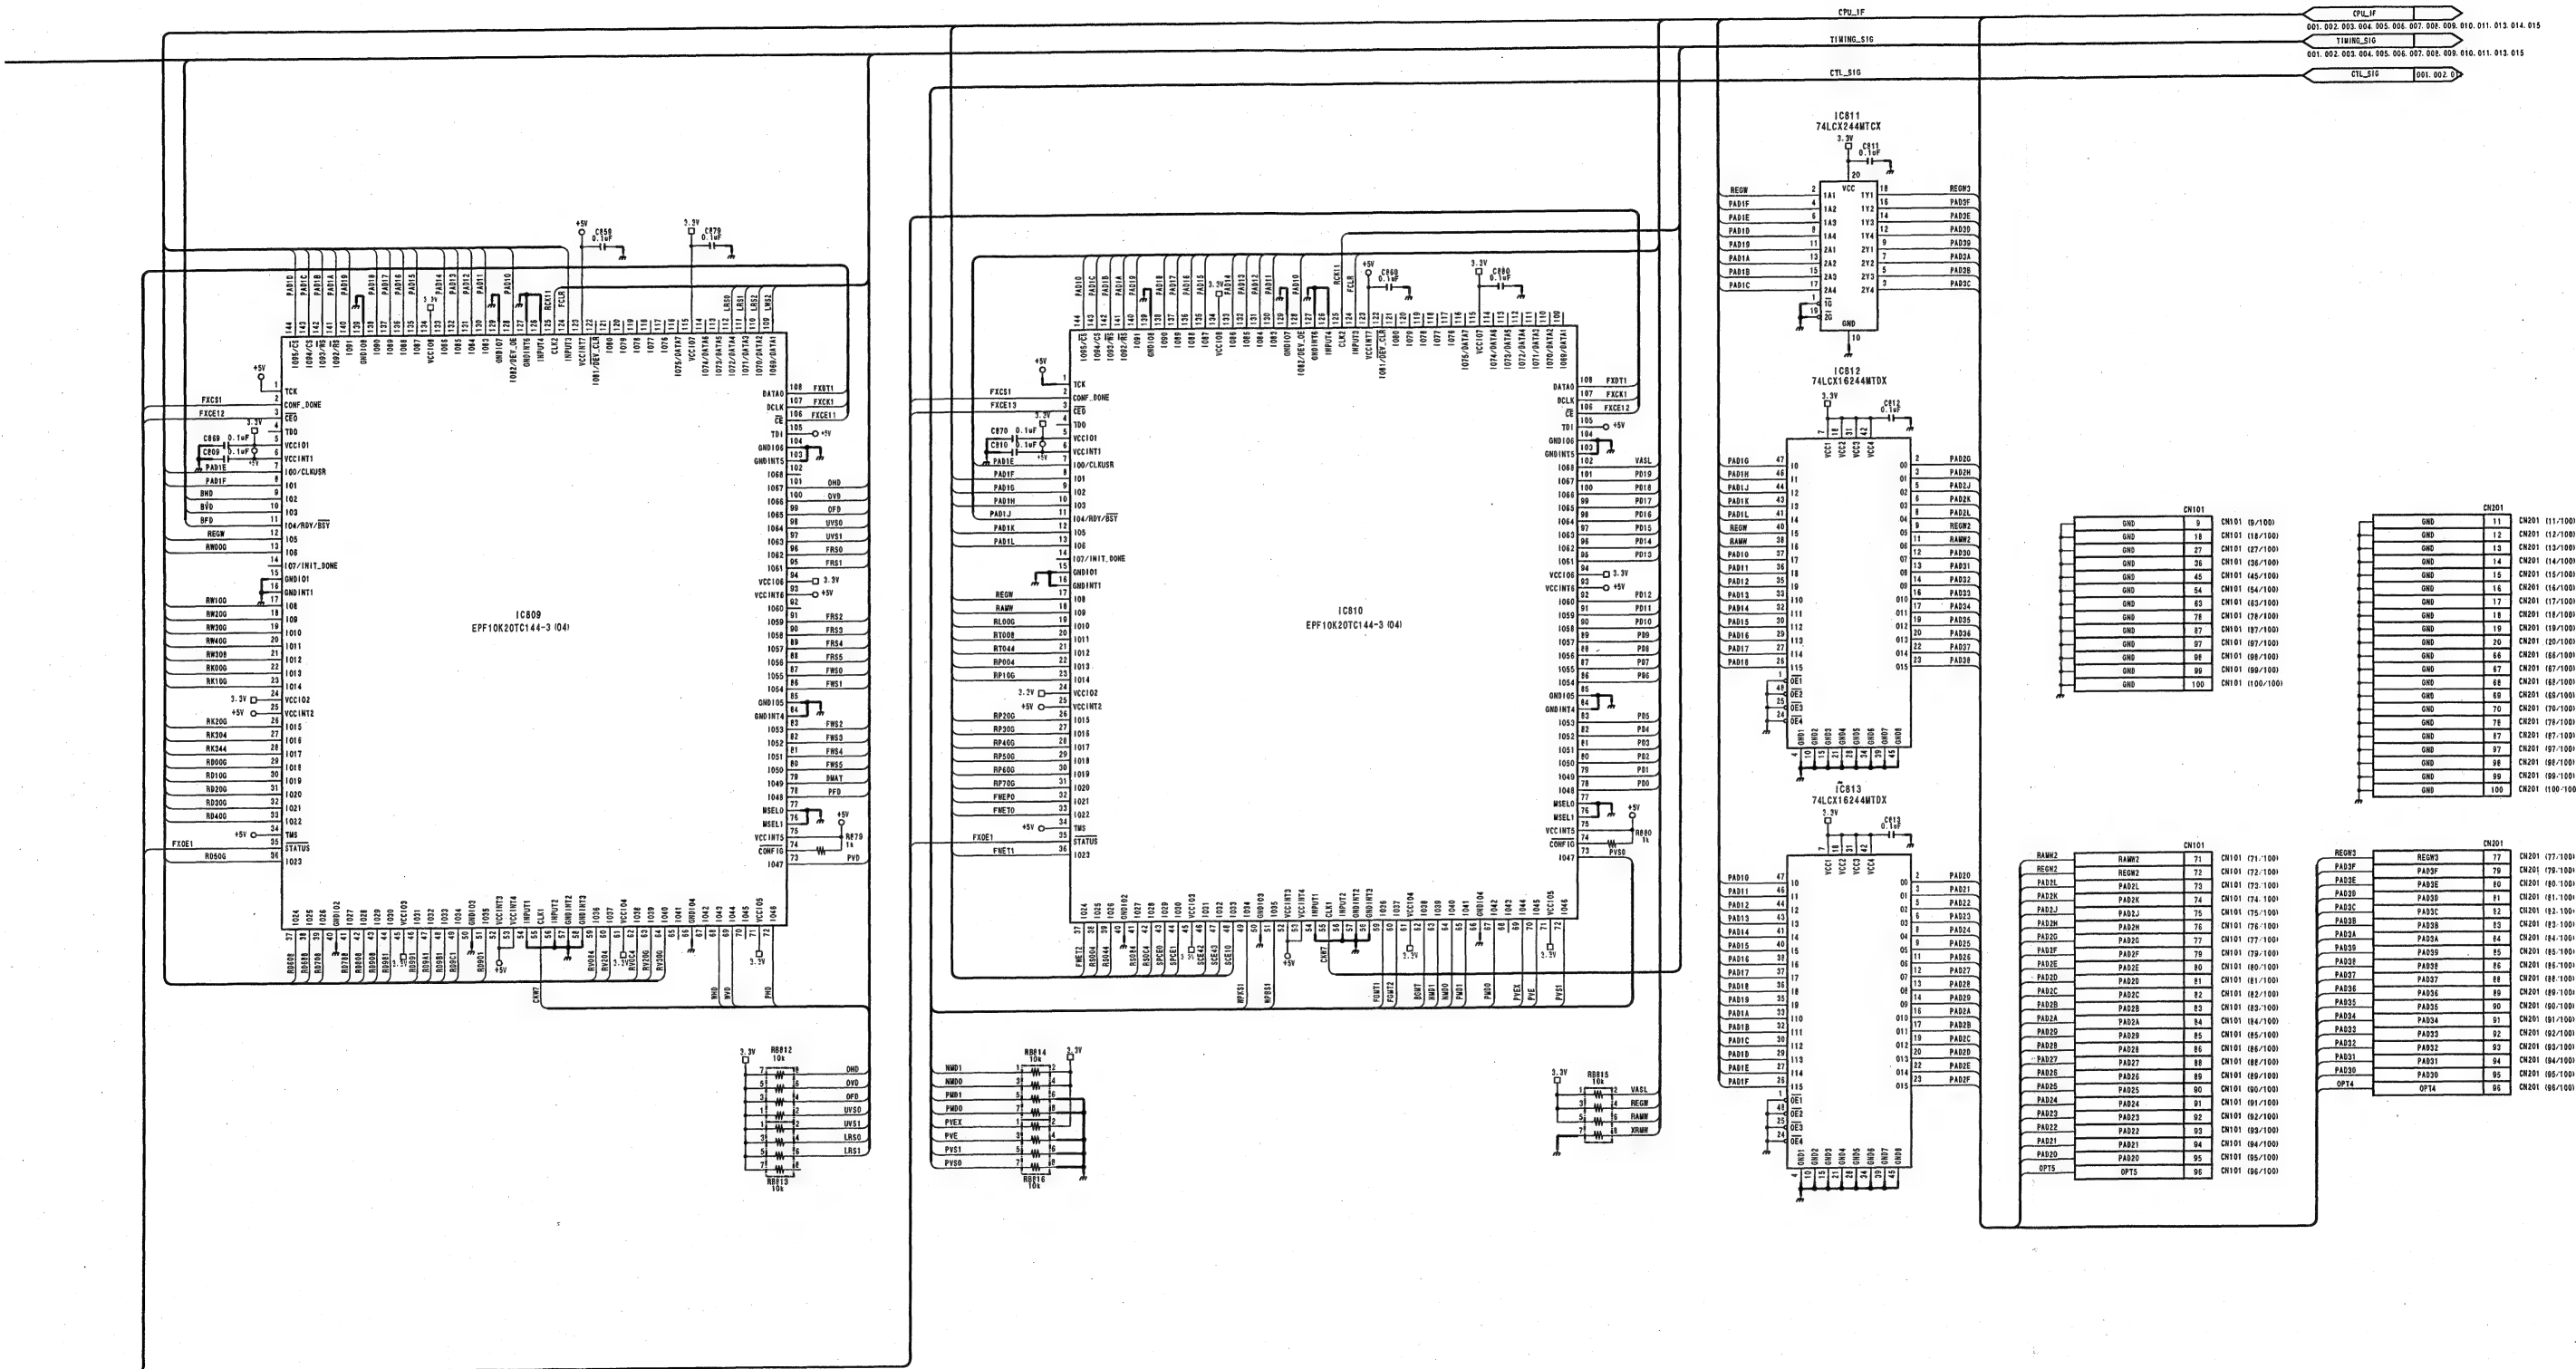

VIDEO PROCESSOR BOARD
VSW-69/69P (12/16)
BOARD NO. 1-677-096-11
LOT NO. 911-

DFS-700 (J): S/N 30001 and Higher
DFS-700 (UC): S/N 10001 and Higher
DFS-700P (CE): S/N 40001 and Higher


1

2

3


4

5

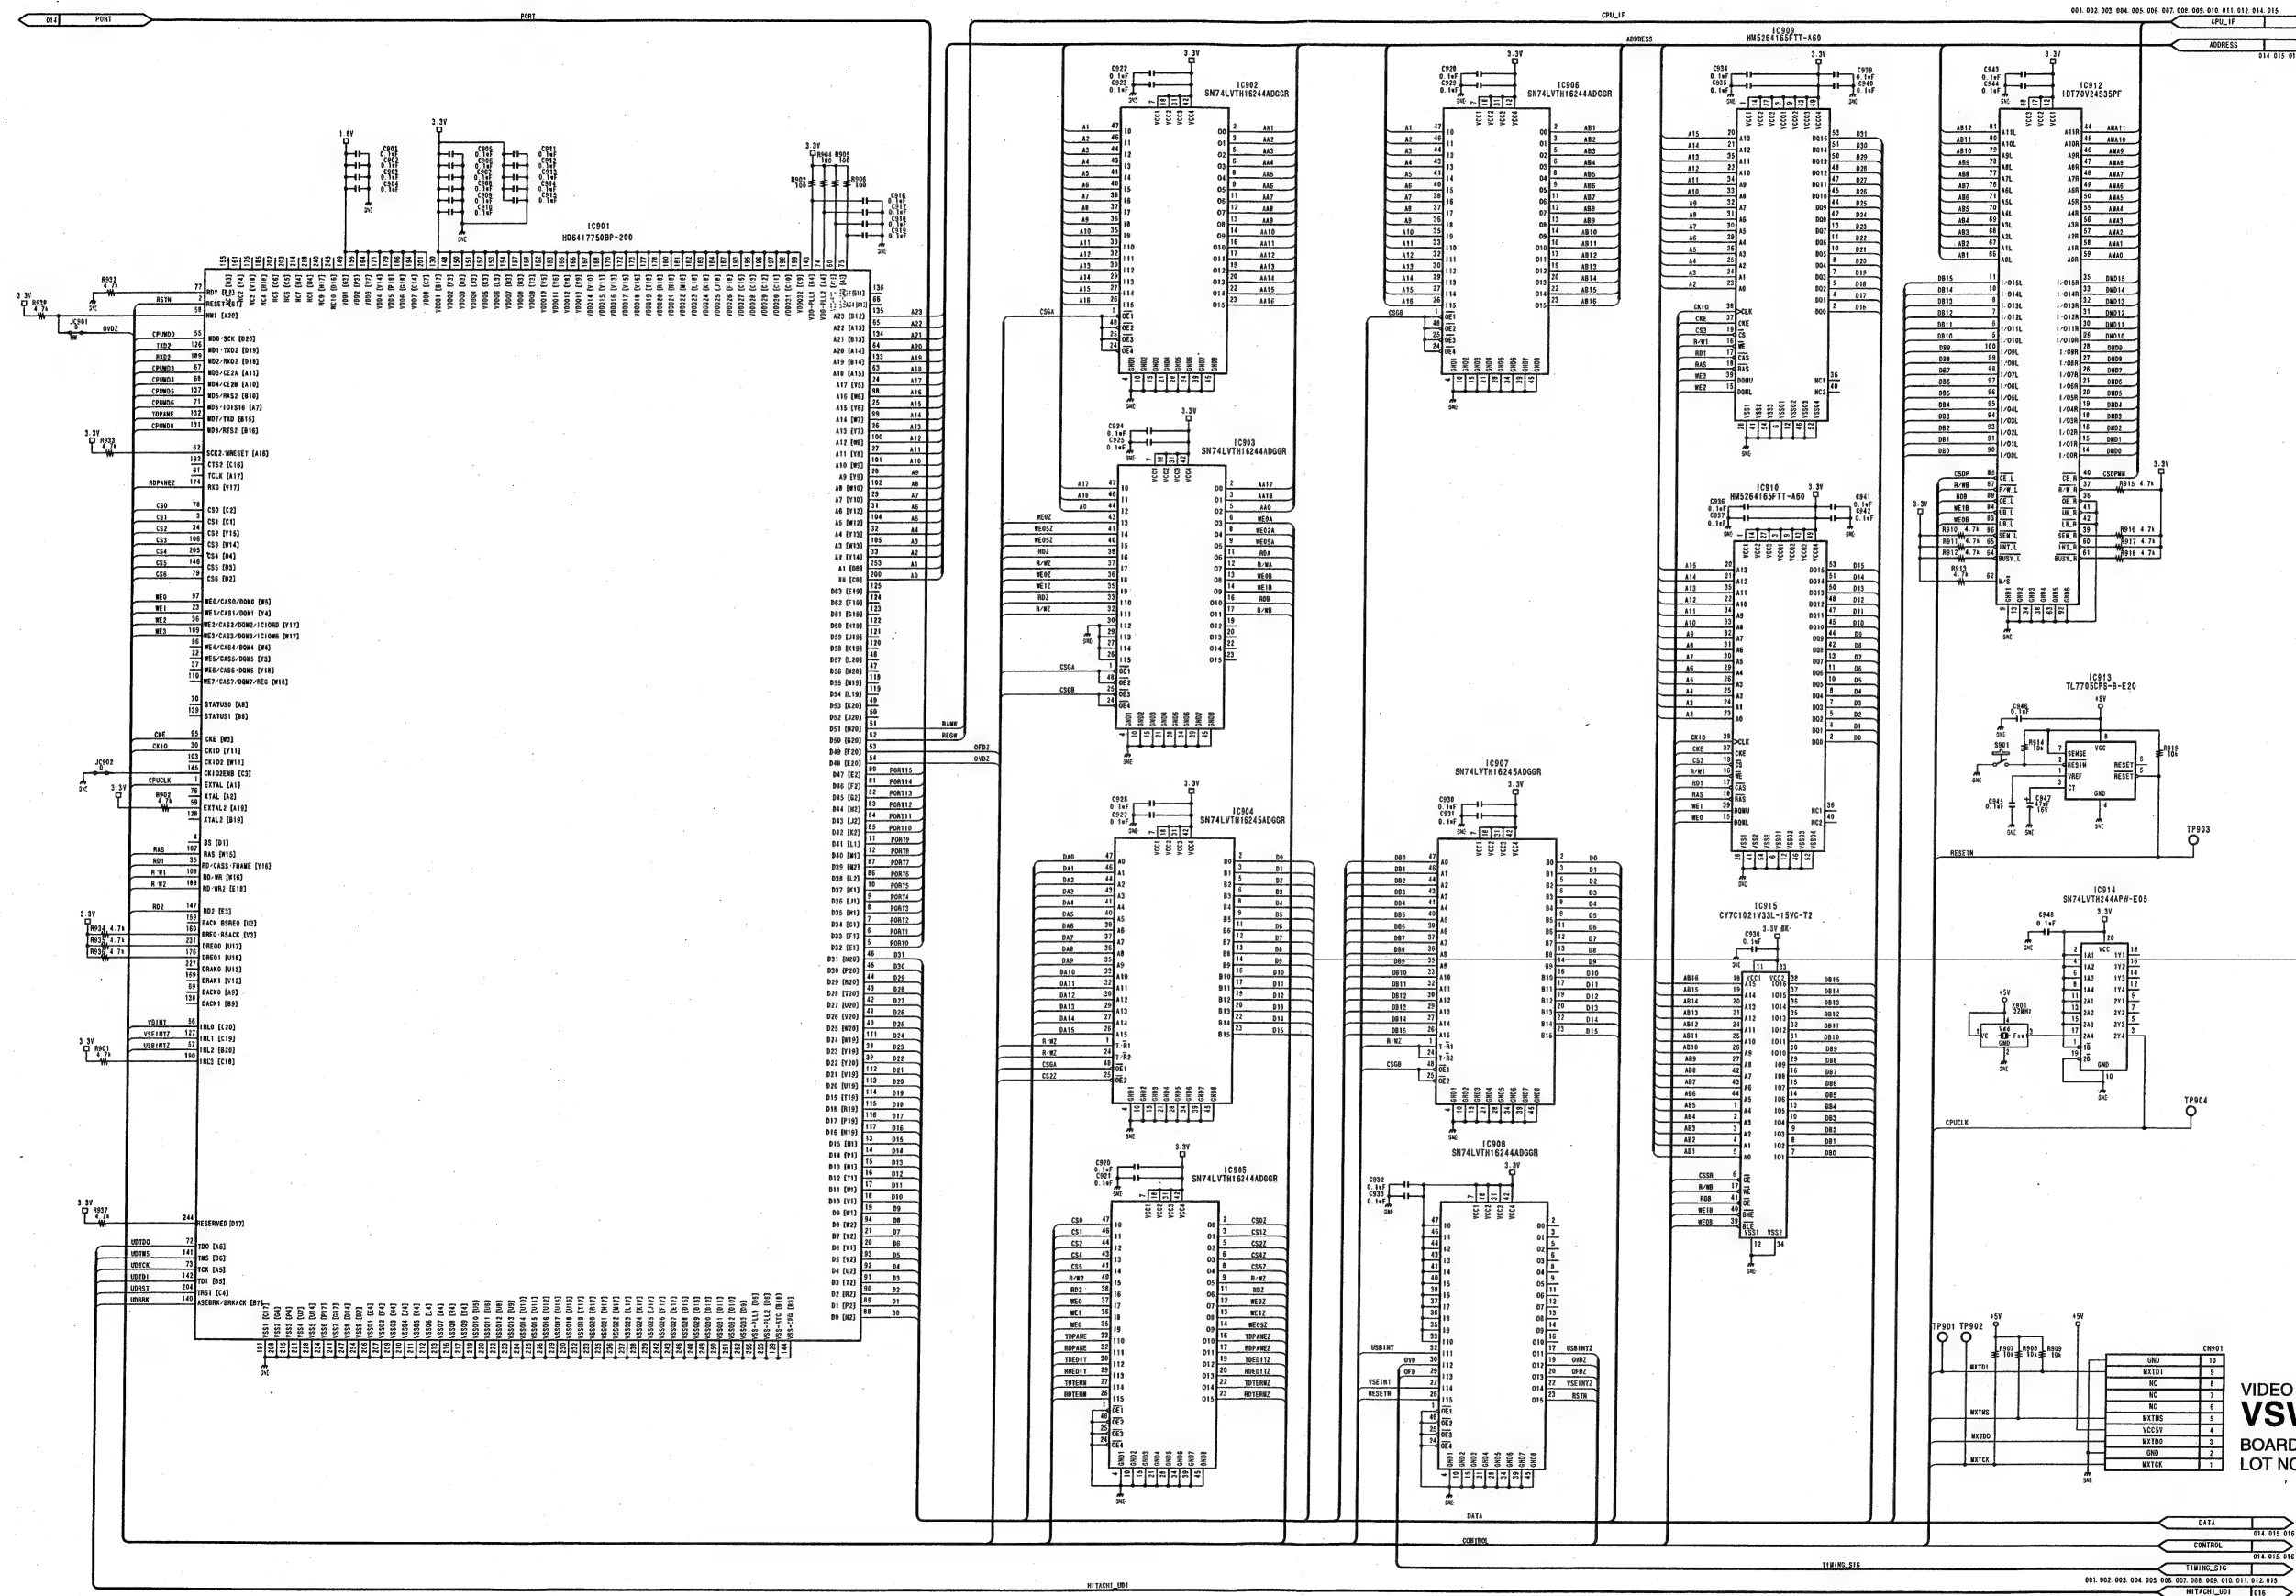

VIDEO PROCESSOR BOARD
VSW-69/69P (13/16)
BOARD NO. 1-677-096-11
LOT NO. 911-


DFS-700 (J): S/N 30001 and Higher
 DFS-700 (UC): S/N 10001 and Higher
 DFS-700P (CE): S/N 40001 and Higher

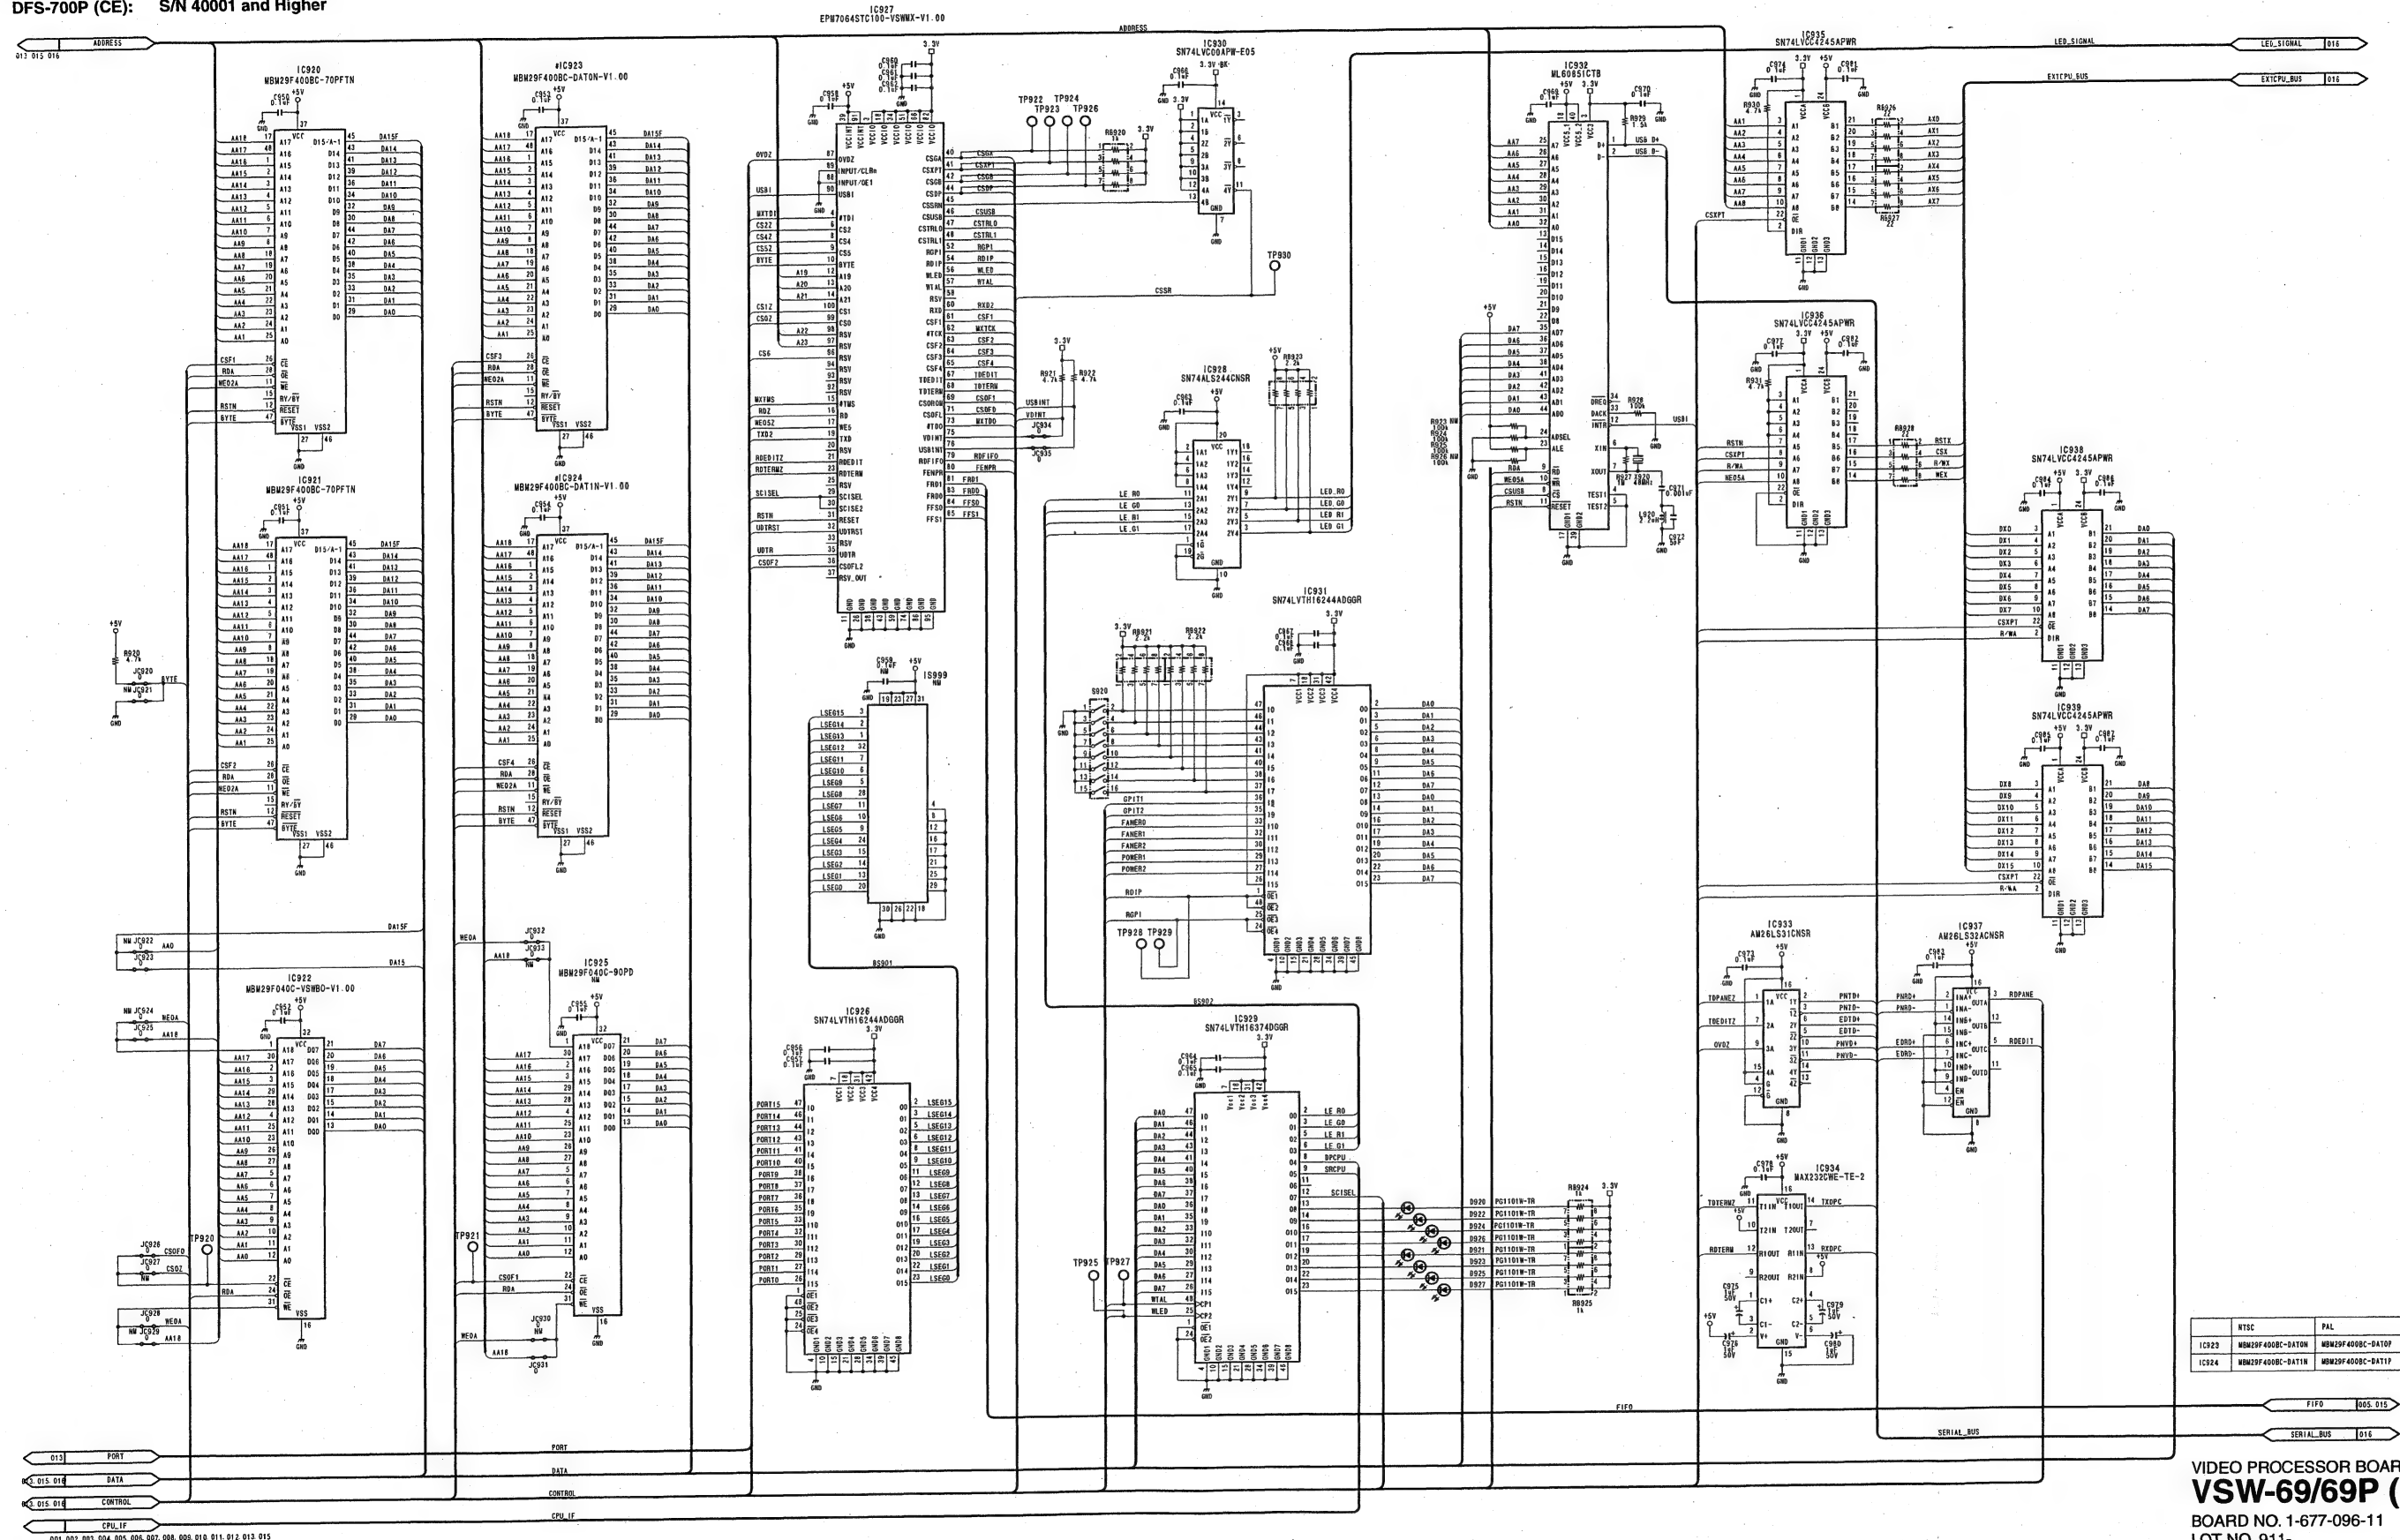

VIDEO PROCESSOR BOARD
VSW-69/69P (14/16)
 BOARD NO. 1-677-096-11
 LOT NO. 911-


VSW-69/69P (15/16) VSW-69/69P (15/16)

DFS-700 (J): S/N 30001 and Higher
DFS-700 (UC): S/N 10001 and Higher
DFS-700P (CE): S/N 40001 and Higher

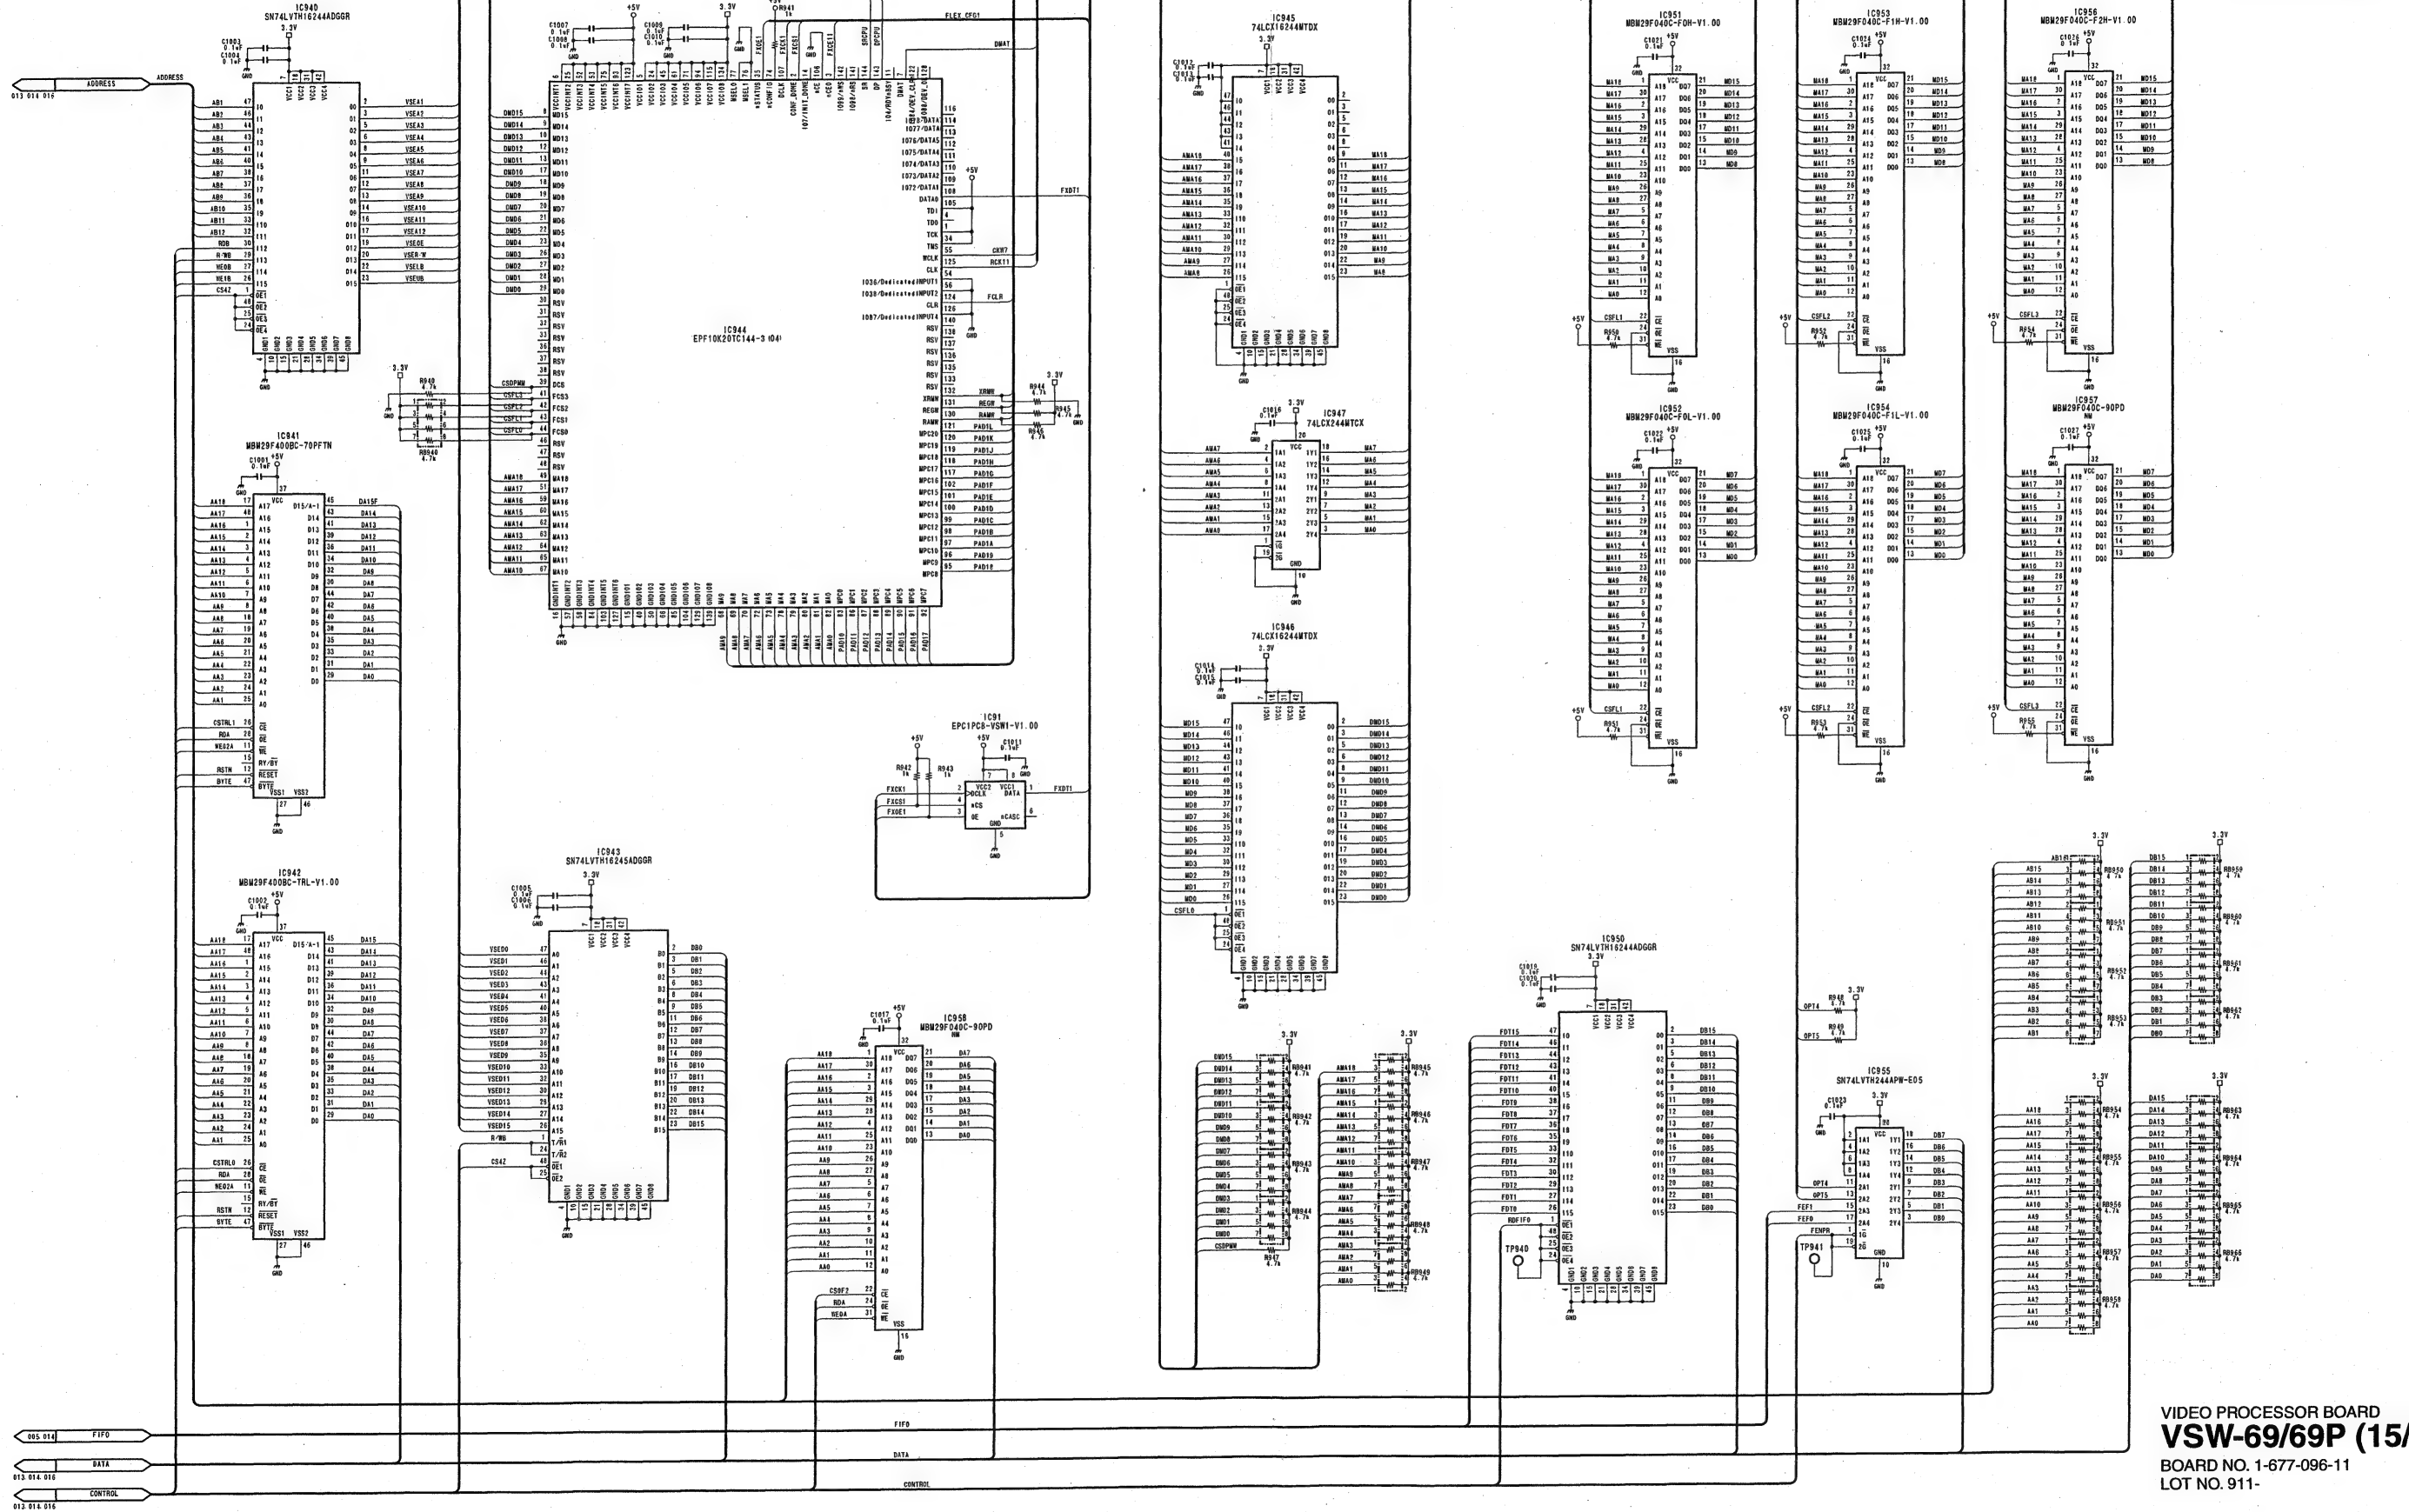

VIDEO PROCESSOR BOARD
VSW-69/69P (15/16)
BOARD NO. 1-677-096-11
LOT NO. 911-

DFS-700 (J): S/N 30001 and Higher
 DFS-700 (UC): S/N 10001 and Higher
 DFS-700P (CE): S/N 40001 and Higher

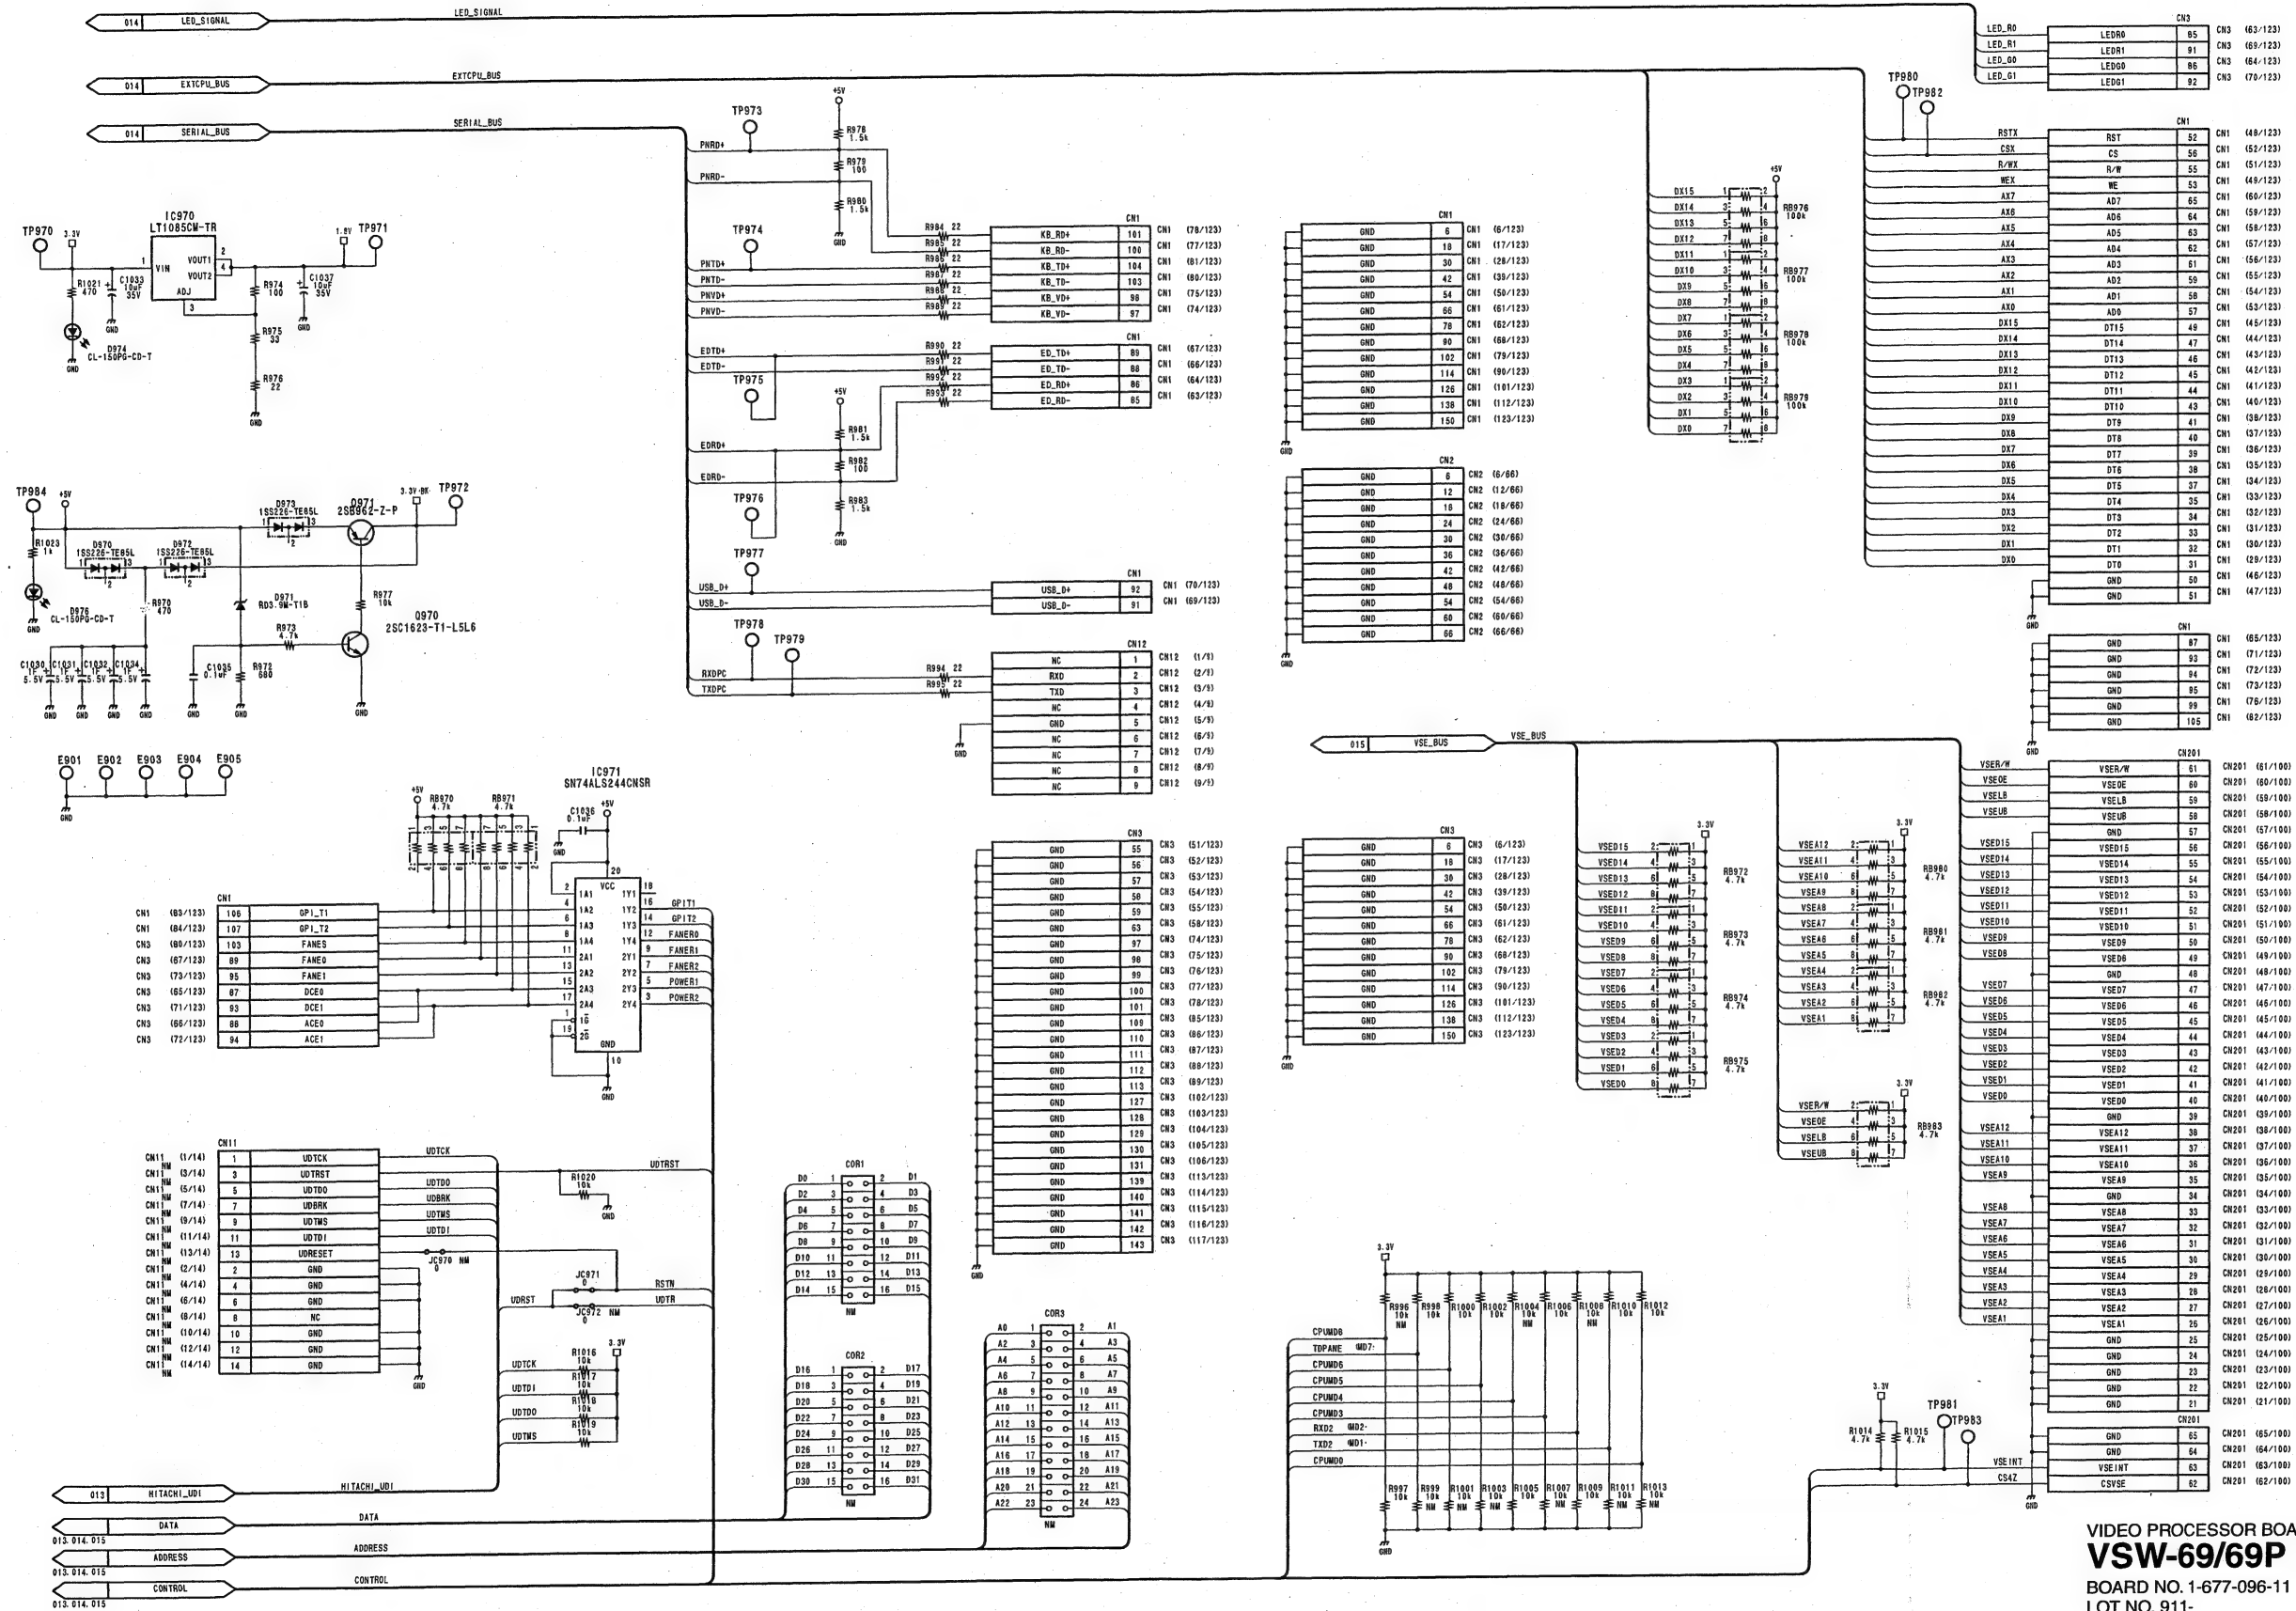

5

F	E	D	C	B	A	Z	Y	X	F
G5D	FVE8	FVE2	GND	FVE1	FVE5	1	1	GND	F1E3
G5D	FVE7	FVE1	GND	FVE5	FVE4	2	2	GND	F1E2
G5D	FVE6	FVE4	GND	FVE5	FVE3	3	3	GND	F1E1
G5D	FVE5	FVE3	GND	FVE4	FVE2	4	4	GND	F1E0
G5D	GND	GND	GND	GND	GND	5	5	GND	GND
G5D	GND	GND	GND	GND	GND	6	6	GND	GND
G5D	GND	GND	GND	GND	GND	7	7	GND	GND
G5D	GND	GND	GND	GND	GND	8	8	GND	GND
G5D	GND	GND	GND	GND	GND	9	9	GND	GND
G5D	GND	GND	GND	GND	GND	10	10	GND	GND
G5D	GND	GND	GND	GND	GND	11	11	GND	GND
G5D	GND	GND	GND	GND	GND	12	12	GND	GND
G5D	GND	GND	GND	GND	GND	13	13	GND	GND
G5D	GND	GND	GND	GND	GND	14	14	GND	GND
G5D	GND	GND	GND	GND	GND	15	15	GND	GND
G5D	GND	GND	GND	GND	GND	16	16	GND	GND
G5D	GND	GND	GND	GND	GND	17	17	GND	GND
G5D	GND	GND	GND	GND	GND	18	18	GND	GND
G5D	GND	GND	GND	GND	GND	19	19	GND	GND
G5D	GND	GND	GND	GND	GND	20	20	GND	GND
G5D	GND	GND	GND	GND	GND	21	21	GND	GND
G5D	GND	GND	GND	GND	GND	22	22	GND	GND
G5D	GND	GND	GND	GND	GND	23	23	GND	GND
G5D	GND	GND	GND	GND	GND	24	24	GND	GND
G5D	GND	GND	GND	GND	GND	25	25	GND	GND
G5D	GND	GND	GND	GND	GND	26	26	GND	GND
G5D	GND	GND	GND	GND	GND	27	27	GND	GND
G5D	GND	GND	GND	GND	GND	28	28	GND	GND
G5D	GND	GND	GND	GND	GND	29	29	GND	GND
G5D	GND	GND	GND	GND	GND	30	30	GND	GND
G5D	GND	GND	GND	GND	GND	31	31	GND	GND
G5D	GND	GND	GND	GND	GND	32	32	GND	GND
G5D	GND	GND	GND	GND	GND	33	33	GND	GND
G5D	GND	GND	GND	GND	GND	34	34	GND	GND
G5D	GND	GND	GND	GND	GND	35	35	GND	GND
G5D	GND	GND	GND	GND	GND	36	36	GND	GND
G5D	GND	GND	GND	GND	GND	37	37	GND	GND
G5D	GND	GND	GND	GND	GND	38	38	GND	GND
G5D	GND	GND	GND	GND	GND	39	39	GND	GND
G5D	GND	GND	GND	GND	GND	40	40	GND	GND
G5D	GND	GND	GND	GND	GND	41	41	GND	GND
G5D	GND	GND	GND	GND	GND	42	42	GND	GND
G5D	GND	GND	GND	GND	GND	43	43	GND	GND
G5D	GND	GND	GND	GND	GND	44	44	GND	GND
G5D	GND	GND	GND	GND	GND	45	45	GND	GND
G5D	GND	GND	GND	GND	GND	46	46	GND	GND
G5D	GND	GND	GND	GND	GND	47	47	GND	GND
G5D	GND	GND	GND	GND	GND	48	48	GND	GND
G5D	GND	GND	GND	GND	GND	49	49	GND	GND
G5D	GND	GND	GND	GND	GND	50	50	GND	GND
G5D	GND	GND	GND	GND	GND	51	51	GND	GND
G5D	GND	GND	GND	GND	GND	52	52	GND	GND
G5D	GND	GND	GND	GND	GND	53	53	GND	GND
G5D	GND	GND	GND	GND	GND	54	54	GND	GND
G5D	GND	GND	GND	GND	GND	55	55	GND	GND
G5D	GND	GND	GND	GND	GND	56	56	GND	GND
G5D	GND	GND	GND	GND	GND	57	57	GND	GND
G5D	GND	GND	GND	GND	GND	58	58	GND	GND
G5D	GND	GND	GND	GND	GND	59	59	GND	GND
G5D	GND	GND	GND	GND	GND	60	60	GND	GND
G5D	GND	GND	GND	GND	GND	61	61	GND	GND
G5D	GND	GND	GND	GND	GND	62	62	GND	GND
G5D	GND	GND	GND	GND	GND	63	63	GND	GND
G5D	GND	GND	GND	GND	GND	64	64	GND	GND
G5D	GND	GND	GND	GND	GND	65	65	GND	GND
G5D	GND	GND	GND	GND	GND	66	66	GND	GND
G5D	GND	GND	GND	GND	GND	67	67	GND	GND
G5D	GND	GND	GND	GND	GND	68	68	GND	GND
G5D	GND	GND	GND	GND	GND	69	69	GND	GND
G5D	GND	GND	GND	GND	GND	70	70	GND	GND
G5D	GND	GND	GND	GND	GND	71	71	GND	GND
G5D	GND	GND	GND	GND	GND	72	72	GND	GND
G5D	GND	GND	GND	GND	GND	73	73	GND	GND
G5D	GND	GND	GND	GND	GND	74	74	GND	GND
G5D	GND	GND	GND	GND	GND	75	75	GND	GND
G5D	GND	GND	GND	GND	GND	76	76	GND	GND
G5D	GND	GND	GND	GND	GND	77	77	GND	GND
G5D	GND	GND	GND	GND	GND	78	78	GND	GND
G5D	GND	GND	GND	GND	GND	79	79	GND	GND
G5D	GND	GND	GND	GND	GND	80	80	GND	GND
G5D	GND	GND	GND	GND	GND	81	81	GND	GND
G5D	GND	GND	GND	GND	GND	82	82	GND	GND
G5D	GND	GND	GND	GND	GND	83	83	GND	GND
G5D	GND	GND	GND	GND	GND	84	84	GND	GND
G5D	GND	GND	GND	GND	GND	85	85	GND	GND
G5D	GND	GND	GND	GND	GND	86	86	GND	GND
G5D	GND	GND	GND	GND	GND	87	87	GND	GND
G5D	GND	GND	GND	GND	GND	88	88	GND	GND
G5D	GND	GND	GND	GND	GND	89	89	GND	GND
G5D	GND	GND	GND	GND	GND	90	90	GND	GND
G5D	GND	GND	GND	GND	GND	91	91	GND	GND
G5D	GND	GND	GND	GND	GND	92	92	GND	GND
G5D	GND	GND	GND	GND	GND	93	93	GND	GND
G5D	GND	GND	GND	GND	GND	94	94	GND	GND
G5D	GND	GND	GND	GND	GND	95	95	GND	GND
G5D	GND	GND	GND	GND	GND	96	96	GND	GND
G5D	GND	GND	GND	GND	GND	97	97	GND	GND
G5D	GND	GND	GND	GND	GND	98	98	GND	GND
G5D	GND	GND	GND	GND	GND	99	99	GND	GND
G5D	GND	GND	GND	GND	GND	100	100	GND	GND

CMB-12 BOARD (OPTION)											
CH11						CH12					
1	2	3	4	5	6	1	2	3	4	5	6
15	16	17	18	19	20	15	16	17	18	19	20
21	22	23	24	25	26	21	22	23	24	25	26
27	28	29	30	31	32	27	28	29	30	31	32
33	34	35	36	37	38	33	34	35	36	37	38
39	40	41	42	43	44	39	40	41	42	43	44
45	46	47	48	49	50	45	46	47	48	49	50
51	52	53	54	55	56	51	52	53	54	55	56
57	58	59	60	61	62	57	58	59	60	61	62
63	64	65	66	67	68	63	64	65	66	67	68
69	70	71	72	73	74	69	70	71	72	73	74
75	76	77	78	79	80	75	76	77	78	79	80
81	82	83	84	85	86	81	82	83	84	85	86
87	88	89	90	91	92	87	88	89	90	91	92
93	94	95	96	97	98	93	94	95	96	97	98
99	100	101	102	103	104	99	100	101	102	103	104


VSW-69 BOARD

MB-874 BOARD (1/2)

VSE-36 BOARD (OPTION)											
CH21						CH22					
1	2	3	4	5	6	1	2	3	4	5	6
7	8	9	10	11	12	7	8	9	10	11	12
13	14	15	16	17	18	13	14	15	16	17	18
19	20	21	22	23	24	19	20	21	22	23	24
25	26	27	28	29	30	25	26	27	28	29	30
31	32	33	34	35	36	31	32	33	34	35	36
37	38	39	40	41	42	37	38	39	40	41	42
43	44	45	46	47	48	43	44	45	46	47	48
49	50	51	52	53	54	49	50	51	52	53	54
55	56	57	58	59	60	55	56	57	58	59	60
61	62	63	64	65	66	61	62	63	64	65	66
67	68	69	70	71	72	67	68	69	70	71	72
73	74	75	76	77	78	73	74	75	76	77	78
79	80	81	82	83	84	79	80	81	82	83	84
85	86	87	88	89	90	85	86	87	88	89	90
91	92	93	94	95	96	91	92	93	94	95	96
97	98	99	100	101	102	97	98	99	100	101	102

OPM-39 BOARD											
CH1						CH2					
1	2	3	4	5	6	1	2	3	4	5	6
7	8	9	10	11	12	7	8	9	10	11	12
13	14	15	16	17	18	13	14	15	16	17	18
19	20	21	22	23	24	19	20	21	22	23	24
25	26	27	28	29	30	25	26	27	28	29	30
31	32	33	34	35	36	31	32	33	34	35	36
37	38	39	40	41	42	37	38	39	40	41	42
43	44	45	46	47	48	43	44	45	46	47	48
49	50	51	52	53	54	49	50	51	52	53	54
55	56	57	58	59	60	55	56	57	58	59	60
61	62	63	64	65	66	61	62	63	64	65	66
67	68	69	70	71	72	67	68	69	70	71	72
73	74	75	76	77	78	73	74	75	76	77	78
79	80	81	82	83	84	79	80	81	82	83	84
85	86	87	88	89	90	85	86	87	88	89	90
91	92	93	94	95	96	91	92	93	94	95	96
97	98	99	100	101	102	97	98	99	100	101	102

FRAME WIRING (1/4)
DFS-700/700P

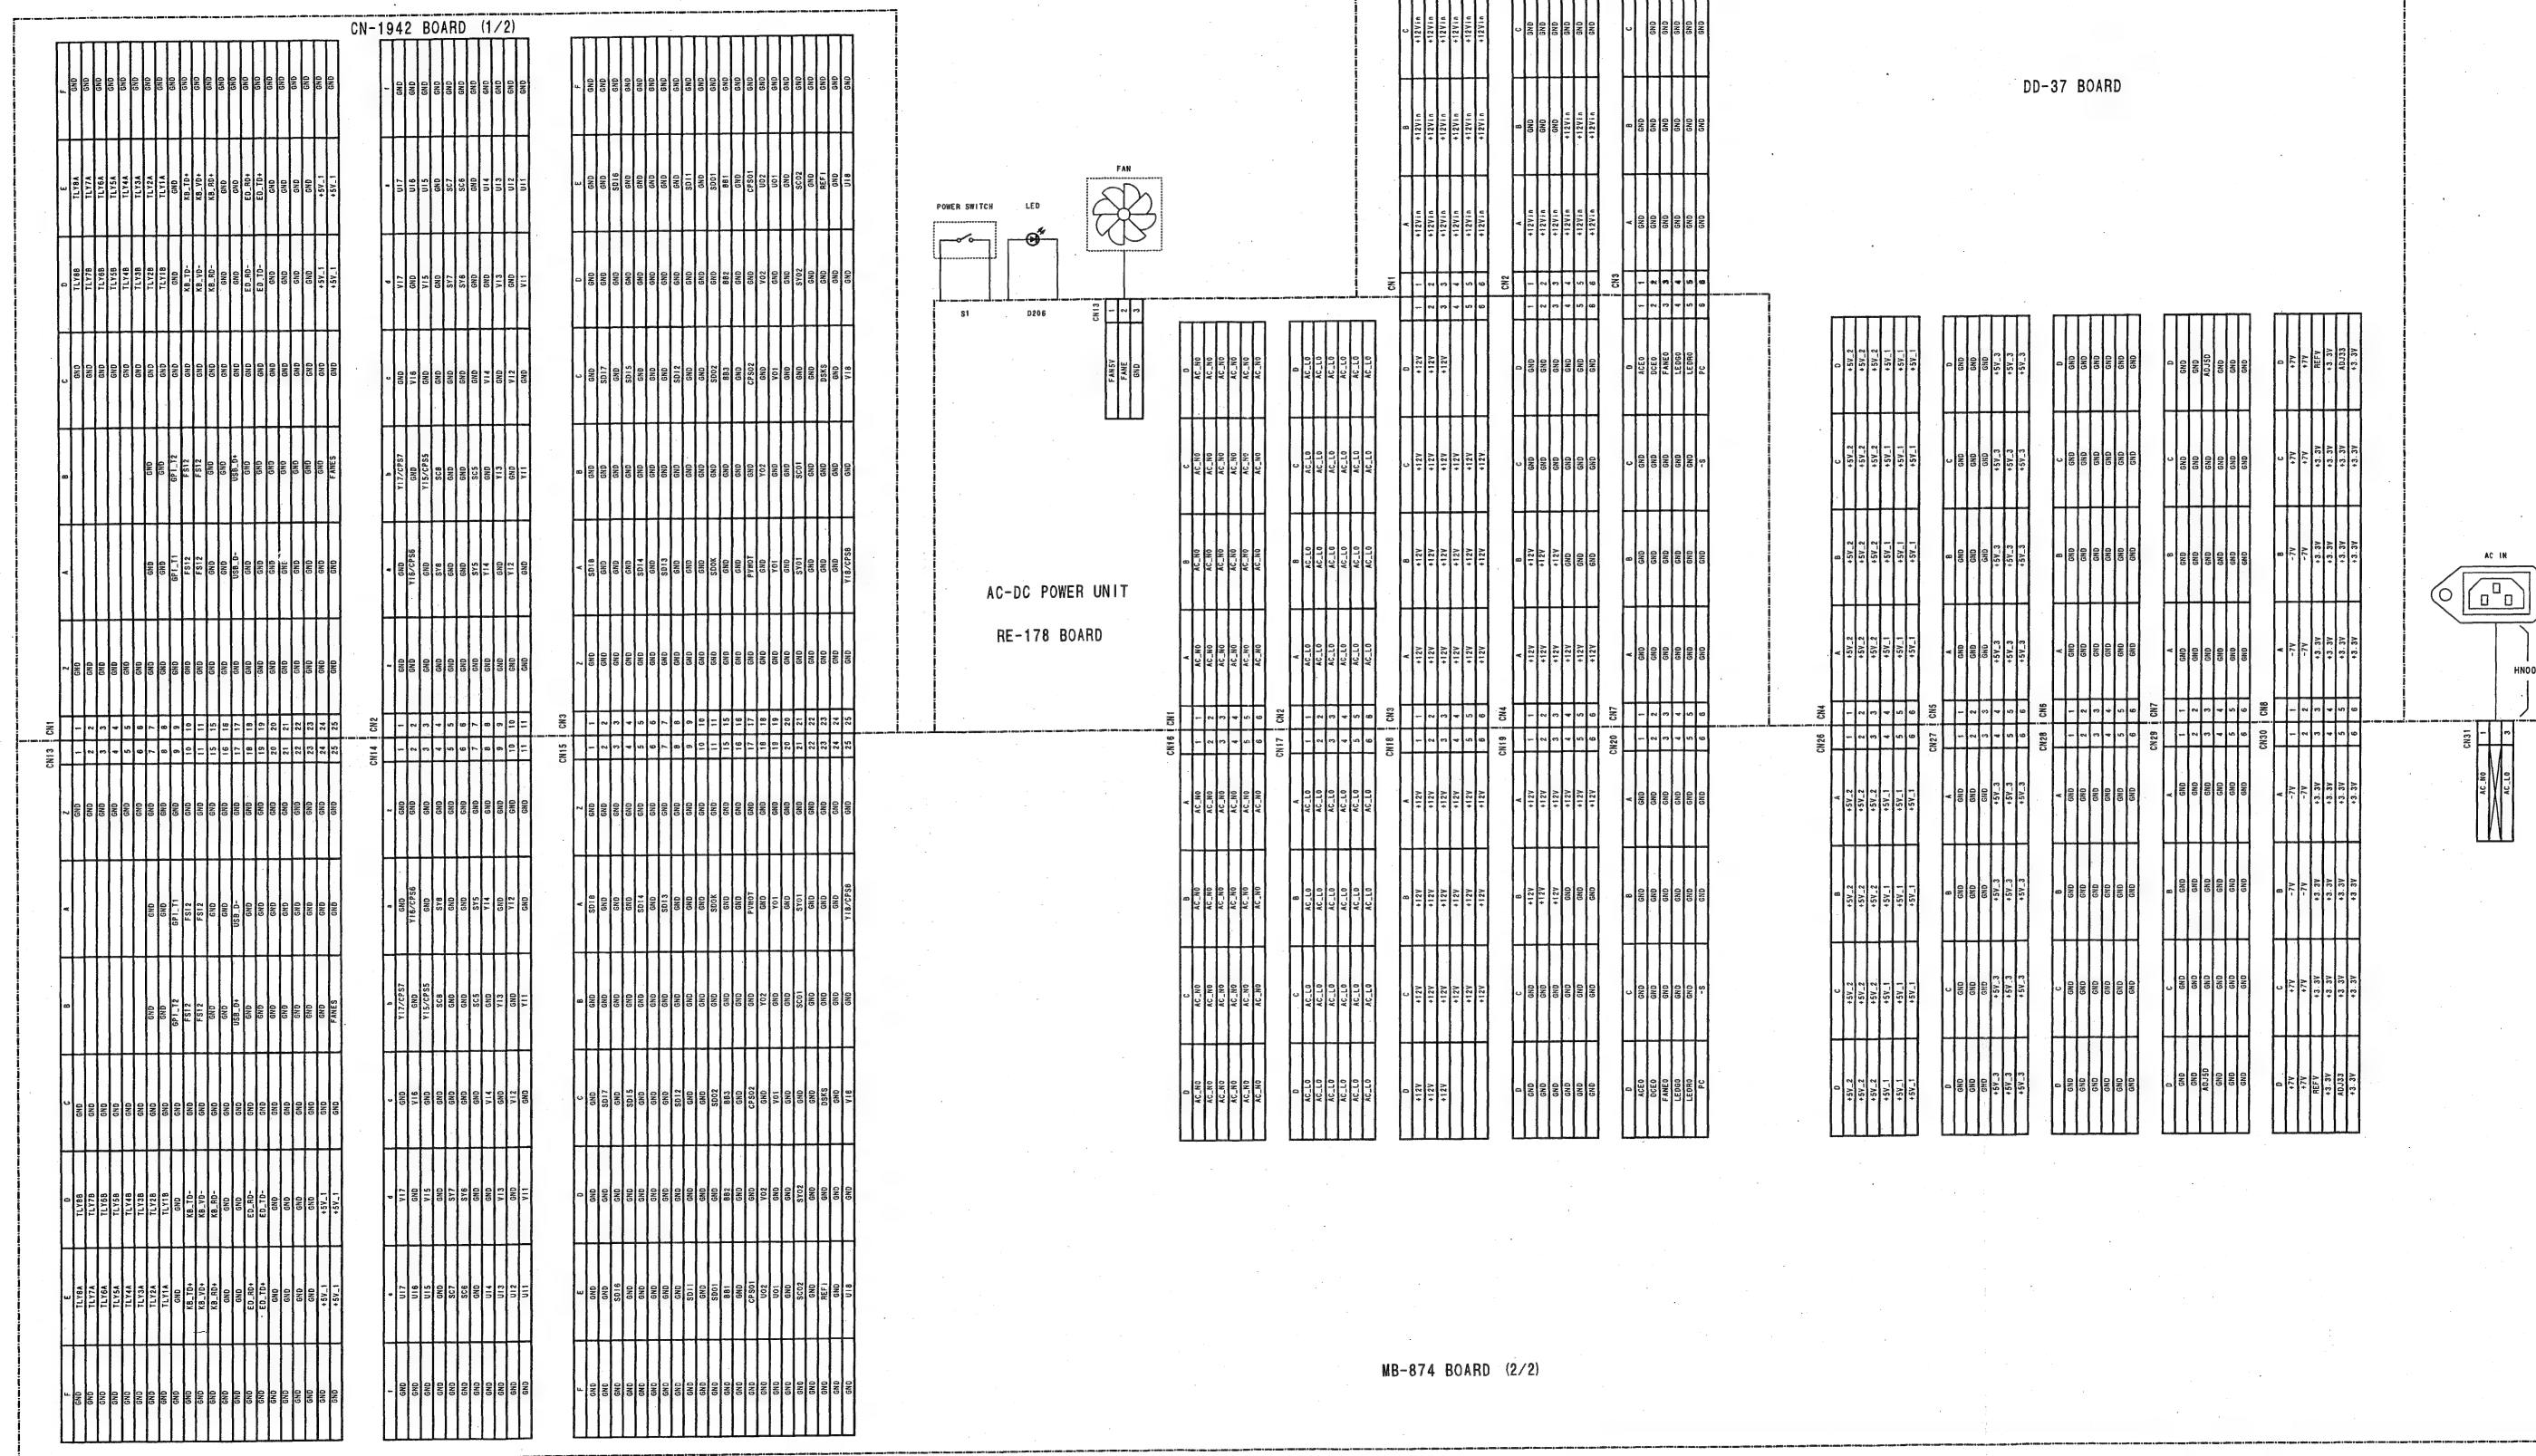



5

CN5 | CN36

CN6 CN37


CN7



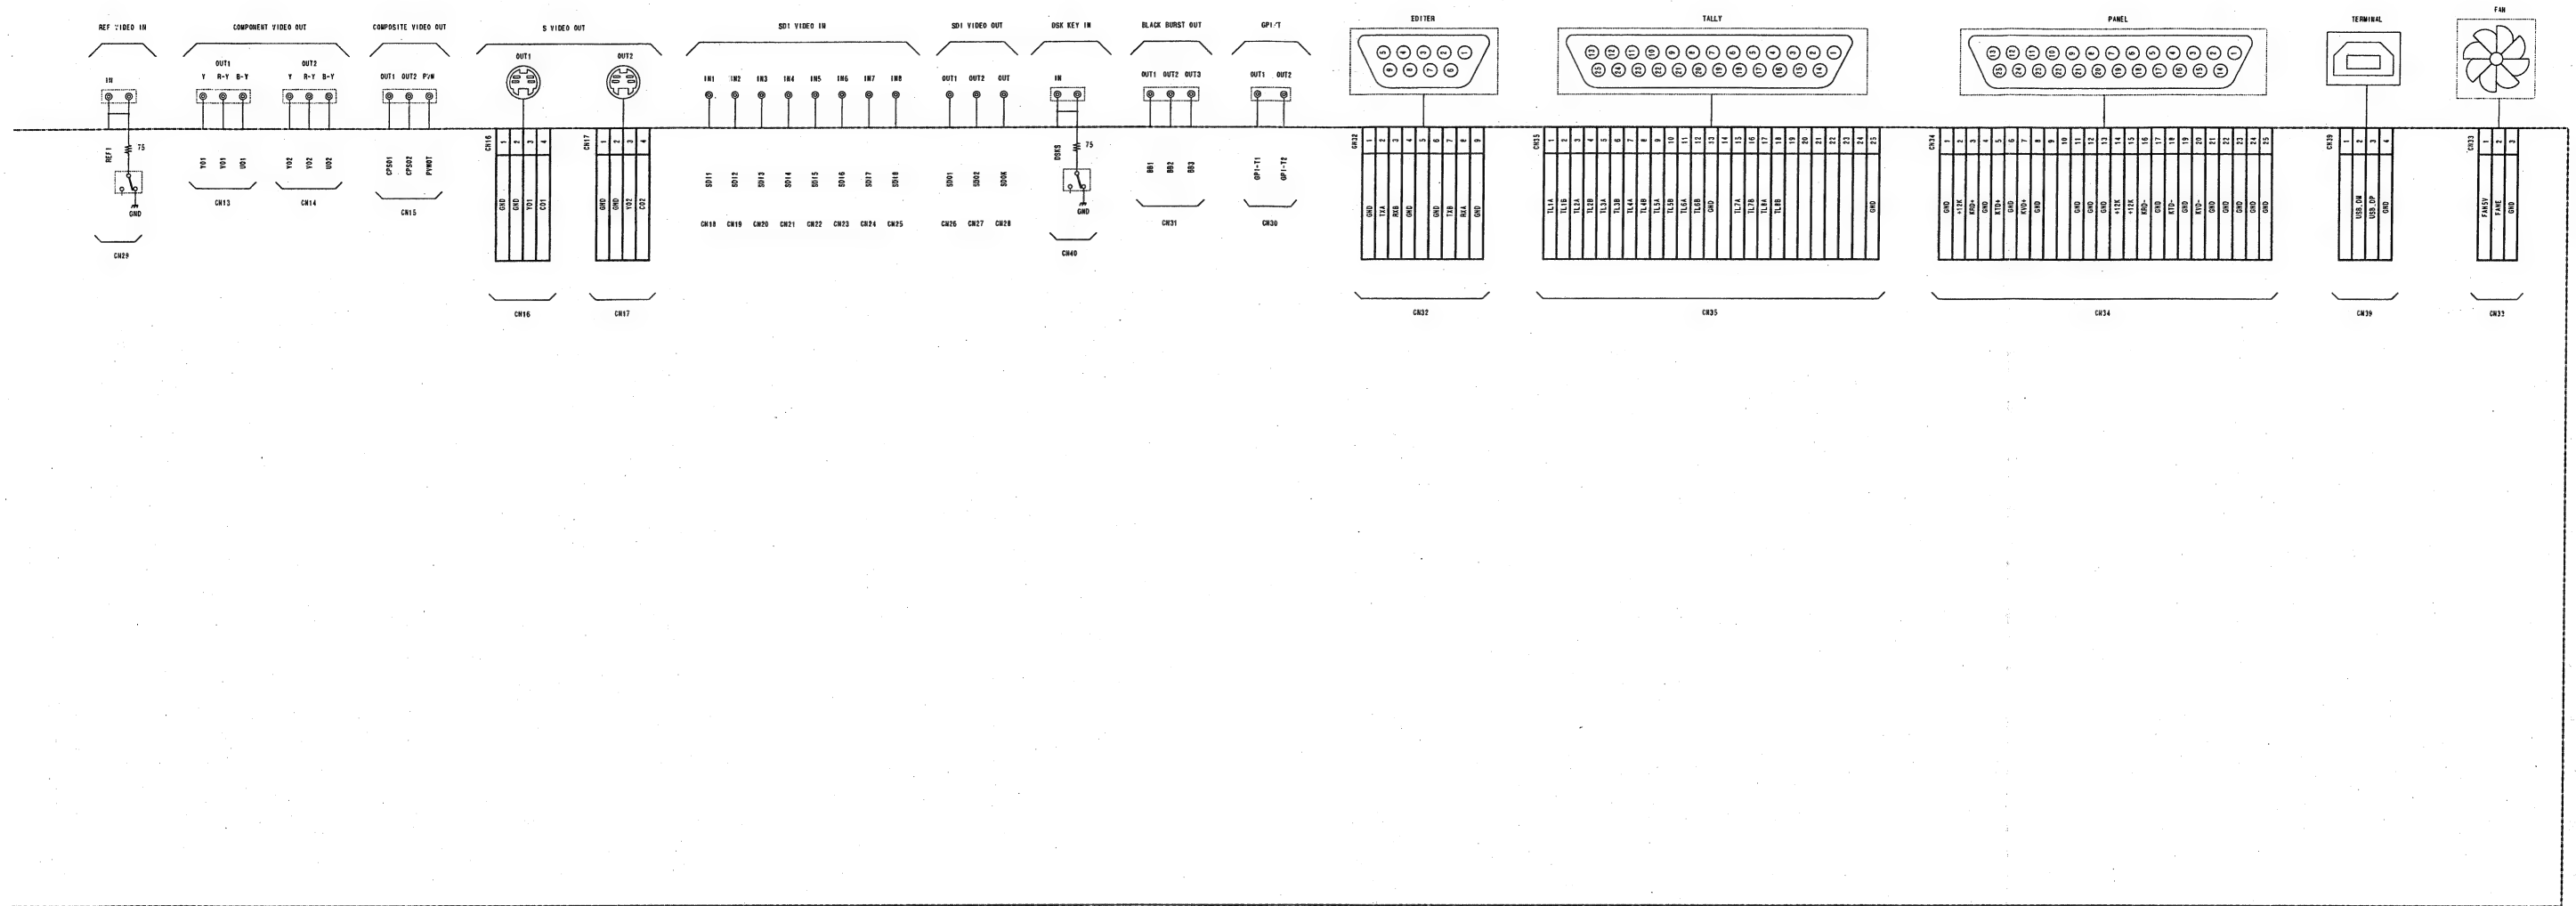

FRAME WIRING (3/4)
DFS-700/700P

Control Panel

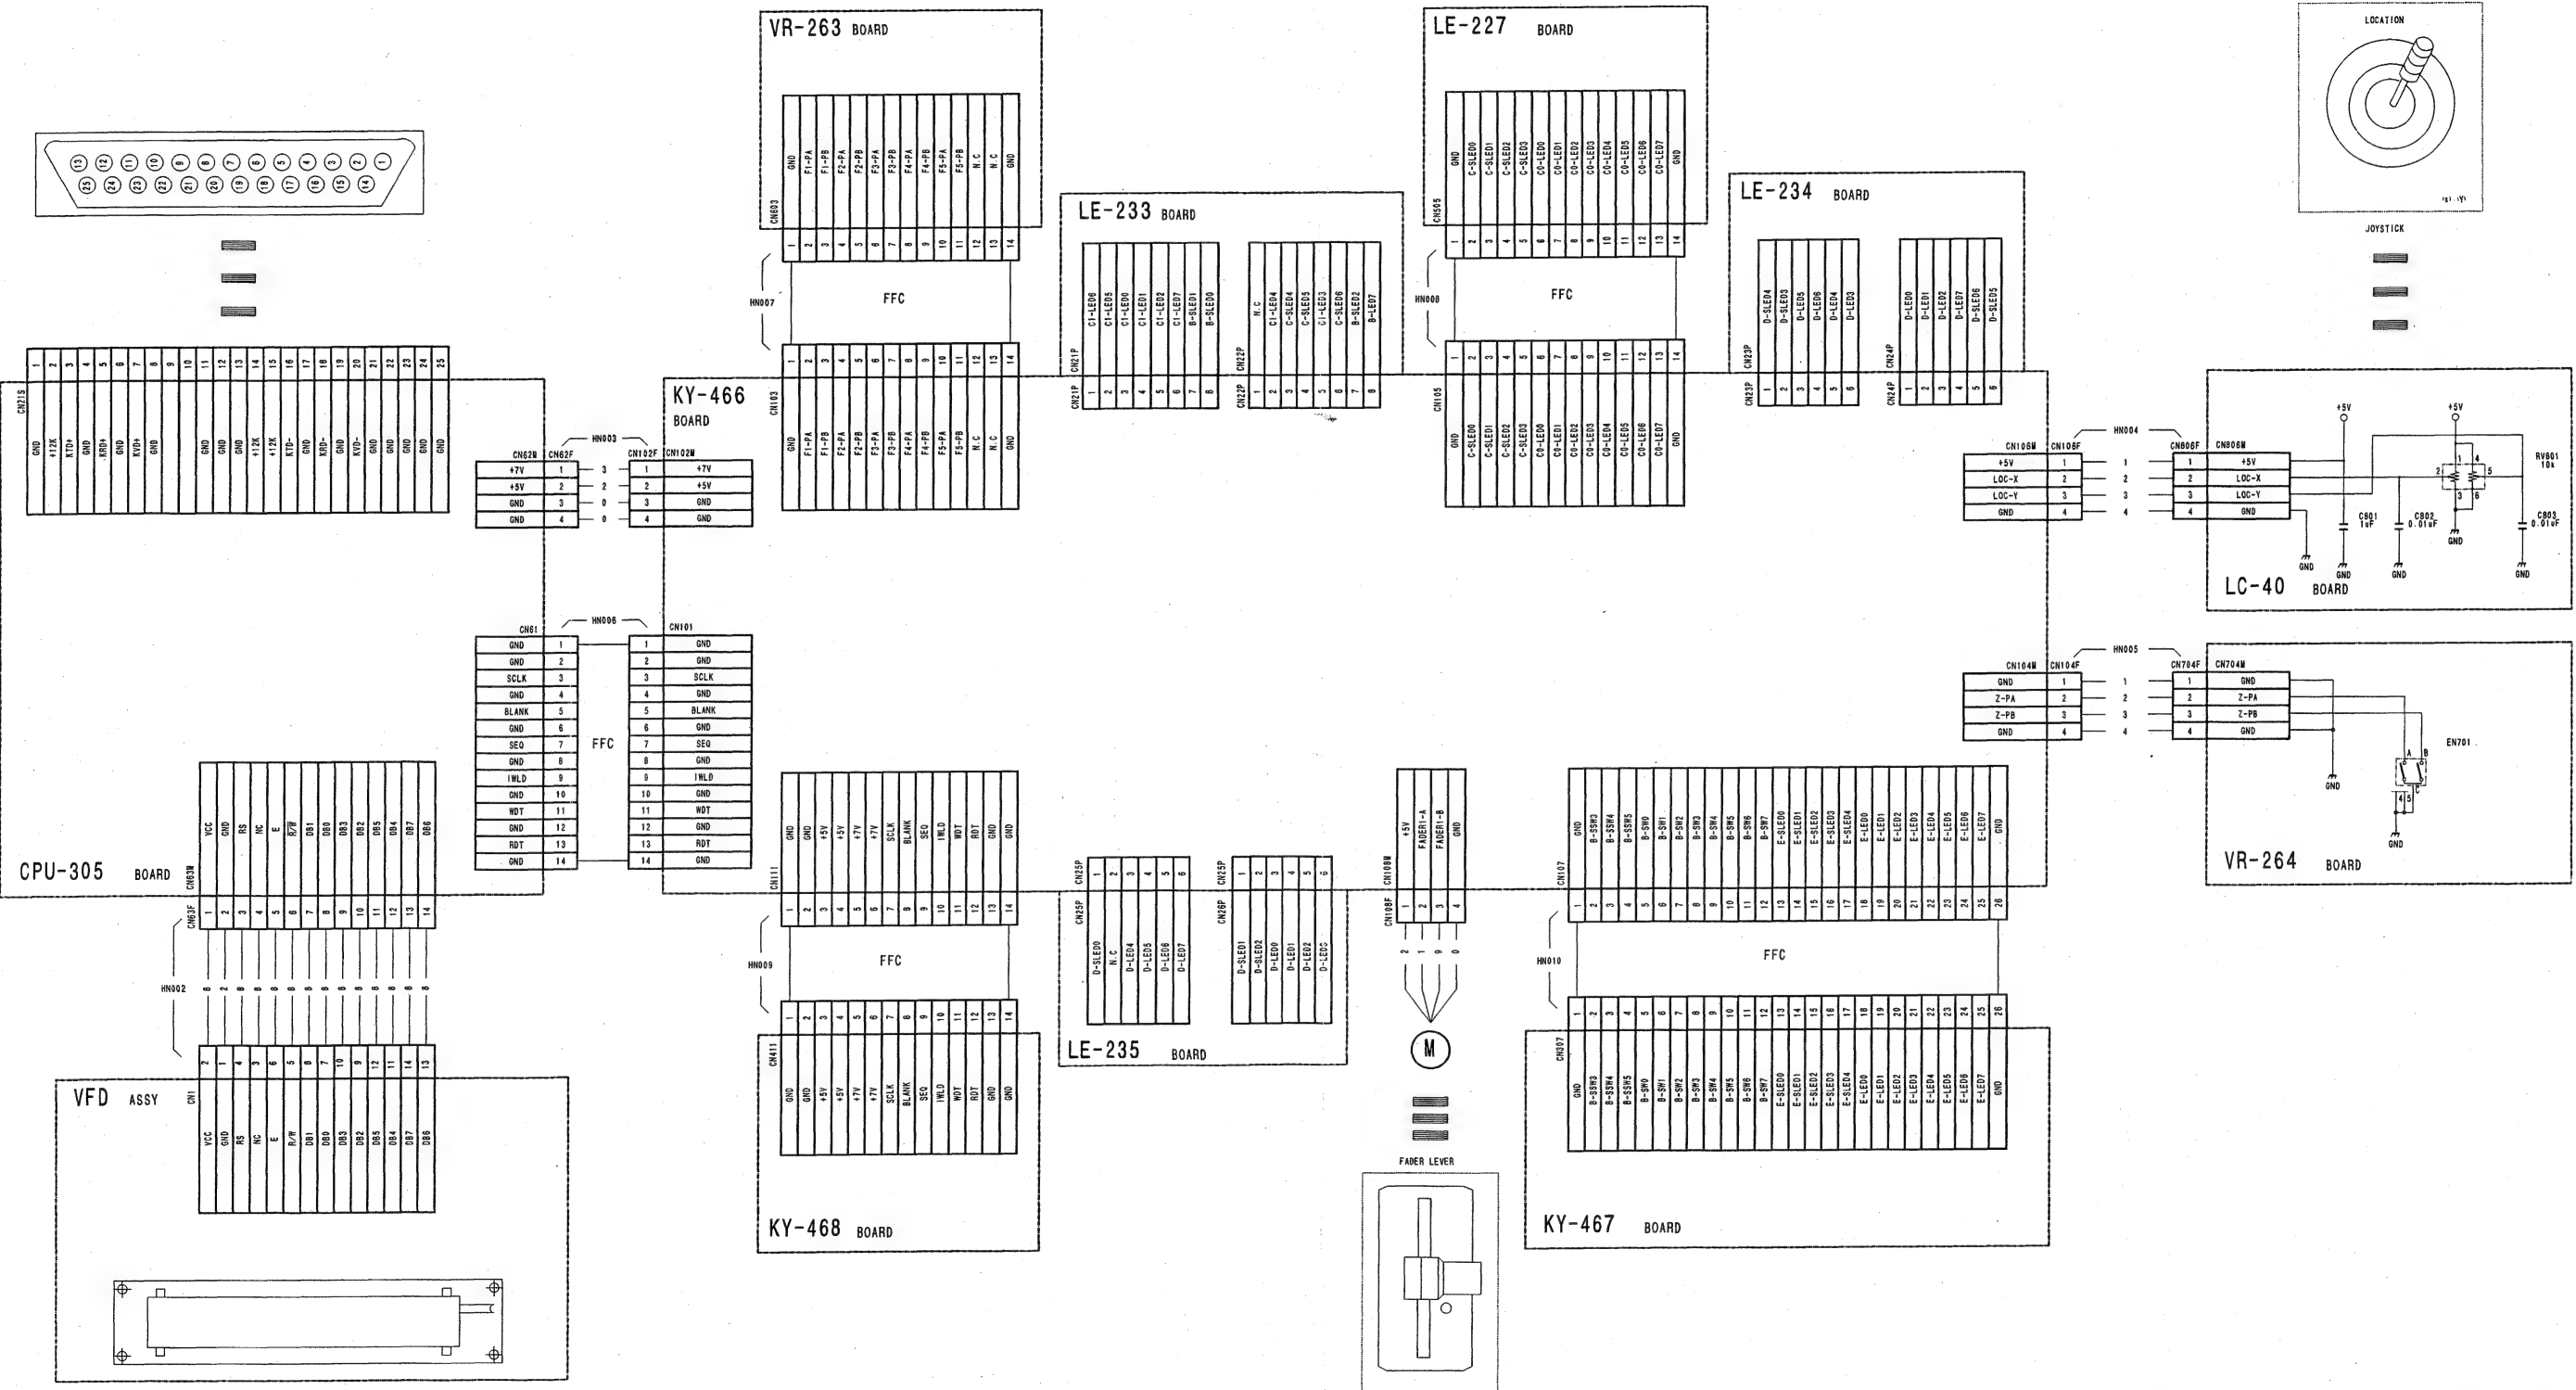

FRAME WIRING (4/4)
DFS-700/700P

DFS-700/700P

Section 5
Board Layouts

Index

DFS-700/700P (Processor)

Board Name	Function	Page
CN-1921	Connector Board	5-4
CN-1942	Connector Board	5-6
DD-37	DC-DC Conversion Board	5-9
IPM-96 (IPM-96P)	Input Processor Board	5-10
MB-874	Motherboard	5-19
OPM-39 (OPM-39P)	Output Processor Board	5-21
VSW-69 (VSW-69P)	Video Processor Board	5-37

DFS-700/700P (Control Panel)

Board Name	Function	Page
CPU-305	CPU Board	5-7
KY-466	Switch Board	5-14
KY-467	Switch Board	5-16
KY-468	Switch Board	5-17
LC-40	Joystick Board	5-18
LE-227	Display LED Board	5-18
LE-233	7-segment LED Board	5-18
LE-234	7-segment LED Board	5-18
LE-235	LED Board	5-18
VR-263	Volume Board	5-32
VR-264	Volume Board	5-32

BKDF-701

Board Name	Function	Page
VIF-20 (VIF-20P)	Digital Analog Input Board	5-28

BKDF-702/702P

Board Name	Function	Page
VIF-19 (VIF-19P)	Analog Composite Input Board	5-24

BKDF-711

Board Name	Function	Page
CMB-12	Digital Multi Effects Board	5-2


BKDF-712

Board Name	Function	Page
VSE-36	3D Video Mapping Effects Board	5-33

CMB-12 (1-677-104-11)

*B SIDE

C11	*K6	C352	*E3	IC316	*F3
C12	J2	C353	*F2	IC317	*G3
C13	K2	C401	*C4	IC318	*G4
C41	*B4	C402	*C4	IC319	*F4
C81	A2	C403	*D3	IC320	F2
C82	*A2	C404	*B5	IC321	*F1
C83	B1	C405	*C3	IC322	*G1
C84	*B1	C411	*D5	IC323	*G2
C85	G4	C415	*D3	IC324	*F2
C86	G2	C421	*C5	IC402	*C4
C87	B4	C425	*D2	IC403	*C3
C88	K2	C431	*D4	IC404	*B4
C91	A1	C435	*C3	IC406	C4
C92	*A1	C451	*B4	IC407	C3
C94	*A1	C452	*C2	IC451	B4
C95	D4	C453	B1	IC452	D2
C96	L2	C454	D1	IC453	*B1
C97	L6	C455	C1	IC454	*D1
C98	D6	C456	B2	IC455	*C1
C100	L2	C457	*C2	IC456	*B2
C101	L3	C458	*B3	IC457	B2
C102	L2			IC458	B3
C103	*L3	CN101	*A3		
C104	*B5	CN102	*M3	L1	A2
C105	*L1			L2	A1
C106	*M2	E1	G4		
C107	*M2	E2	C2	PS2	A1
C108	*L2	E3	K5		
C109	*L2	E4	L2	R101	*L6
C110	*L2	E5	D6	R102	*L6
C111	K1			R103	*L3
C112	*K2	F1	A2	R104	*B5
C113	*M4			R105	*J3
C114	*B6	IC11	K6	R106	*K2
C122	*J3	IC12	J1	R401	*C4
C123	*L3	IC13	K1	R402	*C4
C124	A5	IC41	B4	R403	*D4
C132	*J2	IC100	*L2	R404	*C2
C133	*L3	IC101	*L2	R701	*D4
C134	*B6	IC102	*L2	R702	*C4
C142	*K3	IC103	L3	R703	*C4
C201	*L5	IC104	B6	R704	*C4
C202	*L6	IC105	L1	R705	*C4
C203	*M6	IC106	M1	R706	*C4
C204	*K6	IC107	*M1		
C205	*K4	IC108	*L1	RB101	*B4
C206	*K5	IC109	*L1	RB102	*B4
C207	H6	IC110	*L1	RB103	*B5
C208	*H5	IC111	*K1	RB104	*M2
C209	*H5	IC113	K3	RB105	*L3
C210	*J5	IC201	L5	RB106	*L3
C211	J6	IC202	L6	RB107	*L3
C212	H6	IC203	M6	RB108	*M3
C213	H6	IC204	K6	RB109	*M3
C214	H4	IC205	K4	RB110	B5
C215	*H3	IC206	K5	RB201	*M2
C216	*H3	IC207	H5	RB202	*K6
C217	*J3	IC208	*H5	RB203	*K3
C218	J4	IC209	*H5	RB401	*B4
C219	H4	IC210	*J5	RB402	*B3
C220	H4	IC211	*J6	RB403	*B3
C221	H2	IC212	*H6	RB404	*M4
C222	*H1	IC213	*H6	RB405	*M4
C223	*H1	IC214	H3	RB701	*D4
C224	*J1	IC215	*H3	RB702	*D4
C225	J2	IC216	*H3	RB703	*C4
C226	H2	IC217	*J3	RB704	*C4
C227	H2	IC218	*J4	RB705	*C4
C301	*C5	IC219	*H4		
C302	*D6	IC220	*H4	TP101	C6
C303	*C6	IC221	H2	TP102	A6
C304	A6	IC222	*H1	TP103	L4
C305	*B6	IC223	*H1	TP104	L4
C306	*D2	IC224	*J1	TP105	M4
C307	*D2	IC225	*J2	TP106	L4
C308	E1	IC226	*H2	TP107	L4
C309	E1	IC227	*H2		
C310	*E5	IC301	C6		
C311	*F5	IC302	*D6		
C312	G5	IC303	*C6		
C313	G6	IC304	*A6		
C314	*F5	IC305	*B6		
C315	*F4	IC306	*E2		
C316	*F3	IC307	*E2		
C317	G3	IC308	*E1		
C318	G4	IC309	*E1		
C319	*F3	IC310	F5		
C321	*F1	IC311	*F5		
C322	G1	IC312	*G5		
C323	G2	IC313	*G6		
C324	*F2	IC314	*F6		
C351	*F6	IC315	F3		

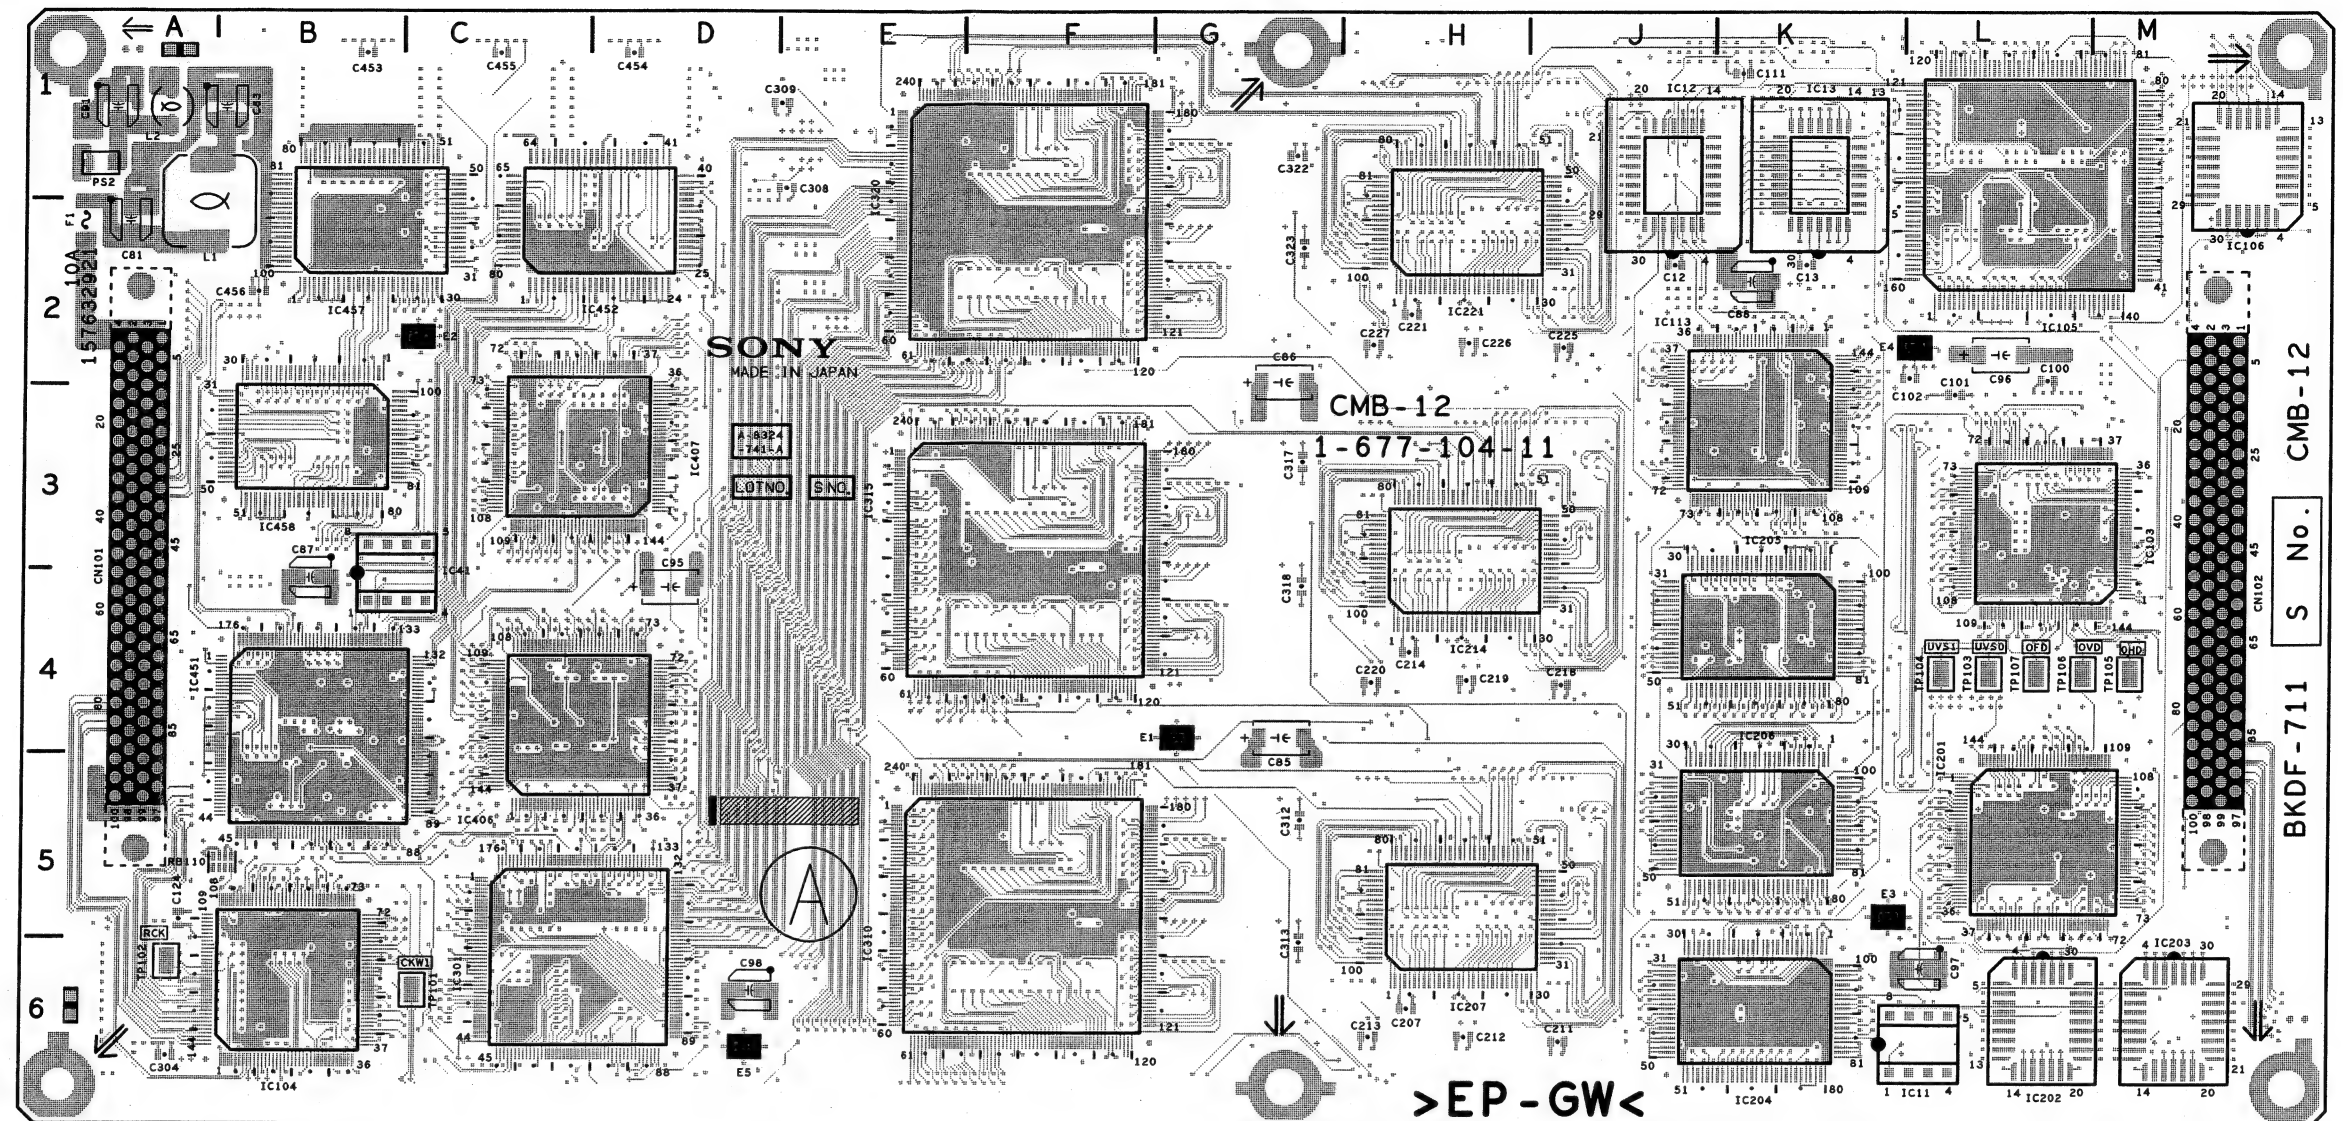


BKDF-711 (J) : S/N 30001 and Higher
 BKDF-711 (UC) : S/N 10001 and Higher
 BKDF-711 (CE) : S/N 40001 and Higher

CMB-12 -A SIDE-
 SUFFIX: -11



CMB-12 -B SIDE-
SUFFIX: -11

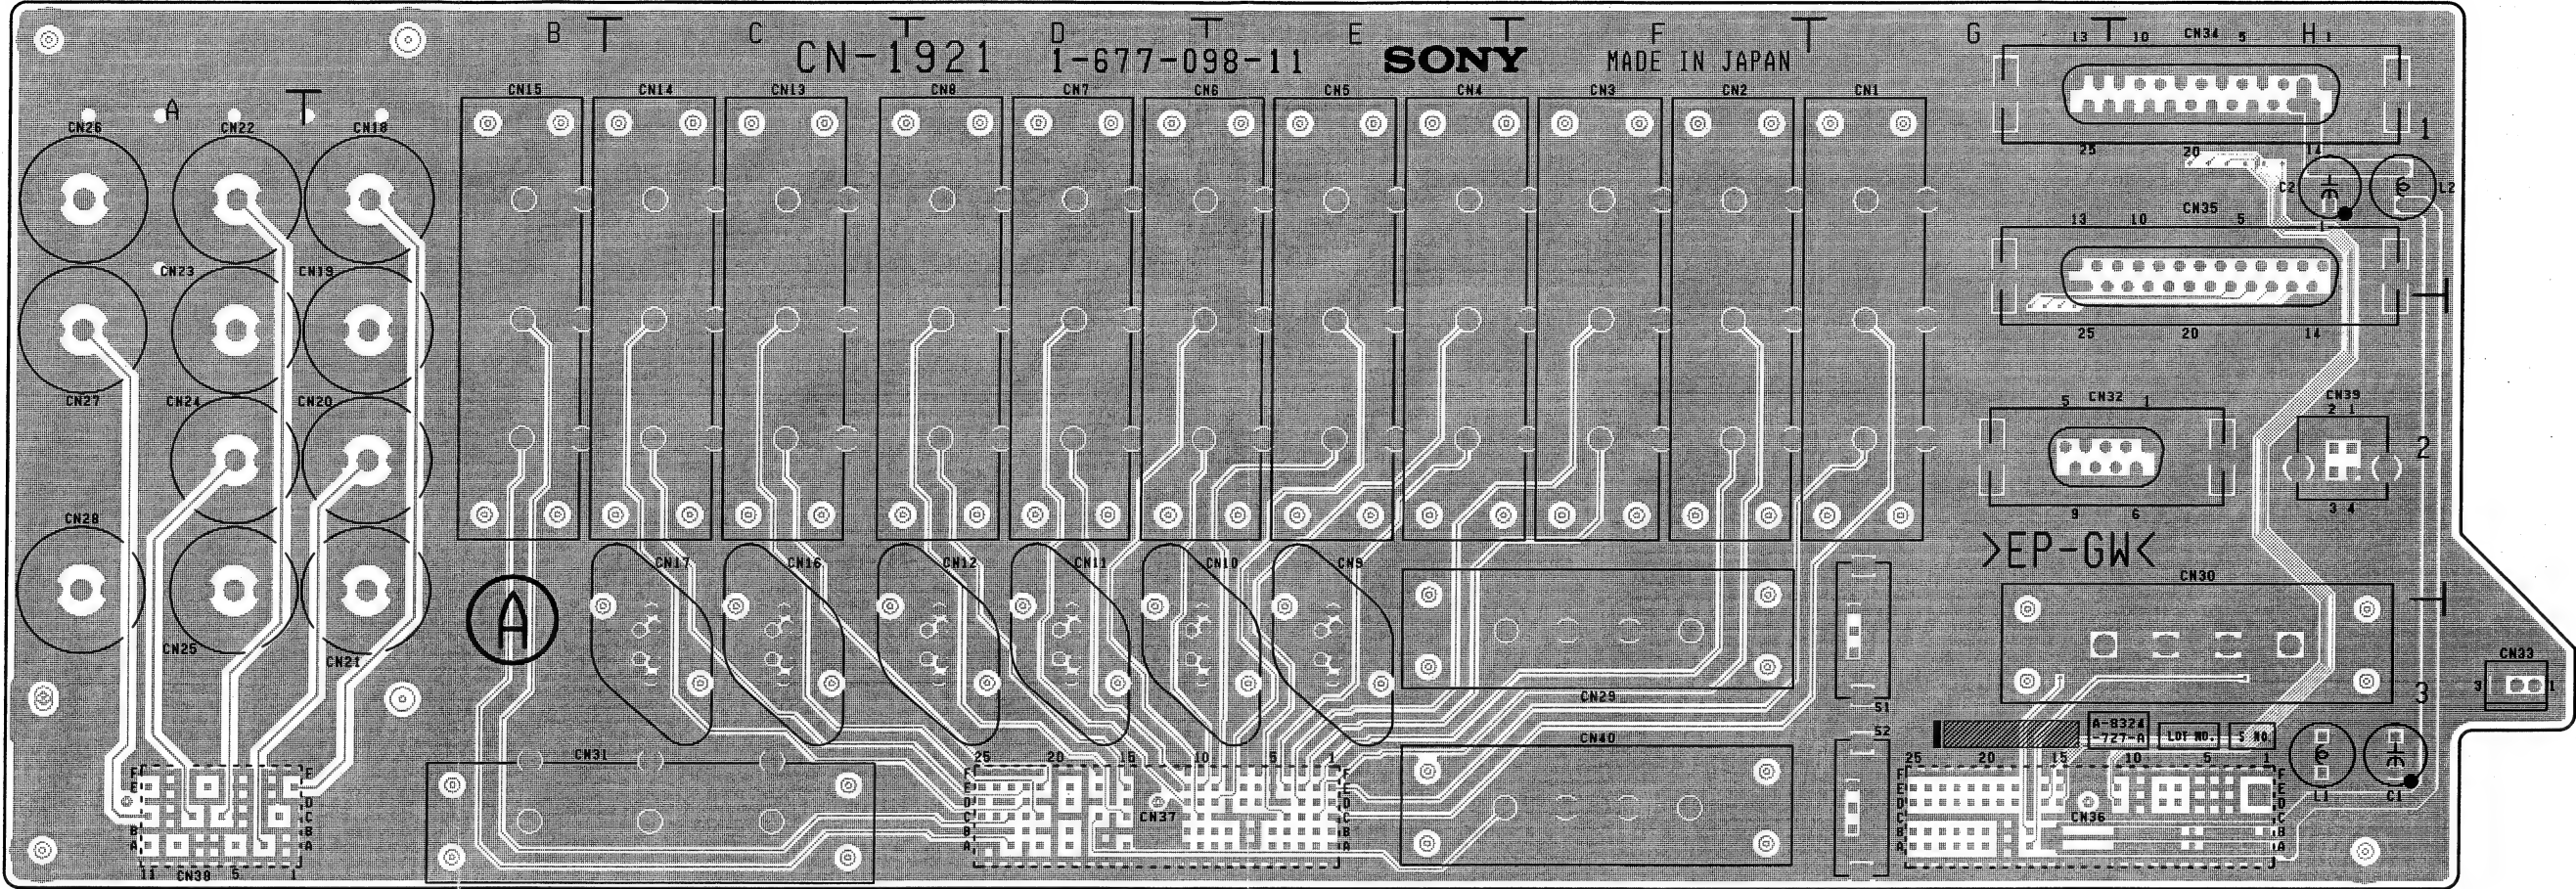


DFS-700 (J) : S/N 30001 and Higher
DFS-700 (UC) : S/N 10001 and Higher
DFS-700P (CE) : S/N 40001 and Higher

CN-1921 -A SIDE-
SUFFIX: -11


CN-1921 (1-677-098-11)

*:B SIDE

C1	H3	CN33	H3	FB27	*G2
C2	H1	CN34	H1	FB28	*G2
		CN35	H1	FB29	*H2
CN1	G2	CN36	*G3	FB30	*H2
CN2	F2	CN37	*D3		
CN3	F2	CN38	*A3	L1	H3
CN4	E2	CN39	H2	L2	H1
CN5	E2	CN40	F3		
CN6	E2			R1	*F3
CN7	D2	FB1	*H3	R2	*F3
CN8	D2	FB2	*G3	S1	G3
CN9	E3	FB3	*H2	S2	G3
CN10	D3	FB4	*G2		
CN11	D3	FB5	*H2		
CN12	D3	FB6	*G2		
CN13	C2	FB7	*H1		
CN14	C2	FB8	*H1		
CN15	B2	FB9	*H1		
CN16	C3	FB10	*H1		
CN17	C3	FB11	*H1		
CN18	B1	FB12	*H1		
CN19	B2	FB13	*H2		
CN20	B2	FB14	*H2		
CN21	B2	FB15	*H2		
CN22	A1	FB16	*H2		
CN23	A2	FB17	*H2		
CN24	A2	FB18	*H2		
CN25	A2	FB19	*H2		
CN26	A1	FB20	*H2		
CN27	A2	FB21	*H2		
CN28	A2	FB22	*H2		
CN29	F3	FB23	*H2		
CN30	H3	FB24	*G2		
CN31	C3	FB25	*G2		
CN32	H2	FB26	*G2		

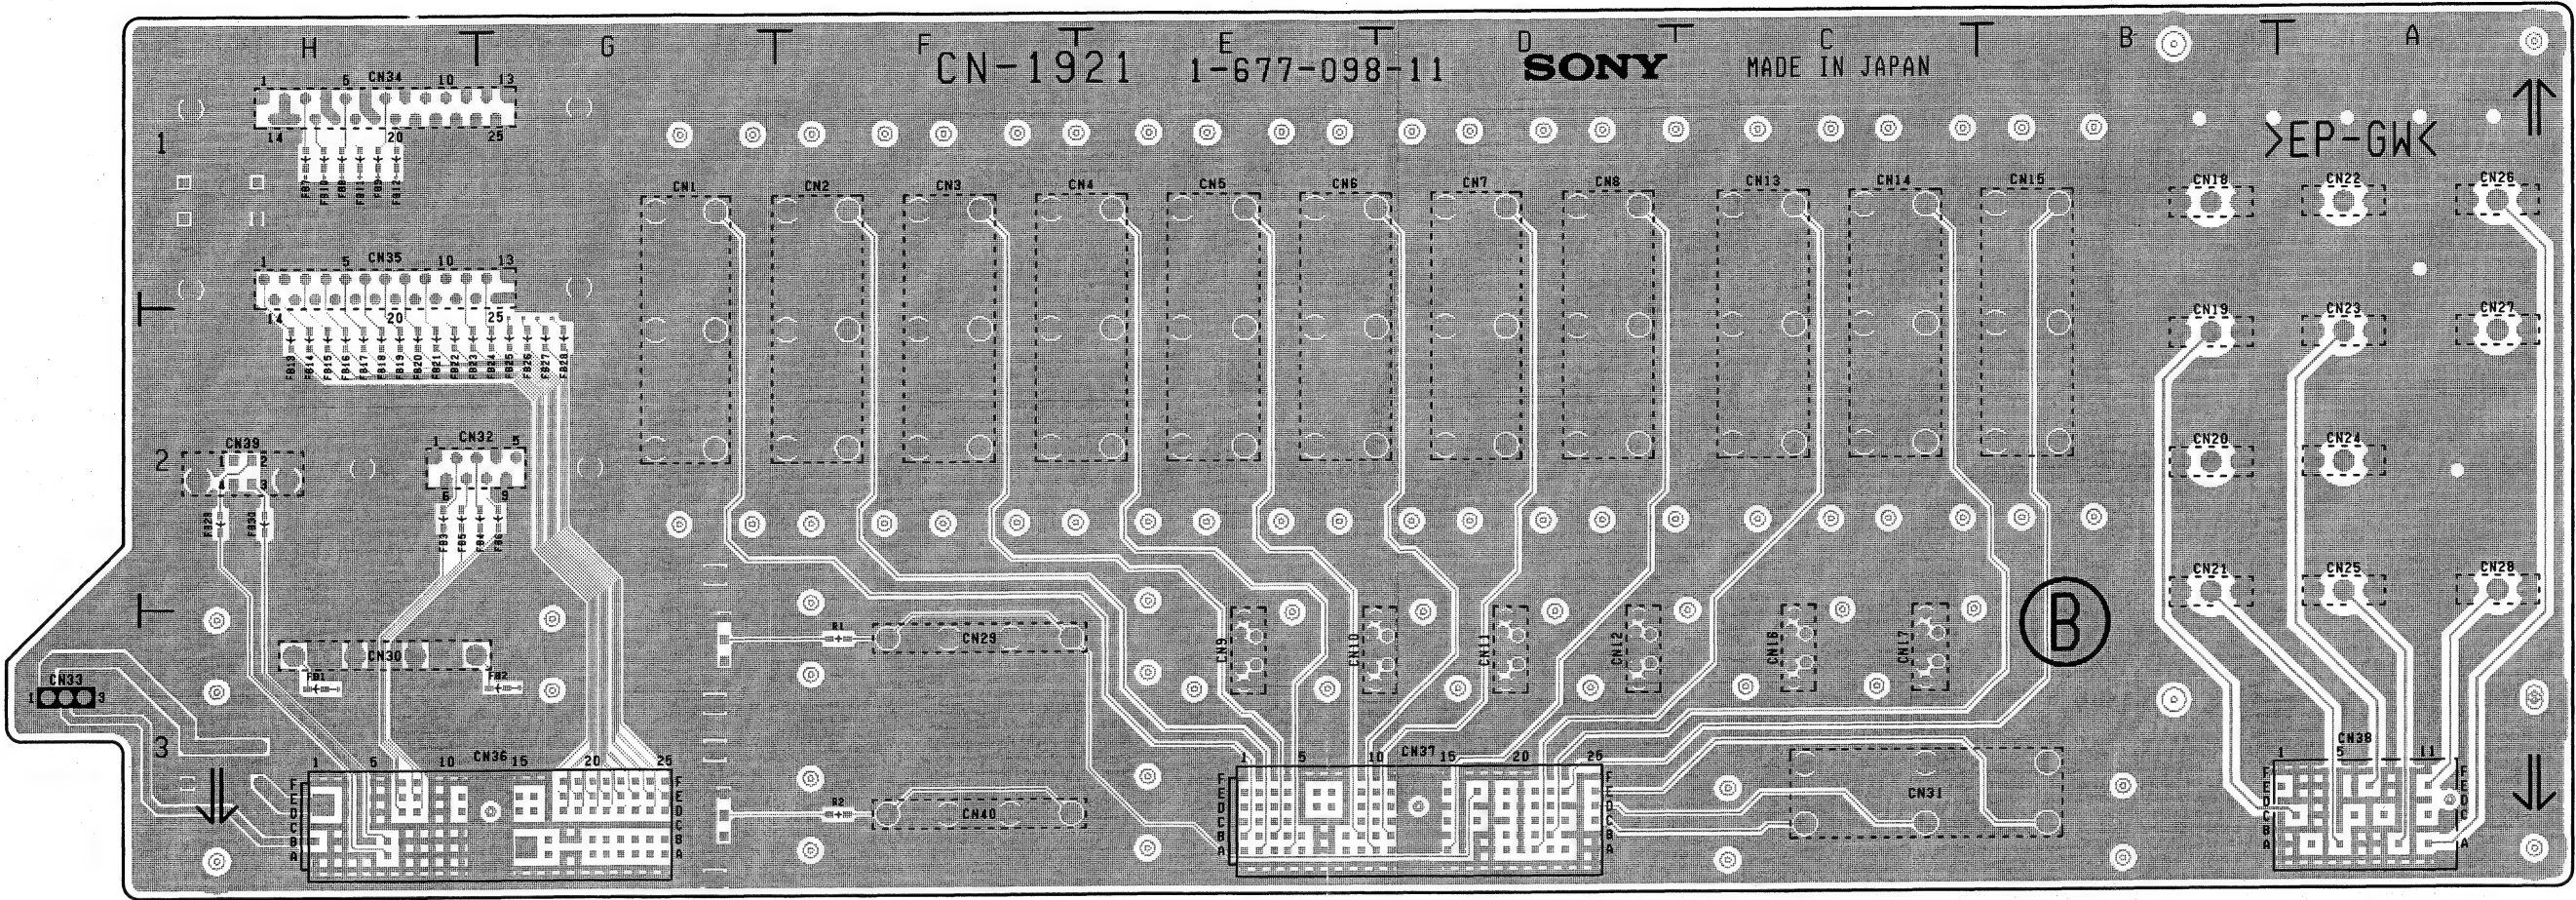

CN-1921 -B SIDE-
SUFFIX: -11

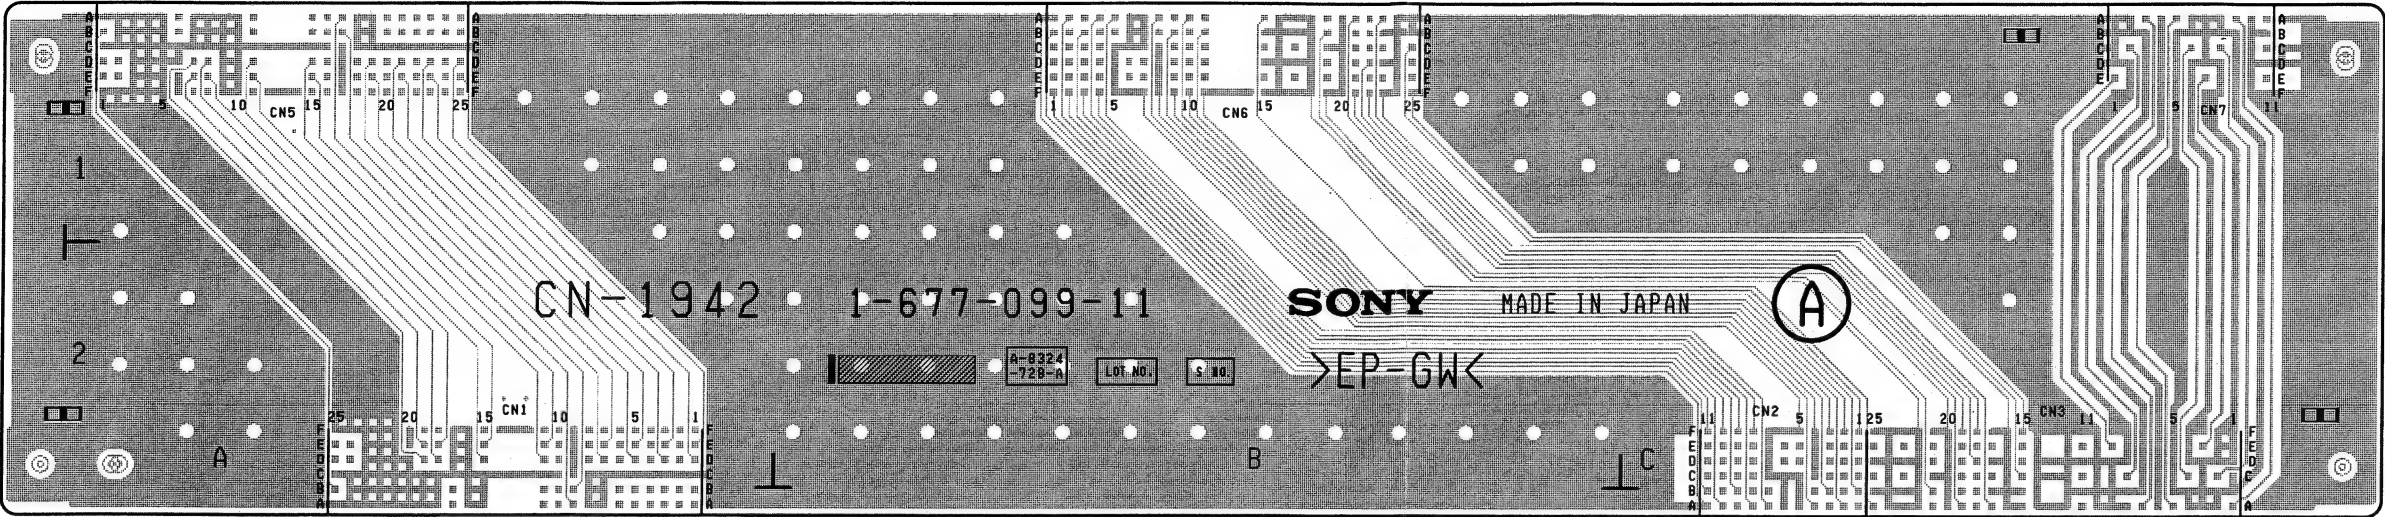


DFS-700 (J) : S/N 30001 and Higher
DFS-700 (UC) : S/N 10001 and Higher
DFS-700P (CE) : S/N 40001 and Higher


CN-1942 -A SIDE-
SUFFIX: -11

CN-1942 (1-677-099-11)

CN1	A2
CN2	C2
CN3	C2
CN5	A1
CN6	B1
CN7	C1

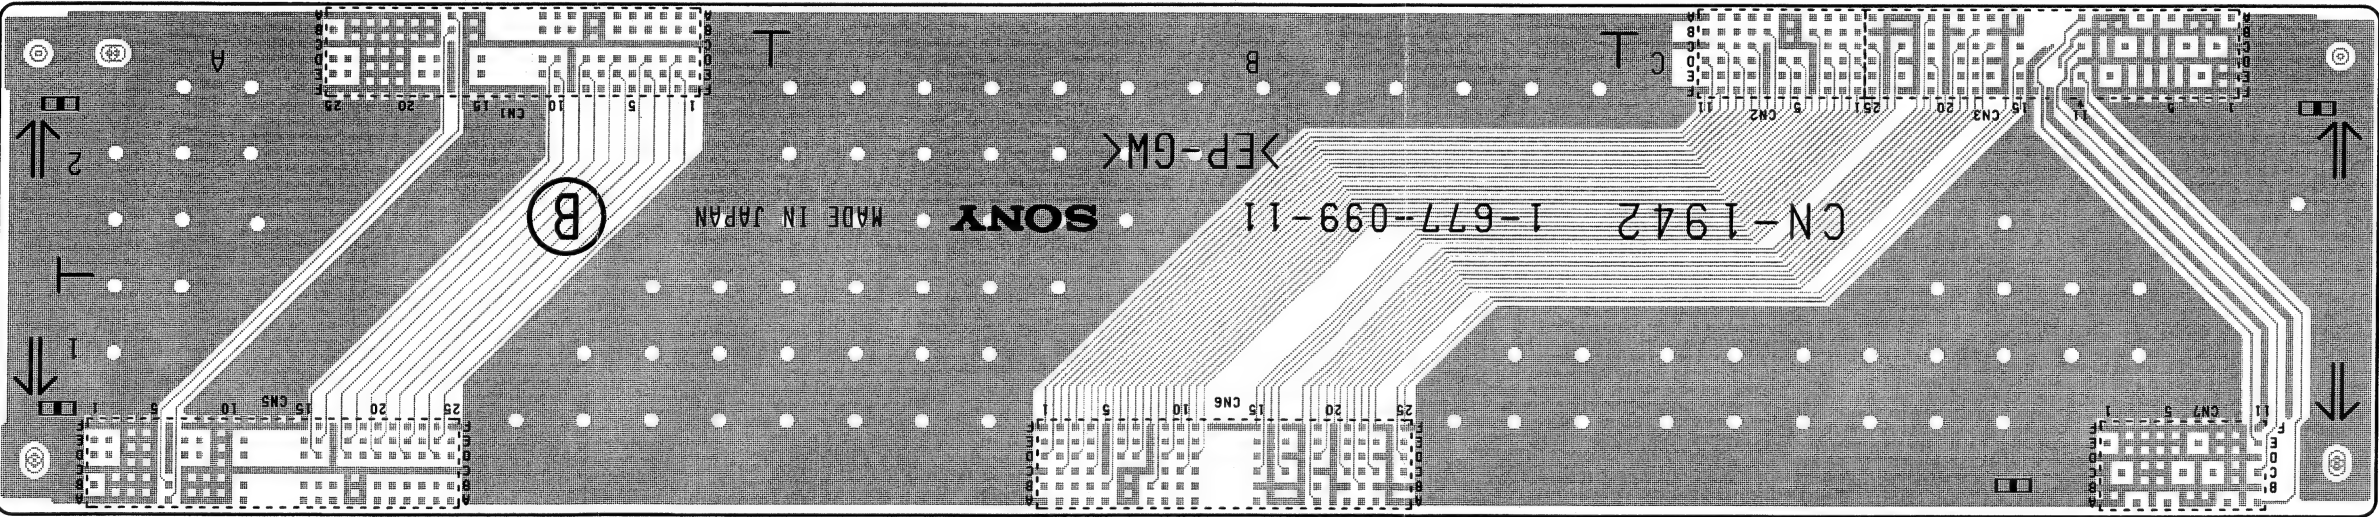


CN-1942 -B SIDE-
SUFFIX: -11

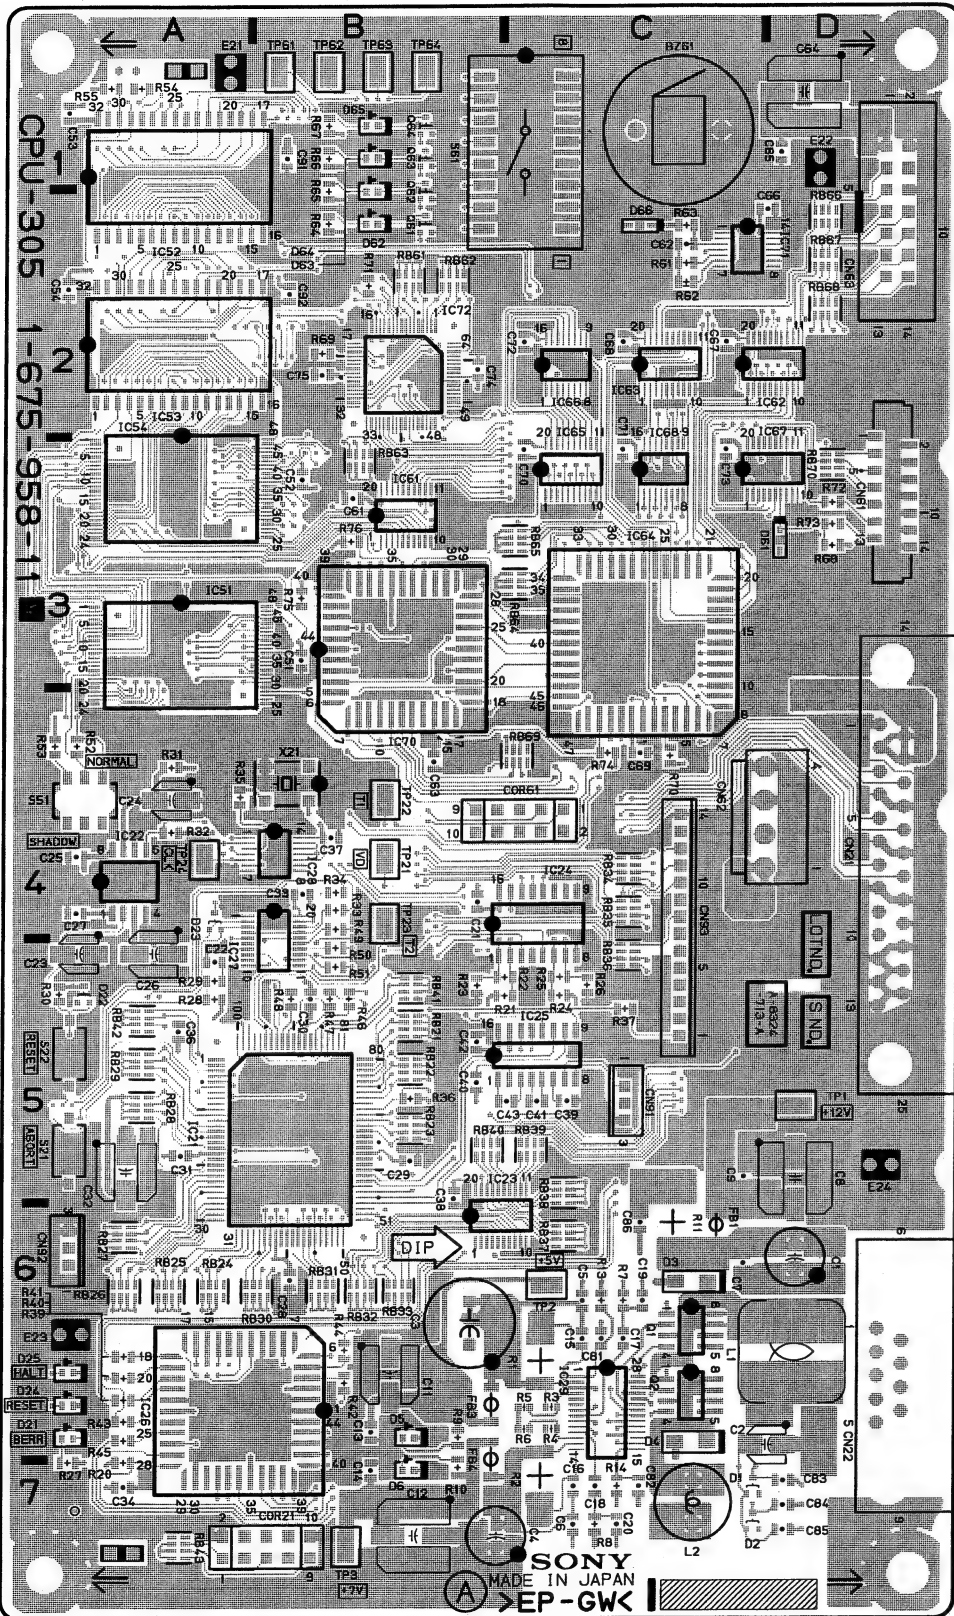

DFS-700 (J) : S/N 30001 and Higher
DFS-700 (UC) : S/N 10001 and Higher
DFS-700P (CE) : S/N 40001 and Higher


CPU-305 -A SIDE-
SUFFIX: -11

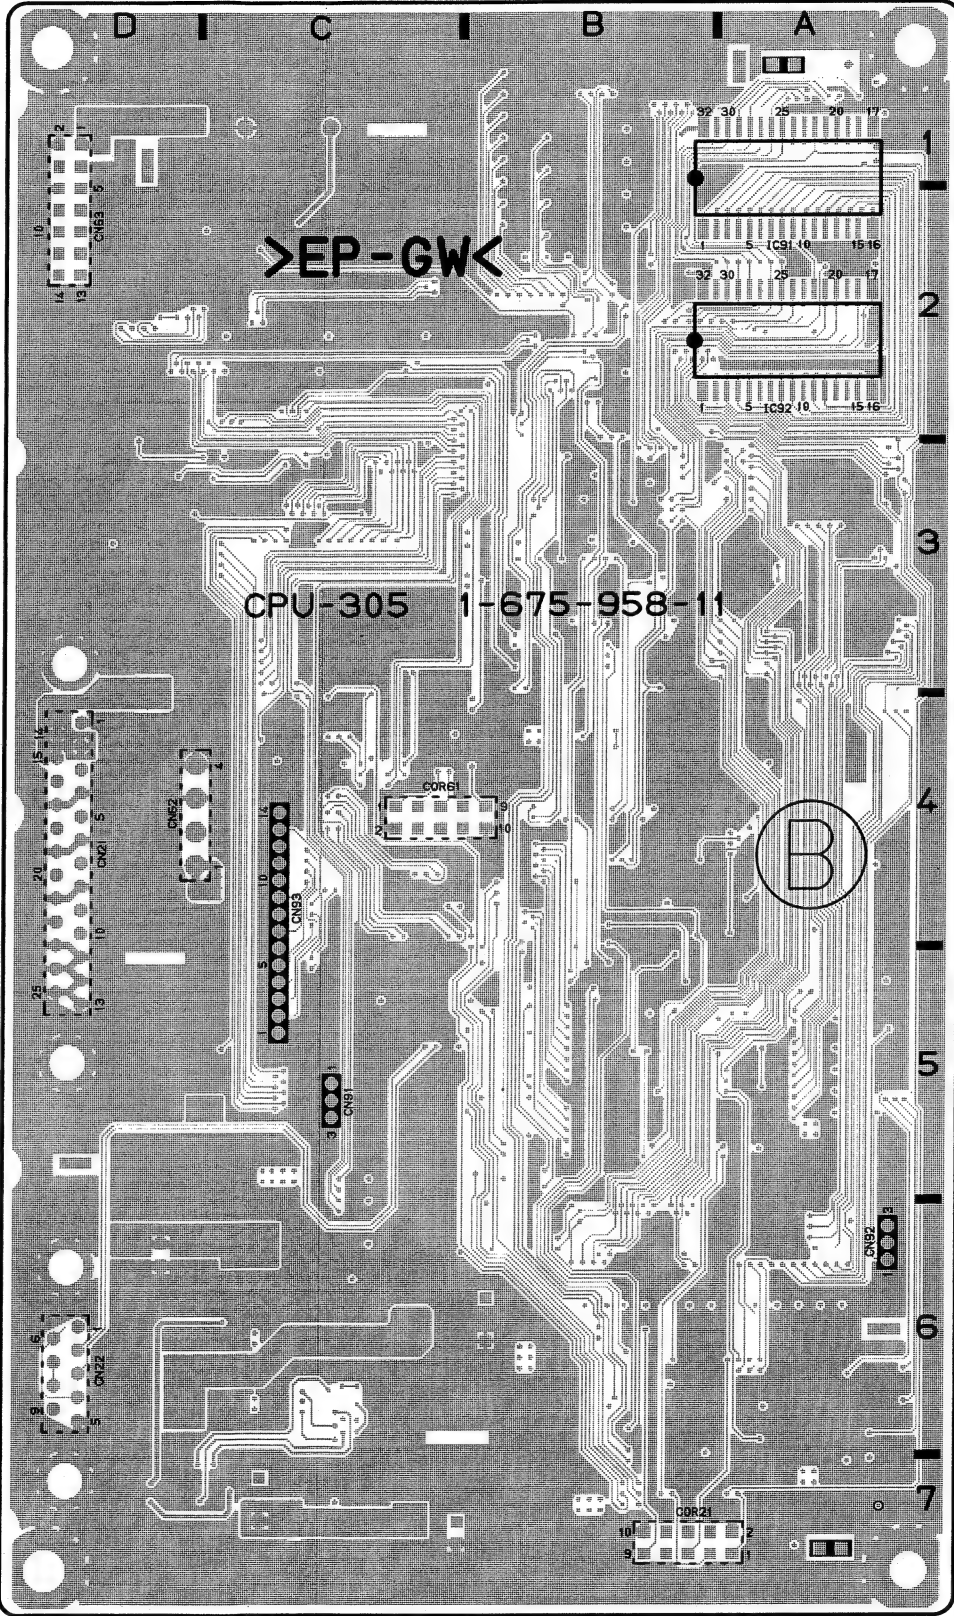

CPU-305 -B SIDE-
SUFFIX: -11


CPU-305 (1-675-958-11)
*:B SIDE

BZ61	C1	D24	A6	R45	A6
C1	D6	D25	A6	R46	B5
C2	D6	D61	D3	R47	B5
C3	B6	D62	B2	R48	B5
C4	B7	D63	B2	R49	B4
C5	C6	D64	B1	R50	B5
C6	C7	D65	B1	R51	B5
C7	C6	D66	C2	R52	A4
C8	D5	E21	A1	R53	A4
C9	C5	E22	D1	R54	A1
C11	B6	E23	A6	R55	A1
C12	B7	E24	D5	R61	C2
C13	B6			R62	C2
C14	B7	FB1	C6	R63	C2
C15	C6	FB3	B6	R64	B2
C16	C7	FB4	B6	R65	B2
C17	C6			R66	B1
C18	C7	IC21	B5	R67	B1
C19	C6	IC22	A4	R68	D3
C20	C7	IC23	B6	R69	B2
C21	B4	IC24	B5	R70	C4
C22	A5	IC25	B5	R71	B2
C23	A5	IC26	A6	R72	D3
C24	A4	IC27	A4	R73	D3
C25	A4	IC28	A4	R74	C4
C26	A5	IC29	C6	R75	B3
C27	A4	IC51	A3	R76	B3
C28	B6	IC52	A2	RB21	B5
C29	B5	IC53	A2	RB22	B5
C30	B5	IC54	A3	RB23	B5
C31	A5	IC61	B3	RB24	A6
C32	A5	IC62	C2	RB25	A6
C33	B4	IC63	C2	RB26	A6
C34	A7	IC64	C3	RB27	A6
C36	A5	IC65	C3	RB28	A5
C37	B4	IC66	C2	RB29	A5
C38	B5	IC67	C3	RB30	B6
C39	C5	IC68	C3	RB31	B6
C40	B5	IC70	B3	RB32	B6
C41	C5	IC71	C2	RB33	B6
C42	B5	IC72	B2	RB34	C4
C43	C5	IC91	*B2	RB35	C4
C51	B3	IC92	*B2	RB36	C5
C52	B3			RB37	C6
C53	A1	L1	D6	RB38	C5
C54	A2	L2	C7	RB39	C5
C61	B3			RB40	B5
C62	C2	Q1	C6	RB41	B5
C63	B4	Q2	C6	RB42	A5
C64	D1	Q61	B2	RB43	A7
C65	D1	Q62	B2	RB61	B2
C66	D2	Q63	B1	RB62	B2
C67	C2	Q64	B1	RB63	B3
C68	C2			RB64	C3
C69	C4	R1	C6	RB65	C3
C70	C3	R2	C7	RB66	D2
C71	C3	R3	C6	RB67	D2
C72	C2	R4	C6	RB68	D2
C73	C3	R5	C6	RB69	C4
C74	B2	R6	C6	RB70	D3
C75	B2	R7	C6		
C81	C6	R8	C7	S21	A5
C82	C7	R9	B6	S22	A5
C83	D7	R10	B7	S51	A4
C84	D7	R11	C6	S61	C1
C85	D7	R13	C6		
C86	C6	R14	C7	TP1	D5
C91	B1	R20	A7	TP2	C6
C92	B2	R21	C5	TP3	B7
		R22	C5	TP21	B4
		R23	B5	TP22	B4
CN21	D4	R24	C5	TP23	B4
CN22	D6	R25	C5	TP24	A4
CN61	D3	R26	C5	TP61	B1
CN62	D4	R27	A7	TP62	B1
CN63	D2	R28	A5	TP63	B1
CN91	C5	R29	A5	TP64	B1
CN92	A6	R30	A5		
CN93	C4	R31	A4	X21	B4
		R32	A4		
COR21	B7	R33	B4		
COR61	C4	R34	B4		
		R35	A4		
D1	C7	R36	B5		
D2	C7	R37	C5		
D3	C6	R39	A6		
D4	C6	R40	A6		
D5	B6	R41	A6		
D6	B7	R42	B6		
D21	A6	R43	A6		
D22	A5	R44	A6		
D23	A4		B6		

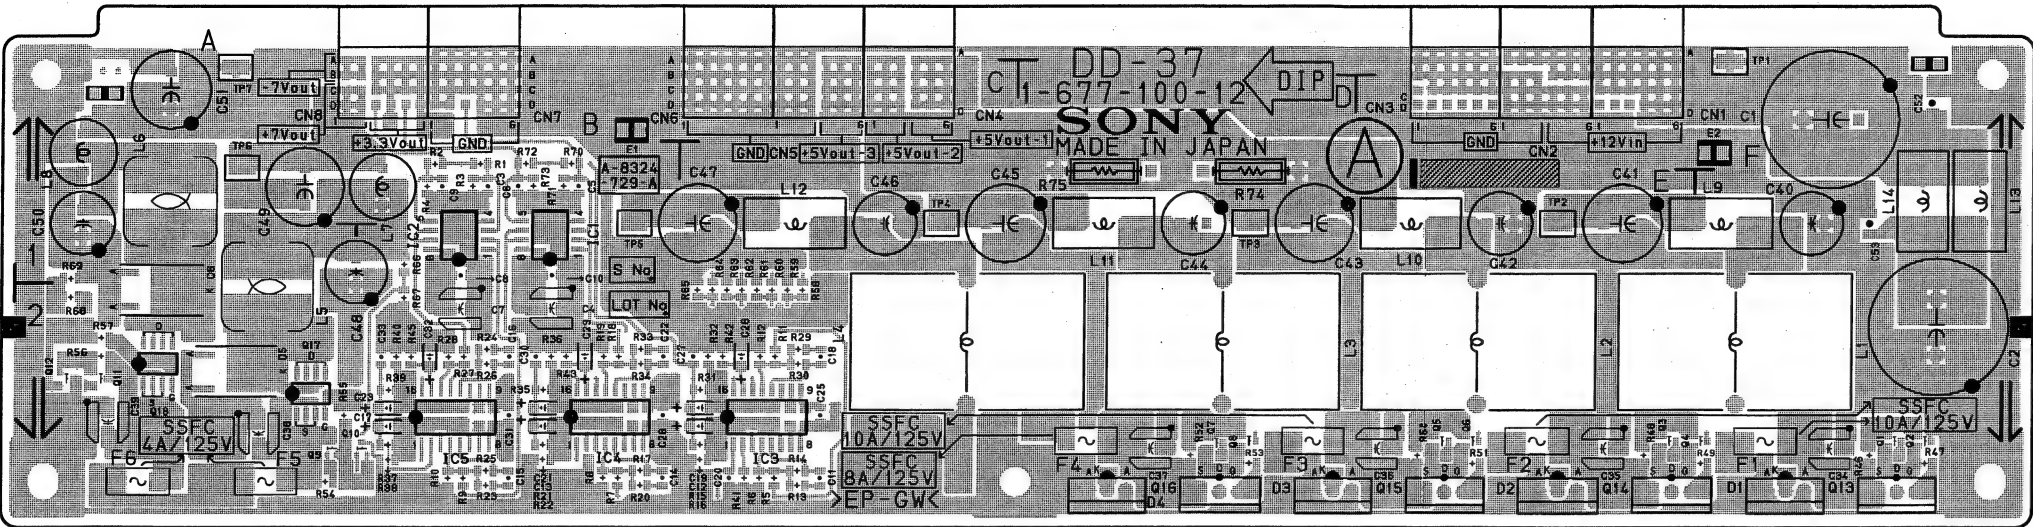

DFS-700 (J) : S/N 30291 and Higher
DFS-700 (UC) : S/N 10161 and Higher
DFS-700P (CE) : S/N 40361 and Higher


DD-37 -A SIDE-
SUFFIX: -12

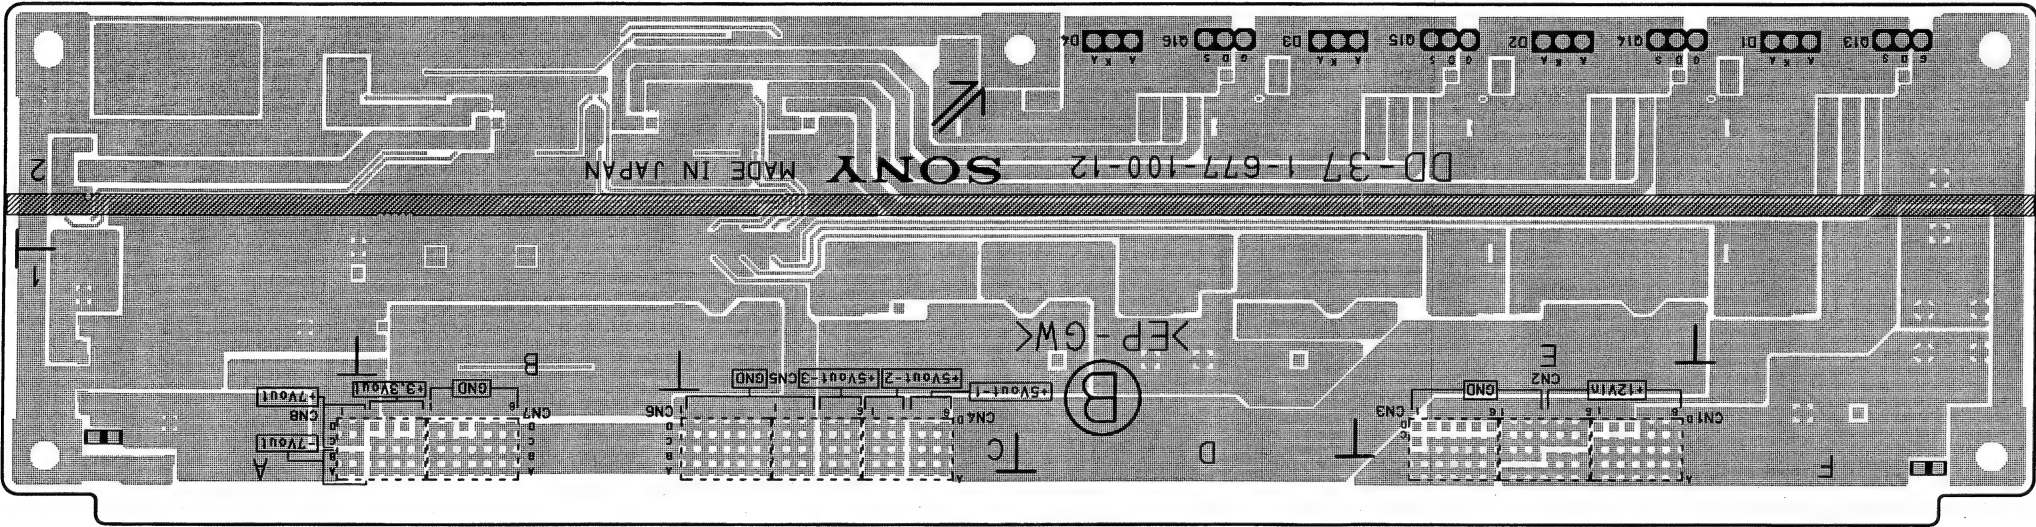

DD-37 -B SIDE-
SUFFIX: -12


DD-37 (1-677-100-12)

C1	F1	L9	F1	R69	A1
C2	F2	L10	E1	R70	B1
C3	B1	L11	D1	R71	B1
C4	B2	L12	C1	R72	B1
C5	B1	L13	F1	R73	B1
C6	B1	L14	F1	R74	D1
C7	B2			R75	D1
C8	B1	Q1	F2		
C9	B1	Q2	F2	TP1	F1
C10	B1	Q3	E2	TP2	E1
C11	C2	Q4	F2	TP3	D1
C12	C2	Q5	E2	TP4	C1
C13	B2	Q6	E2	TP5	B1
C14	B2	Q7	D2	TP6	A1
C15	B2	Q8	D2	TP7	A1
C16	B2	Q9	A2		
C17	B2	Q10	B2		
C18	C2	Q11	A2		
C19	C2	Q12	A2		
C20	C2	Q13	F2		
C21	B2	Q14	E2		
C22	B2	Q15	E2		
C23	B2	Q16	D2		
C25	C2	Q17	A2		
C26	C2	Q18	A2		
C27	C2				
C28	B2	R1	B1		
C29	B2	R2	B1		
C30	B2	R3	B1		
C31	B2	R4	B1		
C32	B2	R5	C2		
C33	B2	R6	C2		
C34	F2	R7	B2		
C35	E2	R8	B2		
C36	E2	R9	B2		
C37	D2	R10	B2		
C38	A2	R11	C2		
C39	A2	R12	C2		
C40	F1	R13	C2		
C41	E1	R14	C2		
C42	E1	R15	C2		
C43	D1	R16	C2		
C44	D1	R17	B2		
C45	C1	R18	B2		
C46	C1	R19	B2		
C47	C1	R20	B2		
C48	A1	R21	B2		
C49	A1	R22	B2		
C50	A1	R23	B2		
C51	A1	R24	B2		
C52	F1	R25	B2		
C53	F1	R26	B2		
CN1	E1	R28	B2		
CN2	E1	R29	C2		
CN3	E1	R30	C2		
CN4	C1	R31	C2		
CN5	C1	R32	C2		
CN6	C1	R33	B2		
CN7	B1	R34	B2		
CN8	B1	R35	B2		
		R36	B2		
D1	F2	R37	B2		
D2	E2	R38	B2		
D3	D2	R39	B2		
D4	D2	R40	B2		
D5	A2	R41	C2		
D6	A2	R42	C2		
		R43	B2		
E1	B1	R45	B2		
E2	F1	R46	F2		
		R47	F2		
F1	F2	R48	E2		
F2	E2	R49	F2		
F3	D2	R50	E2		
F4	D2	R51	E2		
F5	A2	R52	D2		
F6	A2	R53	D2		
		R54	A2		
IC1	B1	R55	A2		
IC2	B1	R56	A2		
IC3	C2	R57	A2		
IC4	B2	R58	C2		
IC5	B2	R59	C2		
		R60	C2		
L1	F2	R61	C2		
L2	E2	R62	C2		
L3	D2	R63	C2		
L4	C2	R64	C2		
L5	A2	R65	C2		
L6	A1	R66	B1		
L7	B1	R67	B2		
L8	A1	R68	A2		

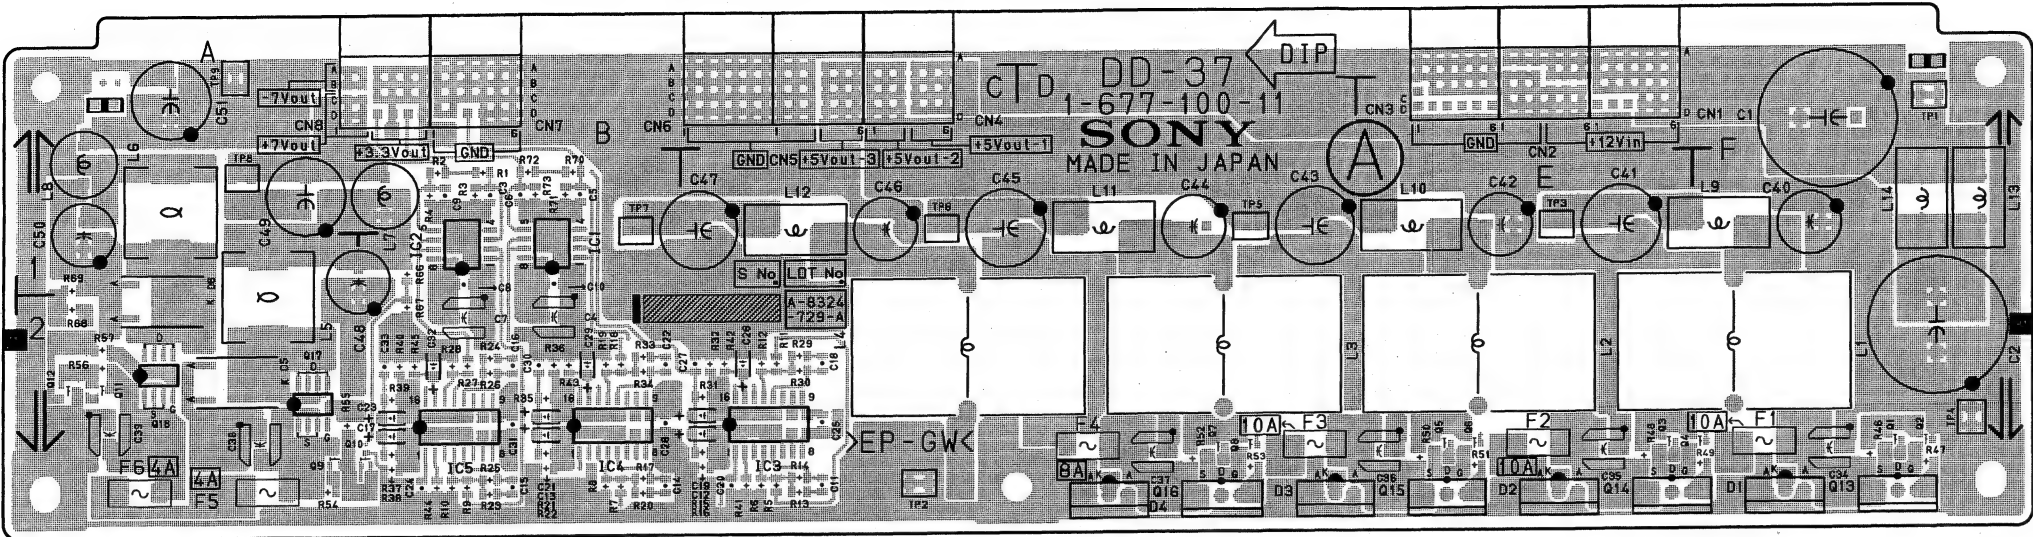

DFS-700 (J) : S/N 30001 through 30290
DFS-700 (UC) : S/N 10001 through 10160
DFS-700P (CE) : S/N 40001 through 40360

DD-37 -A SIDE-
SUFFIX: -11

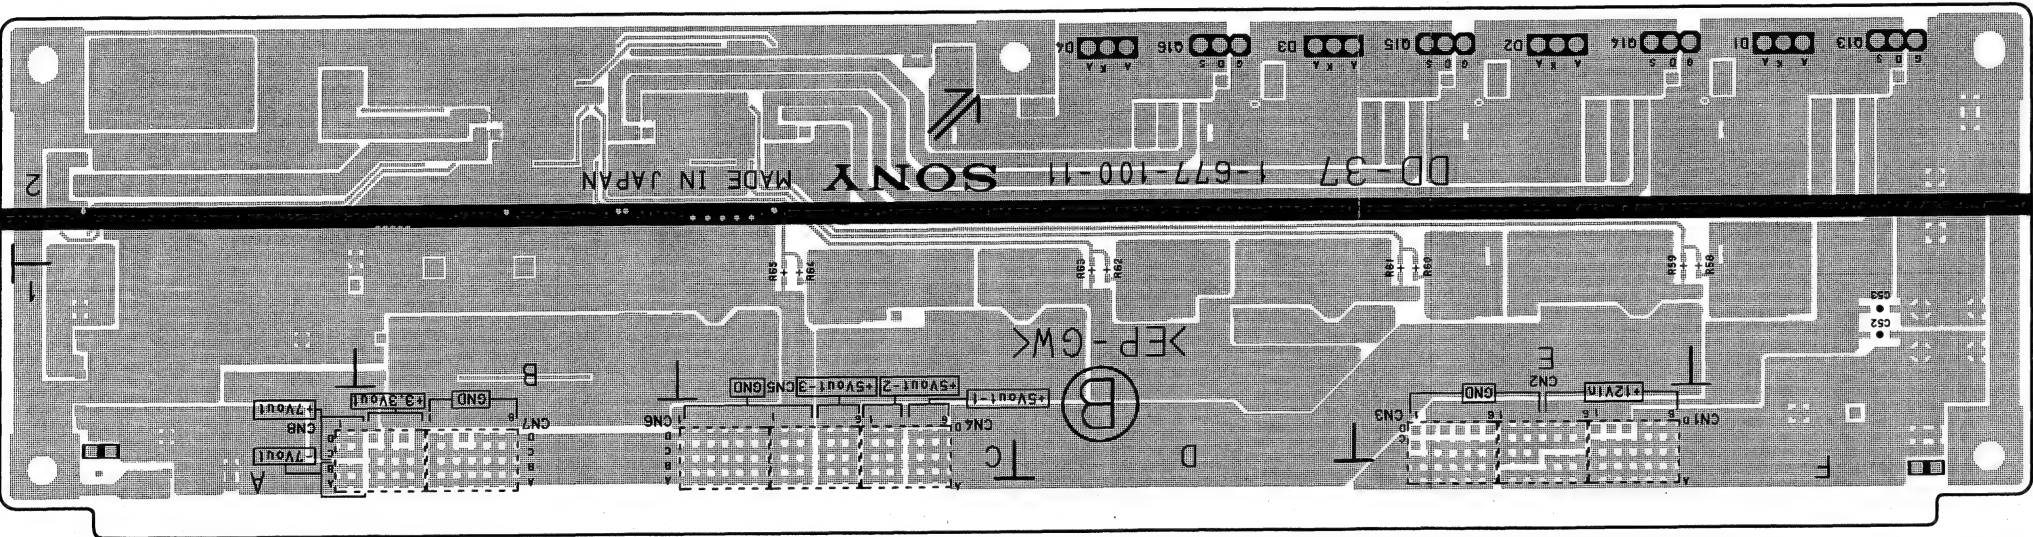

DD-37 -B SIDE-
SUFFIX: -11


DD-37 (1-677-100-11)

*:B SIDE

C1	F1	L10	E1	R68	A2
C2	F2	L11	D1	R69	A1
C3	B1	L12	C1	R70	B1
C4	B2	L13	F1	R71	B1
C5	B1	L14	F1	R72	B1
C6	B1			R73	B1
C7	B2	Q1	F2	TP1	F1
C8	B1	Q2	F2	TP2	C2
C9	B1	Q3	E2	TP3	E1
C10	B1	Q4	F2	TP4	F2
C11	C2	Q5	E2	TP5	D1
C12	C2	Q6	E2	TP6	C1
C13	B2	Q7	D2	TP7	B1
C14	B2	Q8	D2	TP8	A1
C15	B2	Q9	A2	TP9	A1
C16	B2	Q10	B2		
C17	B2	Q11	A2		
C18	C2	Q12	A2		
C19	C2	Q13	F2		
C20	C2	Q14	E2		
C21	B2	Q15	E2		
C22	B2	Q16	D2		
C23	B2	Q17	A2		
C24	B2	Q18	A2		
C25	C2				
C26	C2	R1	B1		
C27	C2	R2	B1		
C28	B2	R3	B1		
C29	B2	R4	B1		
C30	B2	R5	C2		
C31	B2	R6	C2		
C32	B2	R7	B2		
C33	B2	R8	B2		
C34	F2	R9	B2		
C35	E2	R10	B2		
C36	E2	R11	C2		
C37	D2	R12	C2		
C38	A2	R13	C2		
C39	A2	R14	C2		
C40	F1	R15	C2		
C41	E1	R16	C2		
C42	E1	R17	B2		
C43	D1	R18	B2		
C44	D1	R19	B2		
C45	C1	R20	B2		
C46	C1	R21	B2		
C47	C1	R22	B2		
C48	A1	R23	B2		
C49	A1	R24	B2		
C50	A1	R25	B2		
C51	A1	R26	B2		
C52	*F1	R27	B2		
C53	*F1	R28	B2		
		R29	C2		
		R30	C2		
CN1	E1	R31	C2		
CN2	E1	R32	C2		
CN3	E1	R33	B2		
CN4	C1	R34	B2		
CN5	C1	R35	B2		
CN6	B1	R36	B2		
CN7	B1	R37	B2		
CN8	B1	R38	B2		
		R39	B2		
D1	F2	R40	B2		
D2	E2	R41	C2		
D3	D2	R42	C2		
D4	D2	R43	B2		
D5	A2	R44	B2		
D6	A2	R45	B2		
		R46	F2		
F1	F2	R47	F2		
F2	E2	R48	E2		
F3	D2	R49	F2		
F4	D2	R50	E2		
F5	A2	R51	E2		
F6	A2	R52	D2		
		R53	D2		
IC1	B1	R54	A2		
IC2	B1	R55	A2		
IC3	C2	R56	A2		
IC4	B2	R57	A2		
IC5	B2	R58	*F1		
		R59	*E1		
L1	F2	R60	*E1		
L2	E2	R61	*E1		
L3	D2	R62	*D1		
L4	C2	R63	*D1		
L5	A2	R64	*C1		
L6	A1	R65	*C1		
L7	B1	R66	B1		
L8	A1	R67	B2		
L9	F1				

R1030	L9	R7719	B3	RV705	C1
R1033	J9	R7720	*C3	RV706	A3
R1035	K9	R7721	*C3	RV707	A3
R1101	*L4	R7722	*C3	RV708	B3
R1102	*L4	R7723	*C3	RV801	F1
R1103	*J4	R7724	*C3	RV901	G9
R1201	*J1	R7725	*B3	RV902	J9
R1202	*J1	R7726	*B3	RV1001	K9
R1301	M8	R7727	*B3	RV1002	L9
R1302	*L8	R7728	*B3		
R1303	*M2	R7729	*C3	S901	G9
R1304	*M2	R7730	*C3	S904	J9
R1305	M8	R7731	*B3	S1001	K9
R1306	*L8	R7732	*C3	S1002	L9
R1307	*M2	R7733	*C3		
R1308	*M2	R7734	*B3	TP101	C9
R1309	*M2	R7735	*B3	TP102	C9
R1310	*L8	R7736	*C3	TP103	C8
R1311	*M2	R7737	*C3	TP301	C7
R1312	M8	R7738	C3	TP302	C7
R1313	M8			TP303	C6
R1314	L8	RB101	*D9	TP501	C4
R1315	M8	RB102	*D9	TP502	C5
R1316	M8	RB103	*E10	TP503	C4
R1317	M8	RB301	*D6	TP701	C2
R1318	M8	RB302	*D6	TP702	C2
R1319	L8	RB303	*E8	TP703	C1
R1320	M8	RB501	*D4	TP704	A3
R1321	M8	RB502	*D4	TP705	B3
R1322	H5	RB503	*E5	TP706	C3
R1323	H5	RB701	*D1	TP901	F8
R1324	L5	RB702	*D1	TP902	G8
R1325	*L1	RB703	*E3	TP1001	J8
R1326	*L1	RB901	*G9	TP1002	K8
R1327	*L1	RB902	*G9	TP1301	L8
R1328	H5	RB903	*G9	TP1302	L8
R1329	H5	RB904	*H9	TP1303	L8
R1330	H5	RB905	*H9	TP1306	H5
R1331	H5	RB906	*H9	TP1307	H6
R1332	H6	RB1001	*J9		
R1333	H6	RB1002	*J9	X201	F9
R1334	H6	RB1003	*J9	X401	F6
R1335	H6	RB1004	*K9	X601	F4
R1336	H6	RB1005	*K9	X801	F2
R1337	K5	RB1006	*K9		
R1339	H5	RB1101	*M3		
R1340	J1	RB1102	*M3		
R1341	J1	RB1103	*M3		
R1342	J1	RB1104	*M3		
R1343	J1	RB1105	*M3		
R1345	L5	RB1106	*M3		
R1346	L5	RB1107	*M3		
R1347	L5	RB1108	*M3		
R1348	L5	RB1109	*M3		
R1349	L6	RB1110	*M3		
R1350	K1	RB1111	*M3		
R1351	K1	RB1112	*M3		
R1352	K1	RB1113	*M4		
R1353	K1	RB1114	*M6		
R1354	K1	RB1115	*M7		
R1355	K1	RB1116	*M7		
R1356	J1	RB1117	*M4		
R1357	H6	RB1118	*L2		
R1358	H6	RB1119	*L2		
R1359	H6	RB1301	*M2		
R1362	K5	RB1302	*M2		
R1363	L6	RB1304	*M2		
R1364	L6	RB1305	*J1		
R1365	L6	RB1306	*J1		
R1407	M1				
R1408	M5	RV101	B9		
R1409	*M6	RV102	B9		
R1410	*L6	RV103	B9		
R7700	*A3	RV104	B9		
R7701	*B3	RV105	C8		
R7702	*B3	RV201	F8		
R7703	*B3	RV301	B7		
R7704	*B3	RV302	B7		
R7705	*B3	RV303	B7		
R7706	*A3	RV304	B7		
R7707	*A3	RV305	C6		
R7708	*A3	RV401	F6		
R7709	*A3	RV501	B4		
R7710	*B3	RV502	B5		
R7711	*B3	RV503	B4		
R7712	*B3	RV504	B5		
R7713	*B3	RV505	C4		
R7714	*B3	RV601	F4		
R7715	*A3	RV701	B2		
R7716	*A3	RV702	B2		
R7717	*B3	RV703	B2		
R7718	*B3	RV704	B2		

Board layouts : Next page

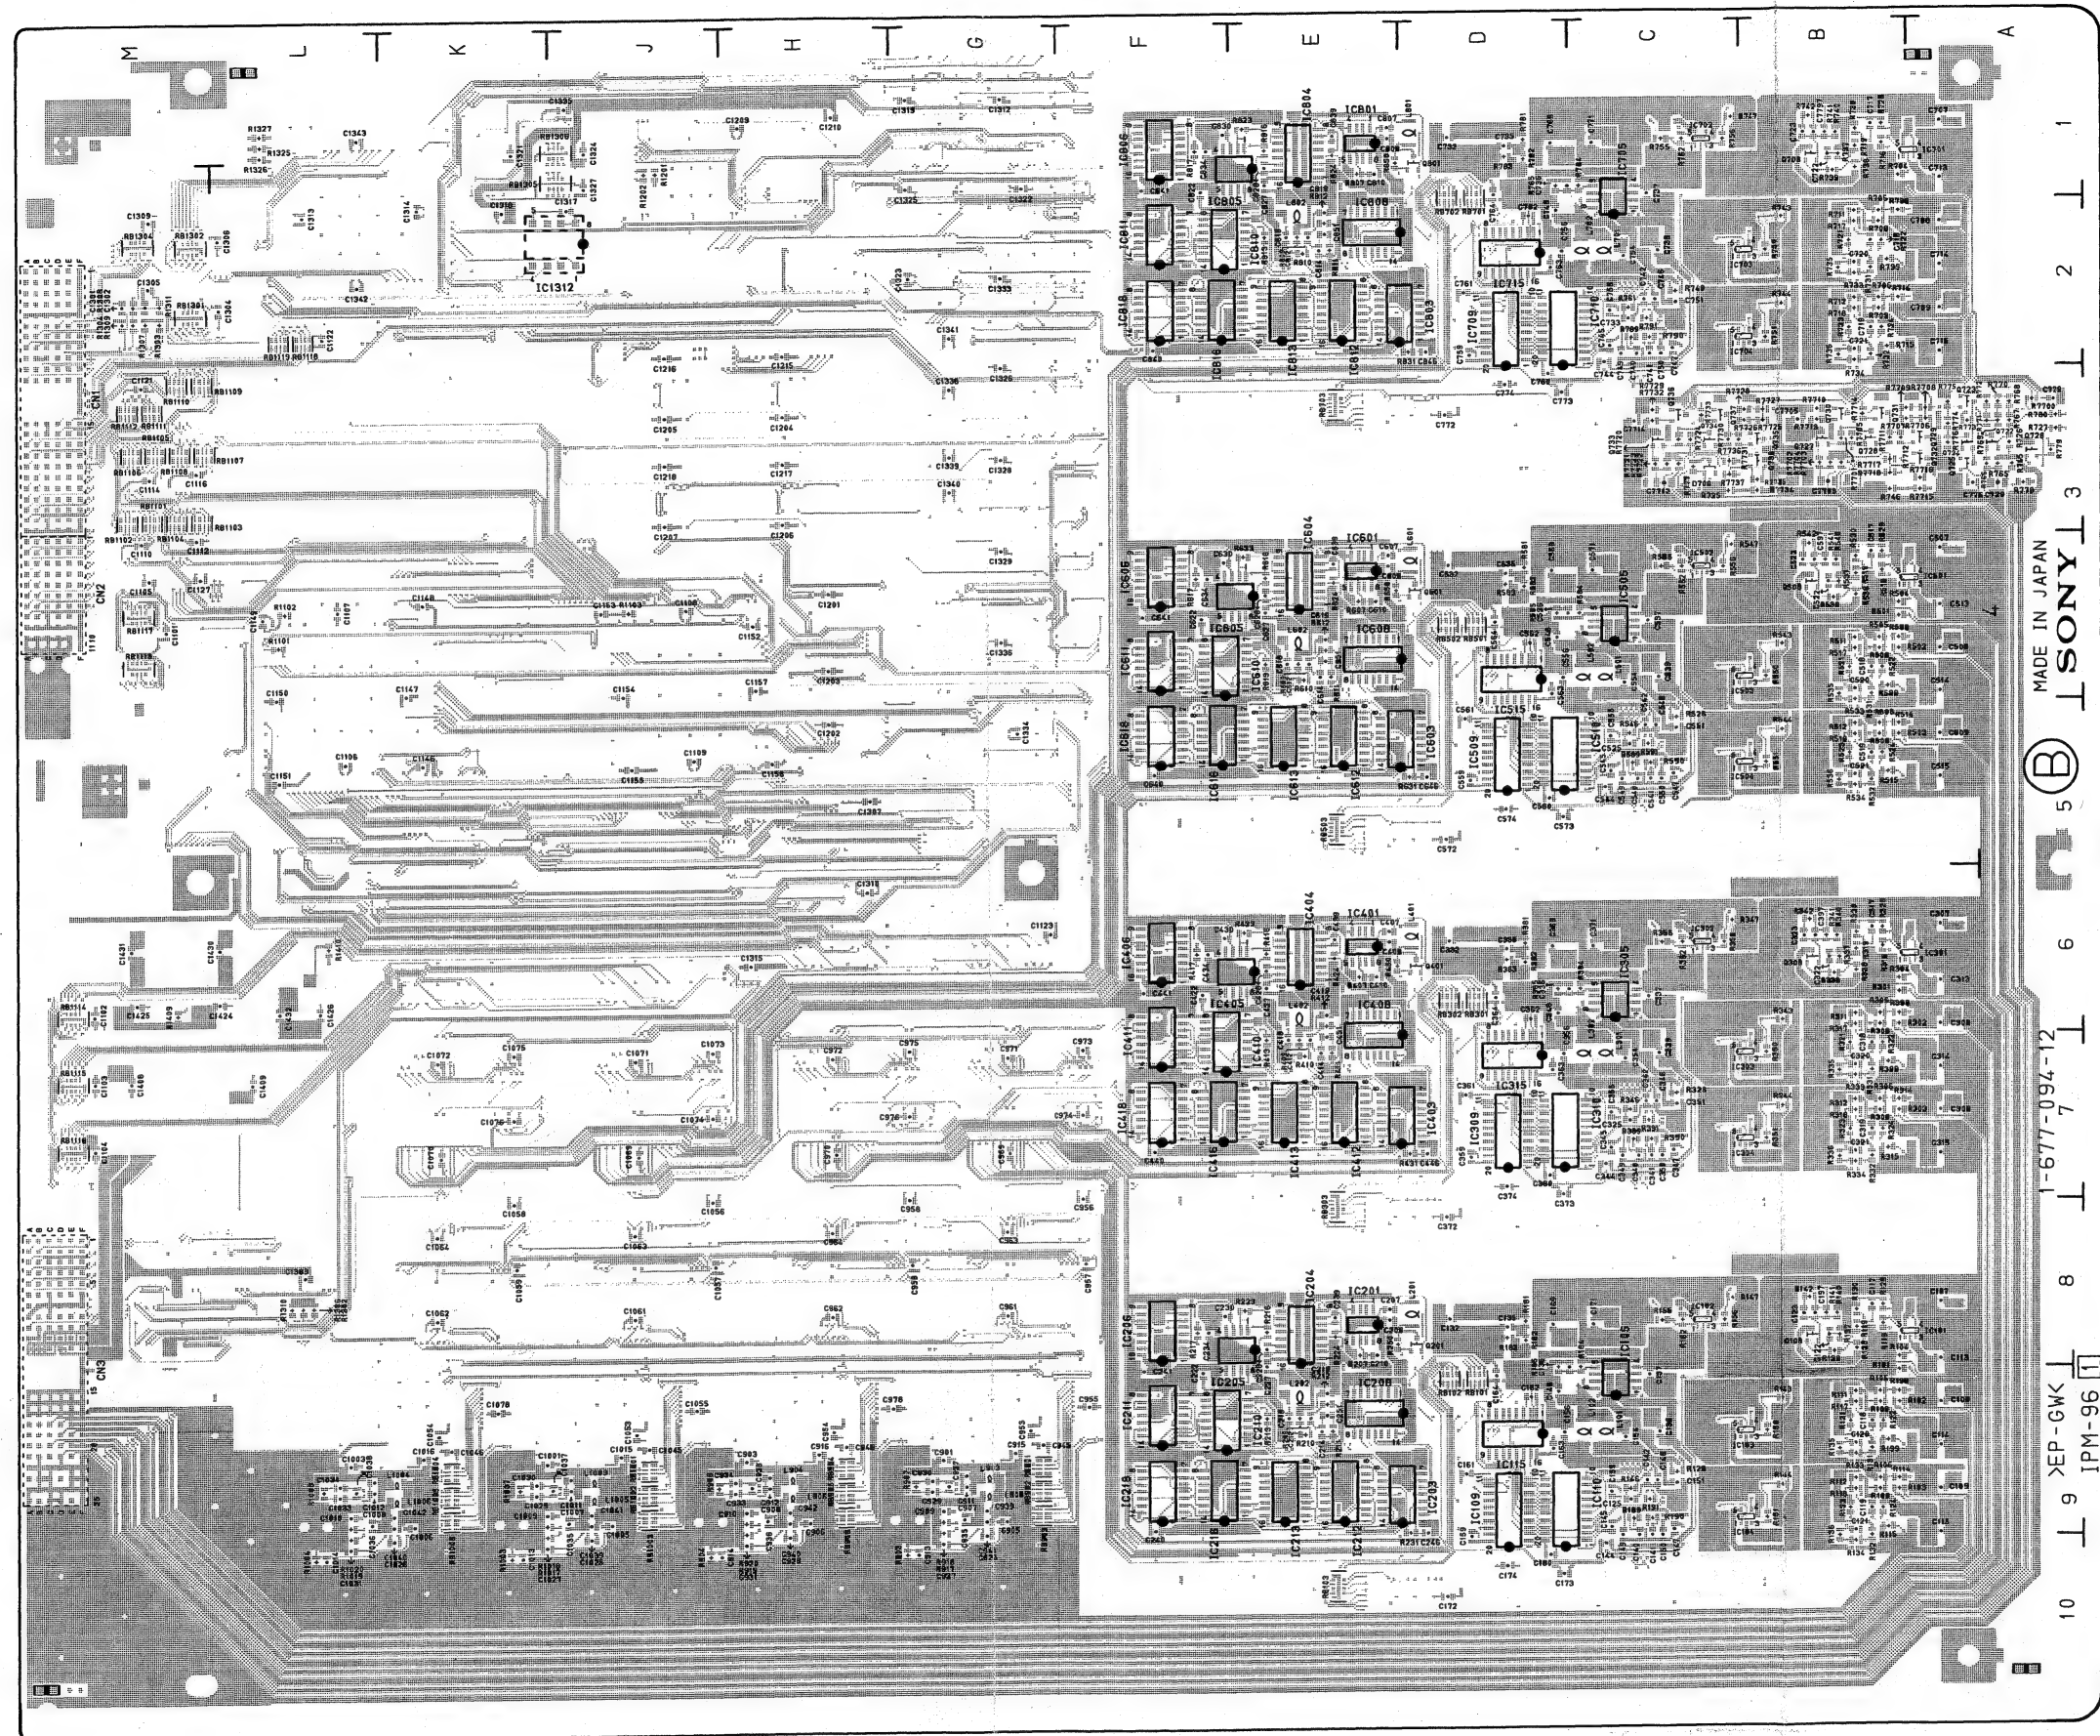


IPM-96 -B SIDE-
SUFFIX: -12

IPM-96 (1-677-094-11)

*:B SIDE


C101	B8	IC314	D7	IC808	*E2	IC1304	M2	Q305	B7	R143	*B9	R342	*B6	R541	*B4	R740	*B1	R918	*G9	R1342	J1	RB1104	*M3
C102	B9	IC315	*D6	IC809	E2	IC1305	H5	Q306	B7	R144	*B9	R343	*B6	R542	*B4	R741	*B1	R919	*H9	R1343	J1	RB1105	*M3
C103	B9	IC316	D6	IC810	*E2	IC1306	L5	Q307	B6	R147	*C8	R344	*B7	R543	*B4	R742	*B1	R920	*H9	R1345	L5	RB1106	*M3
C104	A8	IC317	D8	IC811	*F2	IC1307	M2	Q308	*B6	R150	*B9	R347	*C6	R544	*B5	R743	*B2	R921	G9	R1346	L5	RB1107	*M3
C105	A9	IC318	C7	IC812	*E2	IC1308	H6	Q318	C6	R151	*B9	R350	*B7	R547	*C4	R744	*B2	R922	J9	R1347	L5	RB1108	*M3
C106	A9	IC319	D7	IC813	*E2	IC1309	H6	Q319	C6	R153	B9	R351	*B7	R550	*B4	R745	*A3	R923	G9	R1348	L5	RB1109	*M3
C107	*A8	IC401	*E6	IC814	E2	IC1310	H6	Q320	B6	R154	B9	R353	B7	R551	*B5	R746	*B3	R924	H9	R1349	L6	RB1110	*M3
C108	*A9	IC402	E6	IC815	E2	IC1311	K5	Q321	B7	R155	*C8	R354	B7	R553	B4	R747	*C1	R925	G9	R1350	K1	RB1111	*M3
C109	*A9	IC403	*D7	IC816	*E2	IC1312	J2	Q401	*D6	R156	*C8	R355	*C6	R554	B5	R750	*B2	R926	G9	R1351	K1	RB1112	*M3
C110	A8	IC404	*E6	IC817	F2	IC1313	G5	Q501	B4	R157	C8	R356	*C6	R555	*C4	R751	*B2	R927	G9	R1352	K1	RB1113	*M4
C111	A9	IC405	*E6	IC818	*F2	IC1314	L6	Q502	B4	R158	C9	R357	C6	R556	*C4	R753	B2	R928	H9	R1353	K1	RB1114	*M6
C112	A9	IC406	*F6	IC819	E2	IC1315	K1	Q503	B5	R159	C9	R358	C7	R557	C4	R754	B2	R929	H9	R1354	K1	RB1115	*M7
C113	*A8	IC407	B6	IC901	G9	IC1316	L8	Q504	B4	R162	*C8	R359	C7	R558	C4	R755	*C1	R930	H9	R1355	K1	RB1116	*M7
C114	*A9	IC408	*E6	IC902	G9	IC1317	M8	Q505	B4	R181	*D8	R362	*C6	R559	C5	R756	*C1	R933	F9	R1356	J1	RB1117	*M4
C115	*A9	IC409	E7	IC903	H9	IC1318	L8	Q506	B5	R182	*D8	R381	*D6	R562	*C4	R757	C1	R935	G9	R1357	H6	RB1118	*L2
C117	*B8	IC410	*E7	IC904	H9	IC1319	J1	Q507	B4	R183	*D8	R382	*D6	R581	*D4	R758	C2	R1001	J10	R1358	H6	RB1119	*L2
C118	*B9	IC411	*F7	IC905	F8	IC1320	G1	Q508	*B4	R184	*C8	R383	*D6	R582	*D4	R759	C2	R1002	K10	R1359	H6	RB1301	*M2
C119	*B9	IC412	*E7	IC906	F8	IC1321	G1	Q518	C4	R185	*D8	R384	*C6	R583	*D4	R762	*C1	R1003	*K10	R1362	K5	RB1302	*M2
C120	*B9	IC413	*E7	IC907	G8	IC1322	G1	Q519	C4	R186	C9	R385	*D6	R584	*C4	R765	*A3	R1004	*L10	R1363	L6	RB1304	*M2
C121	*B9	IC414	E7	IC908	G8	IC1323	G2	Q520	B4	R187	C9	R386	C6	R585	*D4	R766	*A3	R1005	K9	R1364	L6	RB1305	*J1
C122	*B8	IC415	E7	IC911	G8	IC1324	G1	Q521	B5	R189	*C9	R387	C6	R586	C4	R767	*A3	R1006	L9	R1365	L6	RB1306	*J1
C123	*B8	IC416	*E7	IC912	H8	IC1325	G2	Q601	*D4	R190	*C9	R389	*C7	R587	C4	R768	*A3	R1007	*K9	R1407	M1	RV101	B9
C127	C9	IC417	F7	IC913	G7	IC1326	G2	Q701	B1	R191	*C9	R390	*C7	R589	*C5	R770	*A3	R1008	*L9	R1408	M5	RV102	B9
C128	C9	IC418	*F7	IC914	H7	IC1327	L2	Q702	B2	R192	C9	R391	*C7	R590	*C5	R771	*A3	R1009	K9	R1409	*M6	RV103	B9
C130	C8	IC419	E7	IC917	G7	IC1328	K2	Q703	B2	R194	B8	R392	C6	R591	*C5	R772	*A3	R1010	L9	R1410	*L6	RV104	B9
C131	D8	IC501	*A4	IC918	H7	IC1329	G2	Q704	B1	R198	*B9	R394	B6	R592	C4	R773	*A3	R1011	K10	R1411	*L6	RV105	C8
C132	*D8	IC502	*C4	IC919	G6	IC1330	G3	Q705	B2	R199	*B9	R398	*B6	R594	B4	R774	*A3	R1012	K10	R1409	*M6	RV106	B9
C134	D8	IC503	*B4	IC920	H6	IC1331	G4	Q706	B2	R201	D8	R399	*B7	R598	*B4	R775	*A3	R1013	K10	R1410	*L6	RV107	B9
C135	*D8	IC504	*B5	IC921	F7	IC1332	J1	Q707	B1	R203	E9	R401	D6	R599	*B4	R776	*A3	R1014	J10	R1411	*L6	RV108	B9
C136	*C8	IC505	*C4	IC922	F7	IC1333	G4	Q708	*B1	R205	D8	R403	E7	R601	D4	R777	*C3	R1015	J10	R1412	*L6	RV109	B9
C137	*C9	IC506	D4	IC923	G7	IC1334	G4	Q718	C1	R206	D8	R405	D6	R603	E5	R778	*A3	R1016	J10	R1413	*L6	RV110	B9
C138	C9	IC507	C5	IC924	G7	IC1335	G3	Q719	C1	R207	*E8	R406	D6	R605	D4	R779	*A3	R1017	*K9	R1414	*L6	RV111	B9
C139	*C9	IC508	C5	IC925	F9	IC1336	G3	Q720	B2	R208	E9	R407	*E6	R606	D4	R780	*A3	R1018	*K9	R1415	*L6	RV112	B9
C140	*C9	IC509	*D5	IC926	G9	IC1337	G3	Q721	B2	R209	*E9	R408	E7	R607	*E4	R781	*D1	R1019	*L9	R1416	*L6	RV113	B9
C141	*C9	IC510	*C5	IC927	F9	IC1338	K2	Q722	*A3	R210	*E9	R409	*E7	R608	E4	R782	*D1	R1020	*L9	R1417	*L6	RV114	B9
C142	*C9	IC511	D5	IC1001	J9	IC1402	L6	Q723	*A3	R211	*E9	R410	*E7	R609	*E4	R783	*D1	R1021	K9	R1418	*L6	RV115	B9
C143	C9	IC512	D4	IC1002	J9	IC1403	M6	Q724	*A3	R212	*E9	R411	*E7	R610	*E4	R784	*D1	R1022	L9	R1419	*L6	RV116	B9
C144	*C10	IC513	D5	IC1003	K9	IC1404	L6	Q725	*A3	R213	*E9	R412	*E6	R611	*E4	R785	*D1	R1023	K9	R1420	*L6	RV117	B9
C145	*C9	IC514	D4	IC1004	K9	IC1405	L6	Q726	*A3	R214	E8	R413	*E7	R612	*E4	R786	*D1	R1024	L9	R1421	*L6	RV118	B9
C146	*C9	IC515	*D4	IC1005	J8	L101	*C9	Q727	*B3	R215	E8	R414	E6	R613	*E4	R787	C2	R1025	K9	R1422	*L6	RV119	B9
C147	*C9	IC516	D4	IC1006	J8	L102	*C9	Q728	*B3	R216	*E8	R415	E6	R614	E4	R788	C2	R1026	K9	R1423	*L6	RV120	B9
C148	*D9	IC517	D5	IC1007	J8	L201	*D8	Q729	*A3	R217	*F8	R416	E6	R615	E4	R789	*C2	R1027	K9	R1424	*L6	RV121	B9
C149	*C9	IC518	C5	IC1012	K8	L202	*E9	Q730	*B3	R223	*E8	R417	*F6	R616	*E4	R790	*C2	R1028	L9	R1425	*L6	RV122	B9
C150	*C9	IC519	D5	IC1013	J7	L203	*E9	Q731	*B3	R224	*E8	R423	*E6	R617	*F4	R791	*C2	R1029	L9	R1426	*L6	RV123	B9
C151	*C9	IC601	*E4	IC1014	K7	L301	*C7	Q732	*A3	R225	F8	R424	*E6	R623	*E4	R792	C2	R1030	L9	R1427	*L6	RV124	B9
C152	C9	IC602	E4	IC1017	J7	L302	*C7	Q733	*A3	R226	F8	R425	F6	R624	*E4	R793	C2	R1031	L9	R1428	*L6	RV125	B9
C153	C9	IC603	*D5	IC1018	K7	L401	*D6	Q734	*C3	R227	F9	R426	F6	R625	F4	R794	*B2	R1032	L9	R1429	*L6	RV126	B9
C154	*C9	IC604	*E4	IC1019	J6	L402	*E6	Q735	*B3	R228	F9	R427	F6	R626	F4	R795	*B2	R1033	J9	R1430	*L6	RV127	B9
C155	*C9	IC605	*E4	IC1020	K6	L501	*C4	Q736	*C3	R229	F9	R428	F7	R627	F4	R796	*B2	R1034	J9	R1431	*L6	RV128	B9
C156	*D9	IC606	*F4	IC1021	J7	L502	*C4	Q737	*C3	R230	E9	R429	F6	R628	F4	R797	*B2	R1035	K9	R1432	*L6	RV129	B9
C157	C9	IC607	E4	IC1022	J7	L601	*D4	Q738	*B3	R231	*D9	R430	E7	R629	F4	R798	*B2	R1036	K9	R1433	*L6	RV130	B9
C158	D9	IC608	*E4	IC1023	K7	L602	*E4	Q801	*D1	R232	F8	R431	*D7	R630	E5	R799	*B2	R1037	K9	R1434	*L6	RV131	B9
C159	*D9	IC609	E4	IC1024	K7	L701	*C2			R233	F9	R432	F6	R631	*D5	R800	*E1	R1038	K9	R1435	*L6	RV132	B9
C160	*D10	IC610	*E4	IC1025	J9	L702	*C2			R234	F9	R433	F7	R632	F4	R801	D1	R1039	K9	R1436	*L6	RV133	B9
C161	*D9	IC611	*F4	IC1026	K9	L801	*D1	R101	*B9	R235	F9	R434	F7	R633	F5	R802	D1	R1040	K9	R1437	*L6	RV134	B9
C162	*D9	IC612	*E5	IC1027	K8	L802	*E2	R102	*B9	R236	F9	R435	F7	R634	F5	R803	D1	R1041	K9	R1438	*L6	RV135	B9
C163	*D9	IC613	*E5	IC1028	K8	L901	G10	R103	*B9	R237	F9	R436	F7	R635	F5	R804	D1	R1042	K9	R1439	*L6	RV136	B9
C164	*D9	IC614	E5	IC1029	K8	L902	H10	R104	*B8	R238	F9	R437	F7	R636	F5	R805	D1	R1043	K9	R1440	*L6	RV137	B9
C165	*D9	IC615	E5	IC1030	K8	L903	*G9	R105	*B9	R239	F9	R438	F7	R637	F5	R806	D1	R1044	K9	R1441	*L6	RV138	B9
C166	*D9	IC616	E5	IC1031	K8	L904	*H9	R106	*B9	R240	F9	R439	F7	R638	F5	R807	D1	R1045	K9	R1442	*L6	RV139	B9
C167	*D9	IC617	E5	IC1032	K8	L905	*G9	R107	*B8	R241	F9	R440	F7	R639	F5	R808	D1	R1046	K9	R1443	*L6	RV140	B9
C168	*D8	IC618	E5	IC1033	K8	L906	*H9	R108	*B9	R242	F9	R441	F7	R640	F5	R809	D1	R1047	K9	R1444	*L6	RV141	B9
C169	*D8	IC619	E5	IC1034	K8	L907	*H9	R109	*B9	R243	F9	R442	F7	R641	F5	R810	D1	R1048	K9	R1445	*L6	RV142	B9
C170	C8	IC620	E5	IC1035	K8	L908	*H9	R110	*B8	R244	F9	R443	F7	R642	F5	R811	D1	R1049	K9	R1446	*L6	RV143	B9
C171	*C8	IC621	*F5	IC1036	K8	L1001	J10	R111	*B9	R245	F9	R444	F7	R643	F5	R812	D1	R1050	K9	R1447	*L6	RV144	B9
C172	*D10	IC622	E5	IC1037	K8	L1002	K10	R112	*B9	R246	F9	R445	F7	R644	F5	R813	D1	R1051	K9	R1448	*L6	RV145	B9
C173	*D10	IC623	E5	IC																			

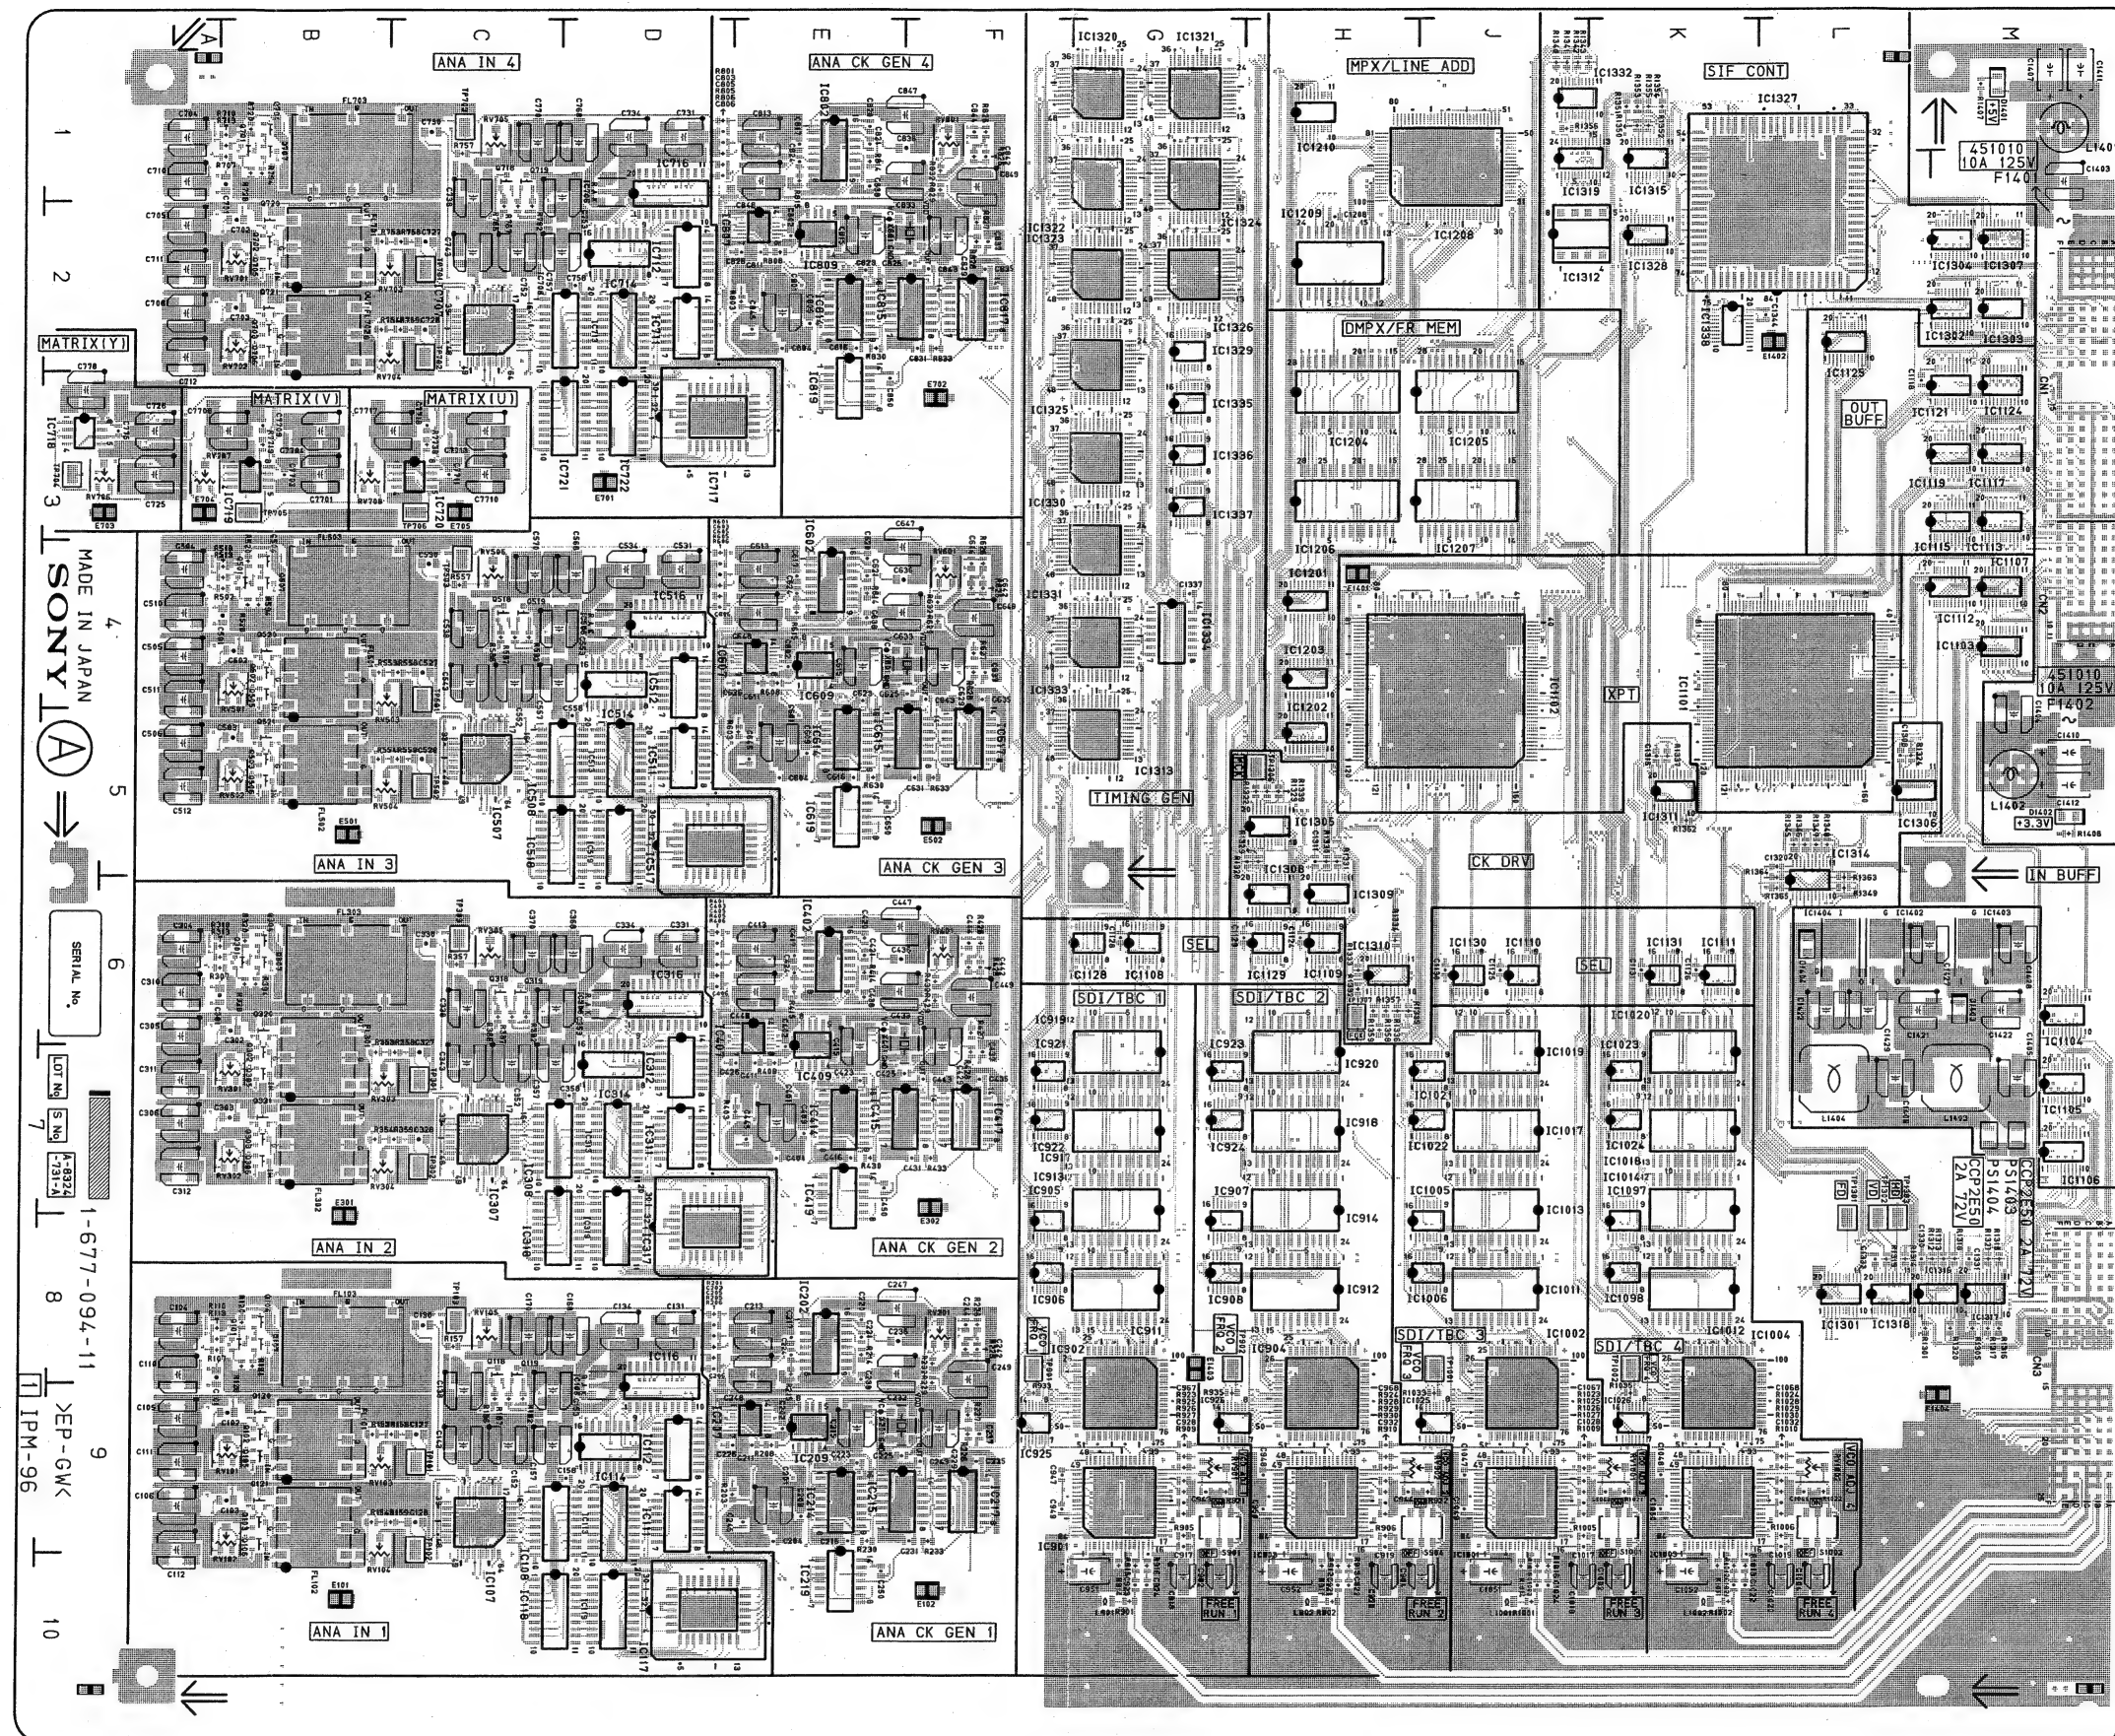


Location list : Previous page

DFS-700 (J) : S/N 30001 through 30290
 DFS-700 (UC) : S/N 10001 through 10160
 DFS-700P (CE) : S/N 40001 through 40360

IPM-96 -A SIDE-
 SUFFIX: -11

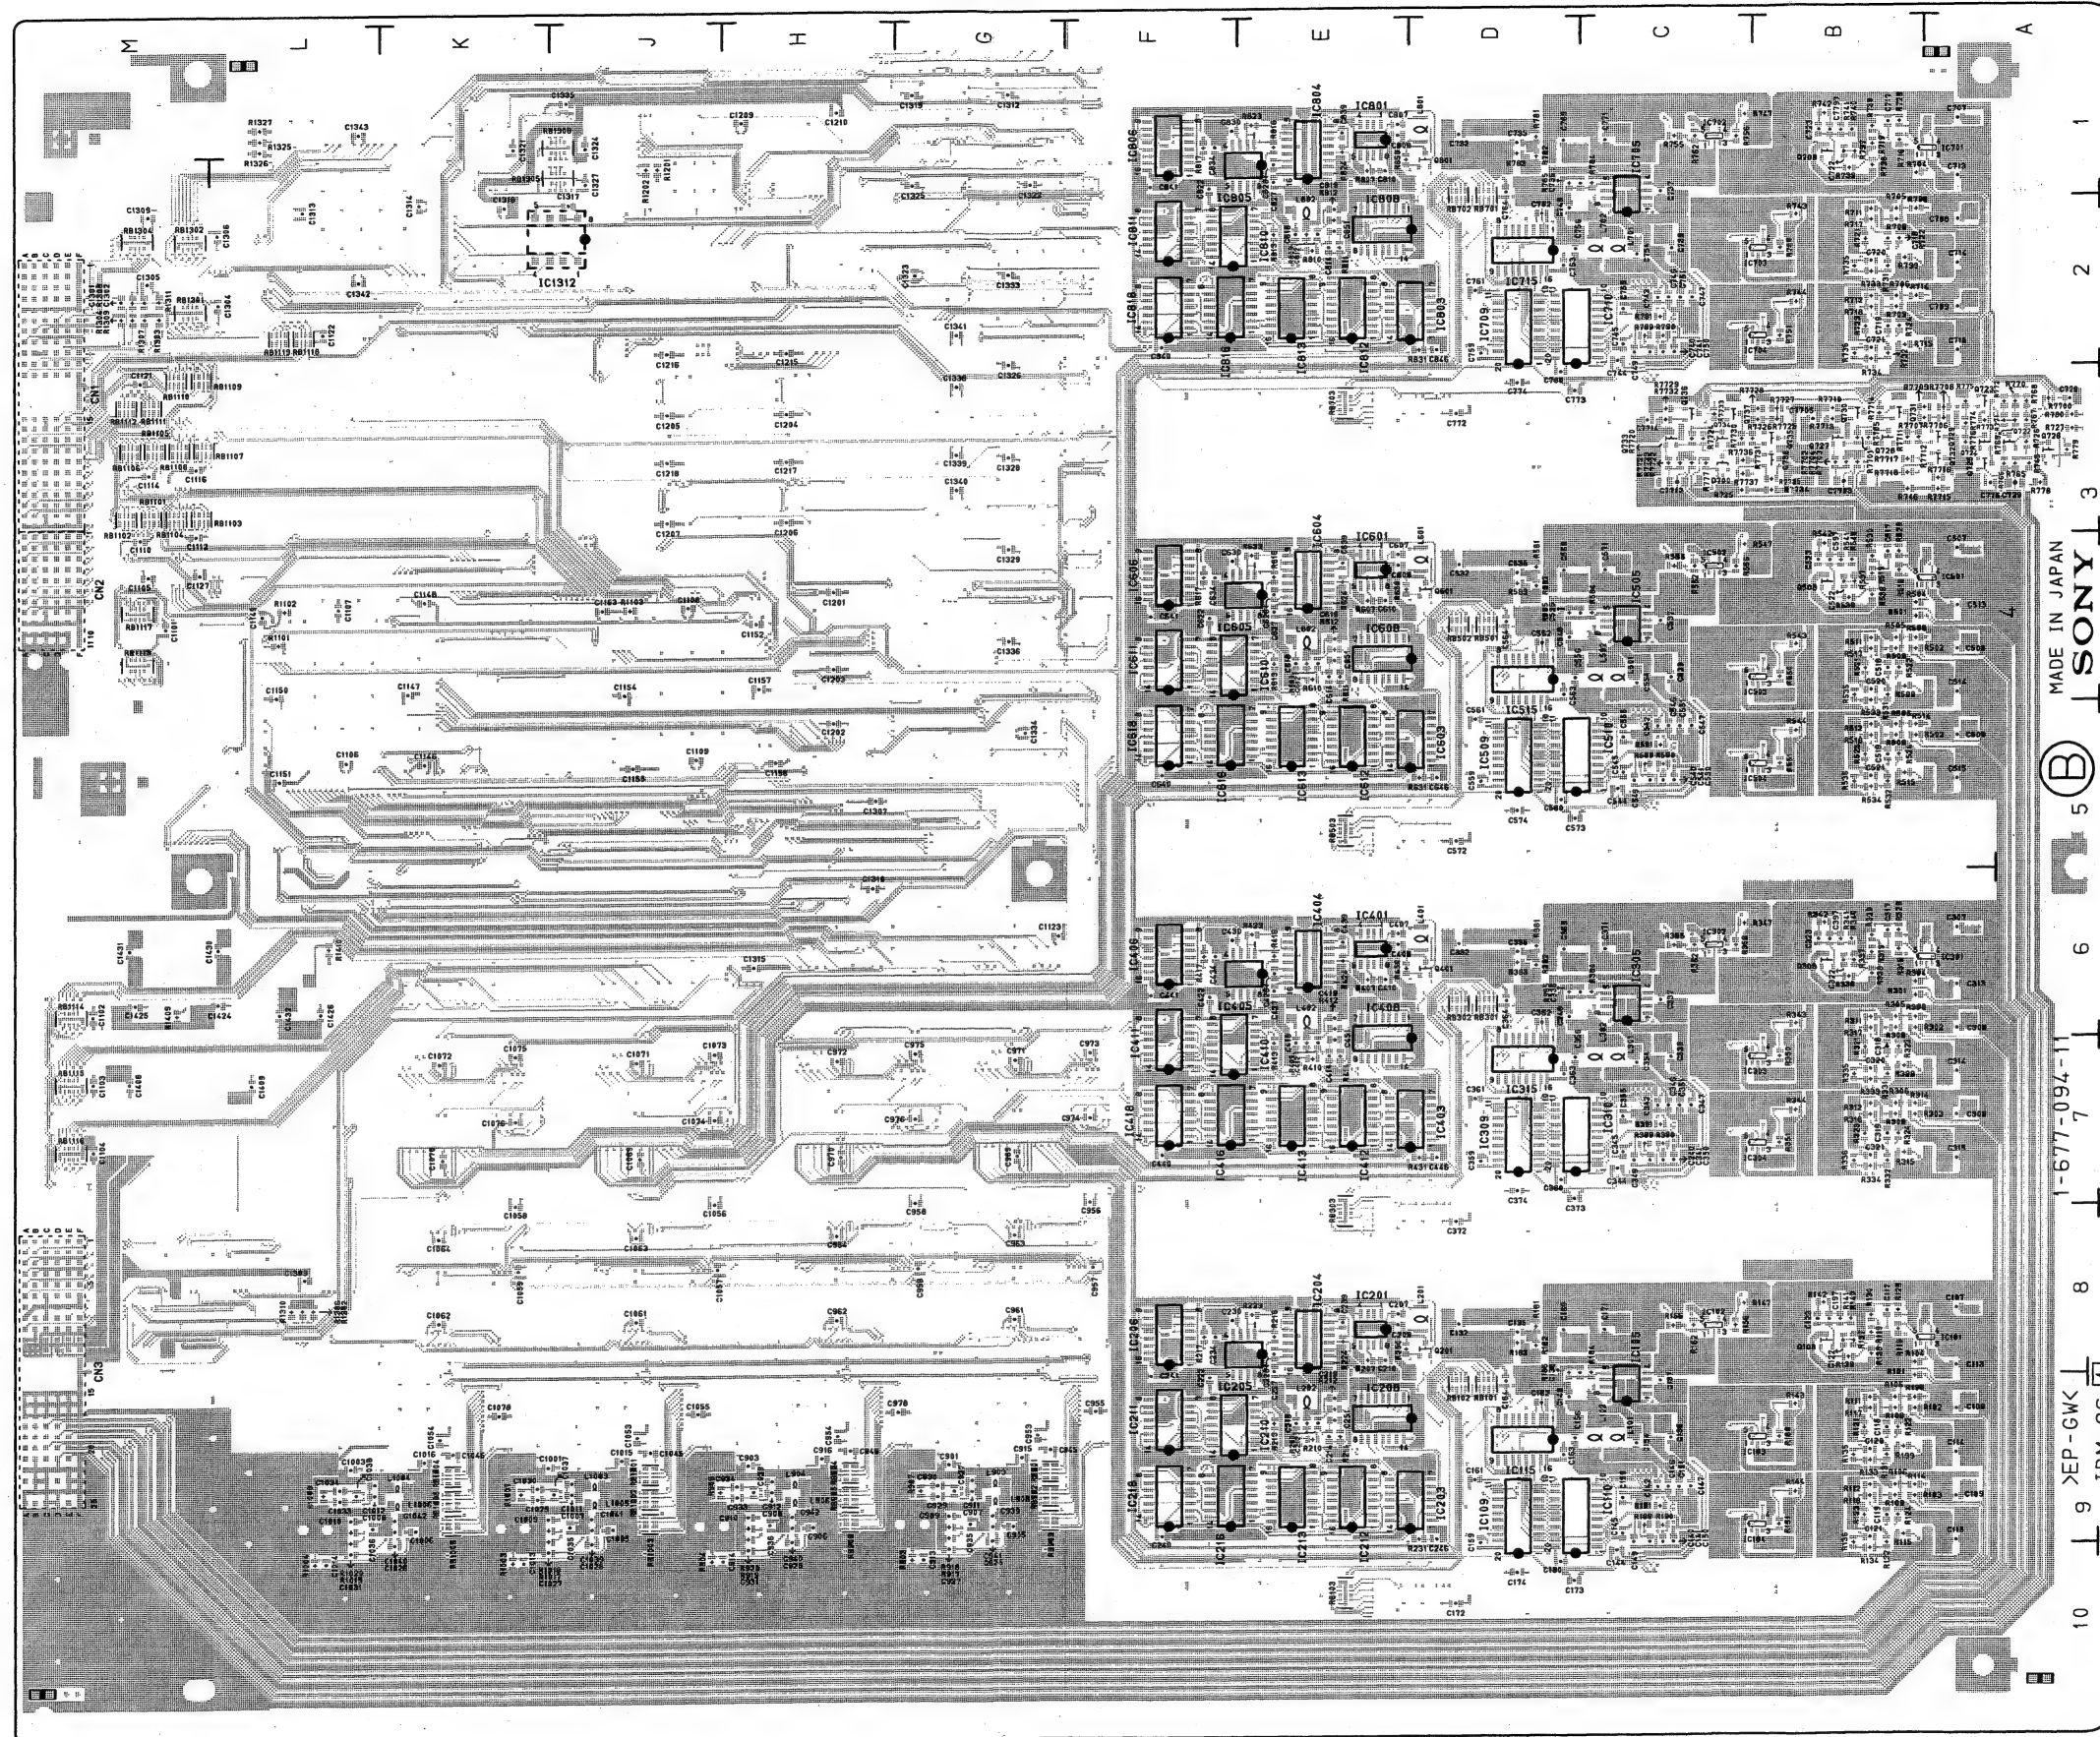

IPM-96 -B SIDE-
SUFFIX: -11

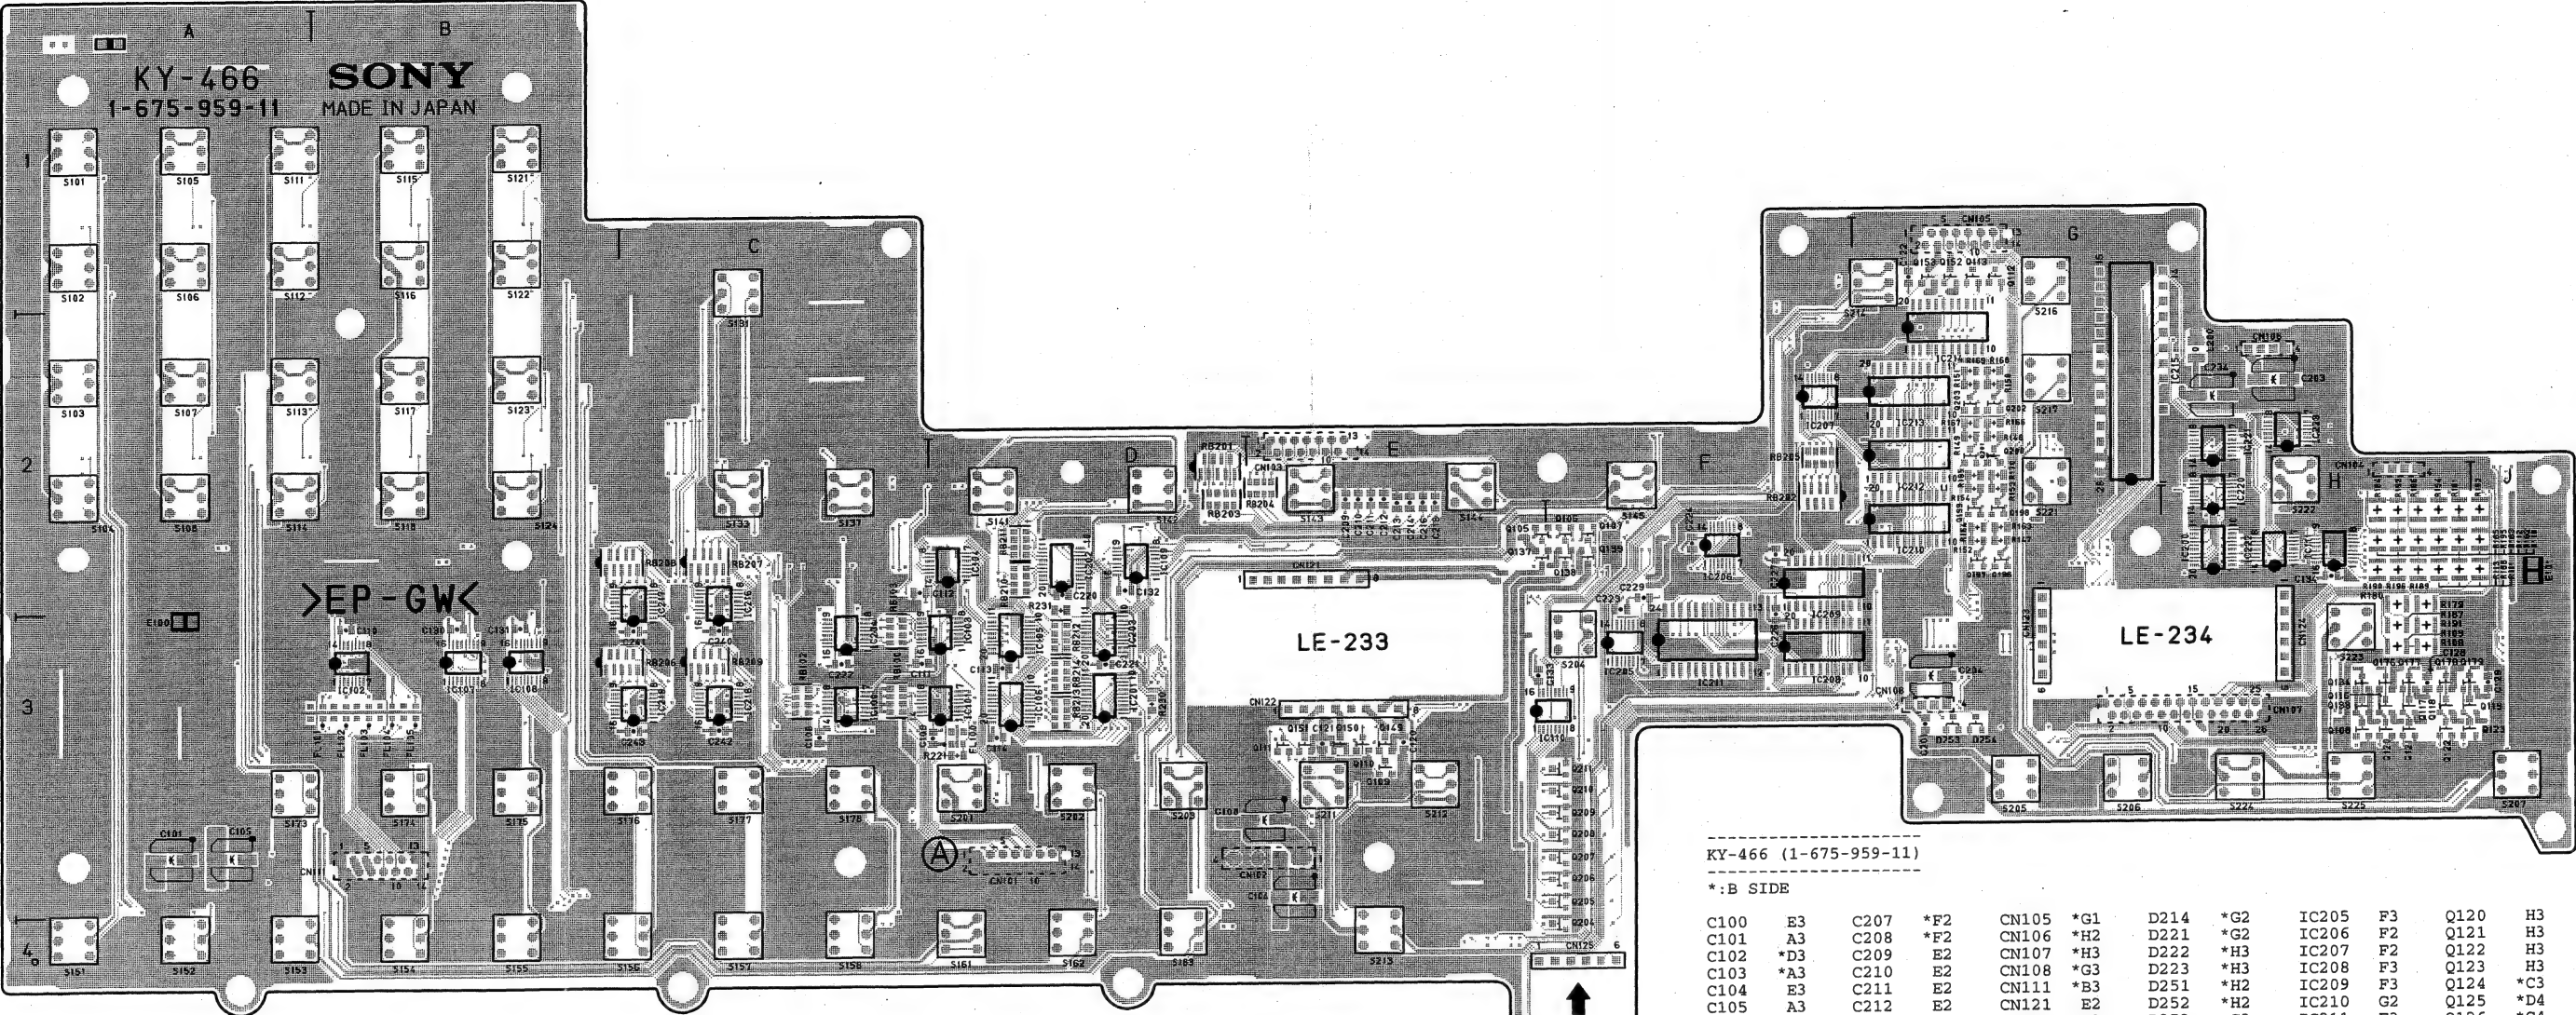


DFS-700 (J) : S/N 30001 and Higher
DFS-700 (UC) : S/N 10001 and Higher
DFS-700P (CE) : S/N 40001 and Higher

KY-466 -A SIDE-
SUFFIX: -11

KY-466 (1-675-959-11)



*:B SIDE

C100	E3	C207	*F2	CN105	*G1	D214	*G2	IC205	F3	Q120	H3
C101	A3	C208	*F2	CN106	*H2	D221	*G2	IC206	F2	Q121	H3
C102	*D3	C209	E2	CN107	*H3	D222	*H3	IC207	F2	Q122	H3
C103	*A3	C210	E2	CN108	*G3	D223	*H3	IC208	F3	Q123	H3
C104	E3	C211	E2	CN111	*B3	D251	*H2	IC209	F3	Q124	*C3
C105	A3	C212	E2	CN121	E2	D252	*H2	IC210	G2	Q125	*D4
C106	*B4	C213	E2	CN122	E3	D253	G3	IC211	F3	Q126	*C4
C107	*A3	C214	E2	CN123	G3	D254	G3	IC212	G2	Q127	*D2
C108	C3	C215	*G3	CN124	H3	D261	*A3	IC213	G2	Q128	*C2
C109	D3	C216	E2	CN125	F4	D262	*D3	IC214	G2	Q129	*B2
C110	B3	C217	*G3	CN126	F4	D263	*D3	IC215	H2	Q130	*B2
C111	C3	C218	E2			D264	*D3	IC216	C3	Q131	*A2
C112	C2	C219	*D3	D101	*A1	D265	*D3	IC217	C3	Q133	H3
C113	D3	C220	D2	D102	*A2	D266	*D3	IC218	C3	Q134	H3
C114	D3	C221	D3	D103	*A1			IC219	C3	Q137	E2
C115	*C3	C222	C3	D104	*A2	E100	A3	IC220	H2	Q138	F2
C116	*C4	C223	F3	D111	*A1	E101	J2	IC221	H2	Q139	F2
C117	*C2	C224	F2	D112	*A2			IC222	H2	Q149	E3
C118	*B2	C225	*F2	D113	*B1	FL100	D3	IC223	H2	Q150	E3
C119	*E2	C226	F3	D114	*B2	FL101	B3			Q151	E3
C120	E3	C227	F2	D121	*B1	FL102	B3	L200	H2	Q152	G1
C121	E3	C228	*G2	D122	*B2	FL103	B3			Q153	G1
C122	G1	C229	F2	D131	*C2	FL104	B3	Q100	*C3	Q154	*F1
C123	*F1	C230	*G2	D134	*C2	FL105	B3	Q101	*E4	Q155	*F1
C124	*G3	C231	*G2	D141	*D2			Q102	*C4	Q157	*G3
C125	*G3	C232	*G2	D142	*E2	IC100	C3	Q103	*D2	Q158	*G3
C126	*G3	C233	*H2	D143	*F2	IC101	D3	Q104	*C2	Q159	*G3
C127	*B4	C234	H2	D151	*A4	IC102	B3	Q105	E2	Q160	*G3
C128	H3	C235	*H2	D152	*B4	IC103	D3	Q106	F2	Q161	*B4
C129	J3	C236	*H2	D153	*B4	IC104	D2	Q107	F2	Q162	*B4
C130	B3	C237	*G1	D154	*C4	IC105	D3	Q108	H3	Q163	*B4
C131	B3	C238	*H2	D161	*D4	IC106	D3	Q109	E3	Q176	H3
C132	D2	C239	*H2	D162	*D4	IC107	B3	Q110	E3	Q177	H3
C133	E3	C240	C3	D172	*B3	IC108	B3	Q111	E3	Q178	H3
C134	H2	C241	C3	D173	*B3	IC109	D2	Q112	G1	Q179	H3
C200	*H2	C242	C3	D174	*C3	IC110	E3	Q113	G1	Q180	*C3
C201	G3	C243	C3	D201	*D3	IC111	H2	Q114	*F2	Q181	*C3
C202	*H2			D202	*D3	IC200	H2	Q115	*F2	Q182	*C3
C203	H2	CN101	*D3	D203	*G3	IC201	D3	Q116	H3	Q183	*B3
C204	G3	CN102	*B3	D204	*J3	IC202	D2	Q117	H3	Q184	*B3
C205	*F2	CN103	*E2	D211	*E3	IC203	D3	Q118	H3	Q185	*B3
C206	*F2	CN104	*H2	D212	*E4	IC204	C3	Q119	H3	Q186	*B3

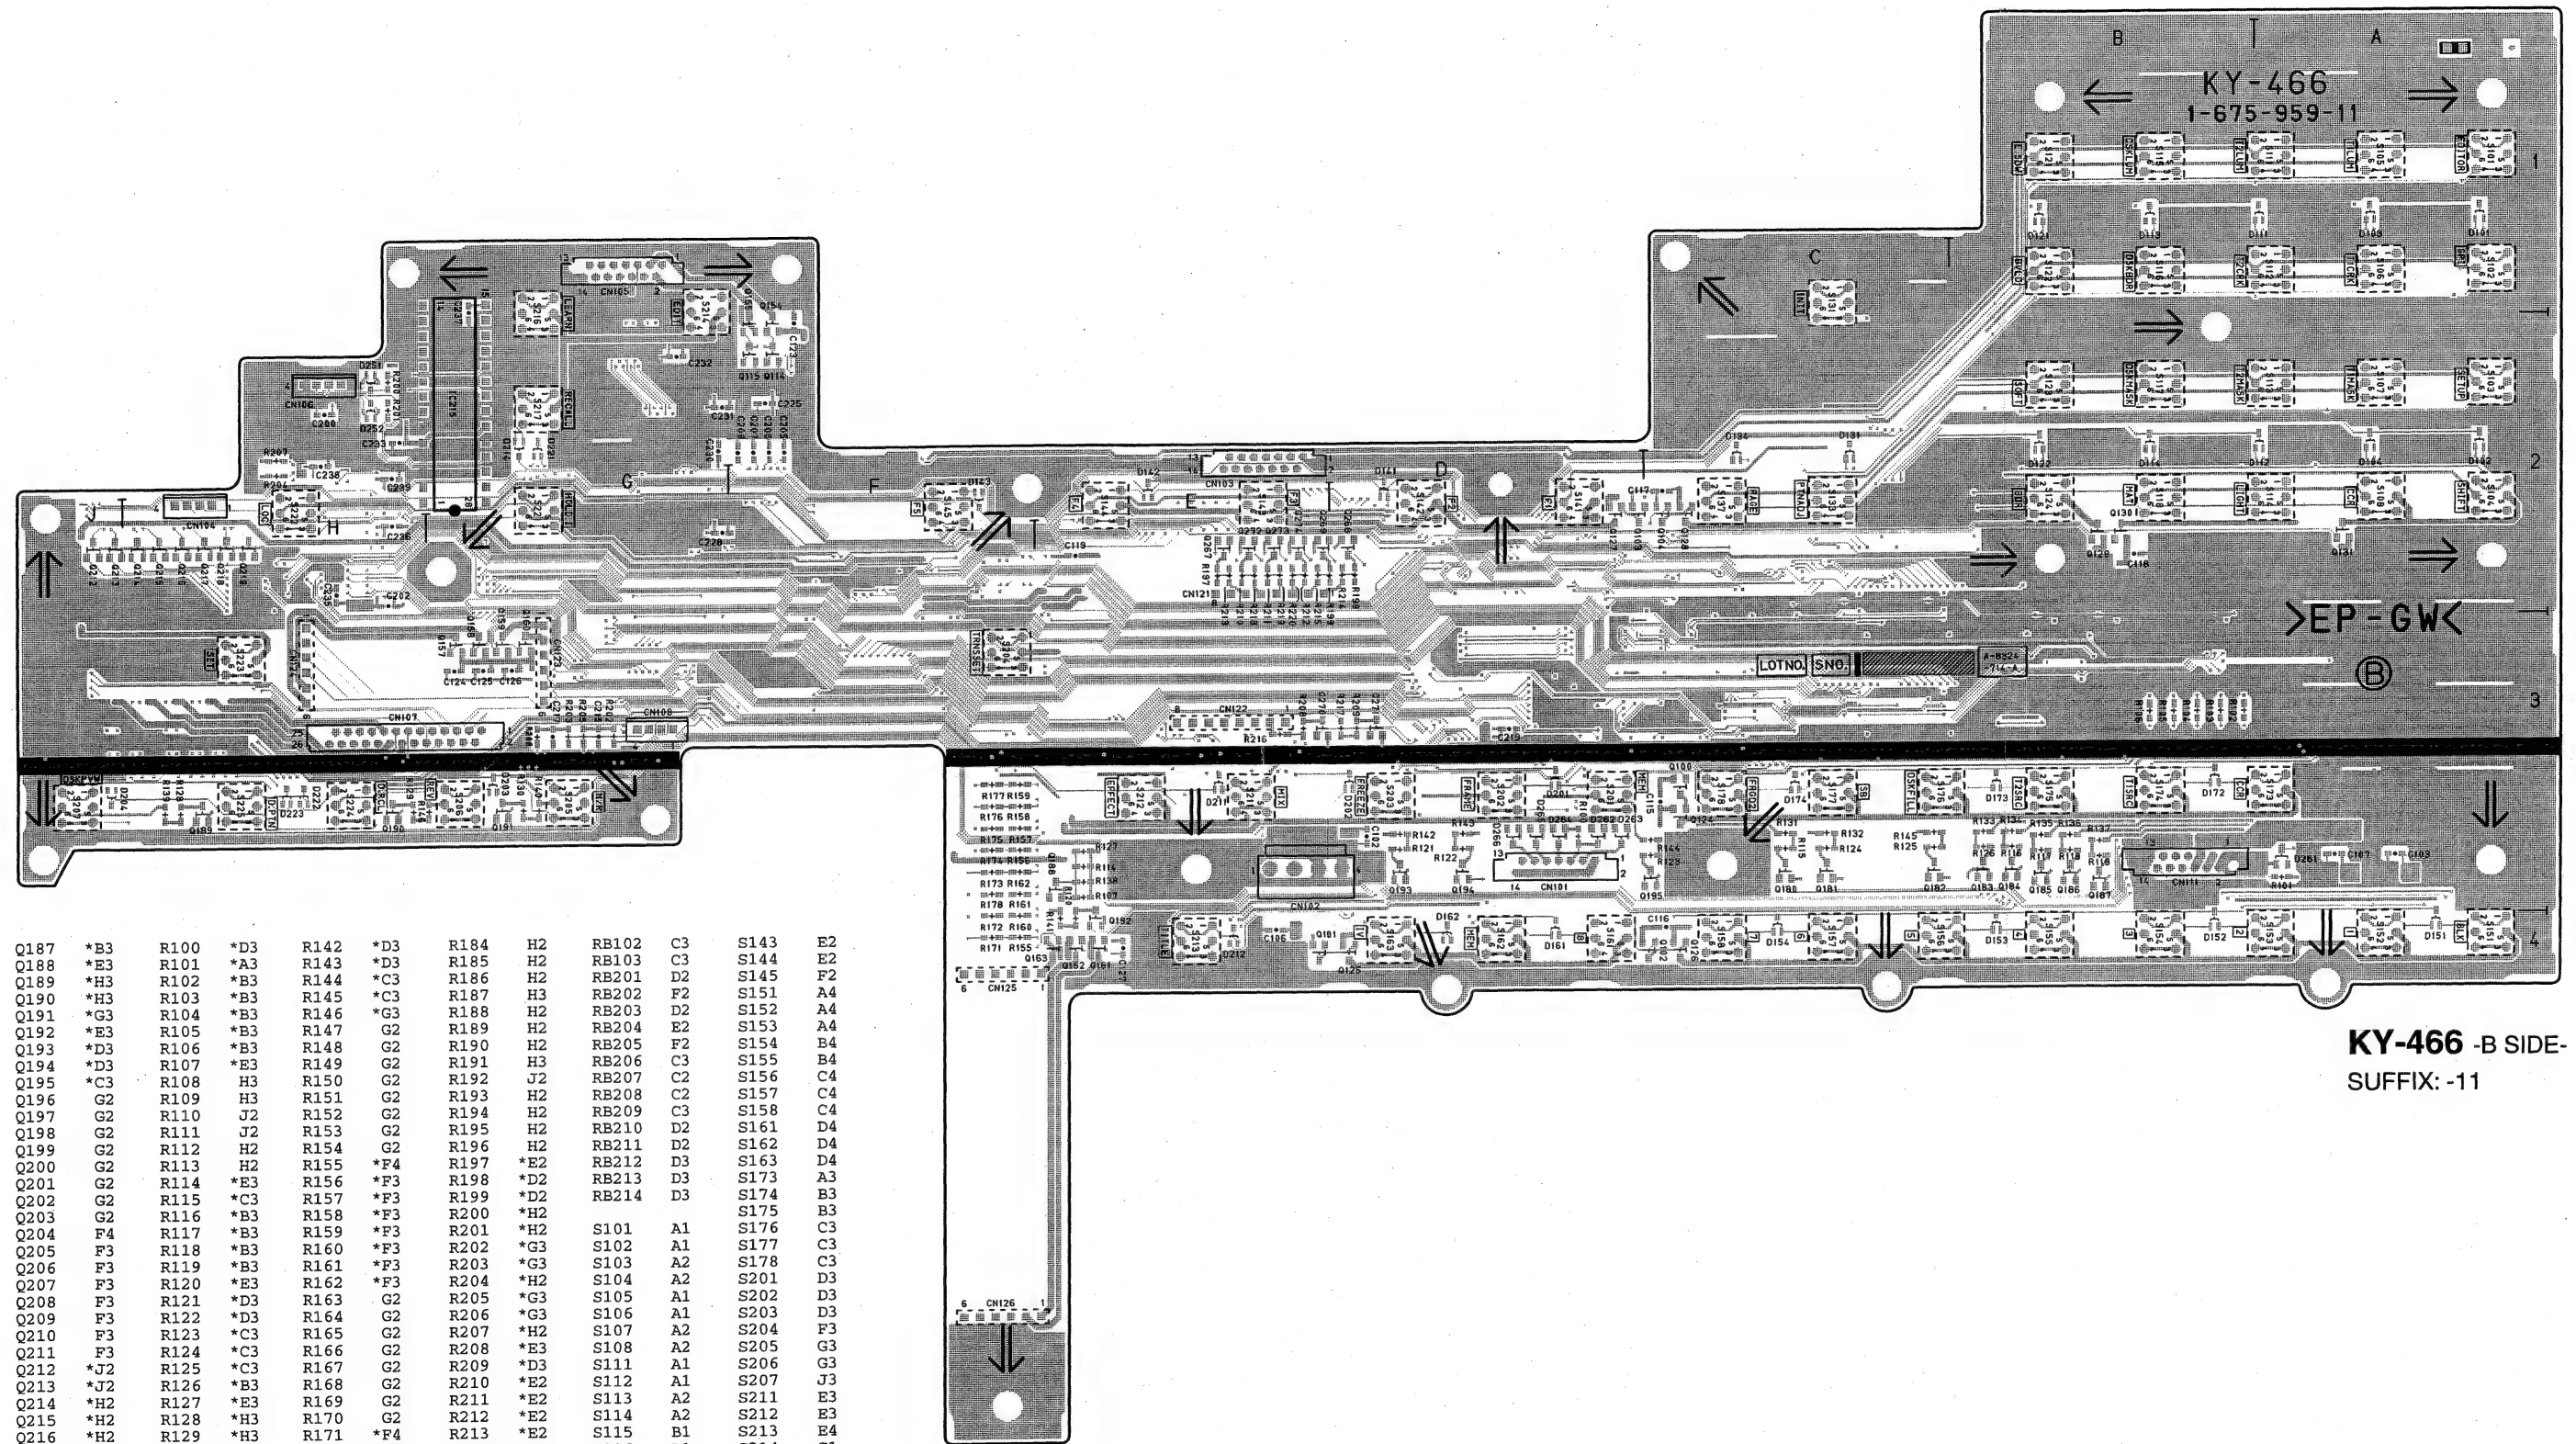

KY-466 -B SIDE-
SUFFIX: -11

Q187	*B3	R100	*D3	R142	*D3	R184	H2	RB102	C3	S143	E2
Q188	*E3	R101	*A3	R143	*D3	R185	H2	RB103	C3	S144	E2
Q189	*H3	R102	*B3	R144	*C3	R186	H2	RB201	D2	S145	F2
Q190	*H3	R103	*B3	R145	*C3	R187	H3	RB202	F2	S151	A4
Q191	*G3	R104	*B3	R146	*G3	R188	H2	RB203	D2	S152	A4
Q192	*E3	R105	*B3	R147	G2	R189	H2	RB204	E2	S153	A4
Q193	*D3	R106	*B3	R148	G2	R190	H2	RB205	F2	S154	B4
Q194	*D3	R107	*E3	R149	G2	R191	H3	RB206	C3	S155	B4
Q195	*C3	R108	H3	R150	G2	R192	J2	RB207	C2	S156	C4
Q196	G2	R109	H3	R151	G2	R193	H2	RB208	C2	S157	C4
Q197	G2	R110	J2	R152	G2	R194	H2	RB209	C3	S158	C4
Q198	G2	R111	J2	R153	G2	R195	H2	RB210	D2	S161	D4
Q199	G2	R112	H2	R154	G2	R196	H2	RB211	D2	S162	D4
Q200	G2	R113	H2	R155	*F4	R197	*E2	RB212	D3	S163	D4
Q201	G2	R114	*E3	R156	*F3	R198	*D2	RB213	D3	S173	A3
Q202	G2	R115	*C3	R157	*F3	R199	*D2	RB214	D3	S174	B3
Q203	G2	R116	*B3	R158	*F3	R200	*H2			S175	B3
Q204	F4	R117	*B3	R159	*F3	R201	*H2	S101	A1	S176	C3
Q205	F3	R118	*B3	R160	*F3	R202	*G3	S102	A1	S177	C3
Q206	F3	R119	*B3	R161	*F3	R203	*G3	S103	A2	S178	C3
Q207	F3	R120	*E3	R162	*F3	R204	*H2	S104	A2	S201	D3
Q208	F3	R121	*D3	R163	G2	R205	*G3	S105	A1	S202	D3
Q209	F3	R122	*D3	R164	G2	R206	*G3	S106	A1	S203	D3
Q210	F3	R123	*C3	R165	G2	R207	*H2	S107	A2	S204	F3
Q211	F3	R124	*C3	R166	G2	R208	*E3	S108	A2	S205	G3
Q212	*J2	R125	*C3	R167	G2	R209	*D3	S111	A1	S206	G3
Q213	*J2	R126	*B3	R168	G2	R210	*E2	S112	A1	S207	J3
Q214	*H2	R127	*E3	R169	G2	R211	*E2	S113	A2	S211	E3
Q215	*H2	R128	*H3	R170	G2	R212	*E2	S114	A2	S212	E3
Q216	*H2	R129	*H3	R171	*F4	R213	*E2	S115	B1	S213	E4
Q217	*H2	R130	*G3	R172	*F3	R214	*D2	S116	B1	S214	G1
Q218	*H2	R131	*C3	R173	*F3	R215	*E2	S117	B2	S216	G1
Q219	*H2	R132	*C3	R174	*F3	R216	*E3	S118	B2	S217	G2
Q267	*E2	R133	*B3	R175	*F3	R217	*D3	S121	B1	S221	G2
Q268	*D2	R134	*B3	R176	*F3	R218	*E2	S122	B1	S222	H2
Q269	*E2	R135	*B3	R177	*F3	R219	*E2	S123	B2	S223	H3
Q270	*E3	R136	*B3	R178	*F3	R220	*E2	S124	B2	S224	H3
Q271	*D3	R137	*B3	R179	H3	R221	D3	S131	C1	S225	H3
Q272	*E2	R138	*E3	R180	H3	R222	D3	S133	C2		
Q273	*E2	R139	*H3	R181	H2	R231	D3	S137	C2		
Q274	*E2	R140	*G3	R182	H2			S141	D2		
		R141	*E3	R183	H2	RB100	C3	S142	D2		

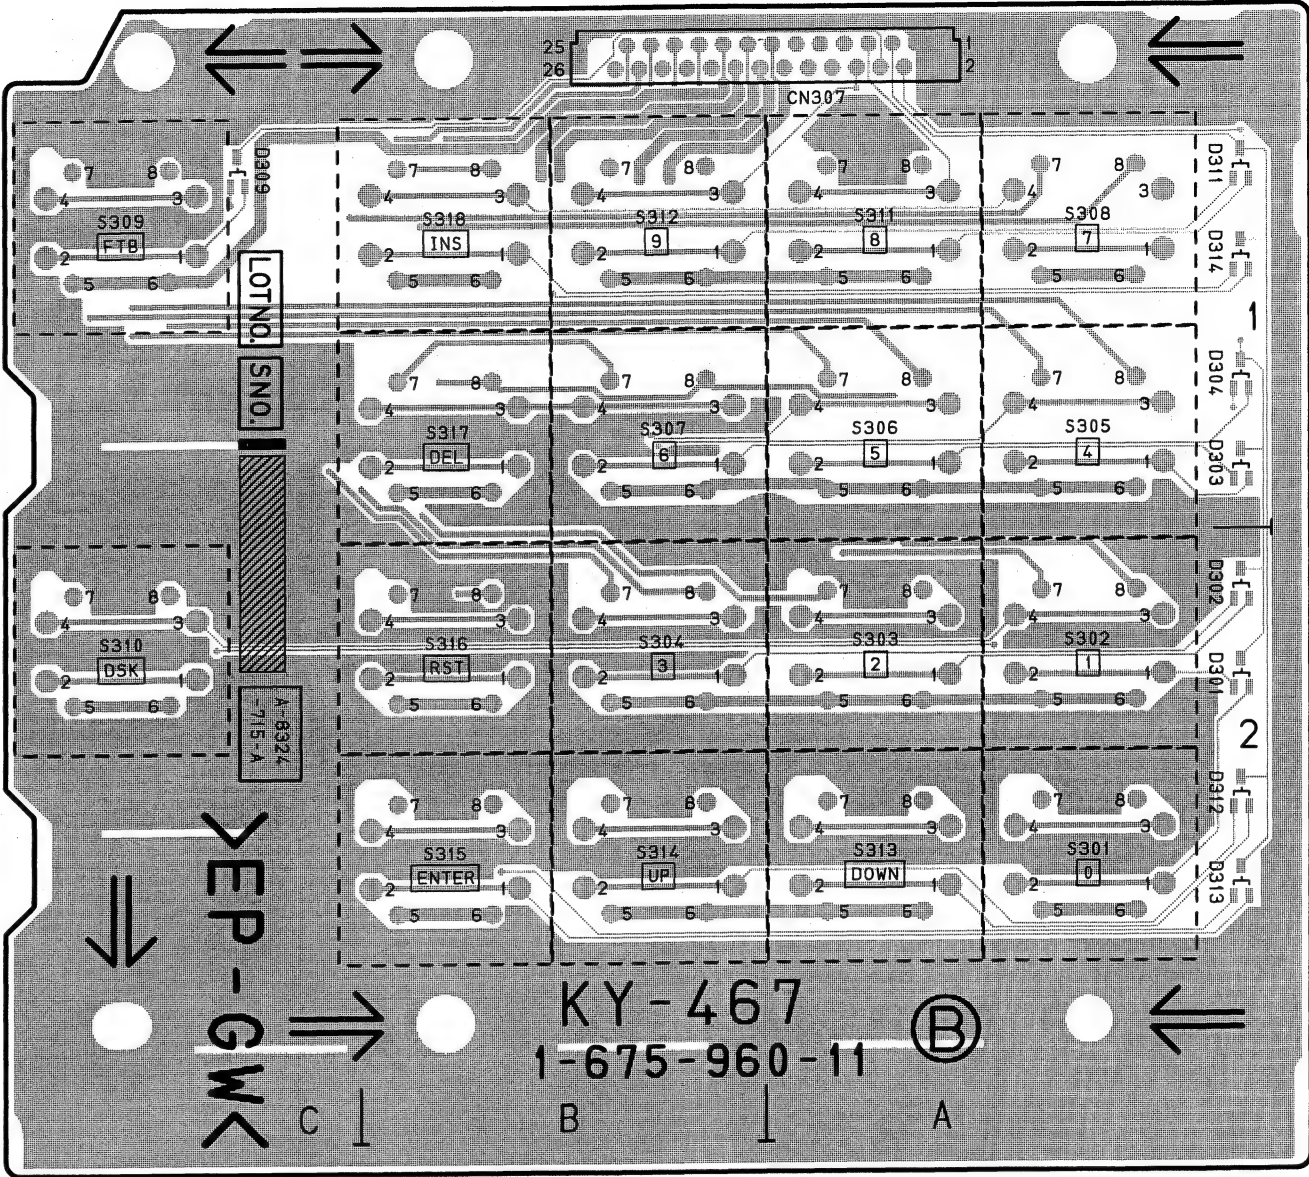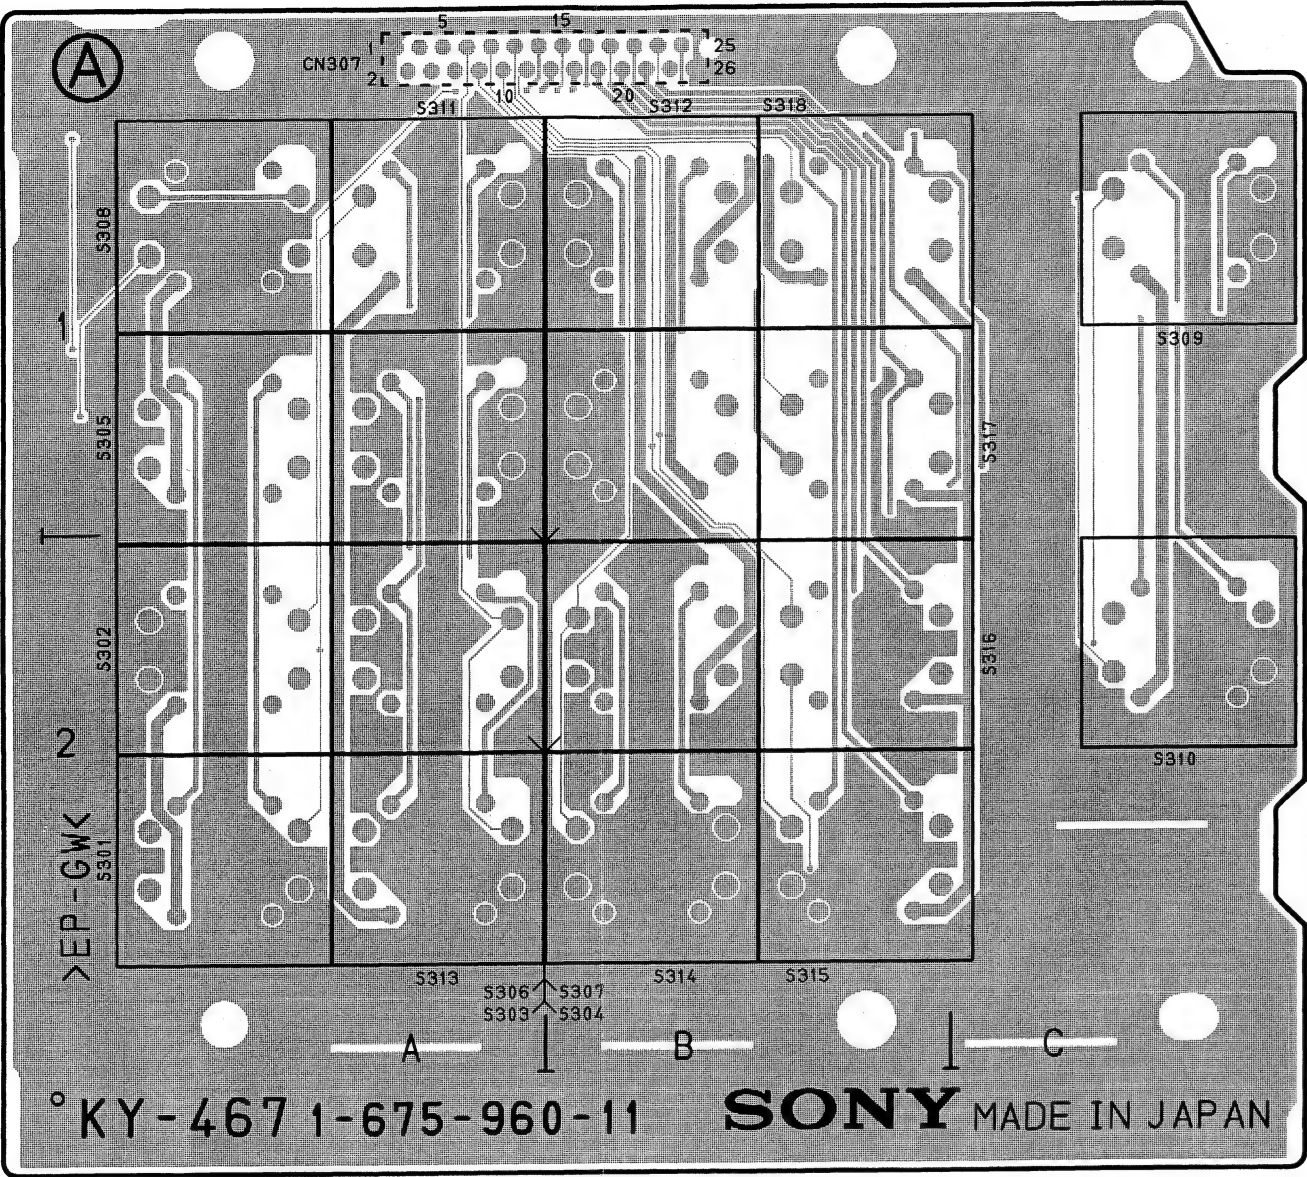

DFS-700 (J) : S/N 30001 and Higher
DFS-700 (UC) : S/N 10001 and Higher
DFS-700P (CE) : S/N 40001 and Higher


KY-467 -A SIDE-
SUFFIX: -11

KY-467 -B SIDE-
SUFFIX: -11

KY-467 (1-675-960-11)


*:B SIDE

CN307	*A1	S305	A1
		S306	A1
D301	*A2	S307	B1
D302	*A2	S308	A1
D303	*A1	S309	C1
D304	*A1	S310	C2
D309	*C1	S311	A1
D311	*A1	S312	B1
D312	*A2	S313	A2
D313	*A2	S314	B2
D314	*A1	S315	B2
		S316	B2
S301	A2	S317	B1
S302	A2	S318	B1
S303	A2		
S304	B2		

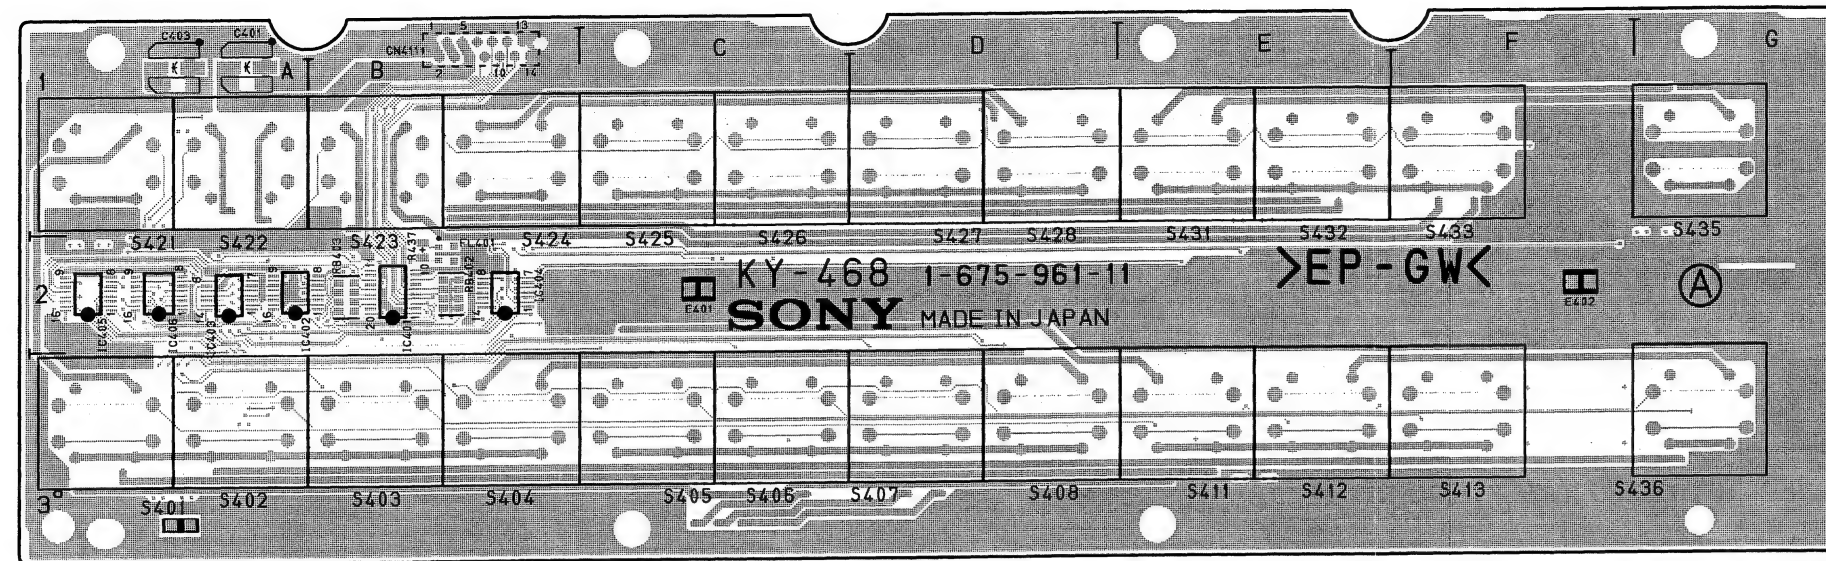

DFS-700 (J) : S/N 30001 and Higher
DFS-700 (UC) : S/N 10001 and Higher
DFS-700P (CE) : S/N 40001 and Higher

KY-468 -A SIDE-
SUFFIX: -11

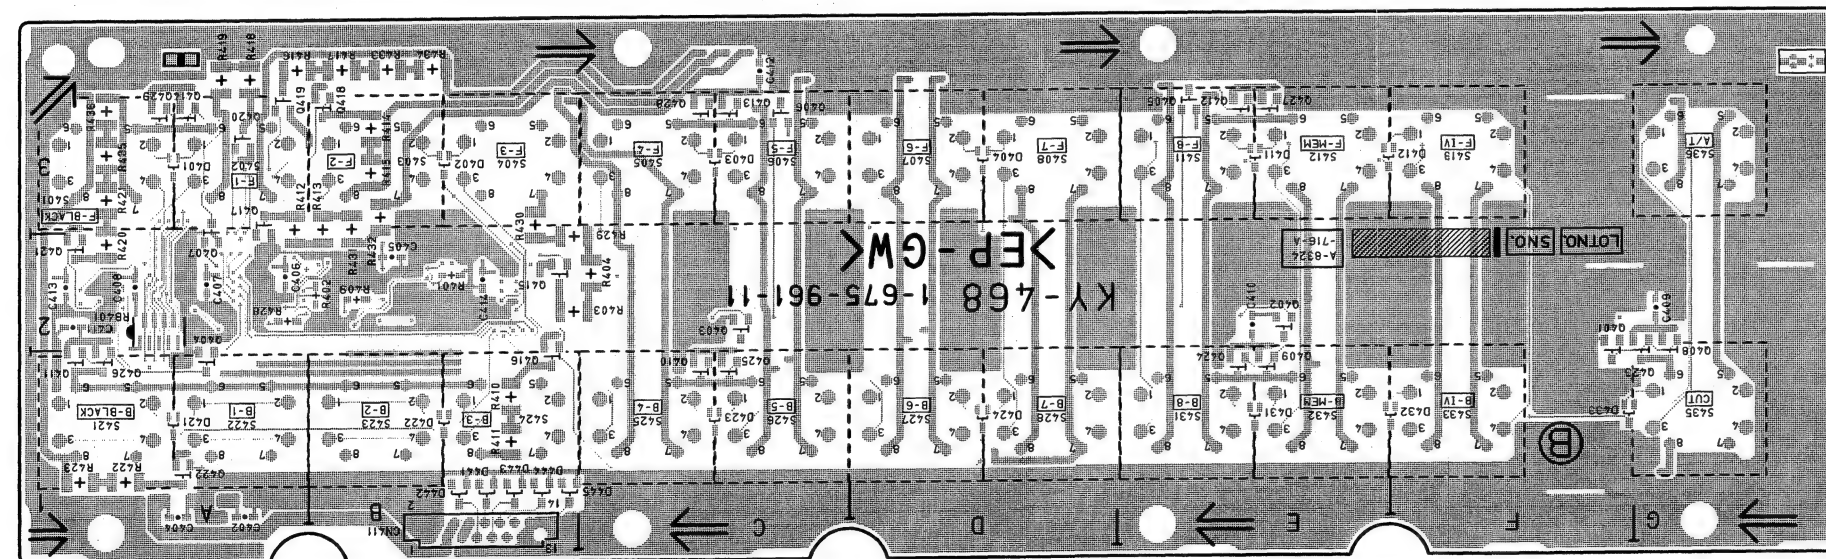


KY-468 -B SIDE-
SUFFIX: -11

KY-468 (1-675-961-11)

*:B SIDE

C401	A1	R419	*A3
C402	*A1	R420	*A2
C403	A1	R421	*A3
C404	*A1	R422	*A1
C405	*B2	R423	*A1
C406	*A2	R428	*A2
C407	*A2	R429	*B2
C408	*A2	R430	*B3
C409	*G2	R431	*B3
C410	*E2	R432	*B3
C411	*A2	R433	*B3
C412	*C3	R434	*B3
C413	*A2	R435	*A3
C414	*B2	R436	*A3
		R437	B2
CN411	*B1		
D401	*A3	RB401	*A2
D402	*B3	RB402	B2
D403	*C3	RB403	B2
D404	*D3	S401	A3
D411	*E3	S402	A3
D412	*E3	S403	B3
D421	*A1	S404	B3
D422	*B1	S405	C3
D423	*C1	S406	C3
D424	*D1	S407	D3
D431	*E1	S408	D3
D432	*E1	S411	E3
D433	*F1	S412	E3
D441	*B1	S413	F3
D442	*B1	S421	A1
D443	*B1	S422	A1
D444	*B1	S423	B1
D445	*B1	S424	B1
		S425	C1
E401	C2	S426	C1
E402	F2	S427	D1
		S428	D1
FL401	B2	S431	E1
		S432	E1
IC401	B2	S433	F1
IC402	B2	S435	G1
IC403	A2	S436	G3
IC404	B2		
IC405	A2		
IC406	A2		
Q401	*F1		
Q402	*E2		
Q403	*C2		
Q404	*A1		
Q405	*E3		
Q406	*C3		
Q407	*A2		
Q408	*G1		
Q409	*E1		
Q410	*C1		
Q411	*A1		
Q412	*E3		
Q413	*C3		
Q414	*A3		
Q415	*B2		
Q416	*B1		
Q417	*A3		
Q418	*B3		
Q419	*A3		
Q420	*A3		
Q421	*A2		
Q422	*A1		
Q423	*G1		
Q424	*E1		
Q425	*C1		
Q426	*A1		
Q427	*E3		
Q428	*C3		
Q429	*A3		
R401	*B2		
R402	*B2		
R403	*B2		
R404	*C2		
R409	*B2		
R410	*B1		
R411	*B1		
R412	*A3		
R413	*B3		
R414	*B3		
R415	*B3		
R416	*A3		
R417	*B3		
R418	*A3		

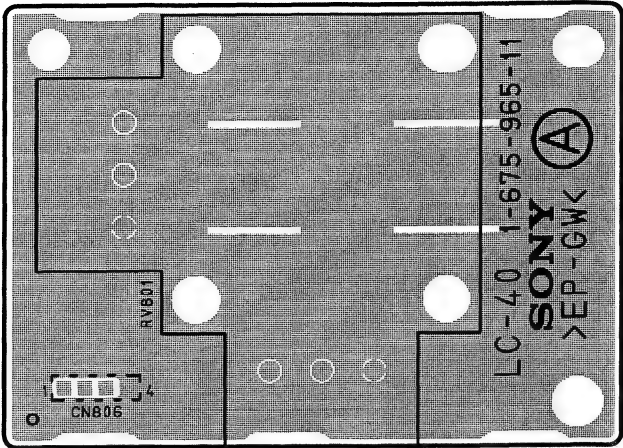

DFS-700 (J) : S/N 30001 and Higher
DFS-700 (UC) : S/N 10001 and Higher
DFS-700P (CE) : S/N 40001 and Higher


LC-40 -A SIDE-
SUFFIX: -11

LC-40 (1-675-965-11)


*:B SIDE

C801 *A1
C802 *A1
C803 *A1

CN806 *A1
RV801 A1

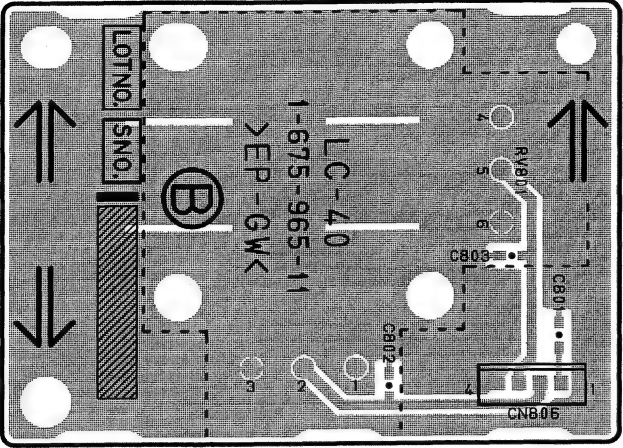

LC-40 -B SIDE-
SUFFIX: -11

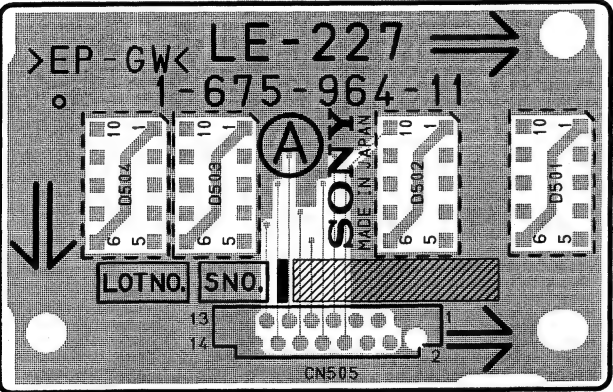

DFS-700 (J) : S/N 30001 and Higher
DFS-700 (UC) : S/N 10001 and Higher
DFS-700P (CE) : S/N 40001 and Higher


LE-227 -A SIDE-
SUFFIX: -11

LE-227 (1-675-964-11)


*:B SIDE

CN505 A1

D501 *A1
D502 *A1
D503 *A1
D504 *A1

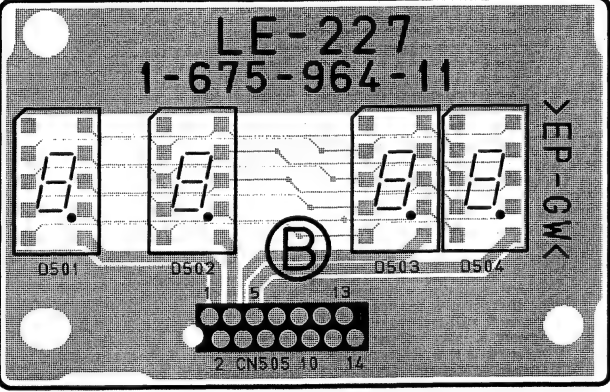

LE-227 -B SIDE-
SUFFIX: -11

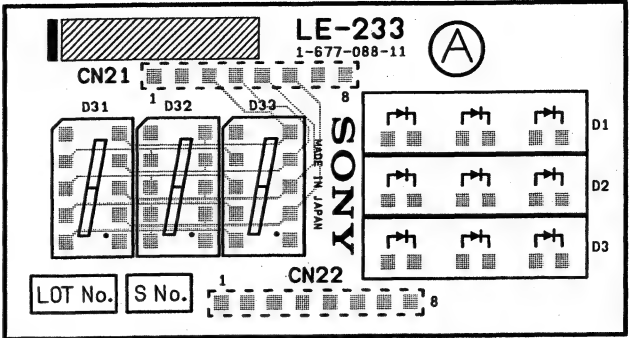


DFS-700 (J) : S/N 30001 and Higher
DFS-700 (UC) : S/N 10001 and Higher
DFS-700P (CE) : S/N 40001 and Higher

LE-233 -A SIDE-
SUFFIX: -11


LE-233 (1-677-088-11)

*:B SIDE

CN21 *A1 D3 A1
CN22 *A1 D31 A1
D1 A1 D32 A1
D2 A1 D33 A1

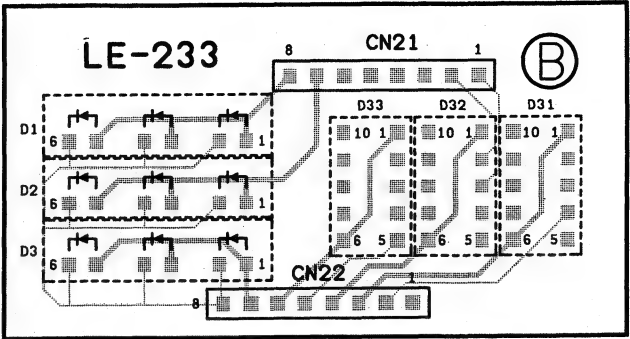

LE-233 -B SIDE-
SUFFIX: -11

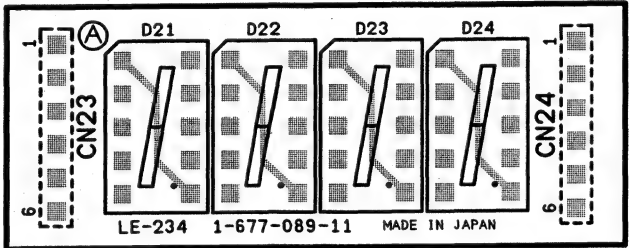

DFS-700 (J) : S/N 30001 and Higher
DFS-700 (UC) : S/N 10001 and Higher
DFS-700P (CE) : S/N 40001 and Higher


LE-234 -A SIDE-
SUFFIX: -11

LE-234 (1-677-089-11)


*:B SIDE

CN23 *A1
CN24 *A1

D21 A1
D22 A1
D23 A1
D24 A1

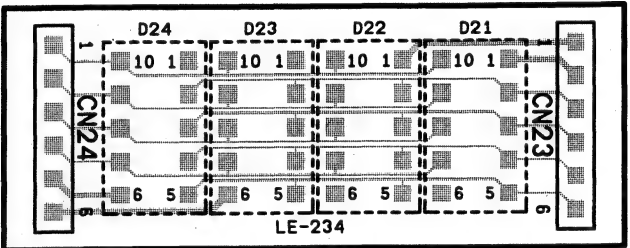

LE-234 -B SIDE-
SUFFIX: -11

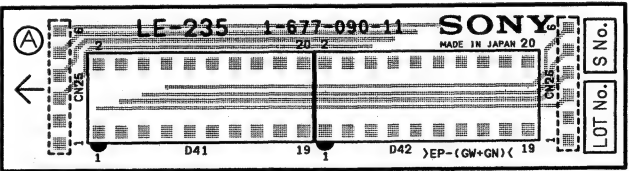

DFS-700 (J) : S/N 30001 and Higher
DFS-700 (UC) : S/N 10001 and Higher
DFS-700P (CE) : S/N 40001 and Higher


LE-235 -A SIDE-
SUFFIX: -11

LE-235 (1-677-090-11)


*:B SIDE

CN25 *A1
CN26 *A1

D41 A1
D42 A1

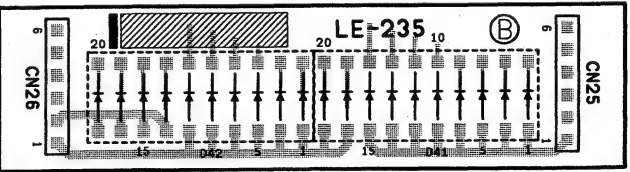

LE-235 -B SIDE-
SUFFIX: -11

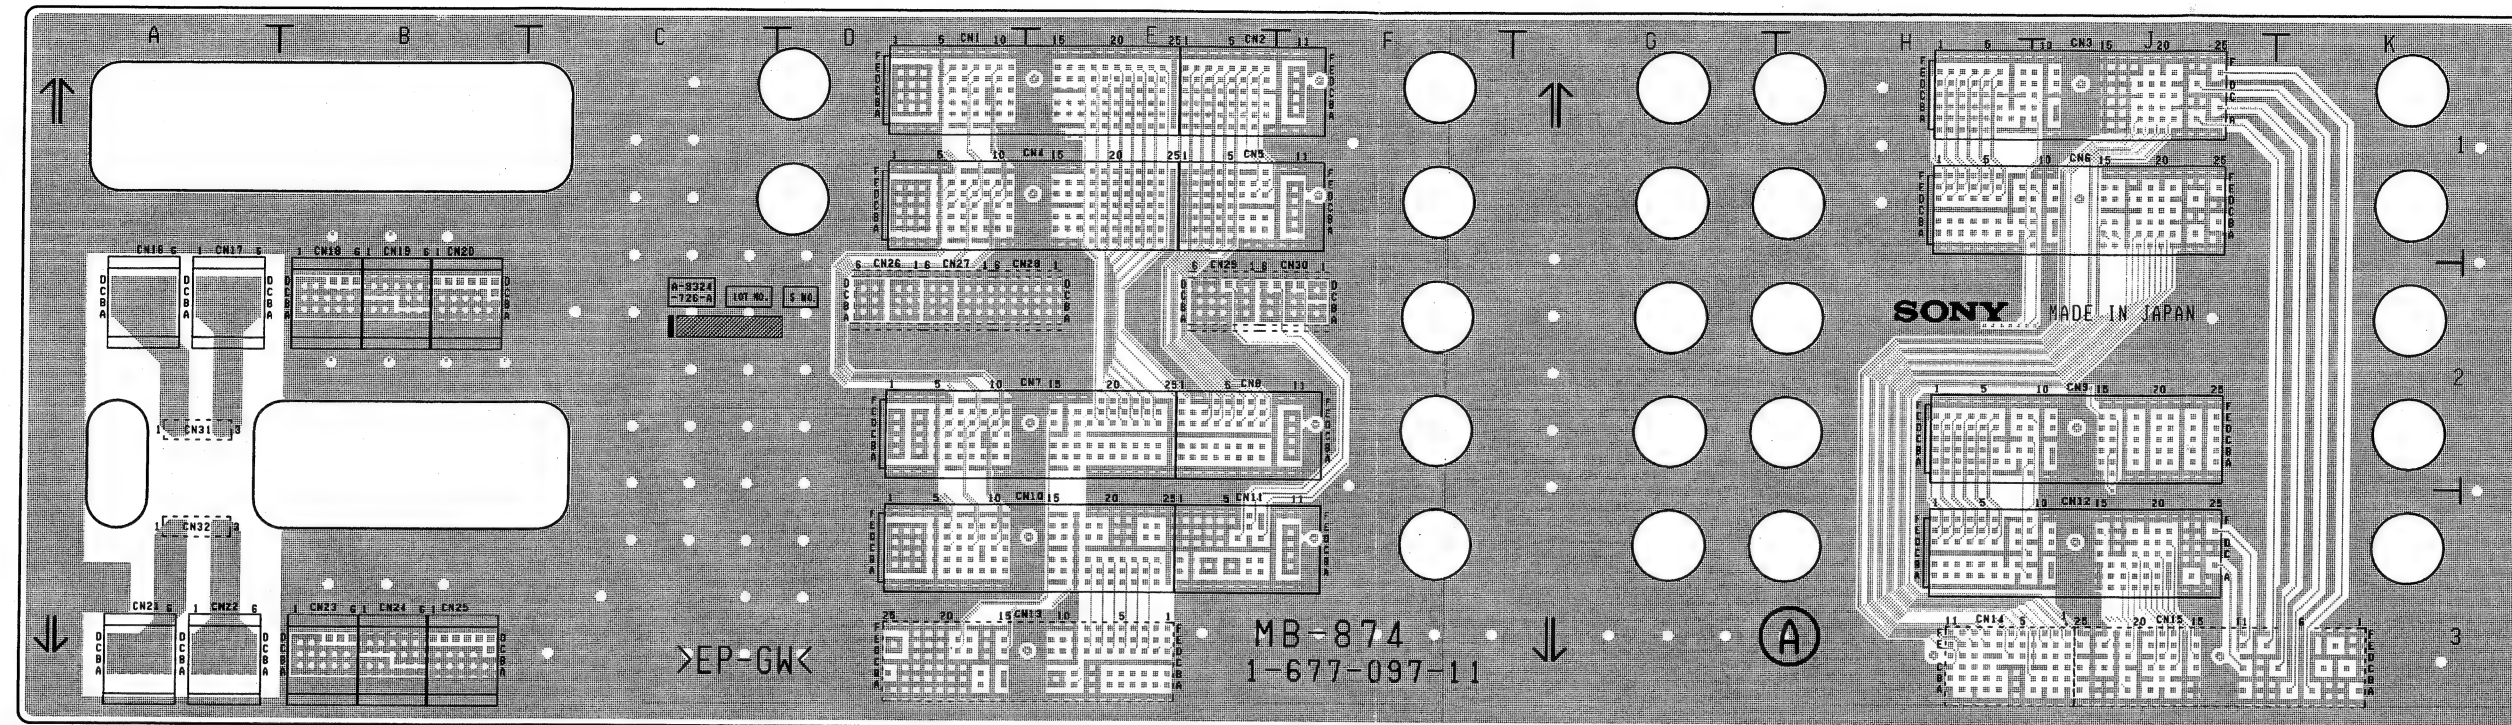

DFS-700 (J) : S/N 30001 and Higher
DFS-700 (UC) : S/N 10001 and Higher
DFS-700P (CE) : S/N 40001 and Higher


MB-874 -A SIDE-
SUFFIX: -11

MB-874 (1-677-097-11)

*:B SIDE

C1	*J1
C2	*J1
CN1	E1
CN2	E1
CN3	J1
CN4	E1
CN5	E1
CN6	J1
CN7	E2
CN8	E2
CN9	J2
CN10	E3
CN11	E3
CN12	J3
CN13	*E3
CN14	*H3
CN15	*J3
CN16	A2
CN17	A2
CN18	B2
CN19	B2
CN20	B2
CN21	A3
CN22	A3
CN23	B3
CN24	B3
CN25	B3
CN26	*D2
CN27	*D2
CN28	*E2
CN29	*E2
CN30	*F2
CN31	*A2
CN32	*A3

R1 *J1
R2 *H1

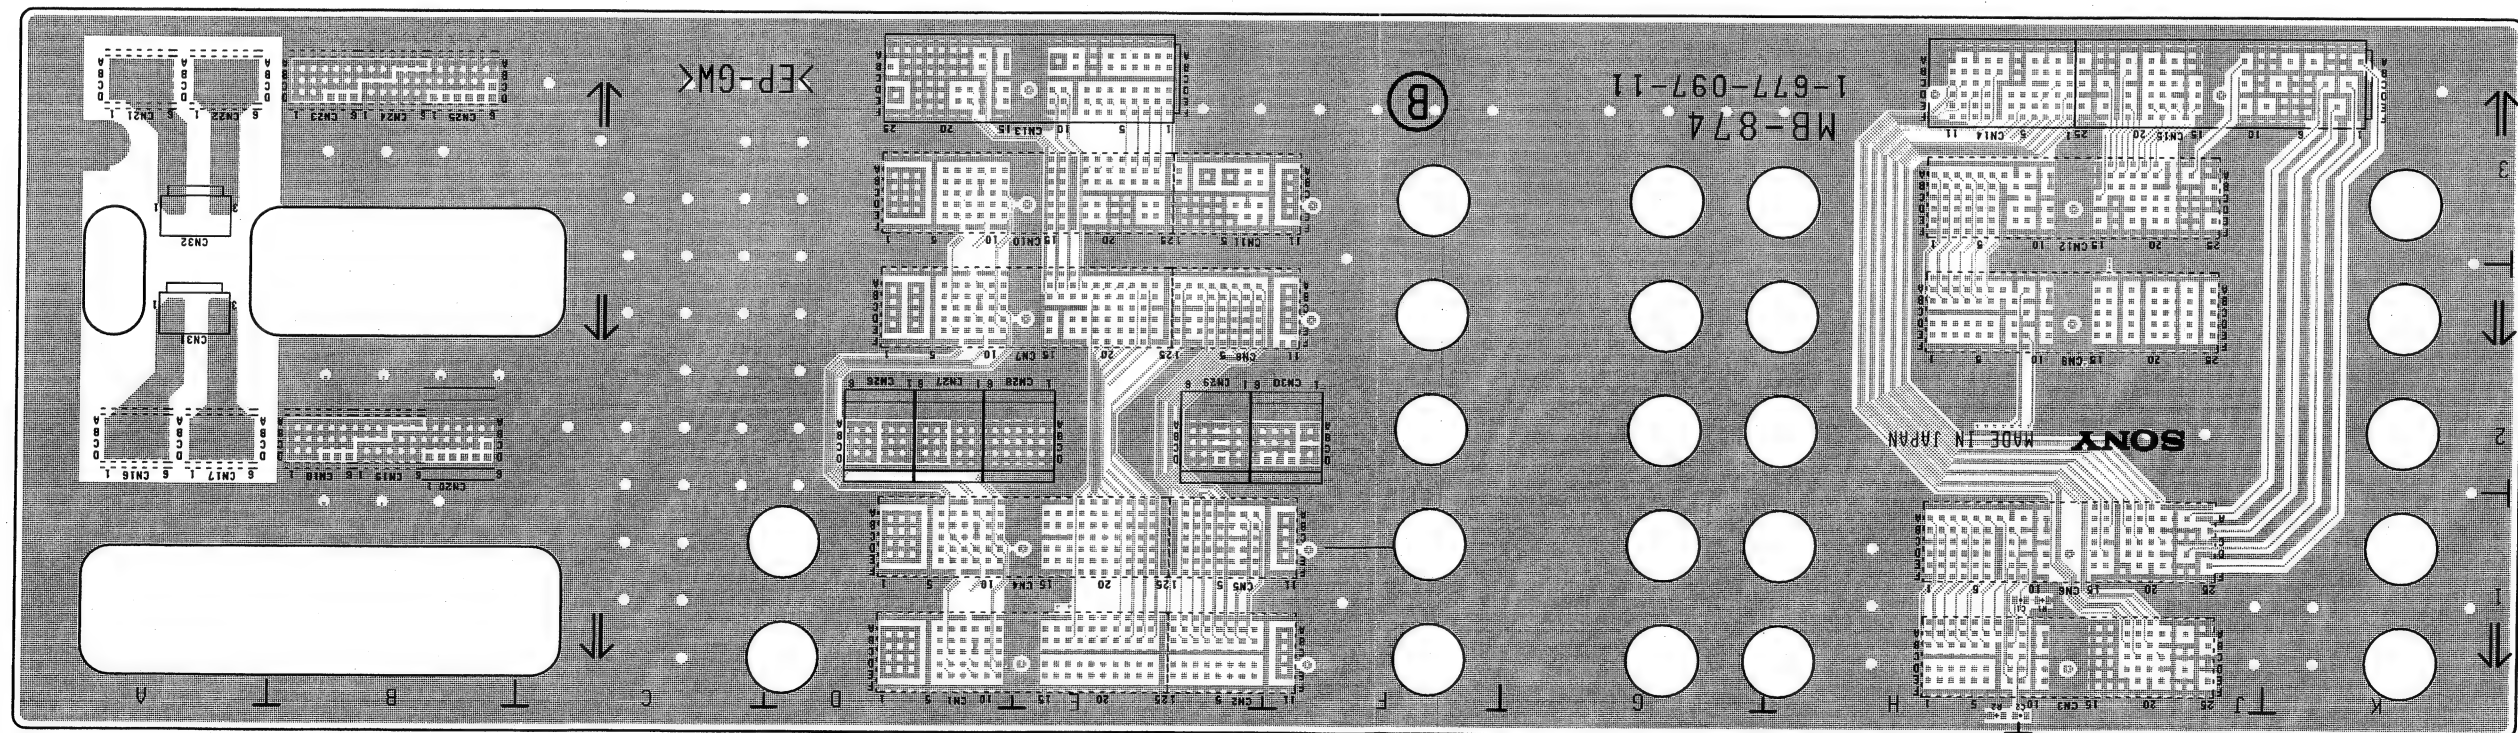


MB-874 -B SIDE-
SUFFIX: -11

OPM-39 (1-677-095-12)

*:B SIDE

C101	D5	C195	B1	C504	J7	C660	D7	C753	D8	C937	H1	FL801	L4	IC616	D5	Q603	F7	R140	A4	R235	E2	R634	E6	R727	B8	R826	M4	R1648	C6	R1794	F7	RV710	A8
C102	B5	C196	B1	C505	J7	C661	D5	C754	F9	C938	J1			IC617	C5	Q604	F5	R141	D1	R236	E2	R635	E7	R728	B9	R827	M5	R1649	C6	R1795	F7	RV711	D8
C103	C5	C197	B1	C506	K6	C662	D5	C755	D7	C939	H1	IC101	C4	IC618	C6	Q605	F6	R142	D1	R237	E2	R636	D6	R729	B9	R830	M4	R1650	C6	R1796	F8	RV712	A8
C104	C5	C201	E3	C507	J5	C663	D5	C756	F9	C940	H1	IC102	D4	IC619	C7	Q606	F7	R143	D1	R403	L9	R637	D7	R730	C8	R839	M4	R1651	C6	R1797	F8	RV713	D9
C105	C5	C202	E3	C508	K6	C664	C5	C757	D7	C1701	D7	IC103	C3	IC620	B5	Q607	E5	R144	D1	R404	L9	R638	E5	R731	C7	R847	M2	R1652	C6	R1798	G8	RV714	E7
C106	D5	C203	E3	C509	K7	C665	C6	C758	D7	C1702	D8	IC104	B5	IC621	B6	Q608	E6	R145	D1	R405	L9	R639	D6	R732	C8	R848	L2	R1653	C6	R1801	F7	RV715	E7
C107	C5	C204	F1	C510	L7	C666	C7	C759	D9	C1703	D7	IC105	B4	IC622	B7	Q609	E7	R146	D1	R406	L9	R640	D6	R733	C9	R849	L2	R1654	C6	R1802	G7	RV717	F7
C108	C5	C205	F2	C511	L7	C667	C5	C760	D8	C1704	D8	IC106	B3	IC623	B5	Q610	E5	R147	B2	R407	L9	R641	D6	R734	C7	R850	L2	R1700	A8	R1805	F7	RV718	F7
C109	B5	C206	F1	C512	M7	C668	C5	C761	E9	C1705	E8	IC107	B3	IC624	B6	Q611	D6	R148	D1	R408	L8	R642	D7	R735	C7	R851	K2	R1701	A8	R1806	F8	RV720	G7
C110	B5	C207	F2	C513	M7	C669	C6	C762	E9	C1706	E8	IC108	B2	IC625	G5	Q612	D7	R149	B1	R409	L9	R643	D5	R736	C7	R852	K2	R1702	D8	R1807	F7	RV721	H8
C111	C4	C208	E3	C514	L7	C670	C7	C763	E9	C1707	E7	IC109	B2	IC626	B7	Q613	D6	R150	B1	R410	L8	R644	D6	R737	C9	R853	J2	R1703	F9	R1808	G7	RV801	K4
C112	B4	C209	E3	C515	L7	C671	C6	C764	D8	C1708	E7	IC110	B2	IC701	C9	Q614	D7	R151	D2	R411	L9	R645	D7	R738	C9	R854	J2	R1704	F9	R1809	G7	RV901	A3
C113	B4	C210	E3	C516	L7	C672	C7	C765	D7	C1709	F9	IC111	B2	IC702	D9	Q615	D6	R152	D2	R412	L9	R646	D5	R739	C9	R855	J3	R1705	F9	R1812	G7	RV902	A3
C114	B5	C211	E3	C517	L7	C673	B5	C766	E9	C1710	F8	IC114	D4	IC703	E9	Q616	D7	R153	D2	R413	L9	R647	D6	R740	C8	R857	L5	R1706	D7	R1813	G7		
C115	B4	C212	E2	C518	M8	C674	B5	C767	D7	C1711	E8	IC115	C4	IC704	D8	Q617	D5	R154	D2	R414	L9	R648	D7	R741	C9	R860	K4	R1707	E9	R1814	G8	RY801	M2
C116	D5	C213	F3	C519	L8	C675	B6	C768	D8	C1712	F8	IC116	C2	IC705	E9	Q618	C6	R155	D2	R415	L9	R649	D5	R742	C7	R861	K3	R1708	E9	R1815	G8	RY802	L2
C117	D4	C214	F2	C520	L8	C676	B6	C769	D8	C1713	F9	IC117	D2	IC706	F9	Q619	C6	R156	D2	R416	L9	R650	D6	R743	C7	R862	K4	R1709	D8	R1816	G8	RY803	L2
C118	C4	C215	E3	C521	L7	C677	B6	C770	F9	C1714	E8	IC118	C2	IC707	E8	Q701	B8	R157	D2	R417	L9	R651	D6	R744	C9	R863	K4	R1710	D7	R1817	G7	RY804	L2
C119	B4	C216	F2	C522	L7	C678	B7	C771	F9	C1716	F8	IC120	E4	IC709	C9	Q702	B9	R158	C2	R418	M9	R652	D7	R745	C8	R864	L3	R1711	D7	R1818	G7	RY805	K2
C120	C4	C217	E2	C523	L7	C679	B5	C772	F9	C1717	F8	IC121	F4	IC710	F8	Q703	B8	R159	C2	R419	M9	R653	D7	R746	C8	R865	L3	R1712	D7	R1819	G8	RY806	K2
C121	C4	C219	E2	C524	L7	C680	B5	C773	F9	C1718	F7	IC122	E4	IC712	G7	Q704	B8	R160	C2	R420	M9	R654	D6	R747	C9	R866	L4	R1713	F9	R1820	G7	RY807	J2
C122	C4	C220	E2	C525	L7	C681	B6	C774	F9	C1720	F8	IC123	E4	IC801	M4	Q705	B8	R161	C2	R421	M9	R655	D7	R748	C9	R870	J3	R1715	D8	R1821	G7	RY808	J2
C123	C4	C221	E2	C526	L7	C682	B7	C775	F9	C1721	F7	IC124	E4	IC802	M3	Q706	C8	R162	C1	R422	M9	R656	D5	R749	C7	R901	A3	R1716	F9	R1822	H7		
C124	B3	C222	E2	C527	L7	C683	B5	C776	D8	C1722	F8	IC125	E4	IC803	M3	Q707	C7	R163	C1	R423	M9	R657	D5	R750	C8	R902	A4	R1717	D7	R1823	G7	S101	A5
C125	B3	C223	E2	C528	L8	C684	B5	C777	E9	C1725	F8	IC126	F4	IC804	M4	Q708	C9	R164	C1	R424	M9	R658	D5	R751	C7	R903	K2	R1718	D8	R1824	G8	S102	B4
C126	B4	C224	E1	C529	L8	C685	B6	C778	E8	C1726	F7	IC127	G5	IC805	L3	Q709	C9	R165	C1	R425	M9	R659	D6	R752	C7	R904	K1	R1719	D7	R1825	H8	S201	E2
C127	C4	C225	E1	C530	L8	C686	B6	C779	E8	C1727	F7	IC132	B3	IC807	J3	Q710	C8	R166	C1	R426	M9	R660	D7	R753	C8	R905	K1	R1720	A8	R1826	G8	S401	K9
C128	C3	C226	E1	C531	M8	C687	B6	C780	E8	C1728	F7	IC133	D2	IC808	K5	Q711	C7	R167	C1	R427	L9	R661	D6	R754	A8	R906	A3	R1721	A8	R1827	H8	S501	L7
C129	D3	C227	E1	C532	J6	C688	B6	C781	E8	C1729	F8	IC135	B1	IC809	K3	Q712	C8	R168	C1	R428	K9	R662	D7	R755	A8	R907	A4	R1722	G9	R1828	H8	S801	L4
C130	B3	C228	E1	C533	J6	C689	B7	C801	L4	C1734	G8	IC136	H5	IC810	L5	Q713	C8	R169	C2	R429	L8	R663	D5	R756	C7	R908	J2	R1723	G9	R1829	H7		
C131	B3	C229	E1	C534	J7	C690	B7	C802	M3	C1735	G7	IC137	H5	IC812	J4	Q714	C9	R170	C1	R430	L8	R664	D6	R757	C7	R909	H1	R1724	G9	R1830	H7	TH101	D1
C132	A3	C230	E2	C535	K6	C691	G5	C803	L3	C1737	G8	IC138	M7	IC813	J3	Q715	C8	R171	A6	R503	M7	R665	D7	R758	D9	R910	H2	R1725	D7	R1831	G7		
C133	B3	C231	E1	C536	M7	C692	E6	C804	L4	C1738	G8	IC139	G4	IC815	M4	Q716	D8	R172	C1	R504	M7	R666	D5	R759	C8	R911	J2	R1726	E8				
C134	D2	C232	D3	C537	L7	C693	E7	C806	M3	C1739	G7	IC140	G5	IC816	K4	Q717	C7	R173	C1	R505	L7	R667	D6	R760	C8	R912	H1	R1727	F9	RB101	A5	TP101	D4
C135	D2	C233	D3	C601	G5	C694	C6	C812	K3	C1740	G8	IC141	H4	IC901	J1	Q718	C7	R174	D1	R506	L8	R668	D7	R761	D9	R913	H2	R1728	F9	RB102	M7	TP108	G4
C136	D2	C234	E2	C602	H5	C695	C6	C813	J4	C1741	G8	IC142	H4	IC902	J2	Q719	D7	R175	D1	R507	M8	R669	C6	R762	D9	R917	A2	R1729	D8	RB103	M7	TP109	G4
C137	A2	C301	F3	C603	H6	C696	C6	C814	L5	C1742	G8	IC143	G4	IC903	J1	Q720	D7	R176	D1	R508	M8	R670	C7	R763	C7	R1100	C3	R1730	D7	RB104	G4	TP110	G4
C138	C1	C302	F1	C604	H5	C697	C6	C815	K5	C1743	G7	IC144	C3	IC904	J1	Q721	D8	R177	D1	R509	L8	R671	D5	R764	C7	R1101	B3	R1731	D8	RB105	H4	TP111	H4
C139	D2	C303	G2	C605	H6	C698	C6	C816	K5	C1744	G8	IC145	C3	IC905	H2	Q722	E8	R178	D1	R510	L8	R672	D5	R765	D9	R1102	B3	R1732	G9	RB106	H4	TP112	G4
C140	A2	C304	G1	C606	H6	C699	C6	C817	K5	C1745	G7	IC146	B3			Q723	E8	R180	C3	R511	L8	R673	D5	R766	D9	R1103	B3	R1733	D8	RB108	G4	TP201	E2
C141	B2	C306	H2	C607	H6	C701	B7	C818	L5	C1746	H8	IC147	B2	L101	C5	Q724	E8	R181	E5	R512	L7	R674	D6	R767	C8	R1105	B2	R1734	D8	RB109	G4	TP202	E2
C142	D1	C308	H2	C608	H7	C702	B8	C819	L5	C1747	H7	IC148	B2	L102	C3	Q725	F8	R182	E4	R513	L7	R675	C6	R768	C8	R1106	B1	R1735	G9	RB301	H3	TP401	L8
C143	D1	C310	H1	C609	G6	C703	B9	C820	K4	C1748	H8	IC149	B1	L103	B5	Q726	E8	R183	E5	R514	L8	R676	D6	R769	D9	R1107	C1	R1736	E9	RB401	L6	TP501	M8
C144	B2	C312	H1	C610	G6	C704	B7	C821	L5			IC150	C3	L104	B4	Q727	F8	R185	E5	R515	M8	R677	C7	R770	C8	R1108	B1	R1737	E8	RB402	M6	TP602	F7
C145	C2	C313	J2	C611	G6	C705	B8	C822	L5	CN1	M3	IC151	B3	L105	E4	Q729	F7	R186	E4	R516	L8	R678	C6	R771	C8	R1600	C7	R1738	E8	RB403	M6	TP603	F6
C146	C1	C314	G3	C612	G7	C706	B9	C823	L4	CN2	M4	IC152	C1	L201	F1	Q731	F8	R187	F4	R517	M8	R679	C7	R772	C8	R1601	B5	R1739	E8	RB404	K9	TP604	F6
C147	D1	C316	J3	C614	F6	C707	B9	C824	M5	CN3	M8	IC201	E3	L202	F1	Q732	F7	R188	F4	R518	L8	R680	C5	R773	D9	R1602	B5	R1740	E8	RB405	K8	TP605	B6
C148	D2	C317	L3	C615	F6	C708	B8	C825	L5			IC202	E3	L203	E2	Q733	F8	R189	B3	R519	M8	R681	C5	R774	C8	R1603	B6	R1741	E8	RB406	K8	TP606	E7
C149	B1	C401	L6	C616	F6	C709	B9	C826	L5	D101	A6	IC203	F2	L204	D1	Q734	F7	R190	C3	R520	L8	R682	C5	R775	C9	R1604	B7	R1742	E8	RB501	L6	TP607	E5
C150	D2	C402	L6	C617	F7	C710	B9	C827	M4	D104	C1	IC205	E2	L205	D1	Q73																	

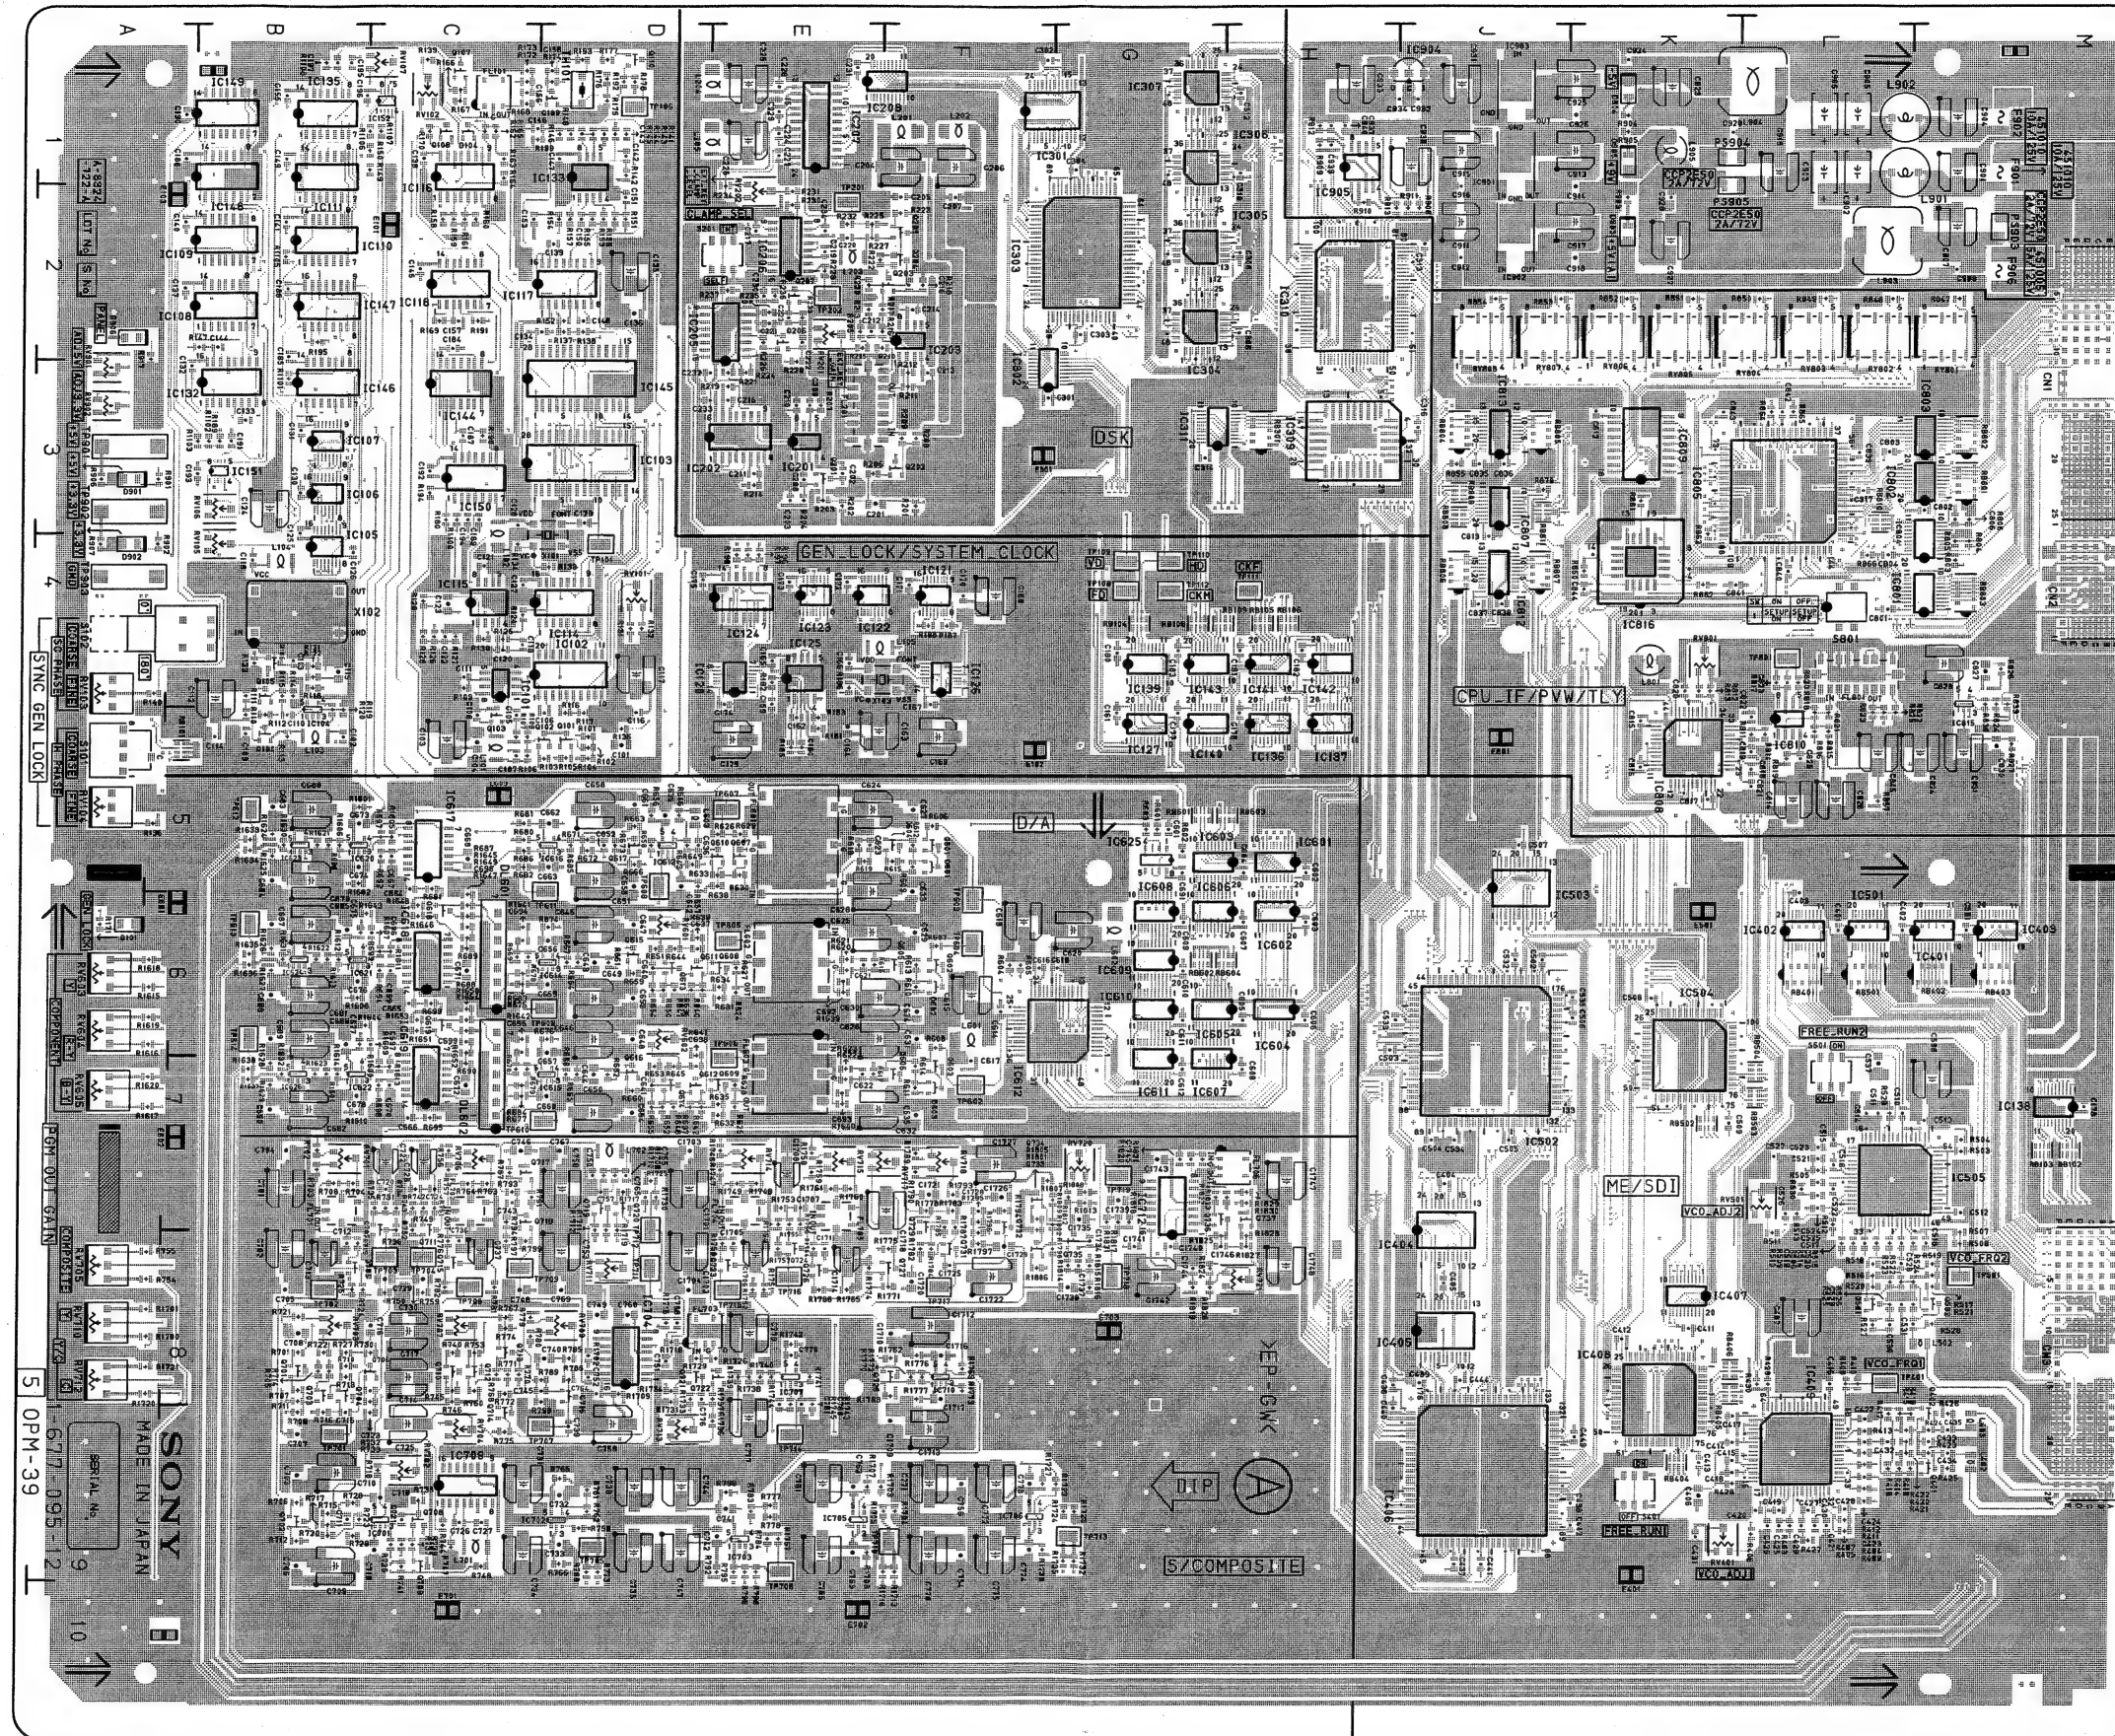

Location list : Previous page


DFS-700 (J) : S/N 30291 and Higher
DFS-700 (UC) : S/N 10161 and Higher
DFS-700P (CE) : S/N 40361 and Higher

OPM-39 -A SIDE-
SUFFIX: -12

5-22 (b)

5-22 (b)


DFS-700/700P

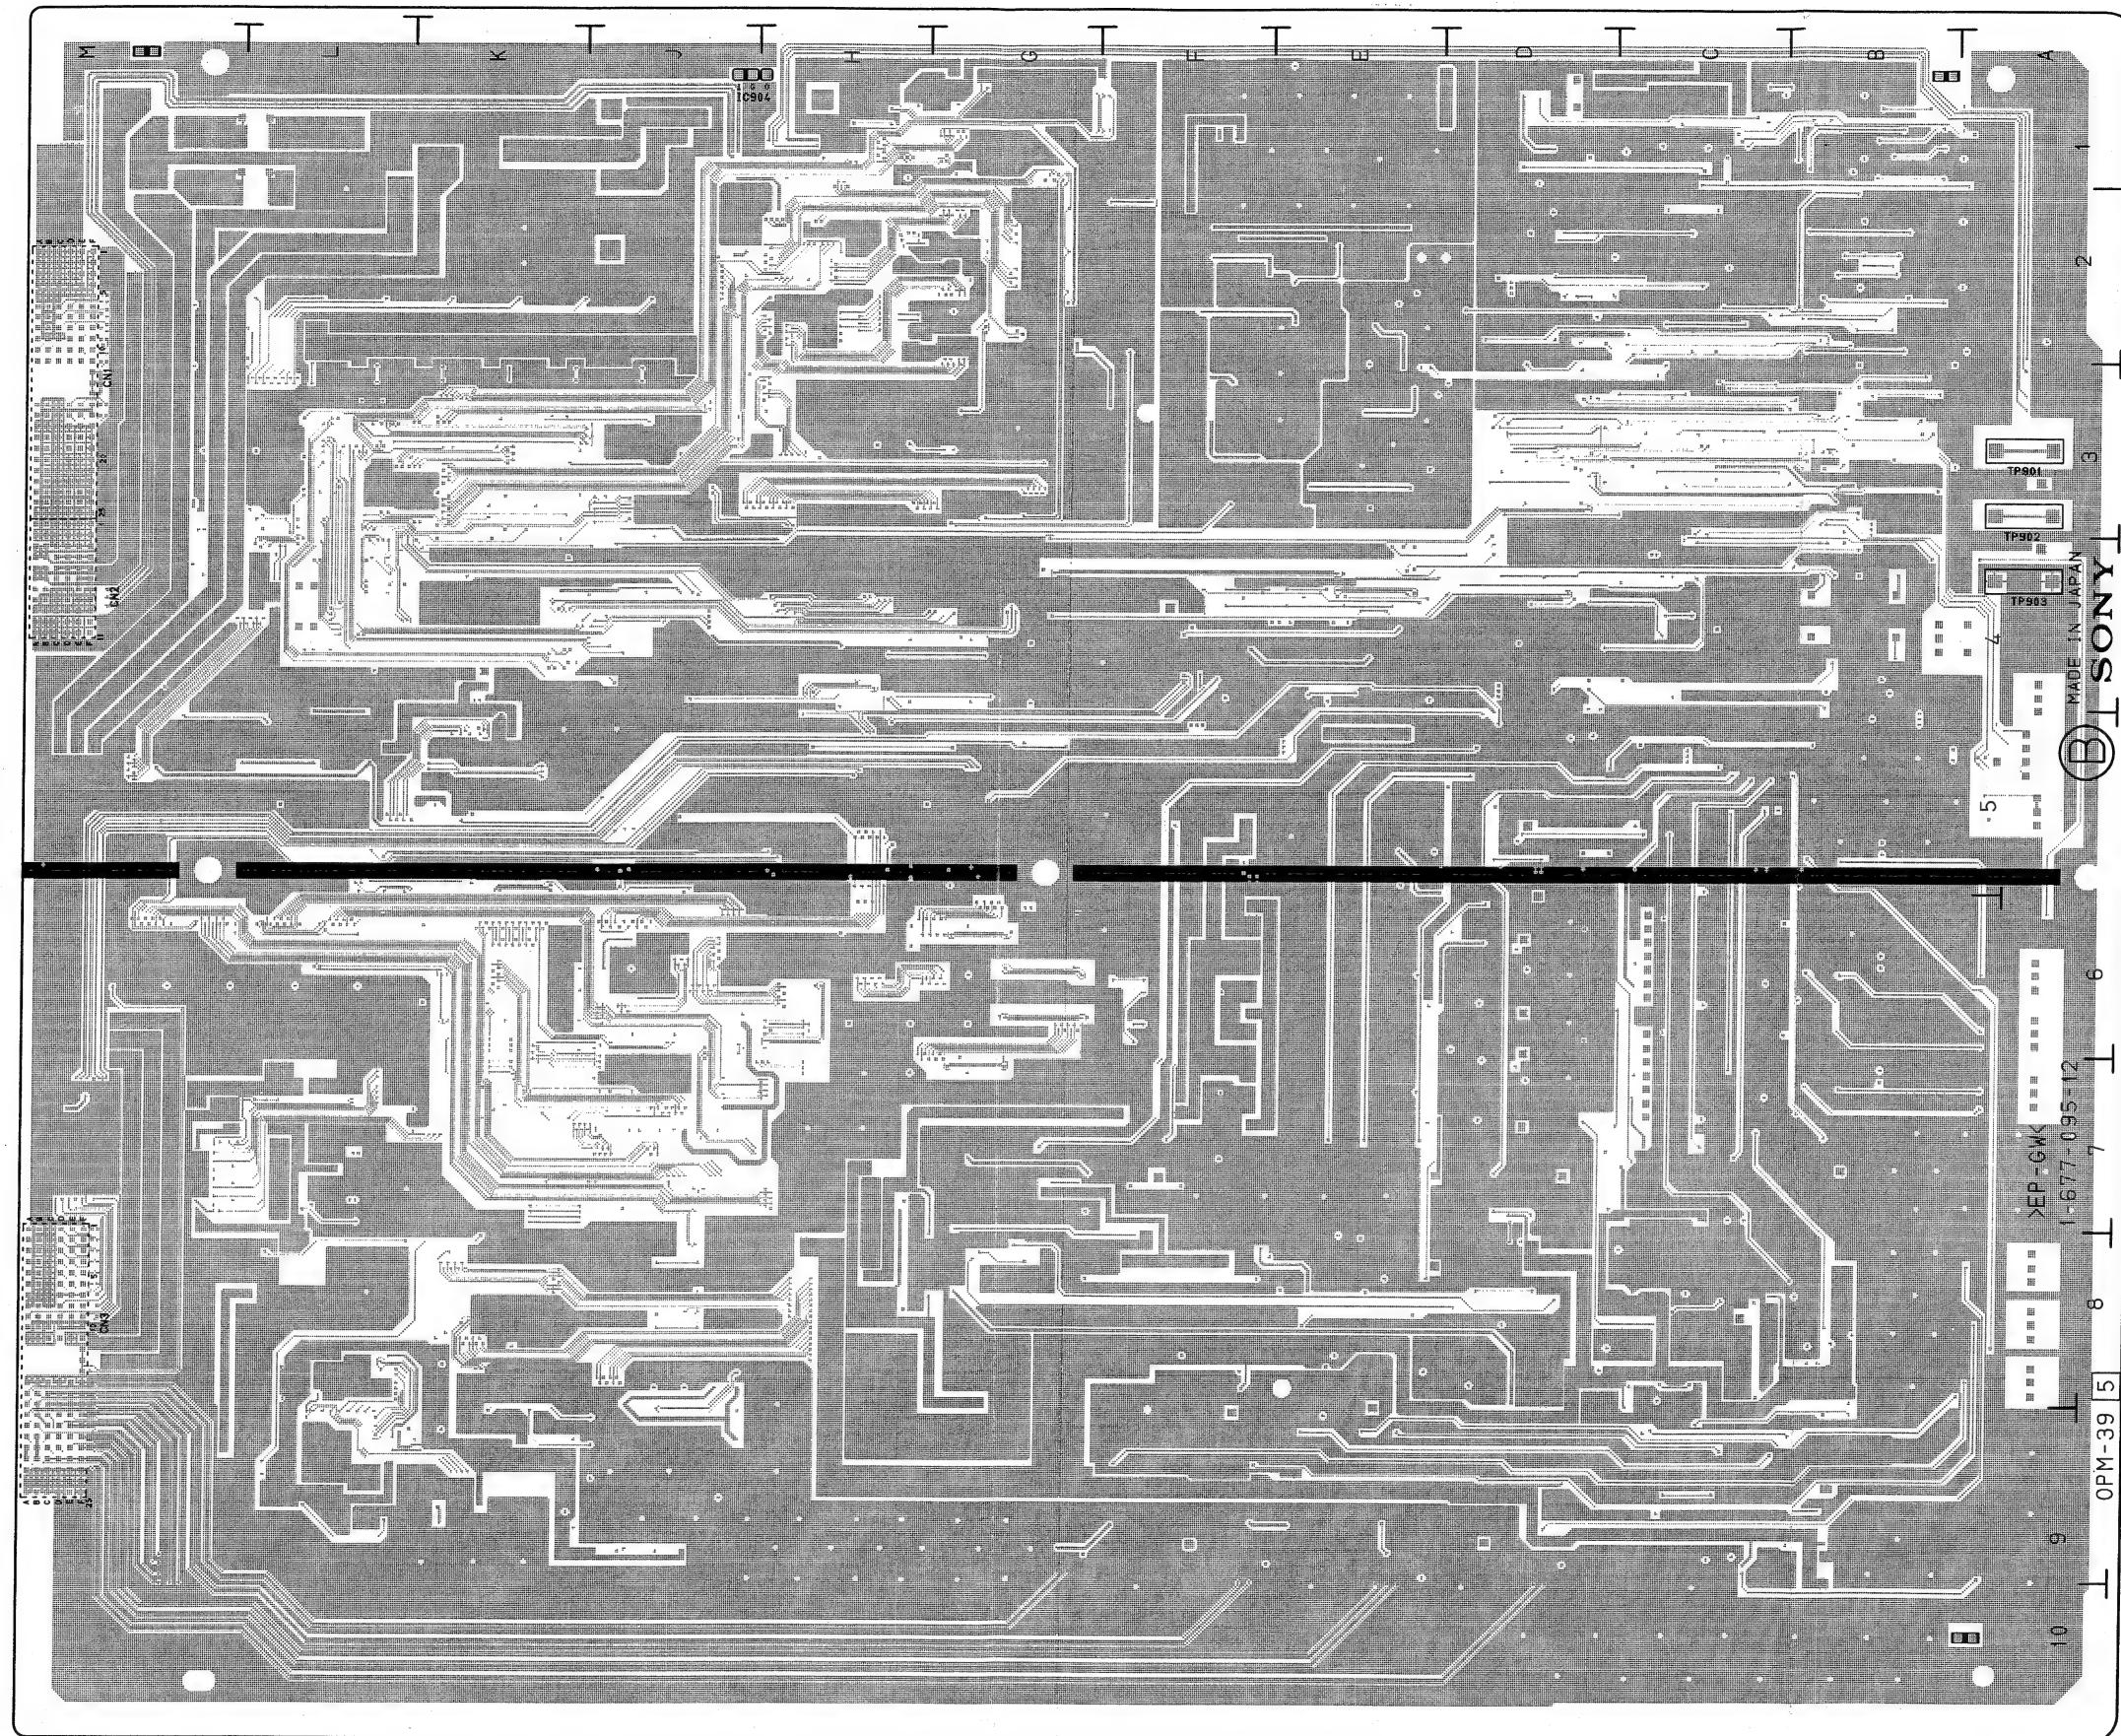

OPM-39 -B SIDE-
SUFFIX: -12

OPM-39 (1-677-095-11)

C101	D5	C196	B1	C507	J5	C664	C5	C758	D7	C1703	D7	IC107	B3	IC625	G5	Q613	D6	R151	D2	R412	L9	R647	D6	R741	C9	R861	K3	R1709	D8	R1817	G7	RY805	K2
C102	B5	C201	E3	C508	K6	C665	C6	C759	D9	C1704	D8	IC108	B2	IC626	B7	Q614	D7	R152	D2	R413	L9	R648	D7	R742	C7	R862	K4	R1710	D7	R1818	G7	RY806	K2
C103	C5	C202	E3	C509	K7	C666	C7	C760	D8	C1705	E8	IC109	B2	IC701	C9	Q615	D6	R153	D2	R414	L9	R649	D5	R743	C7	R863	K4	R1711	D7	R1819	G8	RY807	J2
C104	C5	C203	E3	C510	L7	C667	C5	C761	E9	C1706	E8	IC110	B2	IC702	D9	Q616	D7	R154	D2	R415	L9	R650	D6	R744	C9	R864	L3	R1712	D7	R1820	G7	RY808	J2
C105	C5	C204	F1	C511	L7	C668	C5	C762	E9	C1707	E7	IC111	B2	IC703	E9	Q617	D5	R155	D2	R416	L9	R651	D6	R745	C8	R865	L3	R1713	F9	R1821	G7		
C106	D5	C205	F2	C512	M7	C669	C6	C763	E9	C1708	E7	IC114	D4	IC704	D8	Q618	C6	R156	D2	R417	L9	R652	D7	R746	C8	R866	L4	R1715	D8	R1822	H7	S101	A5
C107	C5	C206	F1	C513	M7	C670	C7	C764	D8	C1709	F9	IC115	C4	IC705	E9	Q619	C6	R157	D2	R418	M9	R653	D7	R747	C9	R870	J3	R1716	F9	R1823	G7	S102	B4
C108	C5	C207	F2	C514	L7	C671	C6	C765	D7	C1710	F8	IC116	C2	IC706	F9	Q701	B8	R158	C2	R419	M9	R654	D6	R748	C9	R901	A3	R1717	D7	R1824	G8	S201	E2
C109	B5	C208	E3	C515	L7	C672	C7	C766	E9	C1711	E8	IC117	D2	IC707	E8	Q702	B9	R159	C2	R420	M9	R655	D7	R749	C7	R902	A4	R1718	D8	R1825	H8	S401	K9
C110	B5	C209	E3	C516	L7	C673	B5	C767	D7	C1712	F8	IC118	C2	IC709	C9	Q703	B8	R160	C2	R421	M9	R656	D5	R750	C8	R903	K2	R1719	D7	R1826	G8	S501	L7
C111	C4	C210	E3	C517	L7	C674	B5	C768	D8	C1713	F9	IC120	E4	IC710	F8	Q704	B8	R161	C2	R422	M9	R657	D5	R751	C7	R904	K1	R1720	A8	R1827	H8		
C112	B4	C211	E3	C518	M8	C675	B6	C769	D8	C1714	F8	IC121	F4	IC712	G7	Q705	B8	R162	C1	R423	M9	R658	D5	R752	C7	R905	K1	R1721	A8	R1828	H8		
C113	B4	C212	E2	C519	L8	C676	B6	C770	F9	C1715	F8	IC122	E4	IC713	G7	Q706	C8	R163	C1	R424	M9	R659	D6	R753	C8	R906	A3	R1722	G9	R1829	H7	TH101	D1
C114	B5	C213	F3	C520	L8	C677	B6	C771	F9	C1717	F8	IC123	E4	IC802	M3	Q707	C7	R164	C1	R425	M9	R660	D7	R754	A8	R907	A4	R1723	G9	R1830	H7		
C115	B4	C214	F2	C521	L7	C678	B7	C772	F9	C1718	F7	IC124	E4	IC803	M3	Q708	C9	R165	C1	R426	M9	R661	D6	R755	A8	R908	J2	R1724	G9	R1831	G7		
C116	D5	C215	E3	C522	L7	C679	B5	C773	F9	C1720	F8	IC125	E4	IC804	M4	Q709	C9	R166	C1	R427	L9	R662	D7	R756	C7	R909	H1	R1725	D7				
C117	D4	C216	F2	C523	L7	C680	B5	C774	F9	C1721	F7	IC126	F4	IC805	L3	Q710	C8	R167	C1	R428	K9	R663	D5	R757	C7	R910	H2	R1726	E8	RB101	A5	TP106	D1
C118	C4	C217	E2	C524	L7	C681	B6	C775	F9	C1722	F8	IC127	G5	IC807	J3	Q711	C7	R168	C1	R429	L8	R664	D6	R758	D9	R911	J2	R1727	F9	RB102	M7	TP109	G4
C119	B4	C219	E2	C525	L7	C682	B7	C776	D8	C1725	F8	IC132	B3	IC808	K5	Q712	C8	R169	C2	R430	L8	R665	D7	R759	C8	R912	H1	R1728	F9	RB103	M7	TP110	G4
C120	C4	C220	E2	C526	L7	C683	B5	C777	E9	C1726	F7	IC133	D2	IC809	K3	Q713	C8	R170	C1	R503	M7	R666	D5	R760	C8	R913	H2	R1729	D8	RB104	G4	TP111	H4
C121	C4	C221	E2	C527	L7	C684	B5	C778	E8	C1727	F7	IC135	B1	IC810	L5	Q714	C9	R171	A6	R504	M7	R667	D6	R761	D9	R917	A2	R1730	D7	RB105	H4	TP112	G4
C122	C4	C222	E2	C528	L8	C685	B6	C779	E8	C1728	F7	IC136	H5	IC812	J4	Q715	C8	R172	C1	R505	L7	R668	D7	R762	D9	R1100	C3	R1731	D8	RB106	H4	TP201	E2
C123	C4	C223	E2	C529	L8	C686	B6	C780	E8	C1729	F8	IC137	H5	IC813	J3	Q716	D8	R173	C1	R506	L8	R669	D7	R763	C7	R1101	B3	R1732	G9	RB108	G4	TP202	E2
C124	B3	C224	E1	C530	L8	C687	B6	C781	E8	C1734	G8	IC138	M7	IC815	M4	Q717	C7	R174	D1	R507	M8	R670	C7	R764	C7	R1102	B3	R1733	D8	RB109	G3	TP401	L8
C125	B3	C225	E1	C531	M8	C688	B6	C801	L4	C1735	G7	IC139	G4	IC816	K4	Q718	C7	R175	D1	R508	M8	R671	D5	R765	D9	R1103	B3	R1734	D8	RB301	H3	TP501	M8
C126	B4	C226	E1	C532	J6	C689	B6	C802	M3	C1737	G8	IC140	G5	IC901	J1	Q719	D7	R176	D1	R509	L8	R672	D5	R766	D9	R1104	B3	R1735	G9	RB401	L6	TP602	F7
C127	C4	C227	E1	C533	J6	C690	B7	C803	L3	C1738	G8	IC141	H4	IC902	J2	Q720	D7	R177	D1	R510	L8	R673	D5	R767	C8	R1105	B2	R1736	E9	RB402	M6	TP603	F6
C128	C3	C228	E1	C534	J7	C691	G5	C804	L4	C1739	G7	IC142	H4	IC903	J1	Q721	D8	R178	D1	R511	L8	R674	D6	R768	C8	R1106	B1	R1737	E8	RB403	M6	TP604	F6
C129	D3	C229	E1	C535	K6	C692	E6	C806	M3	C1740	G8	IC143	G4	IC904	J1	Q722	E8	R180	C3	R512	L7	R675	C6	R769	D9	R1107	C1	R1738	E8	RB404	K9	TP605	E6
C130	B3	C230	E2	C536	M7	C693	E7	C812	K3	C1741	G8	IC144	C3	IC905	H2	Q723	E8	R181	E5	R513	L7	R676	D6	R770	C8	R1600	C7	R1739	E8	RB405	K8	TP606	E7
C131	B3	C231	E1	C537	L7	C694	C6	C813	J4	C1742	G8	IC145	C3			Q724	E8	R182	E4	R514	L8	R677	C7	R771	C8	R1601	B5	R1740	E8	RB406	K8	TP607	E5
C132	A3	C232	D3	C601	G5	C695	C6	C814	L5	C1743	G7	IC146	B3	L101	C5	Q725	F8	R183	E5	R515	M8	R678	C6	R772	C8	R1602	B5	R1741	E8	RB501	L6	TP608	D5
C133	B3	C233	D3	C602	H5	C696	C6	C815	K5	C1744	G8	IC147	B2	L102	C3	Q726	B8	R185	E5	R516	L8	R679	C7	R773	D9	R1603	B6	R1742	E8	RB502	K7	TP609	D6
C134	D2	C234	E2	C603	H6	C697	C6	C816	K5	C1745	G7	IC148	B2	L103	B5	Q727	F8	R186	E4	R517	M8	R680	C5	R774	C8	R1604	B7	R1743	E8	RB503	L7	TP610	D7
C135	D2	C301	F2	C604	H5	C698	C6	C817	K5	C1746	H8	IC149	B1	L104	B4	Q729	F7	R187	F4	R518	L8	R681	C5	R775	C9	R1605	C5	R1744	E8	RB504	L7	TP611	D5
C136	D2	C302	F1	C605	H6	C699	C6	C818	L5	C1747	H7	IC150	C3	L105	E4	Q731	F8	R188	F4	R519	M8	R682	C5	R776	C8	R1606	B5	R1745	E8	RB601	G5	TP612	B5
C137	A2	C303	G2	C606	H6	C701	B7	C819	L5	C1748	H8	IC151	B3	L201	F1	Q732	F7	R189	B3	R520	L8	R683	C6	R777	E9	R1607	B6	R1746	E7	RB602	G6	TP613	B6
C138	C1	C304	G1	C607	H6	C702	B8	C820	K4			IC152	C1	L202	F1	Q733	F8	R190	C3	R521	M8	R684	C7	R778	E9	R1608	B6	R1747	E7	RB603	H5	TP614	B6
C139	D2	C306	H2	C608	H7	C703	B9	C821	L5	CN1	M3	IC201	E3	L203	E2	Q734	F7	R191	C2	R522	L8	R685	D5	R779	C8	R1609	B6	R1748	E7	RB604	H6	TP701	B9
C140	A2	C308	H2	C609	G6	C704	B7	C822	L5	CN2	M4	IC202	E3	L204	D1	Q735	H8	R192	D1	R523	L8	R686	C5	R780	C8	R1610	B7	R1749	E7	RB801	M3	TP702	B8
C141	B2	C310	H1	C610	G6	C705	B8	C823	L4	CN3	M8	IC203	F2	L205	D1	Q736	H7	R193	D1	R524	M8	R687	C6	R781	C8	R1611	C6	R1750	E8	RB802	M3	TP703	C8
C142	D1	C312	H1	C611	G6	C706	B9	C824	M5			IC205	E2	L402	M9	Q737	H7	R194	C3	R525	L8	R688	C6	R782	C8	R1612	B6	R1751	E8	RB803	M4	TP704	C8
C143	D1	C313	J2	C612	G7	C707	B9	C825	L5	D101	A6	IC206	E2	L403	M9			R195	B2	R526	M8	R689	C6	R783	E9	R1613	C7	R1752	E8	RB804	J3	TP705	D9
C144	B2	C314	G3	C614	F6	C708	B8	C826	L5	D104	C1	IC207	E1	L502	M8	R101	D5	R196	E4	R527	L8	R690	C7	R784	E9	R1614	B7	R1753	E7	RB805	J3	TP706	C8
C145	C2	C316	J3	C615	F6	C709	B9	C827	M4	D601	F5	IC208	E1	L601	F6	R102	D5	R197	E4	R528	M8	R691	C5	R785	D8	R1615	A6	R1754	E7	RB806	J4	TP707	D9
C146	C1	C317	L3	C616	F6	C710	B9	C828	M4	D602	F6	IC301	F1	L602	G6	R103	D5	R198	E4	R529	L7	R692	C5	R786	D8	R1616	A6	R1755	E7	RB807	J4	TP708	E9
C147	D1	C401	L6	C617	F7	C711	B9	C830	M5	D603	F7	IC302	G3	L603	D5	R104	D5	R199	C1	R530	L7	R693	C6	R787	C7	R1617	A7	R1756	E7	RB808	J3	TP709	C8
C148	D2	C402	L6	C618	F6	C712	B8	C831	M5	D901	A3	IC303	G2	L701	C9	R105	D5	R201	F3	R601	G5	R694	C6	R788	E9	R1618	A6	R1757	E8	RB809	J3	TP710	F9
C149	B1	C403	L6	C619	G6	C713	B8	C835	J3	D902	A4	IC304	G2	L702	D7	R106	C5	R202	E3	R602	G5	R695	C7	R789	D8	R1619	A6	R1758	E7	RB810	L3	TP711	D8
C150	D2	C404	J7	C620	G6	C714	C8	C836	J3	D903	K2	IC305	G2	L801	K4	R107	C5	R203	E3	R603	G5	R696											

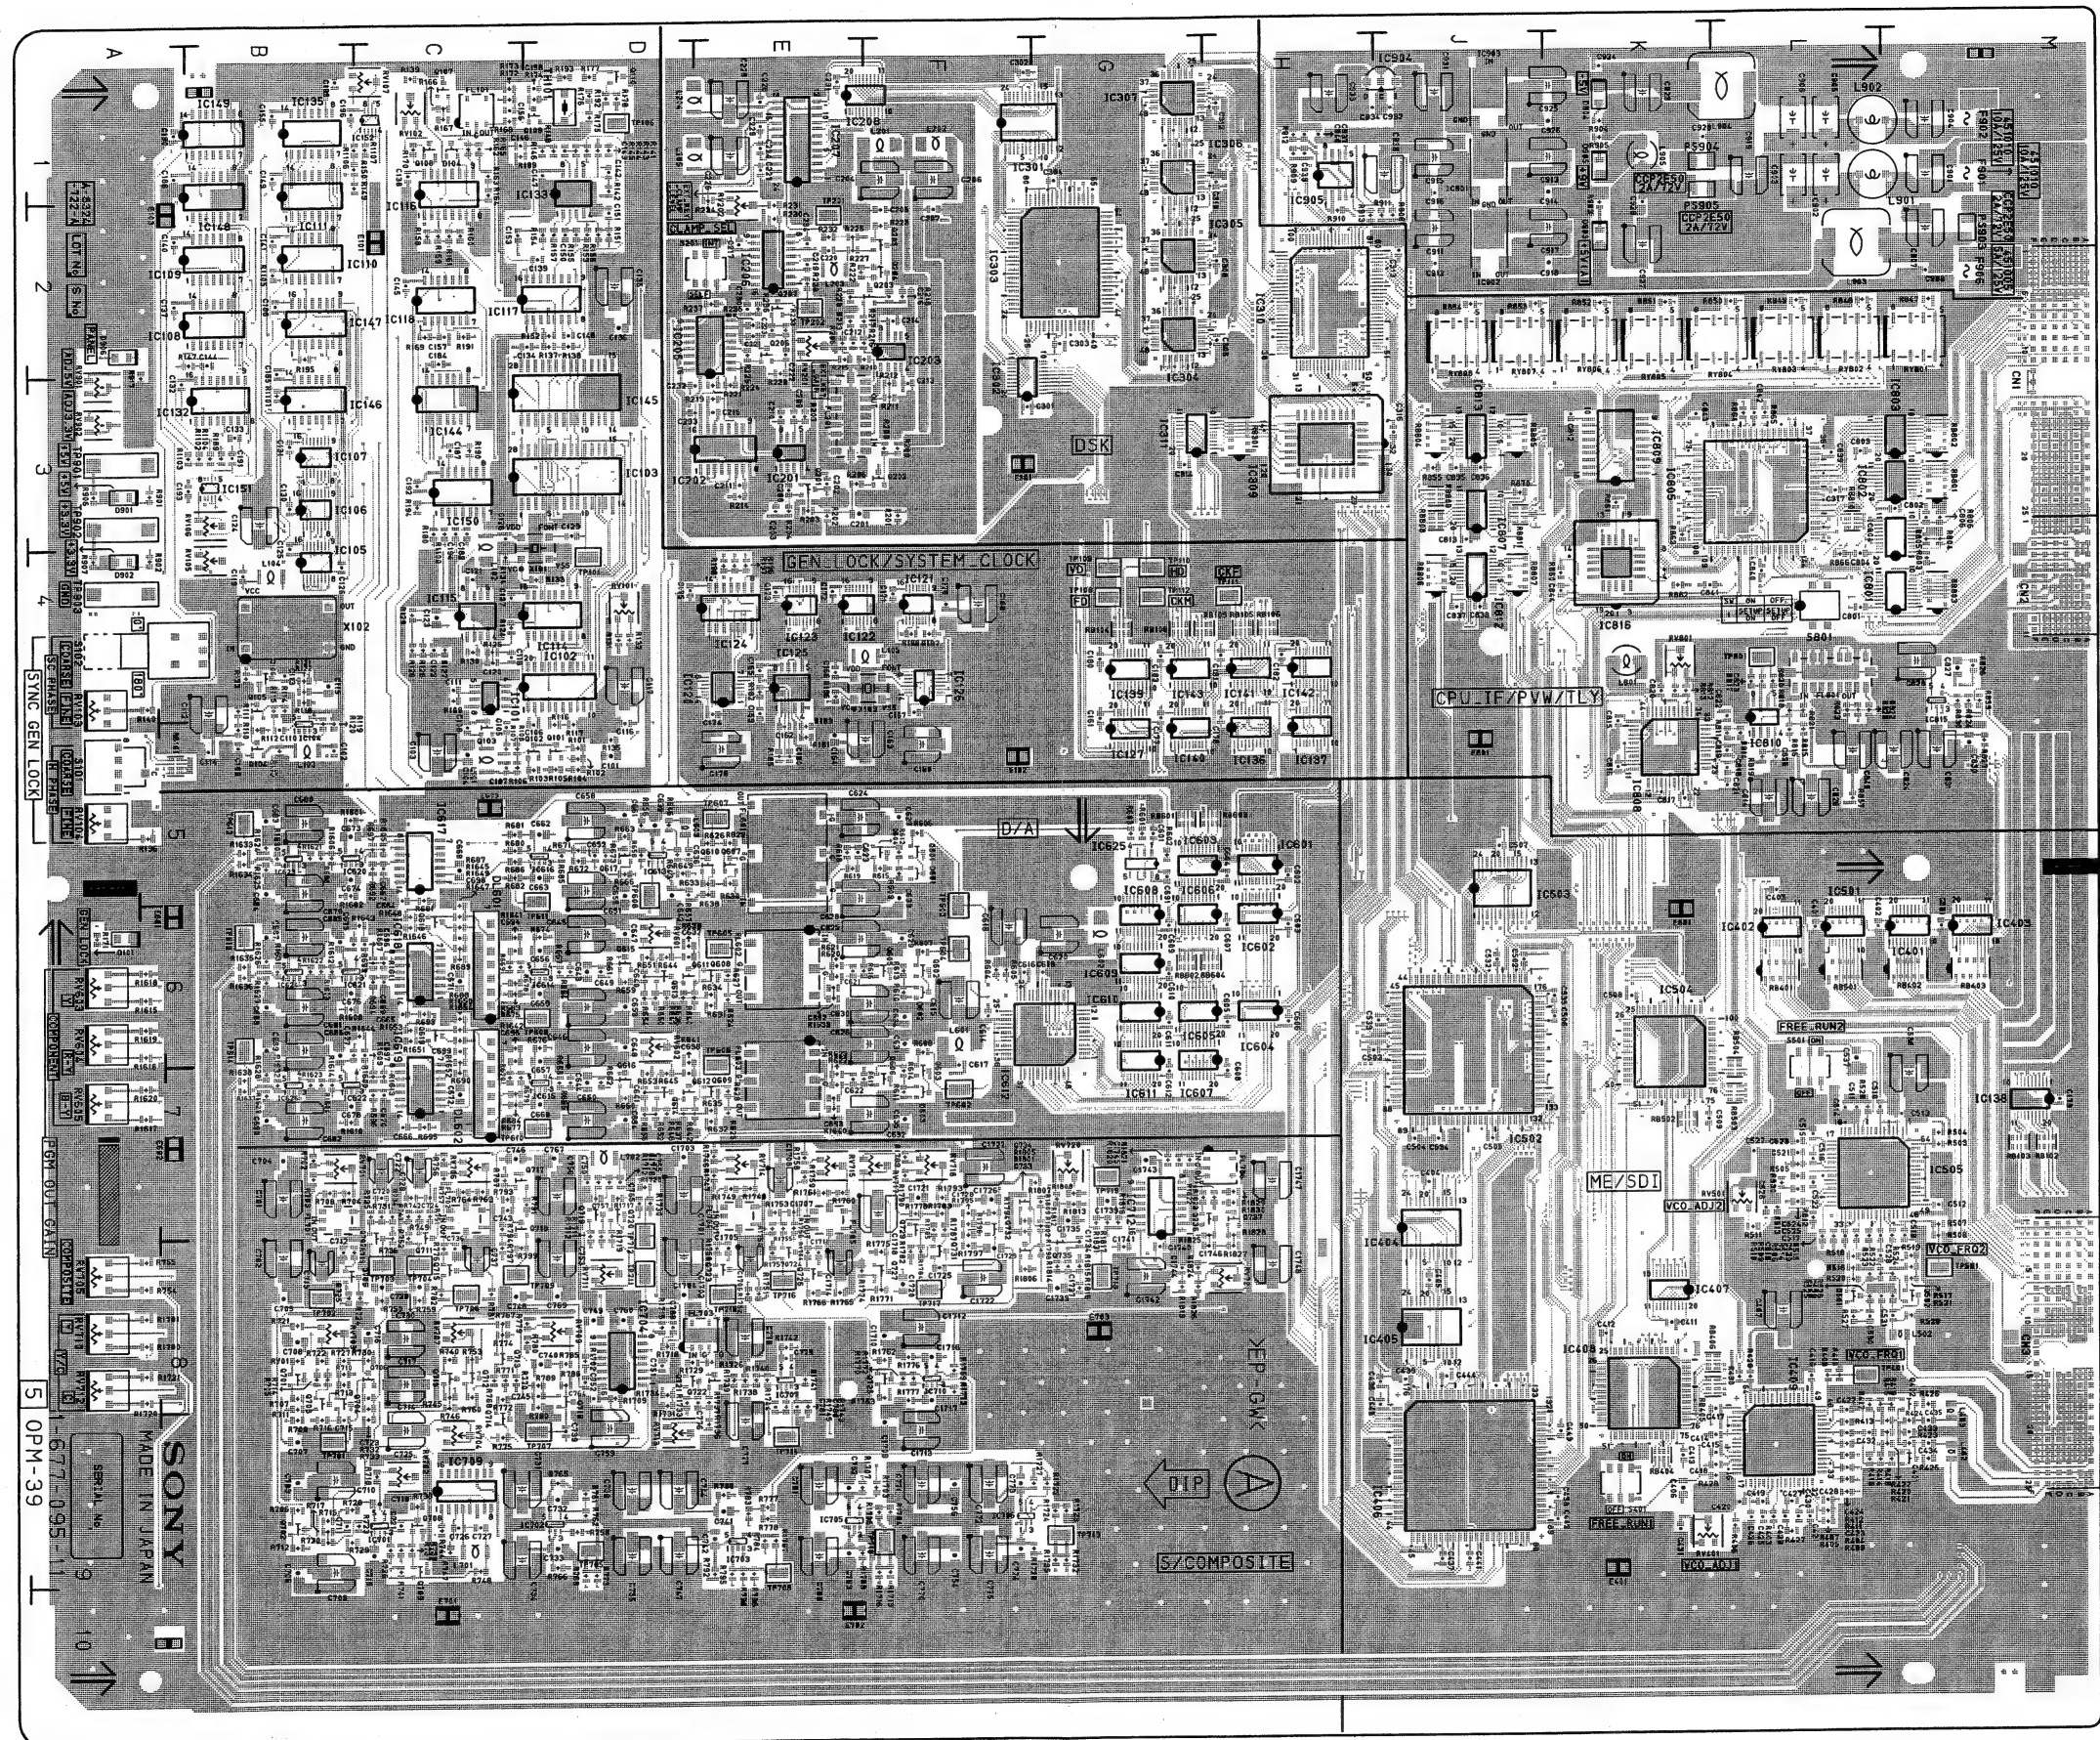

Location list : Previous page


DFS-700 (J) : S/N 30001 through 30290
 DFS-700 (UC) : S/N 10001 through 10160
 DFS-700P (CE) : S/N 40001 through 40360

OPM-39 -A SIDE-
 SUFFIX: -11

5-22 (a)

5-22 (a)

DFS-700/700P

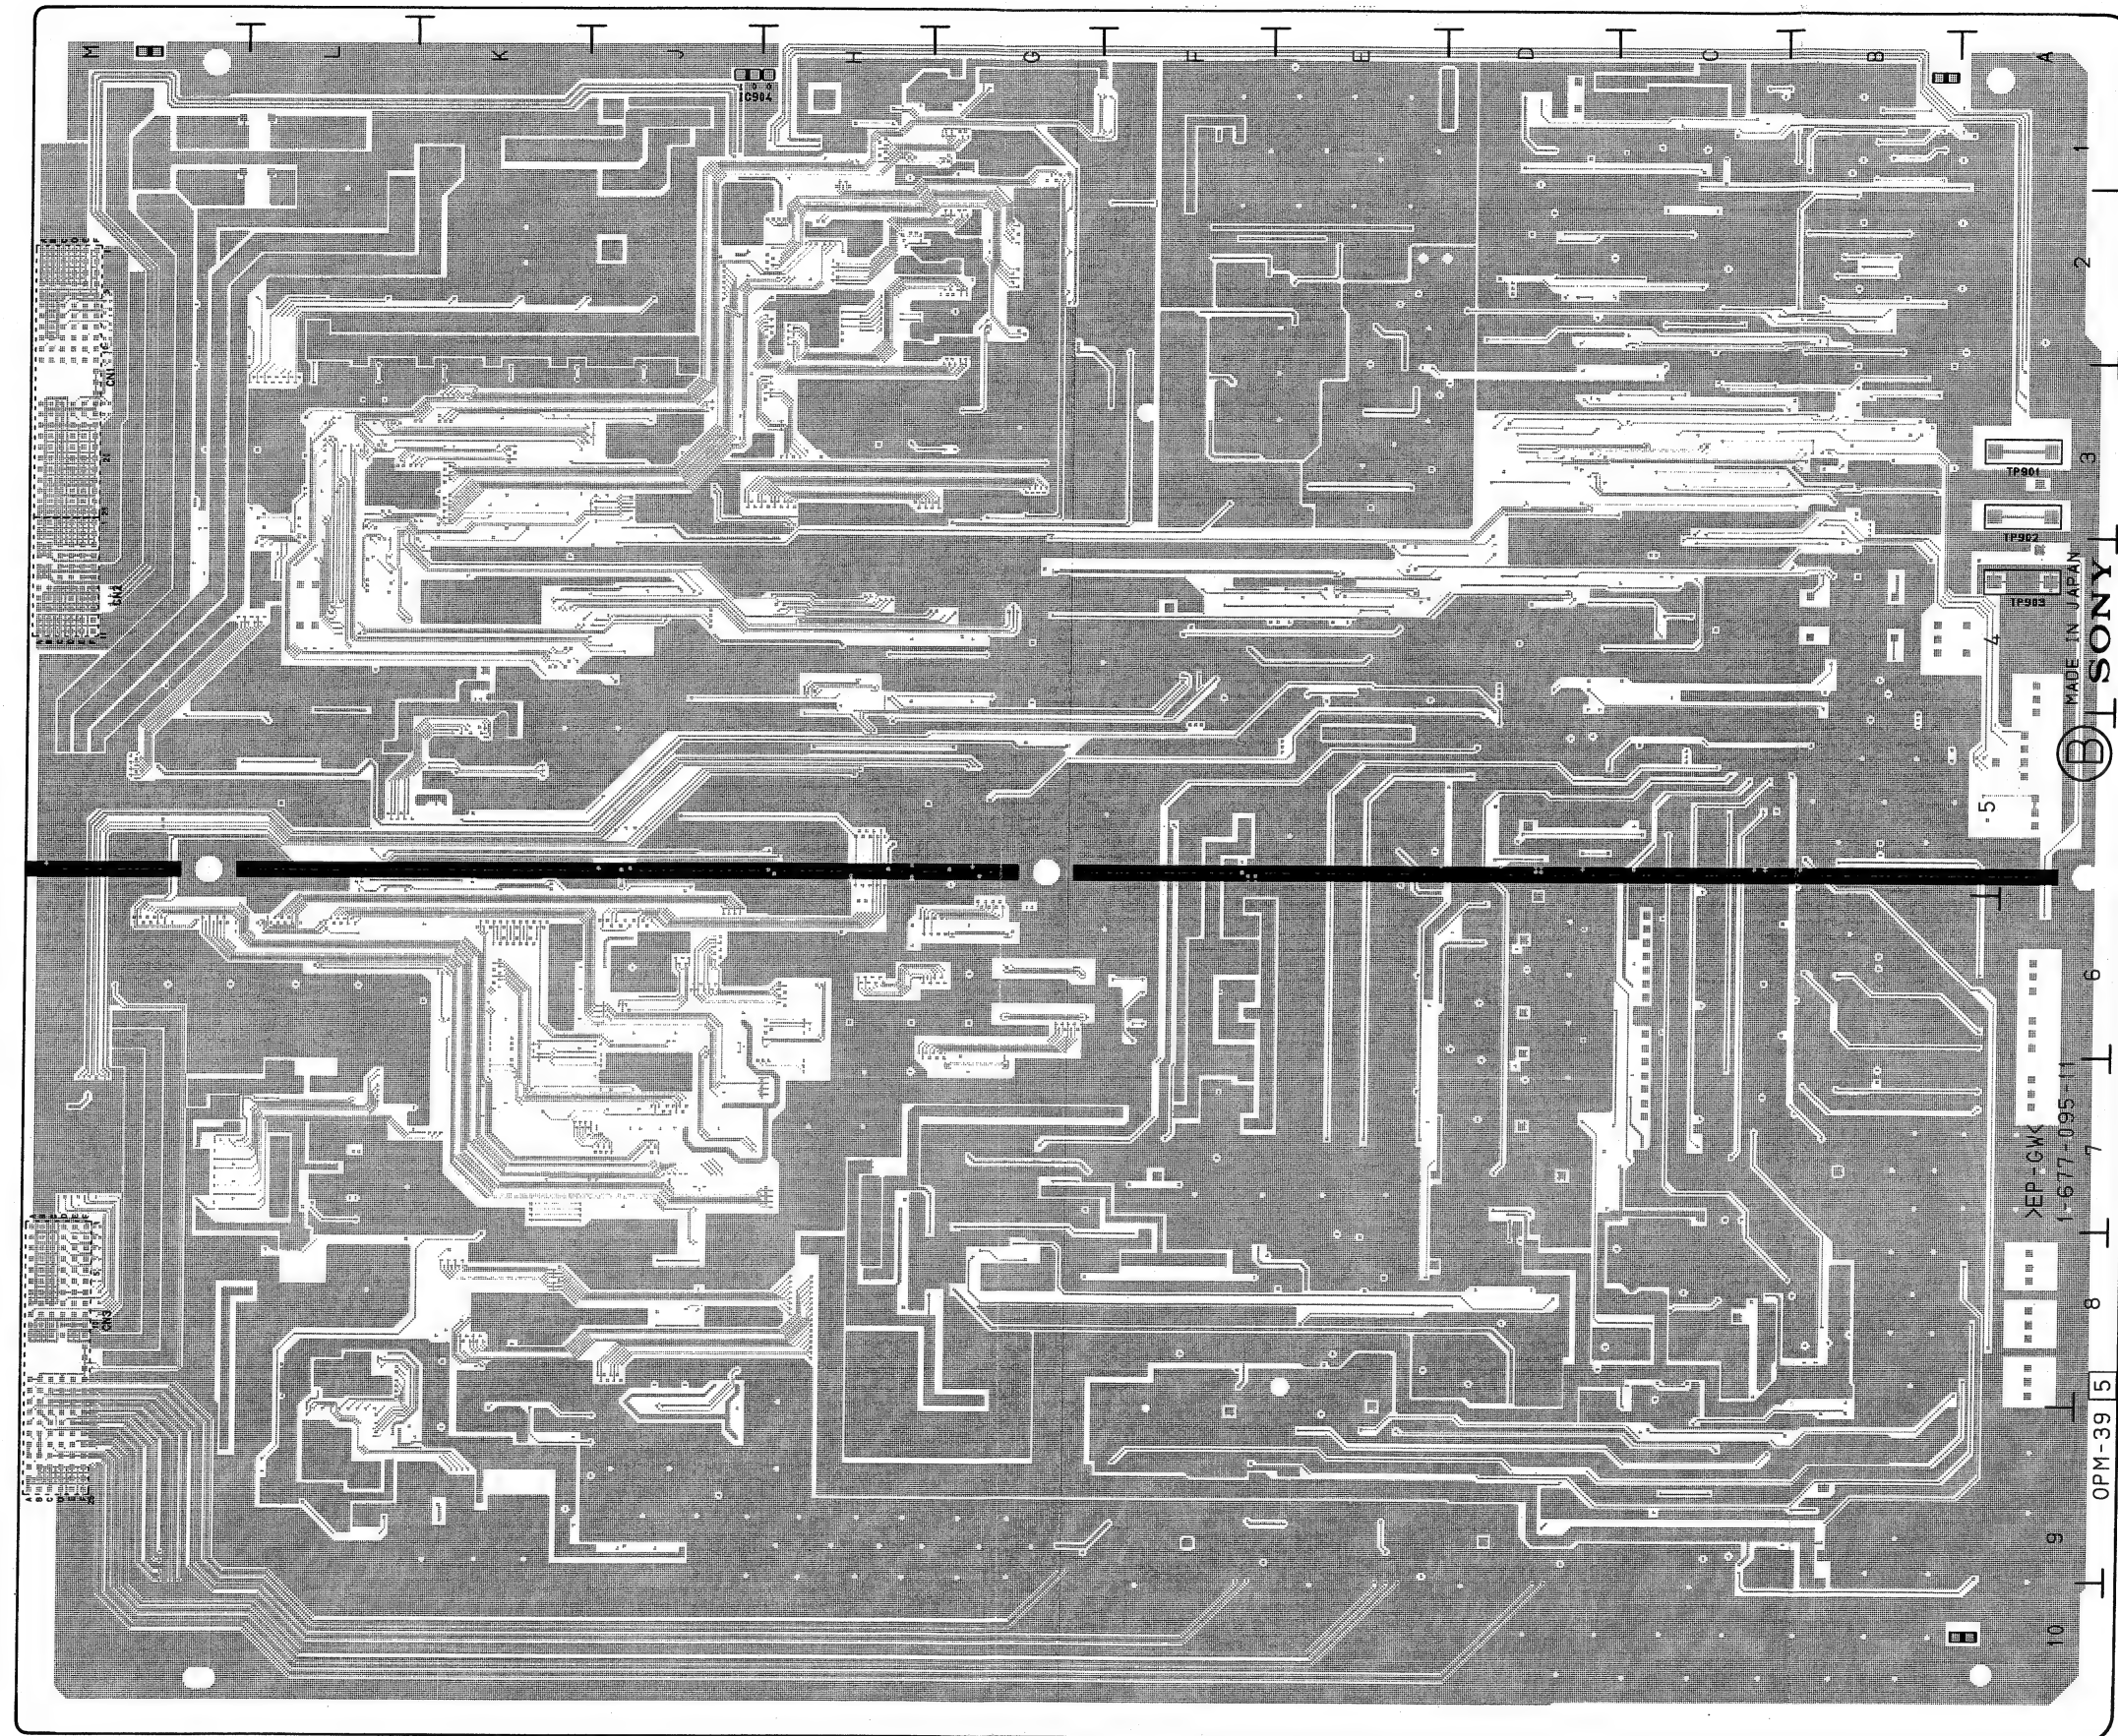


OPM-39 -B SIDE-
SUFFIX: -11

VIF-19 (1-677-103-12)

*:B SIDE

C101	H9	C232	J5	C325	G5	C502	*G5	C594	*G5	C762	D10	C864	*D3	C1003	A9	C1134	C5	C1227	A5	C1615	*A2	C5006	*F3	D707	D10	IC212	J4	IC714	D9	IC1218	*A7	L301	H5	Q101	H9
C102	H9	C233	H5	C326	G6	C503	G5	C595	F4	C763	E10	C865	D4	C1004	A9	C1135	*C4	C1228	A6	C1701	K3	C5007	F3	D708	E10	IC213	J4	IC801	E8	IC1219	*A7	L302	G5	Q103	H9
C104	H9	C234	J5	C327	G5	C504	F8	C596	F4	C764	E10	C866	E4	C1013	B9	C1136	B3	C1229	*A7	C1702	K2	C5008	F3	D709	E10	IC214	J4	IC802	D8	IC1220	*A7	L303	G4	Q104	H9
C105	H10	C235	*J4	C328	G6	C505	F4	C597	F4	C765	E9	C867	E4	C1017	B9	C1137	C4	C1230	*A7	C1703	K3	C5009	G3	D710	*D9	IC215	H3	IC803	D7	IC1300	G2	L401	E9	Q105	H9
C106	H9	C236	H3	C329	*G7	C506	*G8	C598	G4	C766	D9	C868	E4	C1018	B9	C1138	B5	C1231	*A6	C1704	G2	C5010	*F3	D711	*D10	IC216	J3	IC804	D7	IC1301	G1	L402	E9	Q106	J9
C107	J10	C237	J4	C330	*G7	C507	G8	C599	*F3	C767	D9	C869	D4	C1020	B9	C1139	C5	C1232	A5	C1705	K2	C5011	F4	D901	D6	IC217	G4	IC805	E7	IC1302	G1	L403	F10	Q107	J9
C108	J10	C238	H5	C331	*H7	C508	*G8	C601	E10	C768	D9	C870	E4	C1021	B9	C1140	C5	C1233	A5	C1706	*K8	C5012	F3	D902	C6	IC218	G3	IC806	D6	IC1303	G2	L404	F9	Q108	H9
C109	J10	C239	J5	C332	H5	C509	G8	C602	F10	C769	D9	C871	D3	C1024	B8	C1141	B5	C1234	A5	C1707	C2	C5013	F3	D903	C6	IC219	G3	IC807	D5	IC1304	F2	L406	F9	Q110	H9
C110	H10	C240	J5	C333	G5	C510	G8	C603	F10	C770	D8	C872	D3	C1025	B9	C1142	C5	C1235	A5	C1708	K2	C5014	F3	D905	C5	IC220	G3	IC808	E5	IC1305	H2	L407	F9	Q112	G9
C111	J10	C241	H5	C334	G5	C511	*G8	C604	E8	C771	E10	C873	*C3	C1026	B8	C1143	B5	C1236	A5	C1709	J4	C5015	F5	D906	C5	IC221	H3	IC809	D5	IC1306	G2	L408	F8	Q113	H8
C112	J10	C242	J5	C335	G5	C512	*F8	C605	E10	C772	D8	C874	*D3	C1027	B8	C1144	B5	C1237	A5	C1710	J4	C5016	*E3	D907	C5	IC222	H4	IC810	D4	IC1307	H1	L412	E8	Q114	H8
C113	H9	C243	J5	C336	G5	C513	G8	C606	F10	C773	*D8	C875	E4	C1028	B8	C1145	B5	C1238	A4	C1711	*K7	C5017	*F2	D908	C5	IC223	J4	IC811	D4	IC1308	G1	L413	E8	Q115	H8
C114	J9	C244	H5	C337	G5	C514	*F8	C607	F10	C774	*D9	C876	D4	C1032	A8	C1146	B4	C1239	A6	C1712	*J2	C5018	*E3	D909	C5	IC224	G3	IC812	E4	IC1309	H1	L414	F8	Q118	H9
C115	J9	C245	H5	C338	G4	C515	*F8	C608	E8	C775	*D9	C877	D3	C1034	*C9	C1147	B3	C1240	A4	C1713	*J2	C5019	*F7	D1003	A9	IC225	H3	IC813	D4	IC1310	G1	L415	F9	Q119	J9
C116	J9	C246	H4	C339	G6	C516	*G8	C609	F8	C776	*D9	C878	D3	C1036	*A8	C1148	C3	C1241	A4	C1714	*J2	C5020	F7	D1004	B9	IC226	G3	IC814	E4	IC1311	K4	L416	F8	Q120	*J9
C117	H9	C247	H3	C340	G4	C517	G4	C610	F7	C777	*D9	C879	*D3	C1037	A8	C1149	B4	C1242	B6	C1715	*J2	C5021	F5	D1005	A8	IC227	*H7	IC815	D3	IC1312	H1	L417	G10	Q201	H5
C118	H9	C248	J3	C341	G4	C518	*F7	C611	E6	C778	*D9	C880	D3	C1038	A8	C1150	B4	C1243	A4	C1716	J5	C5022	G5	D1006	A8	IC228	G10	IC816	E3	IC1400	E2	L418	G9	Q202	J5
C120	H9	C249	H4	C342	H6	C519	*F7	C612	E5	C779	D9	C881	D3	C1043	A8	C1151	B3	C1244	A4	C1717	*J2	C5023	G5	D1007	B10	IC229	H10	IC817	C4	IC1401	F1	L501	G8	Q203	J5
C121	H9	C250	H4	C343	G4	C520	*G7	C613	*E5	C780	*E9	C882	*D3	C1047	A8	C1152	C4	C1245	A4	C1719	*K8	C5024	*F3	D1008	B10	IC230	H10	IC818	C3	IC1402	E1	L502	G8	Q204	H5
C122	H9	C251	J3	C344	G4	C521	G6	C614	F6	C781	*E9	C883	*D3	C1049	A8	C1153	C3	C1246	A6	C1720	H1	C5025	*F3	D1009	C10	IC231	G7	IC819	C3	IC1403	E2	L503	F5	Q205	H4
C123	H9	C252	J4	C345	H4	C522	G6	C615	E7	C782	E9	C884	D4	C1050	A8	C1154	B4	C1247	B4	C1721	*H1	C5026	*F3	D1010	*B9	IC232	G7	IC820	C3	IC1404	E2	L504	F3	Q206	J4
C124	H8	C253	J3	C346	H6	C523	F7	C616	F6	C783	*E9	C885	*D3	C1052	A8	C1155	*B4	C1248	A6	C1722	*J1	C8001	E3	D1011	*B10	IC233	G7	IC821	D3	IC1405	F2	L505	F3	Q207	H4
C125	H9	C254	H4	C347	H4	C524	G6	C617	E6	C784	E9	C886	D3	C1054	B8	C1156	A3	C1249	A7	C1727	K2	C8002	D3	D1201	A6	IC234	G5	IC822	D4	IC1406	E2	L506	F5	Q208	J4
C126	H8	C255	*J4	C348	G6	C525	F6	C618	E7	C785	D10	C887	D3	C1055	B8	C1157	B4	C1250	A6	C1728	K1	C8003	*D3	D1202	A6	IC235	G5	IC823	E4	IC1407	F1	L507	F5	Q209	*H3
C127	H8	C256	H3	C349	H7	C526	F6	C619	E7	C786	D9	C888	*C4	C1056	A8	C1158	B4	C1251	*A7	C1729	K1	C8004	*D3	D1203	A6	IC236	G5	IC824	C3	IC1408	E1	L508	G5	Q210	*H3
C128	H8	C257	H4	C350	G6	C527	G6	C620	*E7	C787	E10	C889	*C3	C1057	B10	C1159	C4	C1252	*A7	C1733	K9	C8005	*D3	D1205	A5	IC237	G6	IC825	D3	IC1409	F1	L601	F5	Q301	H5
C129	H8	C258	H4	C351	*G7	C528	*F5	C621	*E7	C788	E9	C890	*C3	C1058	B9	C1160	B4	C1253	*A7	C1734	J9	C8006	*D3	D1206	A5	IC238	G6	IC826	C3	IC1410	E1	L602	E5	Q302	H5
C130	J10	C259	J4	C352	*G7	C529	*F5	C622	E5	C789	D9	C891	*C3	C1059	B10	C1161	B4	C1254	*A7	C1735	J9	C8007	D3	D1207	A5	IC239	G4	IC827	*D7	IC1411	K6	L603	E4	Q303	G6
C131	H8	C260	H4	C353	*G7	C530	*F5	C623	E6	C790	C9	C892	E8	C1060	C10	C1162	B4	C1300	*G2	C1736	*K8	C8008	D3	D1208	A5	IC240	G5	IC828	*C7	IC1500	D2	L701	C9	Q304	G5
C132	G8	C261	H4	C354	*G7	C531	*F5	C624	E7	C801	E8	C893	*E8	C1061	C10	C1163	C4	C1301	*G1	C1737	K9	C8009	E3	D1209	A5	IC241	K1	IC829	*C7	IC1501	D1	L702	C9	Q305	G4
C133	*H8	C262	H4	C401	E9	C532	G5	C625	E5	C802	*E5	C894	*D5	C1062	B10	C1164	*B3	C1302	*G1	C1738	J8	C8010	D4	D1701	K1	IC242	F8	IC830	*C7	IC1502	C2	L703	D9	Q401	F9
C134	*J9	C263	J4	C402	F9	C533	F5	C626	E6	C803	E5	C895	*E5	C1063	B10	C1165	B4	C1303	*G2	C1739	K8	C8011	D3	D1703	J9	IC243	F8	IC831	*C7	IC1503	D2	L704	D9	Q402	F9
C135	*H9	C264	*H3	C403	E9	C534	G5	C627	*E5	C804	D8	C896	D4	C1064	C10	C1166	B4	C1304	*G2	C1740	K9	C8012	D3	D1704	J9	IC244	F8	IC832	*C7	IC1504	C2	L705	D9	Q403	F9
C136	*G8	C265	H4	C404	F9	C535	*G4	C628	E6	C805	D4	C897	D4	C1065	C9	C1167	C4	C1305	*H2	C1741	J9	C8013	D3	IC245	F8	IC833	*C7	IC1505	D2	L706	D8	Q404	F9		
C137	G8	C266	J4	C413	F9	C536	F3	C629	*E7	C806	*E8	C898	D4	C1066	B9	C1168	C4	C1306	*G2	C1742	K9	C8014	D3	E105	H9	IC246	E8	IC834	*C7	IC1506	C2	L712	C8	Q410	F9
C138	G8	C267	J4	C417	F9	C537	G4	C630	*E7	C807	E8	C899	E4	C1067	C9	C1169	B4	C1307	*H2	C1743	K9	C8015	D5	E205	J5	IC247	E8	IC835	*C7	IC1507	D1	L713	C8	Q412	E9
C139	*H8	C268	J4	C418	F9	C538	F5	C631	*E6	C808	*E8	C901	C10	C1068	B9	C1170	C4	C1308	*G2	C1744	K9	C8016	D3	E304	G4	IC248	G9	IC836	*C7	IC1508	C1	L714	D8	Q414	F8
C140	*J9	C269	H4	C420	F9	C539	G5	C632	F5	C809	E8	C902	D10	C1069	B9	C1171	B3	C1309	*H1	C1745	K9	C8017	D2	E401	F9	IC249	G9	IC837	*C7	IC1509	C6	L715	D10	Q415	F8
C143	G8	C270	J4	C421	F9	C540	G5	C633	E5	C810	E8	C903	D10	C1070	B8	C1172	B3	C1310	*G1	C1746	K9	C8018	D3	E505	G5	IC250	G9	IC838	*C7	IC1510	C1	L716	D9	Q416	F9
C147	G8	C271	H3	C424	F8	C541	F5	C634	E5	C811	*E8	C904	C8	C1071	C10	C1173	*A3	C1311	*K4	C1747	K9	C8019	*D3	E604	E4	IC251	G9	IC839	*C7	IC1511	K6	L717	D8	Q417	G9
C149	G8	C272	H3	C425	F9	C542	F5	C635	E5	C812	*D8	C905	C10	C1072	B8	C1174	*B3	C1312	H1	C1748	K9	C8020	D7	E704	D9	IC252	F8	IC840	*C7	IC1512	C4	L718	E10	Q418	G8
C150	G8	C273	*H3	C426	F8	C543	G5	C636	E5	C813	E8	C906	D10	C1073	*B8	C1175	C4	C1313	*H2	C1749	K9	C8021	D5	E805	E5	IC253	G8	IC841	*C7	IC1513	C4	L719	E9	Q419	F9
C151	*H9	C274	*H3	C427	F8	C544	F5	C637	E5	C814	*D8	C907	D10	C1074	*B9	C1176	B4	C1314	*G2	C1750	K9	C8022	E5	E904	C4	IC254	F7	IC842	*C7	IC1514	C4	L801	E8	Q420	F9
C152	G8	C275	J4	C428	F8	C545	F5	C638	E4	C815	*D8	C908	C8	C1075	*B8	C1177	B3	C1315	*H2	C1751	K9	C8023	E5	E1001	B9	IC255	F7	IC843	*C7	IC1515	C4	L802	E8	Q421	G9
C153	*J9	C276	H4	C432	E8	C546	F4	C639	E6	C816	*D8	C909	C8	C1076	*B9	C1178	B3	C1316	*G2	C1752	K9	C8024	*D3	E1105	C5	IC256	G7	IC844	*C7	IC1516	B2	L803	D5</		


Q1004	B9	R164	*J9	R259	H3	R401	F9	R494	F9	R587	F4	R730	*D9	R823	D5	R916	C7	R1058	A8	R1151	B4	R1248	A4	R1805	*C8	RB1401	K6	TP501	F8
Q1008	B9	R165	*J9	R260	H3	R402	*F9	R495	G9	R588	F4	R731	D9	R824	E5	R917	C7	R1059	A8	R1152	C4	R1249	A4	R1806	*C7	RB1402	K6	TP502	F4
Q1010	B9	R166	*G8	R261	J5	R403	F9	R496	G9	R589	G4	R732	*D9	R825	*D3	R918	C5	R1060	*B8	R1153	B4	R1250	A5	R1807	B6	RB1403	K6	TP503	F4
Q1012	A9	R167	*J8	R262	*H3	R404	G9	R497	F9	R590	G4	R733	D9	R826	D4	R919	C7	R1061	*B8	R1154	C4	R1252	*A6	R1808	B7	RB1501	K7	TP504	G4
Q1014	B8	R169	G8	R263	J5	R405	F9	R498	G9	R591	G4	R734	E9	R827	*D3	R920	C5	R1062	*B8	R1155	B4	R1253	*A6	R1809	B5	RB1502	K7	TP601	E8
Q1015	B8	R170	*H8	R264	H5	R406	F9	R499	G9	R592	*F3	R735	C9	R828	*D3	R921	C5	R1063	B8	R1156	C4	R1254	*A6	R1810	B5	RB1503	K7	TP602	F6
Q1016	B9	R171	H8	R265	H5	R407	F9	R501	F8	R593	*F3	R736	D9	R829	D5	R922	C5	R1064	*B9	R1157	B4	R1255	*A7	R1811	C5	RB1601	K7	TP603	E6
Q1017	B9	R172	H8	R266	H4	R408	F9	R502	G8	R594	*G3	R737	D9	R830	D5	R923	*C7	R1065	*B9	R1158	C4	R1256	*A7	R1812	*B4	RB1602	K7	TP605	E5
Q1018	C9	R173	*H8	R267	H3	R409	F9	R503	G8	R595	*G3	R738	D8	R831	D5	R924	D5	R1066	B9	R1159	B3	R1300	K4	R1813	*C4	RB1603	K7	TP606	F7
Q1019	B8	R174	*H8	R268	H3	R410	F9	R504	G8	R596	*G3	R739	D8	R832	E5	R926	C6	R1067	*B8	R1160	B3	R1305	*G1	R1814	*B3	RB1701	K3	TP607	E6
Q1020	B9	R175	*H8	R269	H3	R411	F9	R505	G8	R597	*F3	R740	D9	R833	D4	R927	C5	R1068	*B9	R1161	B5	R1306	*G1	R1815	*B3	RB1702	K2	TP608	E6
Q1021	C9	R176	H8	R270	H3	R412	E9	R506	G8	R598	*F4	R741	D9	R834	*D4	R928	C5	R1069	*B9	R1162	*A3	R1307	*G1	R1816	*A3	RB1703	K2	TP702	C8
Q1022	*C9	R177	H9	R271	H3	R413	F9	R507	F6	R599	*G4	R742	*D8	R835	*E4	R929	*D7	R1070	B9	R1163	C5	R1308	*G1	R2001	*H3	RB1704	*J2	TP703	C9
Q1101	B5	R178	J9	R272	G3	R414	F8	R508	F4	R601	E8	R743	D9	R836	E4	R930	C5	R1071	B10	R1164	B5	R1400	K6	R2002	J8	RB1705	J1	TP704	D9
Q1102	B5	R179	J9	R273	G3	R415	F9	R509	F6	R602	E7	R744	D8	R837	D4	R931	C5	R1072	B9	R1165	B5	R1401	*E1	R2003	*H7	RB1706	*J2	TP801	D8
Q1103	C5	R180	H8	R274	G3	R416	F9	R510	G6	R603	E7	R745	*D9	R838	E4	R932	C4	R1073	C10	R1166	B4	R1402	*E1	R2004	*J8	RB1707	*J2	TP802	D4
Q1104	B5	R181	H9	R275	G3	R417	F9	R511	G5	R604	E8	R746	*D9	R839	D4	R933	C4	R1074	C10	R1167	B3	R1403	*E1	R2005	*J8	RB1708	*J1	TP803	D4
Q1105	B4	R182	H9	R276	G3	R418	F9	R512	G5	R605	F7	R747	D9	R840	E4	R934	C4	R1075	B10	R1168	B3	R1404	*E1	R2006	*J7	RV101	H9	TP804	E4
Q1106	C4	R183	H9	R277	G3	R419	F9	R513	G5	R606	E6	R748	*E8	R841	D5	R935	D6	R1076	C10	R1169	B3	R1500	K7	R2007	H6	RV102	J8	TP901	C8
Q1107	B4	R184	J9	R278	G3	R420	F9	R514	G5	R607	E6	R749	*D9	R842	D4	R936	C4	R1077	C10	R1170	B3	R1501	*C1	R2008	H7	RV103	J9	TP902	D5
Q1108	C4	R185	*J9	R279	G2	R421	*F8	R515	F5	R608	E6	R750	*D9	R843	D4	R937	C4	R1078	B9	R1171	B3	R1502	*C1	R2009	H5	RV104	J9	TP903	C6
Q1109	*B3	R186	*J9	R280	H3	R422	F8	R516	F5	R609	E7	R751	D9	R844	E4	R938	D4	R1079	C9	R1172	A2	R1503	*C1	R2010	J5	RV104	J9	TP905	C5
Q1110	*B3	R187	J9	R281	H3	R423	F8	R517	G5	R610	F5	R752	D9	R845	*D4	R939	C6	R1080	C9	R1173	A2	R1504	*C1	R2011	J5	RV201	H4	TP906	D7
Q1201	A5	R188	J9	R282	H3	R424	F9	R518	G4	R611	E6	R753	D9	R846	*E4	R940	C7	R1081	B9	R1174	A2	R1600	K7	R2012	*H3	RV202	J4	TP907	C6
Q1202	A5	R189	J9	R283	J8	R425	F9	R519	G4	R612	E6	R754	D9	R847	D4	R941	D7	R1082	C9	R1175	A2	R1601	*A1	R2013	*H4	RV203	J4	TP908	C6
Q1203	A6	R190	*J8	R284	*J8	R426	*F9	R520	F4	R613	E6	R755	C8	R848	D4	R942	D7	R1083	C9	R1176	A2	R1602	*A1	R2014	*H3	RV204	J4	TP1002	A8
Q1204	A5	R191	*J8	R285	*J8	R427	G9	R521	F5	R614	E5	R756	C8	R849	D4	R943	C6	R1084	B9	R1177	A2	R1603	*A1	R2015	*H3	RV205	J4	TP1003	A9
Q1205	A4	R192	*J9	R286	H4	R428	*G9	R522	F5	R615	F5	R757	C9	R850	D4	R947	C4	R1085	B9	R1178	A2	R1604	*A1	R2016	*J4	RV206	H4	TP1004	B9
R101	H9	R194	*J9	R287	H4	R429	F9	R523	G5	R616	E7	R758	D9	R851	D4	R948	C4	R1086	C9	R1179	A2	R1701	K8	R5001	*F3	RV207	J4	TP1101	B4
R102	J10	R196	*J9	R288	H4	R430	*F9	R524	G5	R617	E7	R759	C8	R852	E4	R949	C4	R1087	*B9	R1180	B3	R1702	K8	R5002	G8	RV301	G7	TP1102	B8
R103	H9	R197	J9	R289	J4	R431	F9	R525	*F3	R618	E5	R760	C8	R853	D4	R950	C5	R1088	B9	R1181	B3	R1703	K3	R5003	*F7	RV302	H5	TP1103	C4
R104	J10	R198	J9	R290	J4	R433	*G9	R526	F4	R619	E7	R761	D8	R854	E4	R952	*D6	R1089	B9	R1182	B3	R1704	K3	R5004	*G8	RV303	H5	TP1104	C4
R105	J10	R199	J9	R291	J4	R434	*G9	R527	*F3	R620	E5	R762	C8	R855	D4	R953	*C6	R1090	B9	R1183	C8	R1705	K8	R5005	*G8	RV401	F9	TP1201	A8
R106	H9	R201	H8	R292	*H3	R435	E9	R528	*F3	R621	E5	R763	C8	R856	E4	R954	*D6	R1091	B9	R1184	*C8	R1706	K3	R5006	*G7	RV402	G8	TP1202	B5
R107	J10	R202	J8	R293	*H3	R436	F9	R529	F5	R622	F5	R764	*E9	R857	D4	R955	*C7	R1092	B9	R1185	*C8	R1707	K8	R5007	F6	RV403	G9	TP1203	A6
R108	J10	R203	J8	R294	*J3	R437	F9	R530	F5	R623	F5	R765	*E9	R858	E4	R956	*C7	R1093	B8	R1186	B4	R1708	K3	R5008	F7	RV404	G9	TP1205	A5
R109	J10	R204	J8	R295	*J3	R438	G9	R531	G5	R624	F5	R766	*C8	R859	D3	R1001	*B9	R1094	A9	R1187	B4	R1709	K8	R5009	F5	RV501	F4	TP1206	B7
R110	H9	R205	J8	R296	*H3	R439	F8	R532	G5	R625	E6	R767	*D8	R860	D3	R1002	*B8	R1095	*C9	R1188	B4	R1710	G2	R5010	G5	RV502	G4	TP1207	A6
R111	H9	R206	J8	R297	*H4	R440	*G9	R533	F4	R626	E5	R768	C8	R861	D5	R1003	B8	R1096	*C9	R1189	B4	R1711	F2	R5011	G5	RV503	G4	TP1208	A6
R112	J9	R207	J8	R298	*J4	R441	*G9	R534	*F4	R627	E5	R769	C8	R862	*D3	R1004	*B9	R1097	*A8	R1190	C4	R1712	F2	R5012	*F3	RV504	G4	TP1701	G2
R113	J9	R208	H4	R299	*H4	R442	*F8	R535	*G4	R628	E5	R770	*D8	R863	E5	R1005	*C8	R1098	*B8	R1191	C4	R1713	F2	R5013	*F4	RV505	G4	TP1702	K8
R114	J9	R209	H6	R301	G8	R443	G9	R536	G4	R629	*F7	R771	C8	R864	D5	R1006	*B8	R1099	*B8	R1192	*C3	R1714	C2	R5014	*F3	RV506	F4	TP1703	K8
R115	H9	R210	J6	R302	G7	R444	F8	R537	F4	R630	E5	R772	D8	R865	D5	R1007	*B8	R1101	B8	R1193	*B3	R1715	C2	R5015	*F3	RV507	G4	TP1704	K8
R116	H9	R211	J5	R303	G7	R445	G9	R538	G4	R631	E5	R773	*D8	R866	D4	R1008	B9	R1102	C8	R1194	*C3	R1716	C2	R5016	*G4	RV601	E7	TP1705	J4
R117	H9	R212	J5	R304	G8	R446	G9	R539	F4	R632	E4	R774	*D8	R867	D3	R1009	B9	R1103	C8	R1195	*B3	R1717	C2	R8001	*D3	RV602	F5	TP1706	K4
R118	J9	R213	J5	R305	H7	R447	*G9	R540	G4	R633	E4	R775	*D8	R868	D3	R1010	C9	R1104	C8	R1196	*B3	R1718	J4	R8002	E8	RV603	F5	TP1707	K3
R119	J9	R214	J5	R306	G6	R448	*G9	R541	F5	R634	E4	R776	D8	R869	D3	R1011	B8	R1105	C8	R1197	*B3	R1719	J4	R8003	*D7	RV701	D9	TP1708	K3
R120	J9	R215	H5	R307	G6	R449	*G8	R542	F4	R635	F6	R777	D10	R870	D3	R1012	B9	R1106	C8	R1198	*B4	R1720	J4	R8004	*E8	RV702	E8	TP1709	K7
R121	H9	R216	H5	R308	H6	R450	*G8	R543	F4	R636	E4	R778	D9	R871	D3	R1013	B9	R1107	C8	R1199	*C4	R1721	J4	R8005	*E8	RV703	E9		
R122	J9	R217	J5	R309	G7	R451	*G8	R544	G4	R637	E4	R779	E10	R872	C2	R1014	B9	R1108	B4	R1201	A8	R1722	J3	R8006	*E7	RV704	E9	X101	H8
R123	J9	R218	J4	R310	H5	R452	*G8	R545	*G4	R638	F4	R780	E10	R873	C3	R1015	C9	R1109	B6	R1202	A7	R1723	K1	R8007	D6	RV801	D4	X401	F8
R124	H9	R219	J4	R311	G6	R453	G9	R546	*G4	R639	E6	R781	D10	R874	C2	R1016	*C9	R1110	B6	R1203	A7	R1725	J3	R8008	D7	RV802	D4	X701	D8
R125	H9	R220	H4	R312	G6	R454	G9	R547	F4	R640	F7	R782	E10	R875	C3	R1017	*C9	R1111	B5	R1204	A8	R1726	J3	R8009	D5	RV803	D4	X1001	B8
R126	*H9	R221	H5	R313	G6	R455	E8	R548	F4	R641	F7	R783	D9	R876	C2	R1018	C9	R1112	B5	R1205	A7	R1727	J3	R8010	E5	RV804	E4		
R127	*J8	R222	H5	R314	H5	R456	E8	R549	F4	R642	F7	R784	D9	R877	C3														

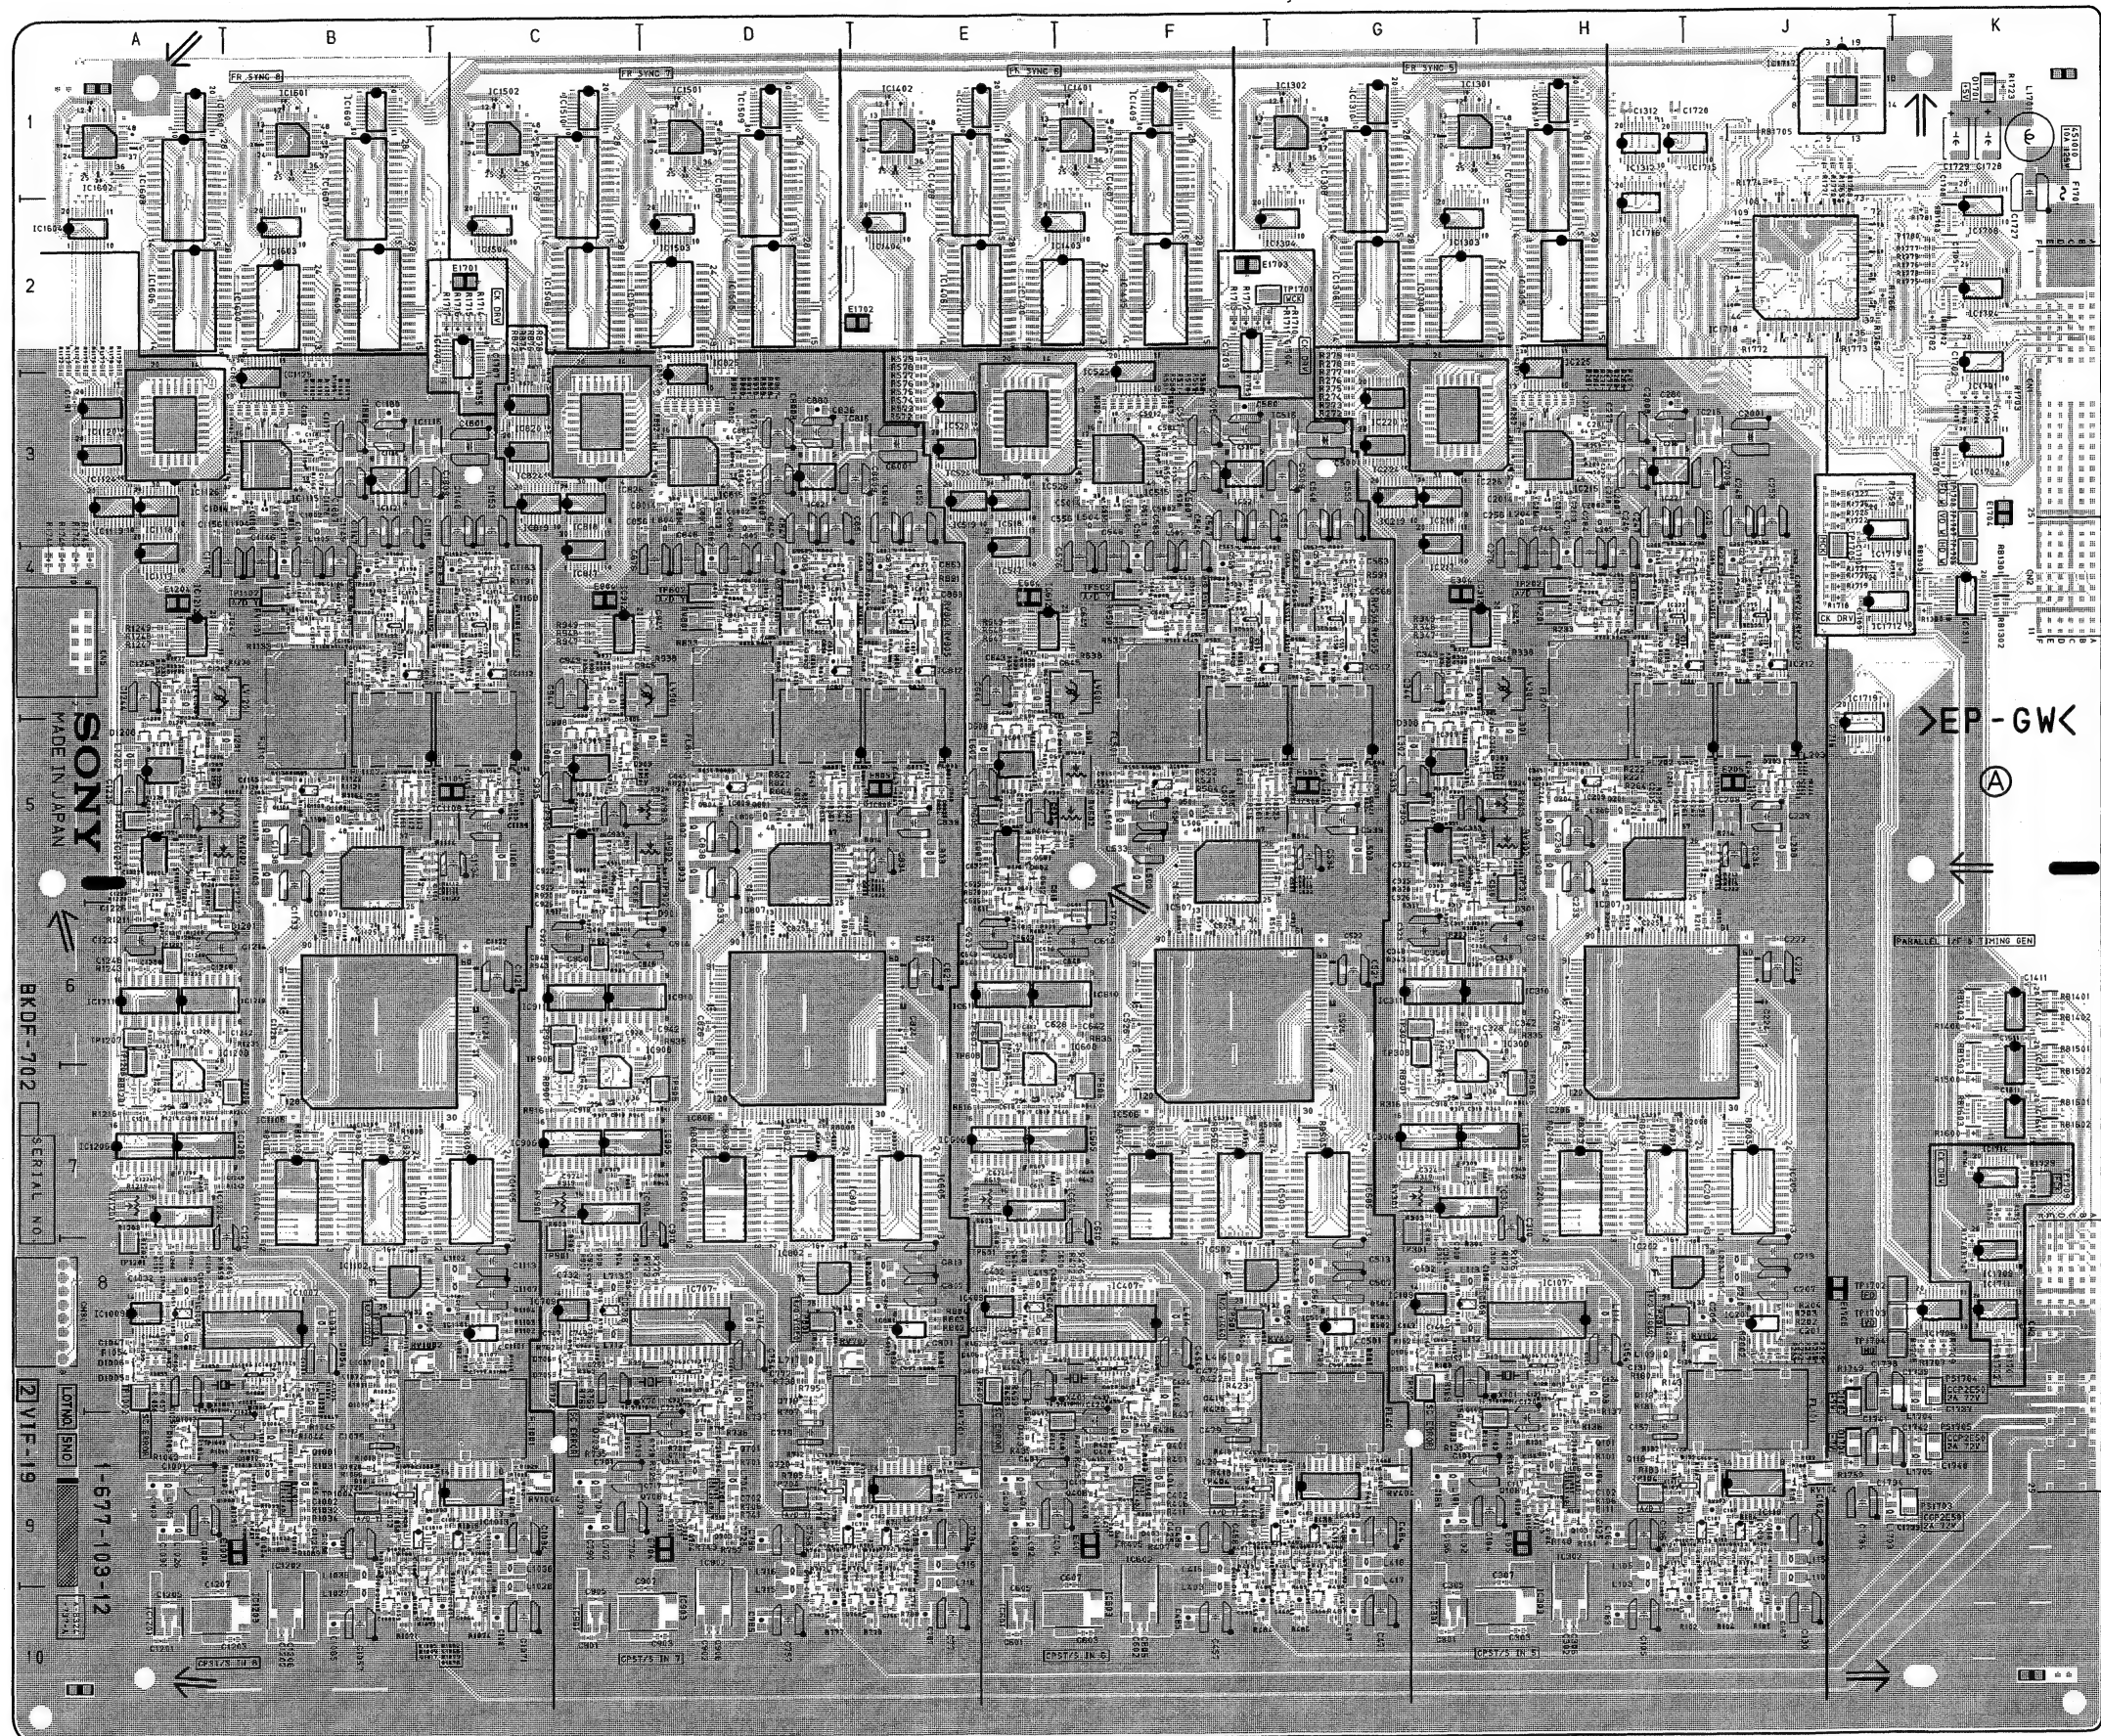

Location list : Previous page

BKDF-702 (J) : S/N 30111 and Higher
 BKDF-702 (UC) : S/N 10061 and Higher
 BKDF-702P (CE) : S/N 40101 and Higher

VIF-19 -A SIDE-
 SUFFIX: -12

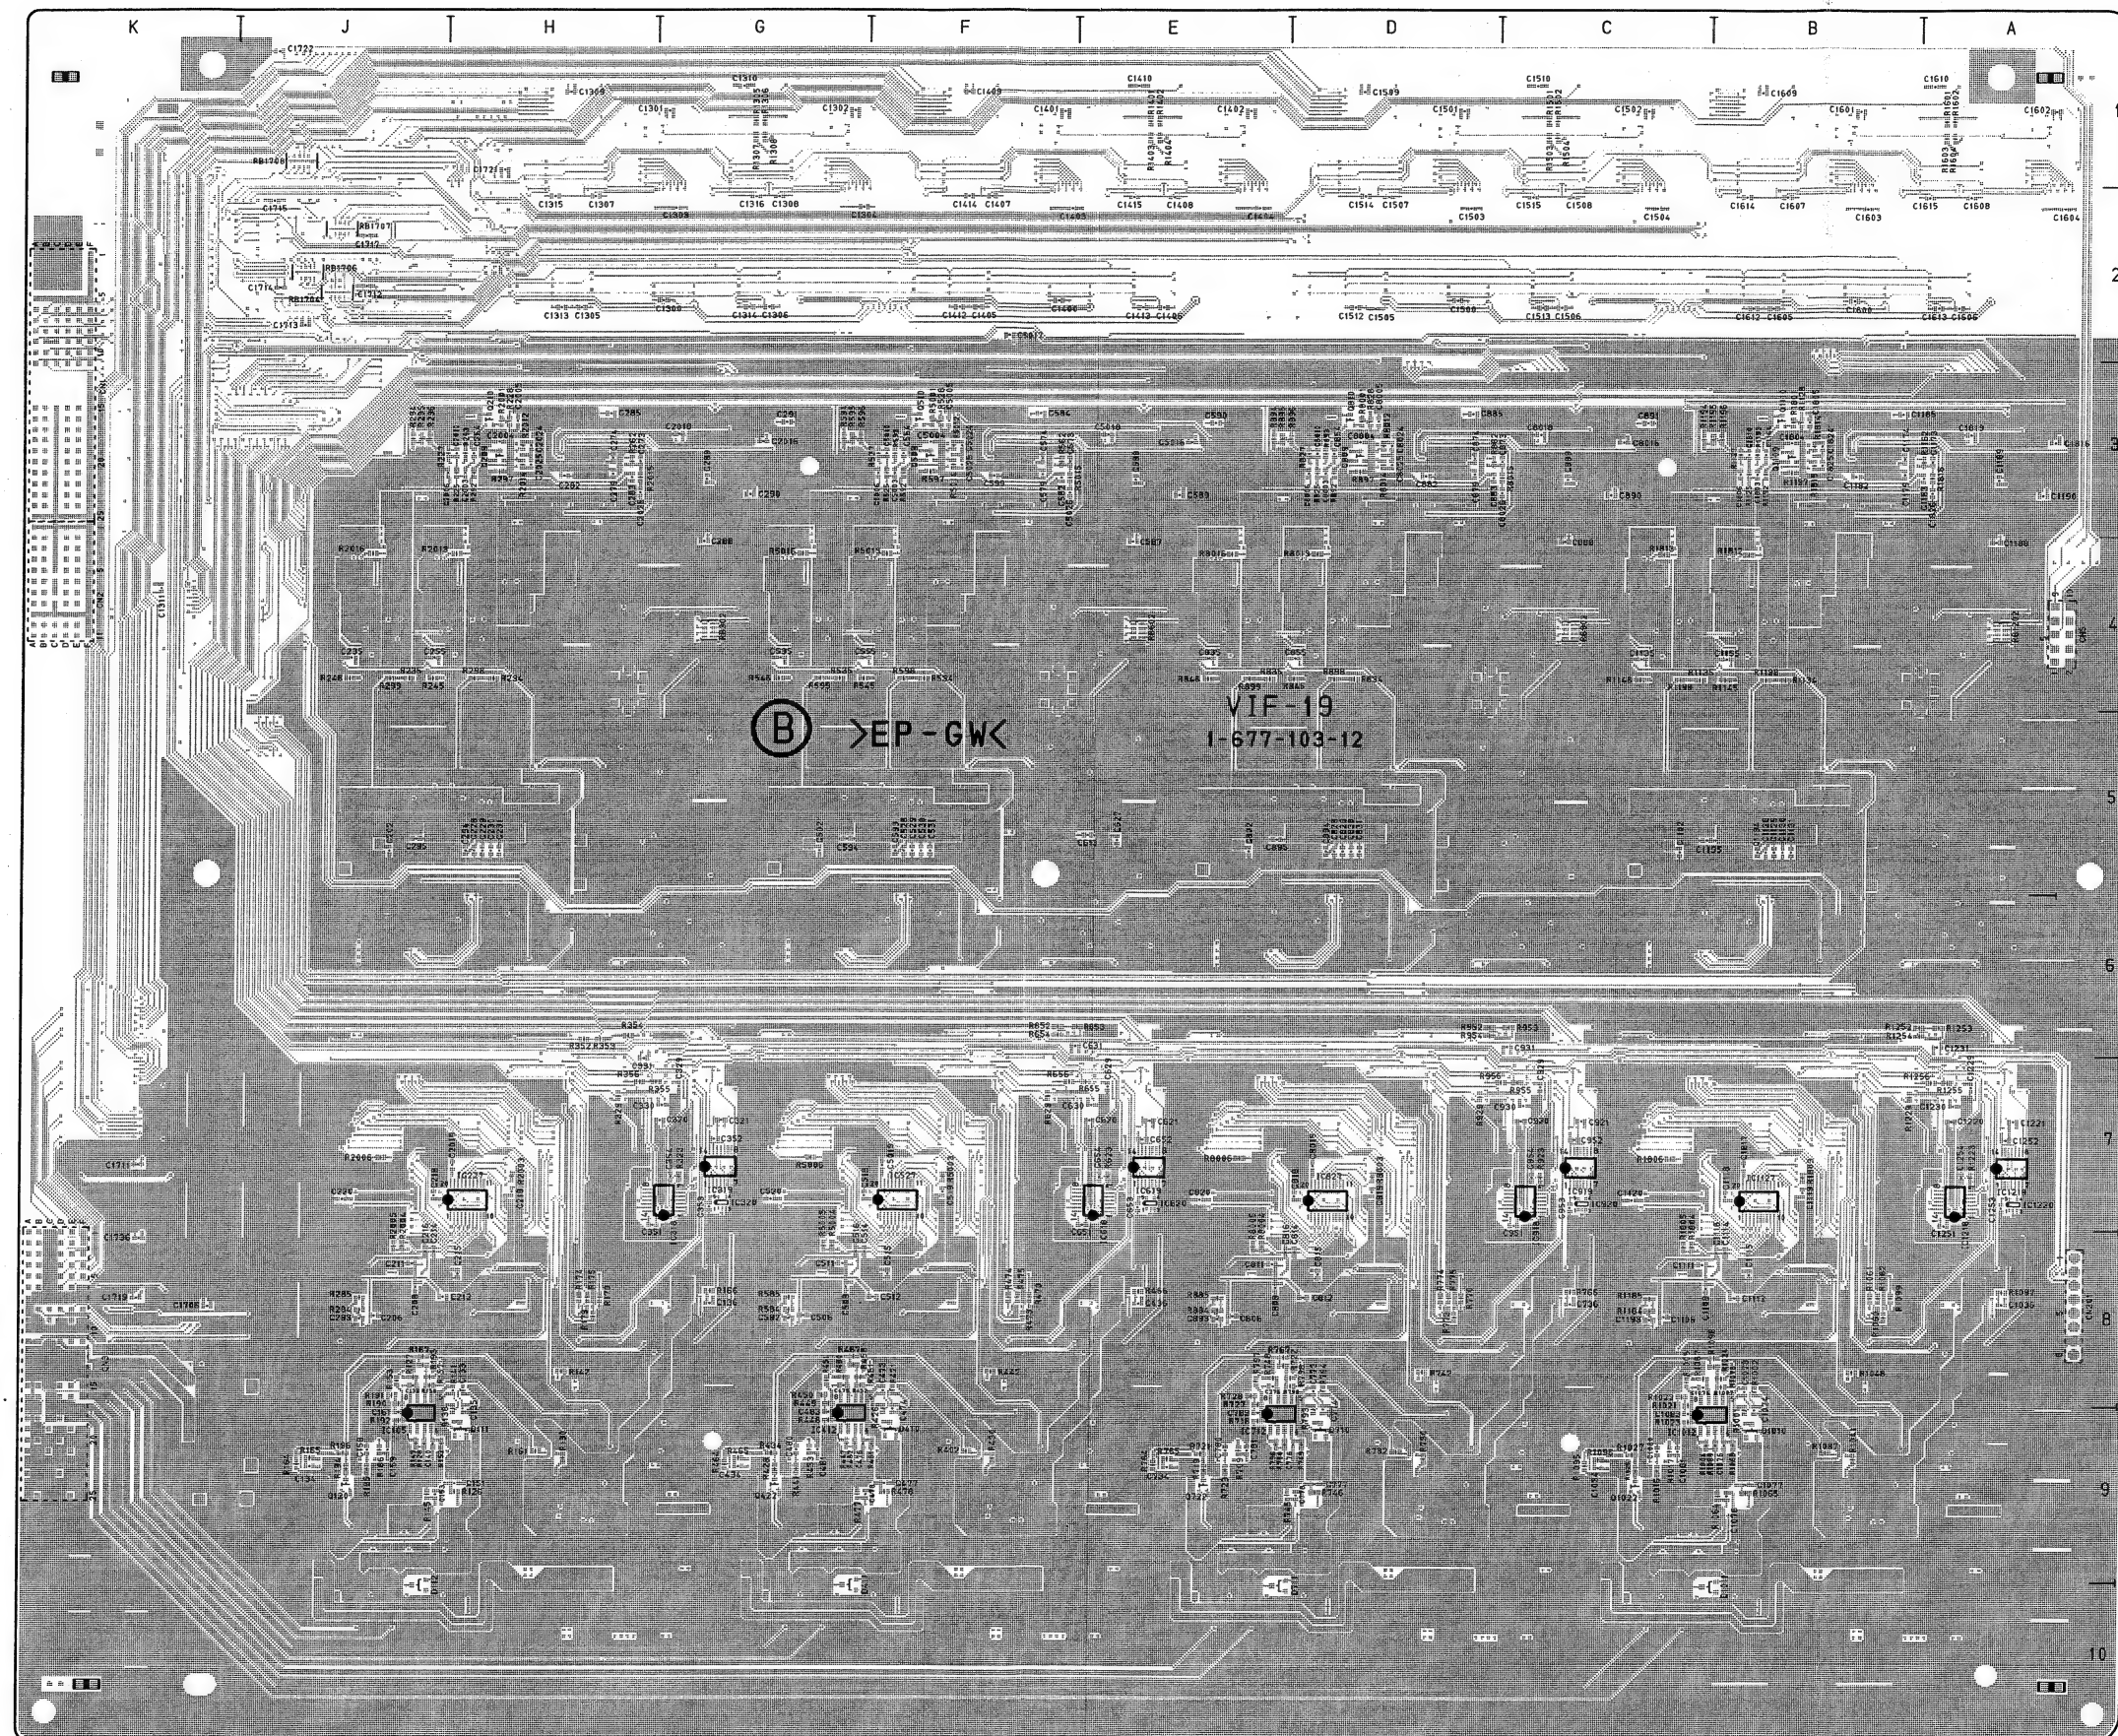


VIF-19 -B SIDE-
SUFFIX: -12

VIF-19 (1-677-103-11)

*:B SIDE

C101	H9	C234	J5	C327	G5	C506	*G8	C598	G4	C769	D9	C871	D3	C1025	B9	C1144	B5	C1237	A5	C1711	*K7	C8015	D5	E1001	B9	IC504	F7	IC1008	A8	IC1607	B1	L806	D5
C102	H9	C235	*J4	C328	G6	C507	G8	C599	*F3	C770	D8	C872	D3	C1026	B8	C1145	B5	C1238	A4	C1712	*J2	C8016	*C3	E1105	C5	IC505	G7	IC1009	A8	IC1608	A1	L807	D5
C104	H9	C236	H3	C329	*G7	C508	*G8	C601	E10	C771	E10	C873	*C3	C1027	B8	C1146	B4	C1239	A6	C1713	*J2	C8017	D2	E1204	A4	IC506	F6	IC1010	B9	IC1609	B1	L808	E5
C105	H10	C237	J4	C330	*G7	C509	G8	C602	F10	C772	D8	C874	*D3	C1028	B8	C1147	B3	C1240	A4	C1714	*J2	C8018	*C3	E1701	C2	IC507	F5	IC1011	C9	IC1610	A1	L901	D5
C106	H9	C238	H5	C331	*H7	C510	G8	C603	F10	C773	*D8	C875	E4	C1032	A8	C1148	B3	C1241	A4	C1715	*J2	CN1	K3	E1702	B2	IC508	G5	IC1012	*B9	IC1611	K7	L902	C5
C107	J10	C239	J5	C332	H5	C511	*G8	C604	E8	C774	*D9	C876	D4	C1037	A8	C1149	B4	C1242	B6	C1716	J5	CN2	K4	E1703	F2	IC509	F5	IC1013	C9	IC1701	K3	L903	C4
C108	J10	C240	J5	C333	G5	C512	*F8	C605	E10	C775	*E8	C877	D3	C1038	A8	C1150	B4	C1243	A4	C1717	*J2	CN3	K8	E1704	K3	IC510	F4	IC1014	B9	IC1702	K3	L1025	A9
C109	J10	C241	H5	C334	G5	C513	G8	C606	F10	C776	*D9	C878	D3	C1043	A8	C1151	B3	C1244	A4	C1719	*K8	CN5	A4	E1705	J8	IC511	G4	IC1101	C8	IC1703	F2	L1026	A9
C110	H10	C242	J5	C335	G5	C514	*F8	C607	F10	C777	*D9	C879	*D3	C1047	A8	C1152	C4	C1245	A4	C1720	H1	CN301	A8	F1701	K2	IC512	G4	IC1102	B8	IC1704	K2	L1027	B10
C111	J10	C243	J5	C336	G5	C515	*F8	C608	E8	C778	*D9	C880	D3	C1049	A8	C1153	C3	C1246	A6	C1721	*H1	D103	G9	FL101	J9	IC513	F4	IC1103	B7	IC1706	K8	L1028	C10
C112	J10	C244	H5	C337	G5	C516	*G8	C609	F8	C779	D9	C881	D3	C1050	A8	C1154	B4	C1247	B4	C1722	*J1	D104	H9	FL101	J9	IC514	G4	IC1104	B7	IC1707	C2	L1029	B9
C113	H9	C245	H5	C338	G4	C517	G4	C610	F7	C780	*E9	C882	*D3	C1052	A8	C1155	*B4	C1248	A6	C1727	K2	D105	H9	FL201	H4	IC515	F3	IC1105	C7	IC1708	K2	L1030	B9
C114	J9	C246	H4	C339	G6	C518	*F7	C611	E6	C781	*E9	C883	*D3	C1054	B8	C1156	A3	C1249	A7	C1728	K1	D106	G8	FL202	H5	IC516	G3	IC1106	B6	IC1709	K8	L1031	B8
C115	J9	C247	H3	C340	G4	C519	*F7	C612	E6	C782	E9	C884	D4	C1055	B8	C1157	B4	C1250	A6	C1729	K1	D108	H10	FL203	J5	IC517	E4	IC1107	B5	IC1711	K8	L1032	A8
C116	J9	C248	J3	C341	G4	C520	*G7	C613	*E5	C783	*E9	C885	*D3	C1056	A8	C1158	B4	C1251	*A7	C1733	K9	D109	J10	FL401	G9	IC518	E3	IC1108	C5	IC1712	J4	L1033	A8
C117	H9	C249	H4	C342	H6	C521	G6	C614	F6	C784	E9	C886	D3	C1057	B10	C1159	C4	C1252	*A7	C1734	J9	D110	J10	FL501	F4	IC519	E3	IC1109	B5	IC1713	J4	L1034	B8
C118	H9	C250	H4	C343	G4	C522	G6	C615	E7	C785	D10	C887	D3	C1058	B9	C1160	B4	C1253	*A7	C1735	J9	D111	*H9	FL502	F5	IC520	E3	IC1110	B4	IC1714	K7	L1035	B9
C120	H9	C251	J3	C344	G4	C523	F7	C616	F6	C786	D9	C888	*C4	C1059	B10	C1161	B4	C1300	*G2	C1736	*K8	D112	*J10	FL503	G5	IC521	F3	IC1111	B4	IC1715	H1	L1036	B9
C121	H9	C252	J4	C345	H4	C524	G6	C617	E6	C787	E10	C889	*C3	C1060	C10	C1162	B4	C1301	*G1	C1737	K9	D113	*H9	FL504	G5	IC522	F4	IC1112	C4	IC1716	H2	L1037	B8
C122	H9	C253	J3	C346	H6	C525	F6	C618	E7	C788	E9	C890	*C3	C1061	C10	C1163	C4	C1302	*G1	C1738	J8	D114	*J10	FL505	G5	IC523	G4	IC1113	B4	IC1717	J1	L1038	C9
C123	H9	C254	H4	C347	H4	C526	F6	C619	E7	C789	D9	C891	*C3	C1062	B10	C1164	*B3	C1303	*G2	C1739	K8	D301	H6	FL801	D4	IC524	E3	IC1114	C4	IC1718	J2	L1101	C8
C124	H8	C255	*J4	C348	G6	C527	G6	C620	*E7	C790	C9	C892	E8	C1063	B10	C1165	B4	C1304	*G2	C1740	K9	D302	G6	FL802	D5	IC525	F3	IC1115	B3	IC1719	J5	L1102	C8
C125	H9	C256	H3	C349	H7	C528	*F5	C621	*E7	C801	E8	C893	*E8	C1064	C10	C1166	B4	C1305	*H2	C1741	J9	D303	G6	FL803	E5	IC526	E3	IC1116	B3	L1103	B5		
C126	H8	C257	H4	C350	G6	C529	*F5	C622	E5	C802	*E5	C894	*D5	C1065	C9	C1167	C4	C1306	*G2	C1742	K9	D305	G5	FL1001	C9	IC527	E10	IC1117	A4	L1104	B3		
C127	H8	C258	H4	C351	*G7	C530	*F5	C623	E6	C803	E6	C895	*E5	C1066	B9	C1168	C4	C1307	*H2	C1801	C3	D306	H5	FL1101	B4	IC528	F10	IC1118	A3	L1105	B3		
C128	H8	C259	J4	C352	*G7	C531	*F5	C624	E7	C804	D8	C896	D4	C1067	C9	C1169	B4	C1308	*G2	C1802	B3	D307	G5	FL1102	B5	IC529	F10	IC1119	A3	L1106	B5		
C129	H8	C260	H4	C353	*G7	C532	G5	C625	E5	C805	D4	C897	D4	C1068	B9	C1170	C4	C1309	*H1	C1803	*B3	D308	G5	FL1103	C5	IC530	E7	IC1120	A3	L1107	B5		
C130	J10	C261	H4	C401	E9	C533	F5	C626	E6	C806	*E8	C898	D4	C1069	B9	C1171	B3	C1310	*G1	C1804	*B3	D309	H5	IC531	E7	IC1121	B3	L1108	C5				
C131	H8	C262	H4	C402	F9	C534	G5	C627	*E5	C807	E8	C899	E4	C1070	B8	C1172	B3	C1311	*K4	C1805	*B3	D403	E9	IC101	J9	IC532	E7	IC1122	B4	L1109	B5		
C132	G8	C263	J4	C403	E9	C535	*G4	C628	E6	C808	*E8	C901	C10	C1071	C10	C1173	*A3	C1312	H1	C1806	*B3	D404	F9	IC102	H8	IC533	E7	IC1123	C4	L1107	H9		
C133	*H8	C264	*H3	C404	F9	C536	F3	C629	*E7	C809	E8	C902	D10	C1072	B8	C1174	*B3	C1313	*H2	C1807	B3	D405	E8	IC103	J9	IC534	E7	IC1124	A3	L1108	H8		
C135	*H9	C265	H4	C413	F9	C537	G4	C630	*E7	C810	E8	C903	D10	C1073	*B8	C1175	C4	C1314	*G2	C1808	B3	D406	E8	IC105	*J9	IC535	E7	IC1125	B3	L1109	H8		
C137	G8	C266	J4	C417	F9	C538	F5	C631	*E6	C811	*E8	C904	C8	C1074	*B9	C1176	B4	C1315	*H2	C1809	B3	D407	F10	IC106	H8	IC536	E6	IC1126	A3	L1107	J10		
C138	G8	C267	J4	C418	F9	C539	G5	C632	F5	C812	*D8	C905	C10	C1075	*B8	C1177	B3	C1316	*G2	C1810	*B3	D408	G10	IC107	H8	IC537	E6	IC1127	A10	L1112	G8		
C139	*J8	C268	J4	C420	F9	C540	G5	C633	E5	C813	E8	C906	D10	C1076	*B9	C1178	B3	C1400	*F2	C1811	B4	D409	G10	IC108	G8	IC538	E4	IC1128	B10	L1113	G8		
C140	*J9	C269	H4	C421	F9	C541	F5	C634	E5	C814	*D8	C907	D10	C1077	*B9	C1179	*B3	C1401	*F1	C1812	B3	D410	*F9	IC109	G8	IC539	*E7	IC1129	A10	L1114	H8		
C143	G8	C270	J4	C424	F8	C542	G5	C635	E5	C815	*D8	C908	C8	C1078	*B9	C1180	B3	C1402	*E1	C1813	B3	D411	*G10	IC110	J9	IC540	*E7	IC1130	A7	L1115	J9		
C147	G8	C271	H3	C425	F9	C543	G5	C636	E5	C816	*D8	C909	C8	C1079	B9	C1181	B3	C1403	*F2	C1814	B3	D601	F6	IC111	J9	IC541	*E7	IC1131	A7	L1116	J8		
C149	G8	C272	H3	C426	F8	C544	F5	C637	E5	C817	E4	C910	D7	C1080	*C9	C1182	*B3	C1404	*E2	C1815	B5	D602	E6	IC1201	J8	IC542	D8	IC1132	A7	L1117	J8		
C150	G8	C273	*H3	C427	F8	C545	F5	C638	E4	C818	*D7	C911	C6	C1081	*C9	C1183	*A3	C1405	*F2	C1816	*A3	D603	E6	IC1202	J8	IC543	D8	IC1133	A7	L1118	H3		
C151	*H9	C274	*H3	C428	F8	C546	F4	C639	E6	C819	*E7	C912	C6	C1082	B9	C1184	*B4	C1406	*E2	C1817	B2	D605	E5	IC1203	H7	IC544	D8	IC1134	A7	L1119	H3		
C152	G8	C275	J4	C432	E8	C547	F3	C640	E4	C820	*E7	C913	C5	C1083	*C9	C1185	*B3	C1407	*F2	C1818	*A3	D606	E5	IC1204	H7	IC545	C8	IC1135	A7	L1205	H3		
C153	*J9	C276	H4	C437	E8	C548	G3	C641	E4	C821	E6	C914	D6	C1084	C9	C1186	*B3	C1408	*E2	C1819	*A3	D607	E5	IC1205	J7	IC546	C8	IC1136	A6	L1206	H5		
C154	H8	C277	H3	C438	E8	C549	F4	C642	F6	C822	E6	C915	C7	C1085	B10	C1187	B3	C1409	*F1	C2002	H3	D608	E5	IC1206	H6	IC547	D9	IC1137	A6	L1207	H5		
C155	H8	C278	H3	C443	E8	C550	F4	C643	E4	C823	D7	C916	C6	C1086	B9	C1188	*A4	C1410	*E1	C2003	H3	D609	E5	IC1207	H5	IC548	E9	IC1138	A4	L1208	J5		
C156	H8	C279	*H3	C447	E8	C551	F3	C644	E4	C824	E6	C917	C6	C1087	C10	C1189	*A3	C1411	K6	C2004	*H3	D703	C9	IC1208	J5	IC549	*E9	IC1139	A7	L1209	H5		
C157	H9	C280	H3	C449	E8	C552	G4	C645	F4	C825	D6	C918	C7	C1088	C9	C1190	*A3	C1412	*F2	C2005	*H3	D704	D9	IC1209	H5	IC550	E9	IC1140	A7	L1210	H5		
C158	*J9	C281	H3	C450	E8	C553	G3	C646	F6	C826	D6	C919	C7	C1089	B9	C1191	*A3	C1413	*F2	C2006	*H3	D705	C8	IC1210	H4	IC551	D9	IC1141	A7	L1211	H5		
C159	*J9	C282	*H3	C452	E8	C554	F4	C647	F4	C827	E6	C920	*C7	C1090	A9	C1192	C8	C1414	*F2	C2007	H3	D706	C8	IC1211	J4	IC552	D8	IC1142	A7	L1212	H5		
C160																																	


Q503	G5	R119	J9	R219	J4	R312	G6	R459	E8	R557	F4	R704	E9	R803	E8	R895	*E3	R1043	A9	R1141	B5	R1235	B6	R1782	K2	RV806	D4
Q504	F5	R120	J9	R220	H4	R313	G6	R460	E8	R558	G4	R705	D9	R804	E8	R896	*D3	R1044	B9	R1142	B4	R1236	A4	R1801	*B3	RV807	E4
Q505	F4	R121	H9	R221	H5	R314	H5	R461	*G8	R559	F3	R706	D9	R805	E8	R897	*D3	R1045	B9	R1143	B4	R1237	A4	R2001	*H3	RV901	C7
Q506	G4	R122	J9	R222	H5	R315	H5	R462	E8	R560	F3	R707	D9	R806	E8	R898	*D4	R1046	B8	R1144	C4	R1238	A4	R5001	*F3	RV902	D5
Q507	F4	R123	J9	R223	J5	R316	G7	R463	E8	R561	F5	R708	E9	R807	E8	R899	*E4	R1047	B9	R1145	*B4	R1239	A6	R8001	*D3	RV903	D5
Q508	G4	R124	H9	R224	J5	R317	G7	R468	E8	R562	*F3	R709	*E9	R808	D4	R901	C8	R1048	*B8	R1146	*C4	R1240	A7			RV1001	B9
Q509	*F3	R125	H9	R225	*H3	R318	G5	R469	E8	R563	G5	R710	D9	R809	D6	R902	C7	R1049	B8	R1147	B4	R1241	B7	RB201	H7	RV1002	B8
Q510	*F3	R126	*H9	R226	H4	R319	G7	R471	E8	R564	F5	R711	D9	R810	E6	R903	C7	R1050	A8	R1148	B4	R1242	A7	RB202	H7	RV1003	B9
Q601	E5	R127	*J8	R227	*H3	R320	G6	R472	F8	R565	F5	R712	D9	R811	E5	R904	C8	R1051	A8	R1149	B4	R1243	A6	RB203	H7	RV1004	C9
Q602	E5	R128	*J9	R228	*H3	R321	G5	R473	*F8	R566	F4	R713	E9	R812	E5	R905	C7	R1052	A8	R1150	B4	R1244	A4	RB204	H7	RV1101	B4
Q603	E6	R129	H9	R229	H5	R322	H5	R474	*F8	R567	F3	R714	E9	R813	E5	R906	C6	R1053	A8	R1151	B4	R1245	A4	RB205	J7	RV1102	B4
Q604	E5	R130	*H9	R230	H5	R323	H5	R475	*F8	R568	F3	R715	D9	R814	E5	R907	C6	R1054	A8	R1152	C4	R1246	A4	RB301	G7	RV1103	B4
Q605	E4	R131	H9	R231	J5	R324	H5	R476	F8	R569	F3	R716	D9	R815	D5	R908	C6	R1055	A8	R1153	B4	R1247	A4	RB302	*G4	RV1104	C4
Q701	D9	R132	J9	R232	J5	R325	G7	R477	*G9	R570	F3	R717	D9	R816	D5	R909	C7	R1056	A8	R1154	C4	R1248	A5	RB501	F7	RV1105	C4
Q703	D9	R133	H9	R233	H4	R326	G6	R478	*F9	R571	F3	R718	*E9	R817	E5	R910	D5	R1057	A8	R1155	B4	R1249	A4	RB502	F7	RV1106	B4
Q704	D9	R134	H9	R234	*H4	R327	G5	R479	F9	R572	E3	R719	*E9	R818	E4	R911	C6	R1058	A8	R1156	C4	R1250	A5	RB503	F7	RV1107	C4
Q708	D9	R135	G9	R235	*J4	R328	H7	R480	*G8	R573	E3	R721	*E9	R819	E4	R912	C6	R1059	A8	R1157	B4	R1251	A4	RB504	F7	RV1201	A7
Q710	D9	R136	H9	R236	J4	R329	G5	R481	*F9	R574	E3	R722	*D8	R820	D4	R913	C6	R1060	*B8	R1158	C4	R1252	A4	RB505	G7	RV1202	B5
Q712	C9	R137	H9	R237	H4	R330	G5	R482	*G9	R575	E3	R723	*E9	R821	D5	R914	C5	R1061	*B8	R1159	B3	R1253	A4	RB601	E7	RV1203	A5
Q714	D8	R138	*H9	R238	H4	R331	G4	R483	F9	R576	E3	R724	D9	R822	D5	R915	D5	R1062	*B8	R1160	B3	R1254	A4	RB602	*E4		
Q715	D8	R139	H8	R239	H4	R332	G4	R484	F10	R577	E3	R725	D9	R823	D5	R916	C7	R1063	B8	R1161	B5	R1255	A4	RB801	D7	TP102	G8
Q716	D9	R140	H9	R240	J4	R333	G4	R485	F9	R578	E3	R726	D9	R824	E5	R917	C7	R1064	*B9	R1162	*A3	R1256	A4	RB802	D7	TP103	H9
Q717	E9	R141	*H8	R241	H5	R334	G4	R486	G10	R579	E2	R727	*E8	R825	*D3	R918	C5	R1065	*B9	R1163	C5	R1257	A4	RB803	D7	TP104	H9
Q718	E9	R142	*H8	R242	H4	R335	H6	R487	G10	R580	F3	R728	*E8	R826	D4	R919	C7	R1066	B9	R1164	B5	R1258	A4	RB804	D7	TP201	H8
Q719	D8	R143	H8	R243	H4	R336	G4	R488	F10	R581	F3	R729	D9	R827	*D3	R920	C6	R1067	*B8	R1165	B5	R1259	A4	RB805	E7	TP202	H4
Q720	D9	R144	H8	R244	J4	R337	G4	R489	G10	R582	F3	R730	*D9	R828	*D3	R921	C5	R1068	*B9	R1166	B4	R1260	A4	RB901	C7	TP203	H4
Q721	E9	R145	*J9	R245	*J4	R338	H4	R490	G10	R583	G8	R731	D9	R829	D5	R922	C5	R1069	*B9	R1167	B3	R1261	A4	RB902	*C4	TP204	J4
Q722	*E9	R146	H9	R246	*J4	R339	G6	R491	F9	R584	*G8	R732	*D9	R830	D5	R923	D5	R1070	B9	R1168	B3	R1262	A4	RB101	C7	TP301	G8
Q801	D5	R147	H8	R247	H4	R340	H7	R492	G9	R585	*G8	R733	D9	R831	D5	R924	C7	R1071	B10	R1169	B3	R1263	A4	RB102	K7	TP302	H6
Q802	D5	R148	H9	R248	H4	R341	H7	R493	G9	R586	F4	R734	D9	R832	E5	R925	C6	R1072	B9	R1170	B3	R1264	A4	RB103	B7	TP303	G6
Q803	E5	R149	*J9	R249	H4	R342	H7	R494	F9	R587	F4	R735	C9	R833	D4	R926	C5	R1073	C10	R1171	B3	R1265	A4	RB104	B7	TP305	G5
Q804	D5	R150	H9	R250	H4	R343	G6	R495	G9	R588	F4	R736	D9	R834	*D4	R927	C5	R1074	C10	R1172	A2	R1266	A4	RB105	C7	TP306	H7
Q805	D4	R151	H9	R251	J4	R344	G4	R496	G9	R589	G4	R737	D9	R835	*E4	R928	C5	R1075	B10	R1173	A2	R1267	A4	RB1201	A7	TP307	G6
Q806	E4	R152	*H9	R252	J4	R345	G4	R497	F9	R590	G4	R738	D8	R836	E4	R929	C5	R1076	C10	R1174	A2	R1268	A4	RB1202	*A4	TP308	G6
Q807	D4	R153	*J8	R253	H4	R346	H5	R498	G9	R591	G4	R739	D8	R837	D4	R930	C5	R1077	C10	R1175	A2	R1269	A4	RB1301	K4	TP402	B8
Q808	E4	R154	H9	R254	J4	R347	G4	R499	G9	R592	*F3	R740	D9	R838	E4	R931	C5	R1078	B9	R1176	A2	R1270	K8	RB1302	K4	TP403	F9
Q809	*D3	R155	G8	R255	H4	R348	G4	R500	F8	R593	*F3	R741	D9	R839	D4	R932	C4	R1079	C9	R1177	A2	R1271	K8	RB1303	K4	TP404	F9
Q810	*D3	R156	G8	R256	H4	R349	G4	R501	F8	R594	*G3	R742	*D8	R840	E4	R933	C4	R1080	C9	R1178	A2	R1272	K8	RB1401	K6	TP501	F8
Q901	C5	R157	*J8	R257	H4	R350	H5	R502	G8	R595	*G3	R743	D9	R841	D5	R934	C4	R1081	B9	R1179	A2	R1273	K8	RB1402	K6	TP502	F4
Q902	C6	R158	*J8	R258	H4	R351	G6	R503	G8	R596	*G3	R744	D8	R842	D4	R935	D6	R1082	C9	R1180	B3	R1274	K8	RB1403	K6	TP503	F4
Q903	C6	R159	G8	R259	H3	R352	H6	R504	G8	R597	*F3	R745	*D9	R843	D4	R936	C4	R1083	C9	R1181	B3	R1275	K8	RB1501	K7	TP504	G4
Q904	C5	R160	G8	R260	H3	R353	H6	R505	G8	R598	*F4	R746	*D9	R844	E4	R937	C4	R1084	B9	R1182	B3	R1276	K8	RB1502	K7	TP601	E8
Q905	C4	R161	*H9	R261	J5	R354	H6	R506	G8	R599	*G4	R747	D9	R845	*D4	R938	C4	R1085	B9	R1183	C8	R1277	G2	RB1503	K7	TP602	F6
Q1001	B9	R162	G8	R262	*H3	R355	H6	R507	G8	R600	E8	R748	*E8	R846	*E4	R939	C6	R1086	C9	R1184	*C8	R1278	F2	RB1601	K7	TP603	E6
Q1003	B9	R163	G8	R263	J5	R356	H6	R508	F4	R601	E8	R749	*D9	R847	D4	R940	C7	R1087	*B9	R1185	*C8	R1279	F2	RB1602	K7	TP605	E5
Q1004	B9	R164	G8	R264	H5	R357	H6	R509	F6	R602	E7	R750	*D9	R848	D4	R941	D7	R1088	B9	R1186	B4	R1280	F2	RB1603	K7	TP606	F7
Q1008	B9	R165	G8	R265	H5	R358	H6	R510	G6	R603	E7	R751	D9	R849	D4	R942	D7	R1089	B9	R1187	B4	R1281	C2	RB1701	K3	TP607	E6
Q1010	B9	R166	G8	R266	H5	R359	H6	R511	G6	R604	E8	R752	D9	R850	D4	R943	C6	R1090	B9	R1188	B4	R1282	C2	RB1702	K2	TP608	E6
Q1012	A9	R167	*H8	R267	H3	R360	H6	R512	G5	R605	F7	R753	D9	R851	D4	R944	C4	R1091	B9	R1189	B4	R1283	C2	RB1703	K2	TP702	C8
Q1014	B8	R168	*H8	R268	H3	R361	H6	R513	G5	R606	E6	R754	D9	R852	E4	R945	C4	R1092	B9	R1190	C4	R1284	C2	RB1704	*J2	TP703	C9
Q1015	B8	R169	*H8	R269	H3	R362	H6	R514	G5	R607	E6	R755	D9	R853	D4	R946	C4	R1093	B8	R1191	C4	R1285	C2	RB1705	J1	TP704	D9
Q1016	B9	R170	H8	R270	H3	R363	H6	R515	F5	R608	E6	R756	C8	R854	E4	R947	C4	R1094	A9	R1192	*B3	R1286	J4	RB1706	*J2	TP801	D8
Q1017	B9	R171	H9	R271	H3	R364	H6	R516	F5	R609	E7	R757	C9	R855	D4	R948	C4	R1095	A9	R1193	*B3	R1287	J4	RB1707	*J2	TP802	D4
Q1018	C9	R172	J9	R272	G3	R365	H6	R517	G5	R610	F5	R758	D9	R856	E4	R949	C4	R1096	B9	R1194	*C3	R1288	J4	RB1708	*J1	TP803	D4
Q1019	B8	R173	J9	R273	G3	R366	H6	R518	G4	R611	E6	R759	D9	R857	D4	R950	C5	R1097	B9	R1195	*B3	R1289	J4			TP804	E4
Q1020	B9	R174	H8	R274	G3	R367	H6	R519	G4	R612	E6	R760	C8	R858	E4	R951	C5	R1098	B9	R1196	*B3	R1290	J4	RV101	H9	TP901	C8
Q1021	C9	R175	H8	R275	G3	R368	H6	R520	F4	R613	E6	R761	C8	R859	D3	R952	C5	R1099	B9	R1197	*B3	R1291	J4	RV102	J8	TP902	D6
Q1022	*C9	R176	H9	R276	G3	R369	H6	R521	F5	R614	E5	R762	C8	R860	D3	R953	C5	R1100	B9	R1198	*B4	R1292	J4	RV103	J9	TP903	C6
Q1101	B5	R177	H9	R277	G3	R370	H6	R522	F5	R615	F5	R763	C8	R861	D5	R954	C5	R1101	B8	R1							

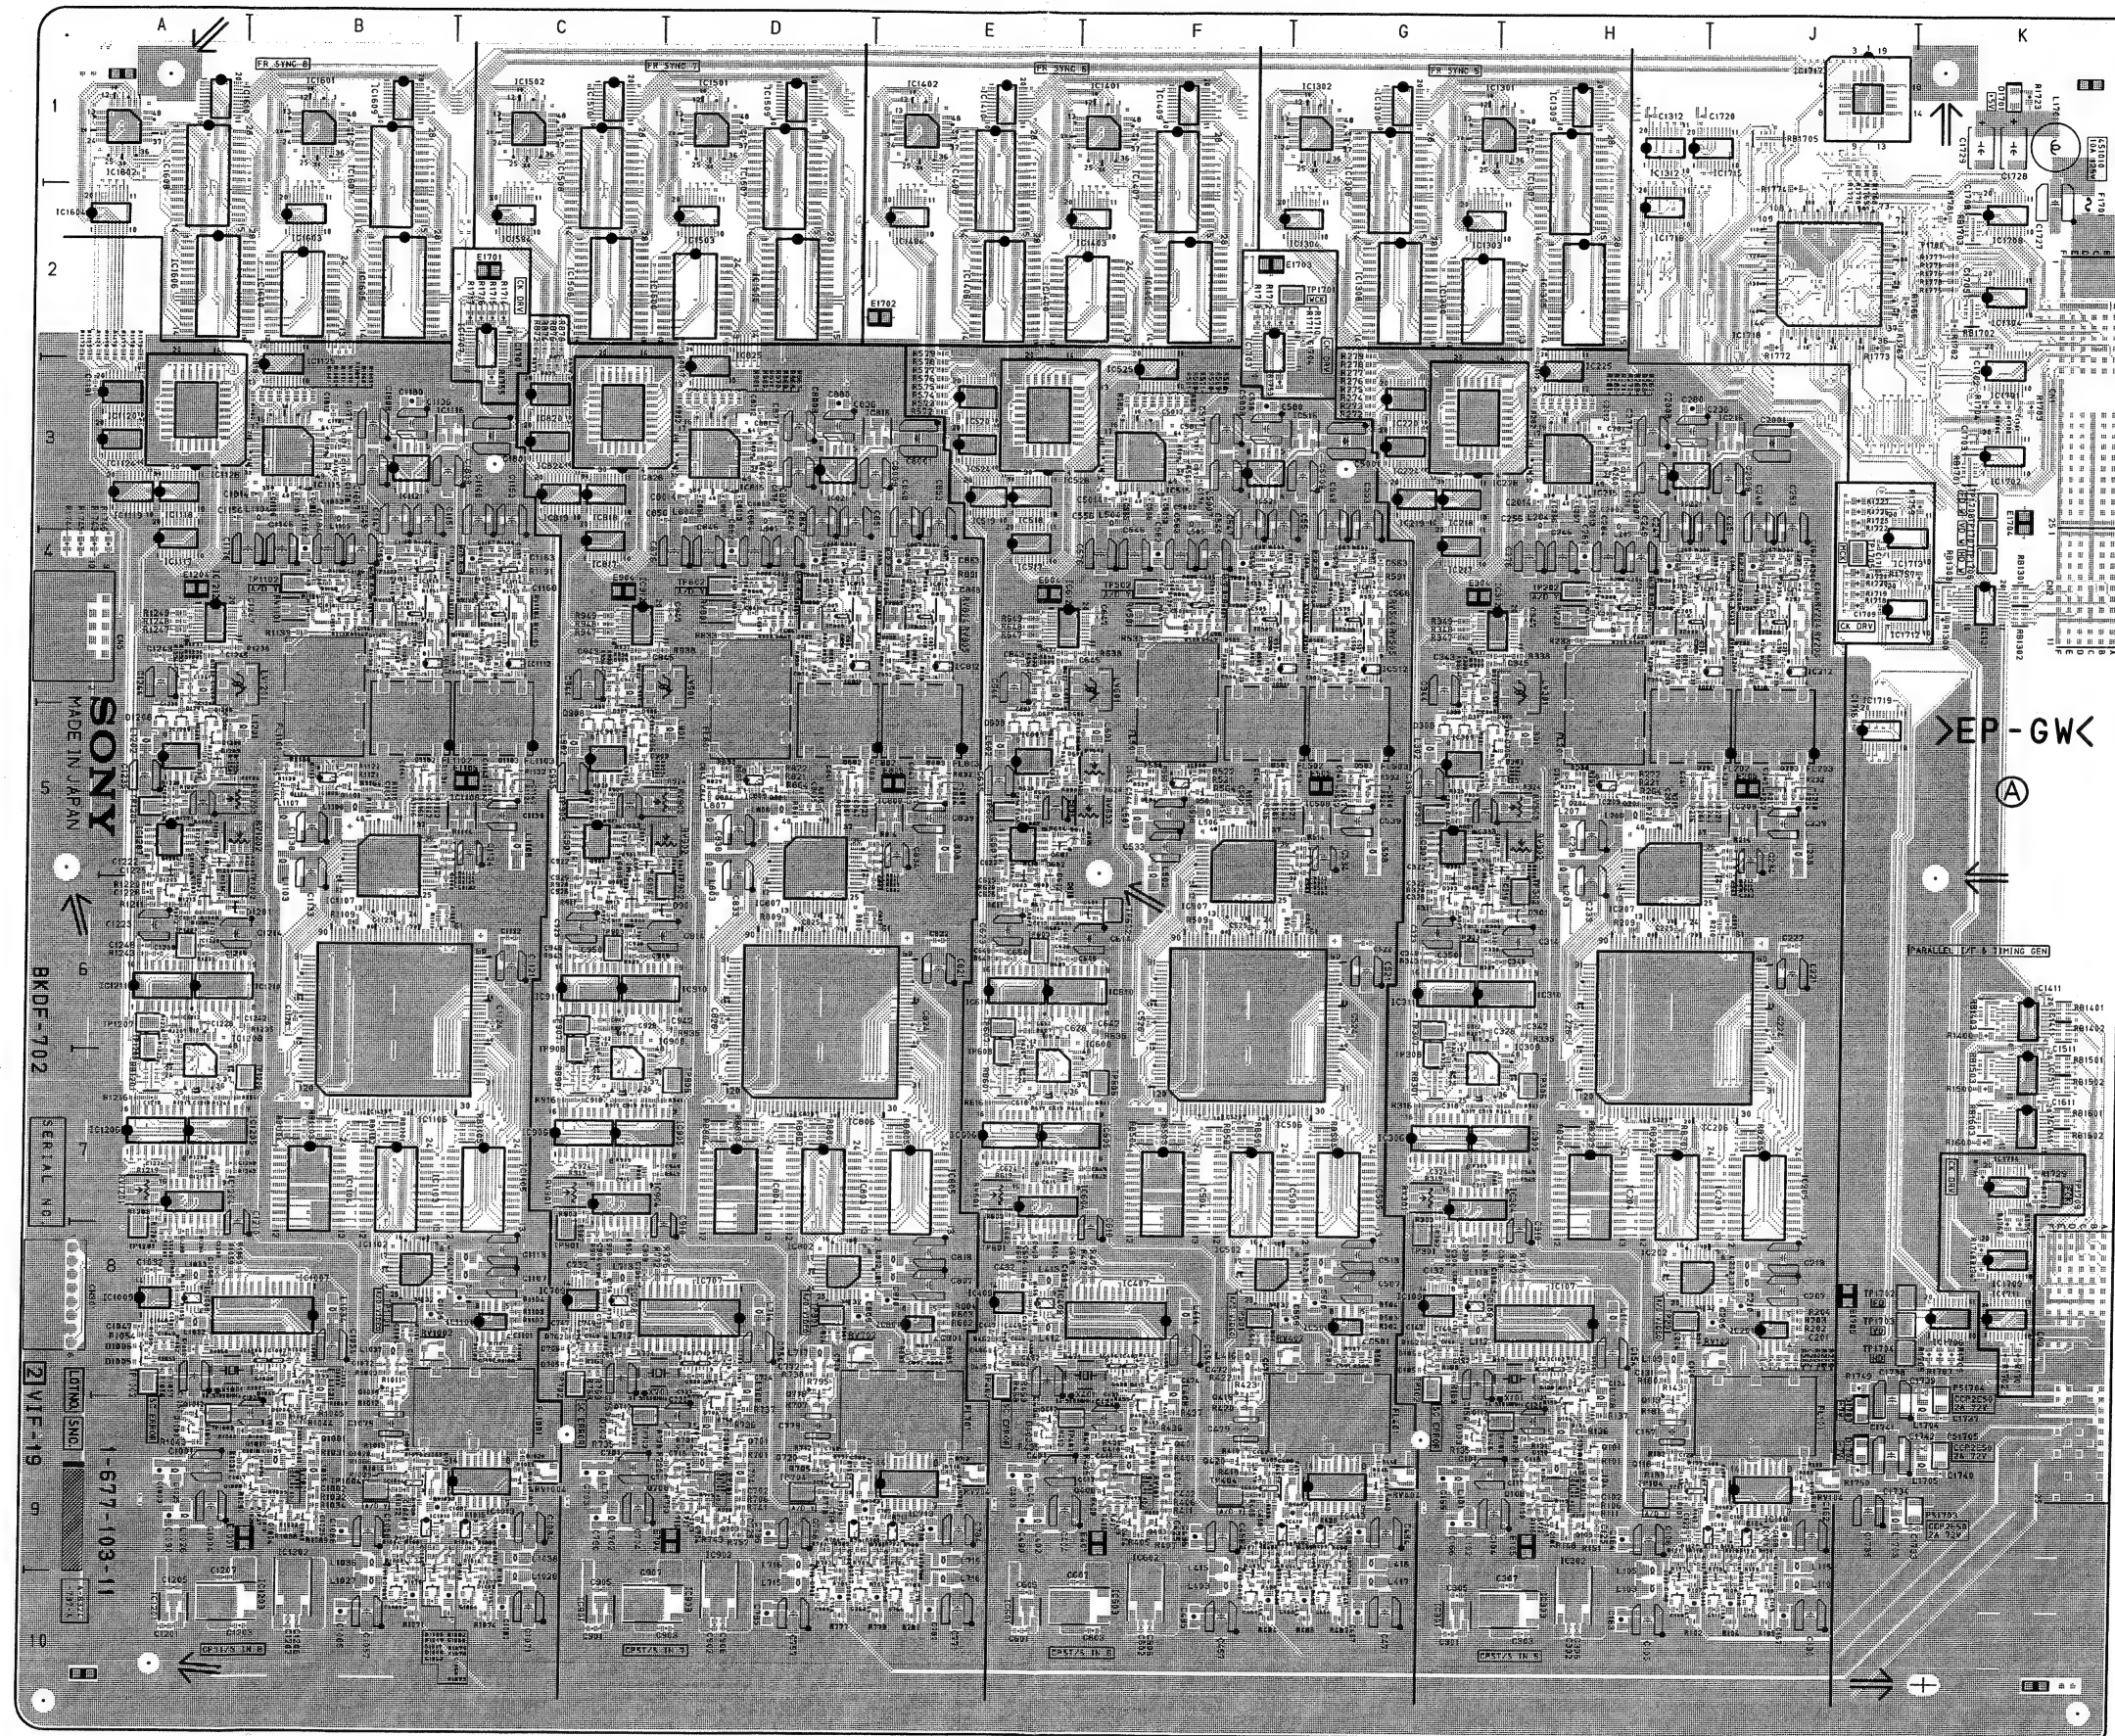

Location list : Previous page

BKDF-702 (J) : S/N 30001 through 30110
BKDF-702 (UC) : S/N 10001 through 10060
BKDF-702P (CE) : S/N 40001 through 40100

VIF-19 -A SIDE-
SUFFIX: -11

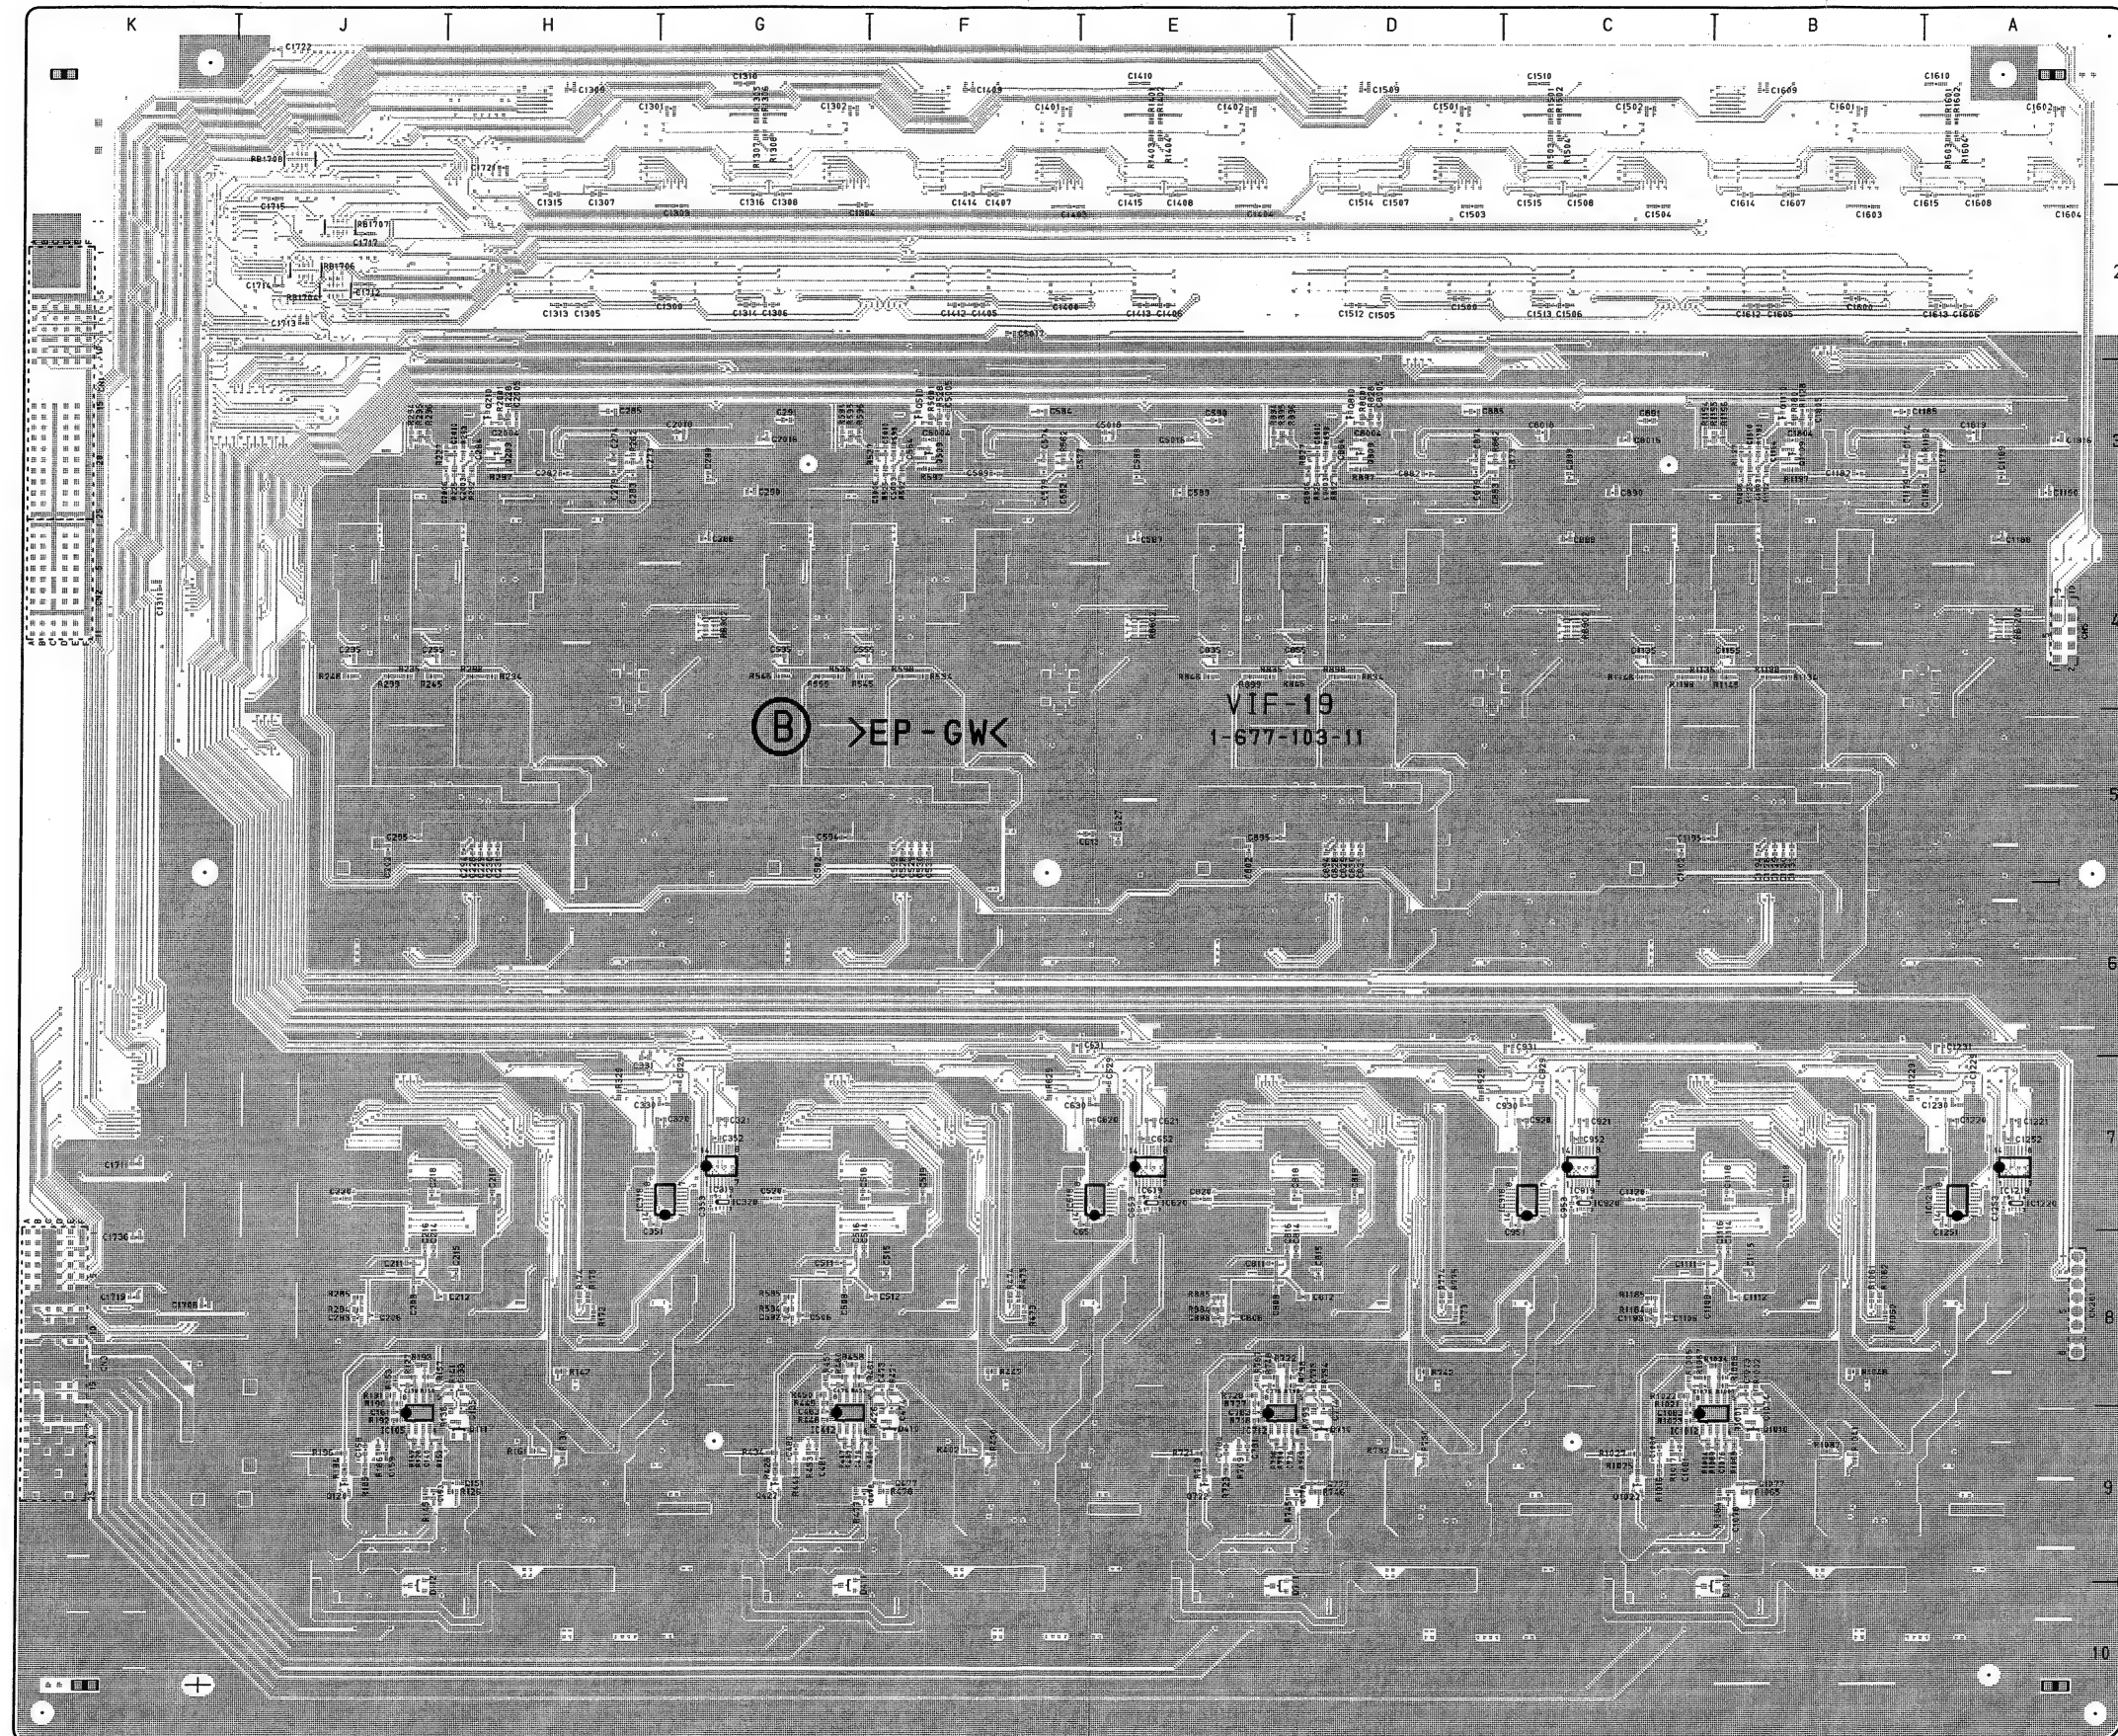

VIF-19 -B SIDE-
SUFFIX: -11


VIF-20 (1-677-102-11)

*:B SIDE

C101	B8	C207	*E8	C353	C6	C503	B5	C608	*E4	C754	*C2	C905	*G9	C1025	*J9	C1411	M1	IC205	*E8	IC619	E5	IC1313	K3	Q505	B4	R173	*B9	R346	B6	R516	B4	R624	*E4
C102	B9	C208	*E8	C354	*C7	C504	A4	C609	E5	C755	*C2	C906	*H9	C1026	*K9	C1412	M5	IC206	*F8	IC701	*C1	IC1314	L5	Q506	B5	R174	*B9	R347	B6	R517	B5	R625	F4
C103	B10	C209	E9	C355	*C7	C505	A5	C610	*E4	C756	*D2	C907	*G9	C1027	*K9	C1421	M6	IC207	E9	IC702	*B2	IC1315	K1	Q507	*B4	R175	C8	R348	*B6	R518	B4	R626	F4
C104	A9	C210	E9	C356	*D7	C506	A4	C611	E4	C757	C2	C908	*H9	C1028	K9	C1422	M6	IC208	*E9	IC703	*B3	IC1316	L8	Q508	*B4	R176	*C8	R349	B7	R519	B4	R627	F4
C105	A9	C211	E9	C357	C7	C507	A4	C612	*E4	C758	D2	C909	*G9	C1029	*K9	C1423	L6	IC209	E9	IC704	*C2	IC1317	M8	Q509	*B5	R177	*C8	R350	*B7	R520	B4	R628	F4
C106	A8	C212	*E9	C358	*D7	C508	A4	C613	E4	C759	*D3	C910	*H9	C1030	*K9	C1424	*M6	IC210	*E9	IC705	*C2	IC1318	L8	Q510	B4	R178	C8	R351	B7	R521	B4	R629	F4
C107	A8	C213	E8	C359	*D7	C509	A5	C614	*E4	C760	*D3	C911	*G9	C1031	*L9	C1425	*M6	IC211	*F9	IC706	D2	IC1319	J3	Q511	B4	R179	*C8	R352	*B6	R522	B4	R630	E5
C108	A9	C214	*E9	C360	*D7	C510	*A4	C615	E4	C761	*D2	C912	*H9	C1032	L9	C1426	*L6	IC212	*E9	IC707	C3	IC1320	M3	Q512	B5	R180	*B9	R353	*B7	R523	B5	R631	*D5
C109	A9	C215	E9	C361	*D7	C511	*A5	C616	E5	C762	*D2	C913	*G10	C1033	*L9	C1427	M6	IC213	*E9	IC708	C2	IC1321	M3	Q518	C4	R181	*D8	R355	*B7	R524	B5	R632	F4
C110	*A9	C216	E9	C362	*D6	C512	*A4	C617	E4	C763	*D2	C914	*H10	C1034	*L9	C1428	M6	IC214	E9	IC709	*D3	IC1322	J3	Q519	C4	R182	*D8	R356	*B7	R525	B4	R633	F5
C111	*A9	C217	E8	C363	*D7	C513	*A4	C618	*E4	C764	*D2	C915	*G9	C1035	*J9	C1429	L6	IC215	E9	IC710	*C3	IC1323	L3	Q601	*D4	R183	*D8	R357	*B7	R526	*B4	R701	*B2
C112	*A8	C218	*E9	C364	*D6	C514	*A4	C619	*E4	C765	*B2	C916	*H9	C1036	*L9	C1430	*M6	IC216	*E9	IC711	D2	IC1324	K3	Q701	*B1	R184	*C8	R358	*C6	R527	*B5	R702	*B2
C113	*A8	C219	*E9	C365	*B6	C515	*A5	C620	E4	C766	*C2	C917	G9	C1037	*J9	C1431	*M6	IC217	F9	IC712	D2	IC1326	L3	Q702	*B2	R185	*D8	R359	*B6	R528	*B4	R703	*B3
C114	*A9	C220	E8	C366	*C7	C516	B4	C621	E4	C767	*C1	C918	G10	C1038	*L9	C1432	*M6	IC218	*F9	IC713	D2	IC1327	L2	Q703	*B3	R186	C9	R360	*B6	R529	*B4	R704	*B2
C115	*A9	C221	E8	C367	*B7	C517	B4	C622	*F4	C768	C2	C919	H9	C1039	*J9			IC219	E10	IC714	D2	IC1328	K2	Q704	B1	R187	C9	R361	*B7	R530	*B5	R705	*B2
C116	B8	C222	*F8	C368	C6	C518	B5	C623	E4	C769	*B2	C920	H10	C1040	*K9	CN1	M3	IC301	*C6	IC715	*D2	IC1332	J1	Q705	B2	R189	*C9	R362	*B7	R531	*B4	R706	*B3
C117	B9	C223	E9	C369	*B7	C519	*B4	C624	E4	C770	*B3	C921	H10	C1041	*J9	CN2	M4	IC302	*B7	IC716	D2	IC1333	K3	Q706	B3	R190	*C9	R363	*C6	R532	*B4	R707	*B2
C118	B9	C224	E8	C370	*B7	C522	*B4	C625	F4	C771	*C1	C922	H10	C1042	*K9	CN3	M8	IC303	*B7	IC717	D3	IC1333	K3	Q707	*B1	R191	*C9	R365	*B6	R533	*B4	R708	*B2
C119	*B8	C225	F9	C371	*C6	C523	*B4	C626	E4	C772	*C1	C923	G10	C1043	K9			IC304	*C7	IC718	C3	IC1402	L6	Q708	*B2	R192	*C9	R366	*B6	R535	*B4	R709	*B3
C120	*B8	C226	E9	C372	*D8	C524	*B4	C627	*E4	C773	*D3	C924	G10	C1044	L9	D101	*B8	IC305	*C6	IC719	D3	IC1403	M6	Q709	*B3	R193	*B9	R367	*B6	R536	*B4	R710	*A2
C121	*B8	C227	*E8	C373	*D7	C525	*B4	C628	*E4	C774	*D3	C925	*G9	C1045	*J9	D102	*B9	IC306	D6	IC720	*C3	IC1404	L6	Q710	B1	R194	*B9	R368	*B6	R538	*B5	R711	*A2
C122	*B8	C228	*E8	C374	*D7	C526	*B5	C629	F4	C775	*C2	C926	*H9	C1046	*K9	D103	*B9	IC307	C7	IC801	*E1	L101	*C9	Q711	B2	R195	*B9	R369	*B6	R540	*B4	R712	*A3
C123	*B8	C229	F9	C375	*C6	C527	*B5	C630	F4	C776	*B3	C927	*G9	C1047	J9	D301	*B6	IC308	C7	IC802	E1	L102	*C9	Q712	B2	R196	*C9	R370	*B7	R541	B4	R713	A1
C124	*B9	C230	*F8	C376	*B7	C529	C4	C631	F5	C777	*B3	C928	G9	C1048	K9	D302	*B6	IC309	*D7	IC803	*D3	L201	*D8	Q718	C2	R197	*C9	R371	*B7	R544	B4	R714	A2
C125	*B9	C231	F9	C377	*B7	C530	*C4	C632	E4	C778	*C1	C929	*G9	C1049	J9	D303	*B7	IC310	*C7	IC804	*E2	L202	*E9	Q719	C2	R198	*C9	R372	*B7	R545	B5	R715	A3
C126	*B9	C232	E8	C378	*C6	C531	D4	C633	F4	C779	*C2	C930	*G9	C1050	K9	D501	*B4	IC311	D7	IC805	*E1	L301	*C7	Q801	*D2	R199	*C10	R373	*B7	R546	B4	R716	B2
C127	*B9	C233	E8	C379	*C6	C532	*D4	C634	F4	C780	*C2	C931	*H9	C1051	J10	D502	*B4	IC312	D7	IC806	*F2	L302	*C7	R201	D8	R374	*B7	R547	B4	R717	B3		
C128	*B9	C234	*F8	C380	*C6	C533	D4	C635	F4	C781	*C2	C932	H9	C1052	K10	D503	*B5	IC313	D7	IC807	E2	L401	*D6	R202	E9	R375	C6	R548	*B4	R718	B2		
C129	*B9	C235	F9	C381	*C6	C534	D4	C636	F4	C782	*C2	C933	*H9	C1053	*J9	D701	*B1	IC314	D7	IC808	*E2	L402	*E6	R203	D8	R376	*C6	R549	B4	R719	B1		
C130	*C9	C236	F8	C382	*C7	C535	*D4	C637	F4	C783	*C2	C934	*H9	C1054	*K9	D702	*B2	IC315	*D6	IC809	E2	L501	*C4	R204	*B8	R207	*E8	R377	*C6	R550	*B5	R720	B2
C131	D8	C237	F9	C383	*C7	C536	*C4	C638	E4	C784	*C3	C935	*G9	C1055	*J8	D703	*B2	IC316	D6	IC810	*E2	L502	*C4	R205	B9	R378	C6	R551	B5	R721	B2		
C132	*D8	C238	E8	C384	*C7	C537	*C4	C639	*E4	C785	*B3	C936	*H9	C1056	*J8	D1401	M1	IC317	D8	IC811	*F2	L601	*D4	R206	B9	R379	*C6	R552	*B4	R722	B2		
C133	*D8	C239	*E8	C385	*C7	C538	C4	C640	*F5	C786	B3	C937	*G9	C1057	*J8	D1402	M5	IC318	C7	IC812	*E3	L602	*E4	R207	B9	R380	*B7	R553	*B4	R723	B2		
C134	D8	C240	*F9	C386	B7	C539	*C4	C641	*F4	C787	*C2	C938	*H9	C1058	*L8	D1403	M6	IC319	D7	IC813	*E3	L701	*C2	R208	B9	R381	*D6	R554	*B4	R724	B3		
C135	*D8	C241	*F8	C387	*C7	C540	C4	C642	F4	C788	*C3	C939	*G9	C1059	*K8	D1404	L6	IC320	*C7	IC814	E2	L702	*C2	R209	B9	R382	*D6	R555	*B4	R725	B2		
C136	*C8	C242	F8	C388	*C7	C541	*C5	C643	F4	C789	*C2	C940	*H9	C1060	*K8			IC401	*E6	IC815	E2	L801	*D1	R210	B9	R383	*D6	R556	*B5	R726	B2		
C137	*C9	C243	F9	C389	C6	C542	*C5	C644	F4	C790	C3	C941	*G9	C1061	*J7	E101	B10	IC402	E6	IC816	*E3	L802	*E2	R211	B9	R384	*C6	R557	*B5	R727	*B3		
C138	*C9	C244	F8	C390	C7	C543	*C5	C645	E5	C791	C3	C942	*H9	C1062	*K7	E102	F10	IC403	*D7	IC817	F2	L901	G10	R212	B9	R385	*C6	R558	*B4	R728	*B2		
C139	*C9	C245	F8	C391	*B6	C544	*C5	C646	*D5	C792	*C3	C943	G9	C1063	*J6	E301	B8	IC404	*E6	IC818	*F3	L902	H10	R213	B9	R386	*C6	R559	*B4	R729	*B2		
C140	*C9	C246	*D9	C392	*B6	C545	*C5	C647	E4	C793	C3	C944	H9	C1064	*K6	E302	C7	IC405	*E6	IC819	E3	L903	*G9	R214	B9	R387	*C6	R560	*B4	R730	*B3		
C141	*C9	C247	E8	C393	*B6	C546	*C5	C648	E4	C794	C3	C945	*G9	C1065	*L7	E303	F8	IC406	*F6	IC901	G9	L904	*H9	R215	B9	R388	*C6	R561	*B5	R731	*B2		
C142	*C9	C248	E8	C394	*B6	C547	*C5	C649	F4	C795	C3	C946	*H9	C1066	*M7	E304	C8	IC407	E6	IC902	G8	L905	*G9	R216	B9	R389	*C7	R562	*B5	R732	*B1		
C143	*C9	C249	F8	C395	*B6	C548	*D4	C650	E5	C796	C3	C947	F9	C1067	J9	E501	B5	IC408	*E6	IC903	H9	L906	*H9	R217	B9	R390	*C7	R563	*B4	R733	*B1		
C144	*C10	C250	E9	C396	*B6	C549	*C5	C651	*E4	C797	C3	C948	H9	C1068	K9	E502	F5	IC409	E7	IC904	H8	L907	*H9	R218	B8	R391	*C7	R564	*B4	R734	*B2		
C145	*C9	C251	*E9	C397	*B6	C550	*C5	C652	B2	C798	C3	C949	F9	C1069	*J7	E503	C4	IC410	*E7	IC905	G8	L1001	J10	R219	B8	R392	*C6	R565	*B4	R735	*B1		
C146	*C9	C252	E8	C398	*B6	C551	*C5	C653	B2	C799	C3	C950	H9	C1070	*J7	E701	B3	IC411	*F7	IC906	G8	L1002	K10	R220	B8	R393	*B7	R566	*B4	R736	*B2		
C147	*C9	C253	E8	C399	*B6	C552	*C4	C654	B2	C800	E1	C951	G10	C1071	*K7	E702	F3	IC412	*E7	IC907	F8	L1003	*J9	R221	B8	R394	*B7	R567	*B4	R737	*B3		
C148	*D9	C254	E8	C400	*B6	C553	*C4	C655	B2	C801	E1	C952	H10	C1072	*K7	E703	C2	IC413	*E7	IC908	H8	L1004	*K9	R222	B9	R395	*B7	R568	*B4	R738	*B3		
C149	*C9	C255	E8	C401	*B6	C554	*C4	C656	B2	C802	E1	C953	G9	C1073	*K7	E704	C2	IC414	*E7	IC													

R791	*C2	R1026	K9	RB906	*H9	X801	F2
R792	*C2	R1027	K9	RB907	M4		
R793	*B3	R1028	L9	RB908	M4		
R794	*B2	R1029	L9	RB909	L7		
R795	*B3	R1030	L9	RB910	L7		
R796	*C2	R1031	J8	RB1001	*J9		
R797	*C2	R1032	K8	RB1002	*J9		
R798	*C3	R1101	*C9	RB1003	*J9		
R799	*C3	R1102	*C9	RB1004	*K9		
R801	D1	R1131	*C7	RB1005	*K9		
R803	E2	R1132	*C7	RB1006	*K9		
R805	D2	R1151	*C4	RB1007	L7		
R806	D2	R1152	*C5	RB1008	L7		
R807	*E2	R1171	*C2	RB1009	M7		
R808	E2	R1172	*C3	RB1010	M7		
R809	*E2	R1301	L8	RB1301	*M2		
R810	*E2	R1302	*L8	RB1302	*M2		
R811	*E2	R1303	*M2	RB1304	*M2		
R812	*E2	R1304	*M2	RB1305	K2		
R813	*E2	R1305	M8	RB1308	*K2		
R814	E2	R1306	*L8				
R815	E2	R1307	*M2	RV101	B9		
R816	*E1	R1308	*M2	RV102	B9		
R817	*F1	R1309	*M2	RV103	C8		
R823	*E1	R1310	*L8	RV104	B9		
R824	*E2	R1311	*M2	RV105	B10		
R825	F2	R1312	M8	RV201	F8		
R826	F1	R1313	M8	RV301	B7		
R827	F2	R1314	L8	RV302	B7		
R828	F2	R1315	M8	RV303	C6		
R829	F2	R1316	M8	RV304	B7		
R830	E3	R1317	M8	RV305	B7		
R831	*D3	R1321	M8	RV401	F6		
R832	F2	R1322	K5	RV501	B4		
R833	F3	R1323	K5	RV502	B5		
R901	G10	R1325	*L1	RV503	C4		
R902	H10	R1326	*L1	RV504	B4		
R903	*G10	R1327	*L1	RV505	B5		
R904	*J10	R1328	K4	RV601	F4		
R905	G9	R1329	K4	RV701	B2		
R906	H9	R1332	L4	RV702	B3		
R907	*G9	R1333	L4	RV703	C1		
R908	*J9	R1334	L4	RV704	B2		
R909	G9	R1335	L4	RV705	B3		
R910	H9	R1336	L5	RV801	F1		
R911	H10	R1337	K5	RV901	G9		
R912	H10	R1339	K5	RV902	J9		
R913	H10	R1340	J1	RV1001	K9		
R914	G10	R1341	J1	RV1002	L9		
R915	G10	R1342	J1				
R916	G10	R1343	K1	S901	G9		
R917	*G9	R1345	L5	S904	J9		
R918	*G9	R1346	L5	S1001	K9		
R919	*H9	R1347	L5	S1002	L9		
R920	*H9	R1348	L5				
R921	G9	R1349	L5	TP101	B8		
R922	J9	R1350	K1	TP102	B9		
R923	G9	R1351	K1	TP103	B9		
R924	H9	R1352	K1	TP104	C8		
R925	G9	R1353	K1	TP105	C9		
R926	G9	R1354	K1	TP106	C10		
R927	G9	R1355	K1	TP301	B6		
R928	H9	R1356	*K2	TP302	B6		
R929	H9	R1361	*K5	TP303	B7		
R930	H9	R1362	*K5	TP304	C6		
R931	G8	R1363	*K4	TP305	C7		
R932	H8	R1364	*K4	TP306	C7		
R1001	J10	R1365	*L5	TP501	B4		
R1002	K10	R1366	*L5	TP502	B4		
R1003	*K10	R1367	*K5	TP503	B5		
R1004	*L10	R1407	M1	TP504	C4		
R1005	K9	R1408	M5	TP505	C4		
R1006	L9	R1409	*M6	TP506	C5		
R1007	*K9	R1410	*L6	TP701	B2		
R1008	*L9			TP702	B2		
R1009	K9	RB101	*D9	TP703	B2		
R1010	L9	RB102	*D9	TP704	C1		
R1011	K10	RB103	*E10	TP705	C2		
R1012	K10	RB301	*D6	TP706	C3		
R1013	K10	RB302	*D6	TP901	F10		
R1014	J10	RB303	*E7	TP902	H10		
R1015	J10	RB501	*D4	TP1001	J10		
R1016	J10	RB502	*D4	TP1002	K10		
R1017	*K9	RB503	*E5	TP1301	L8		
R1018	*K9	RB701	*D2	TP1302	L8		
R1019	*L9	RB702	*D2	TP1303	L8		
R1020	*L9	RB703	*E3	TP1304	L2		
R1021	K9	RB901	*G9	TP1305	L4		
R1022	L9	RB902	*G9				
R1023	K9	RB903	*G9	X201	F9		
R1024	L9	RB904	*H9	X401	F6		
R1025	K9	RB905	*H9	X601	F4		

Board layouts : Next page

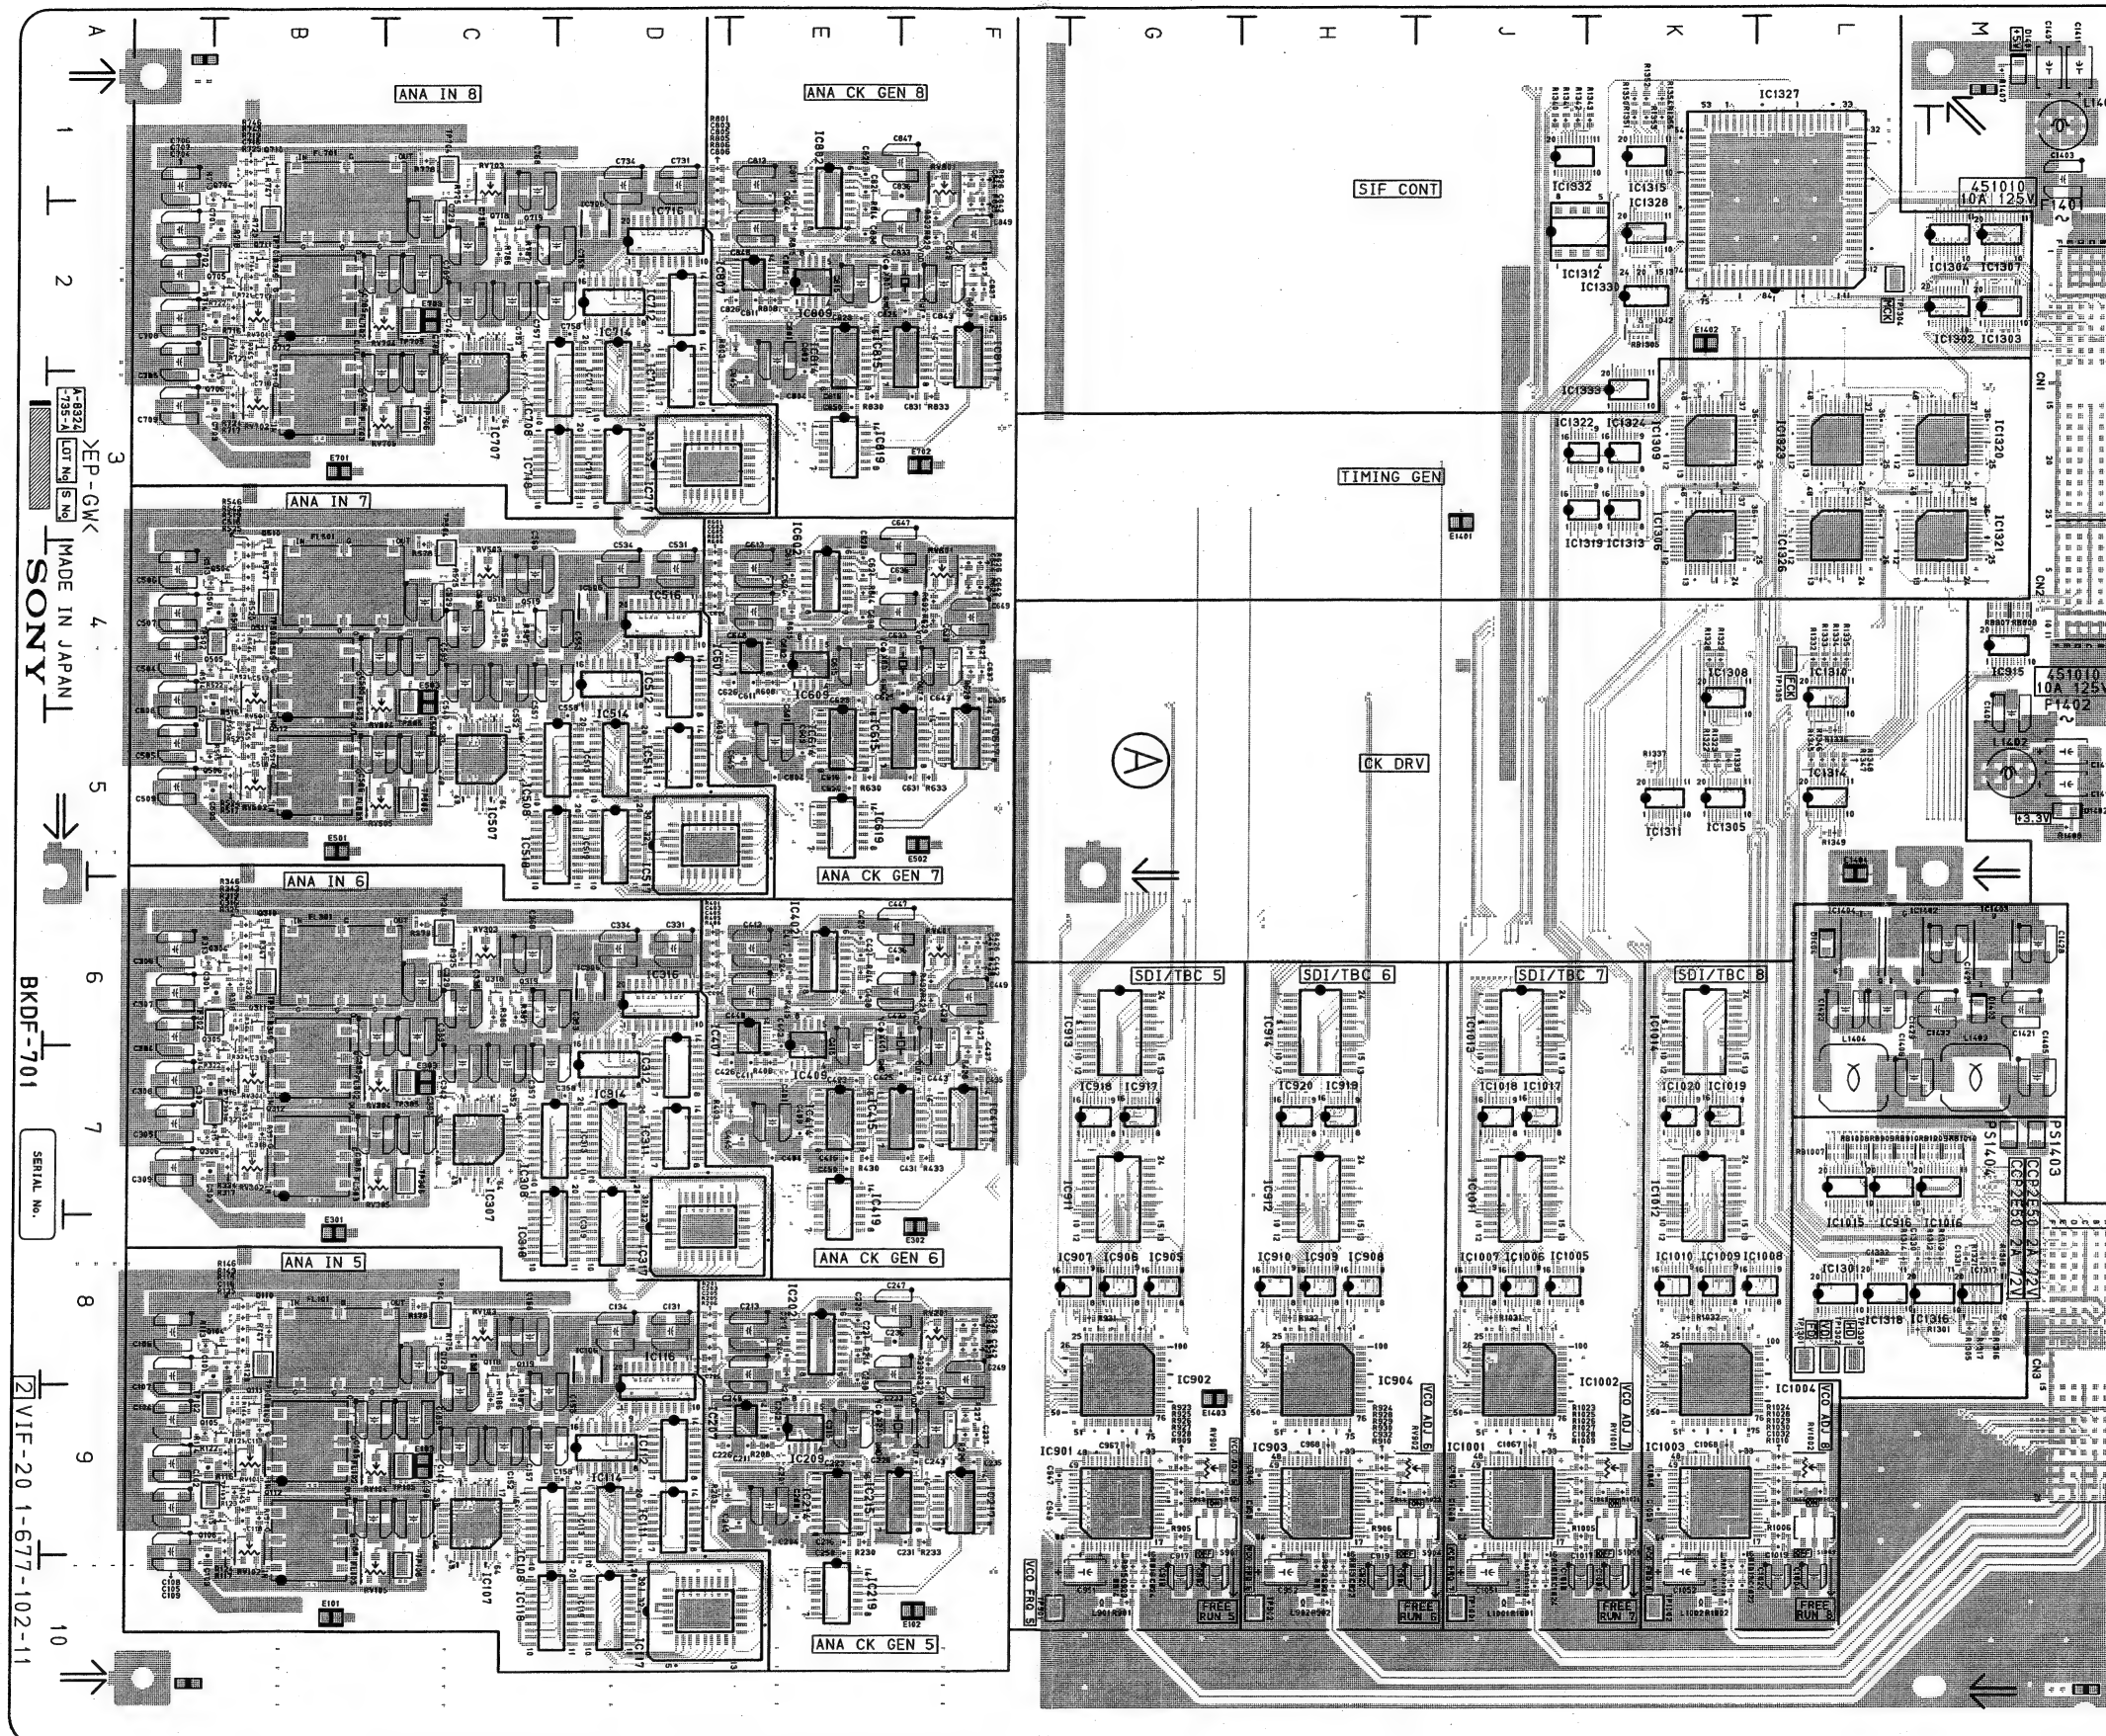


Location list : Previous page

BKDF-701 (J) : S/N 30001 and Higher
BKDF-701 (UC) : S/N 10001 and Higher
BKDF-701 (CE) : S/N 40001 and Higher

VIF-20 -A SIDE-SUFFIX: -11



VIF-20 -B SIDE-
SUFFIX: -11

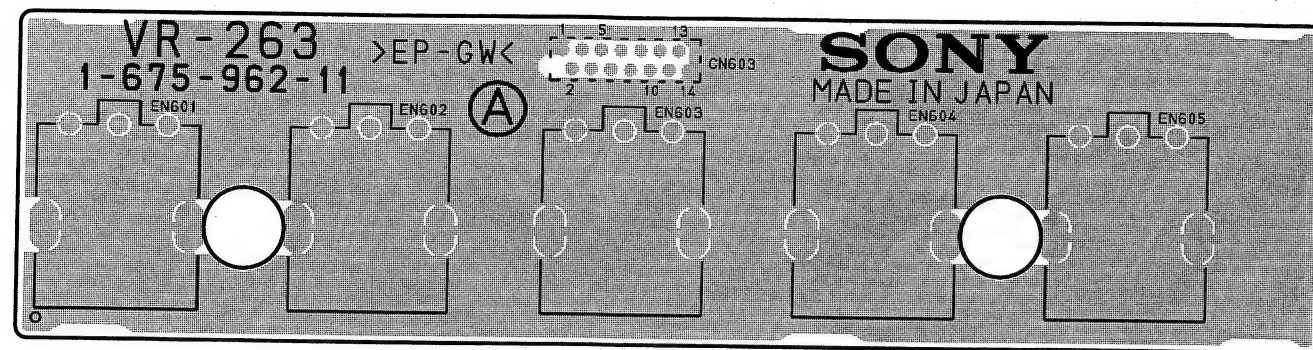

DFS-700 (J) : S/N 30001 and Higher
 DFS-700 (UC) : S/N 10001 and Higher
 DFS-700P (CE) : S/N 40001 and Higher


VR-263 -A SIDE-
 SUFFIX: -11

VR-263 (1-675-962-11)


*:B SIDE

CN603 *A1

EN601 A1
 EN602 A1
 EN603 A1
 EN604 A1
 EN605 A1

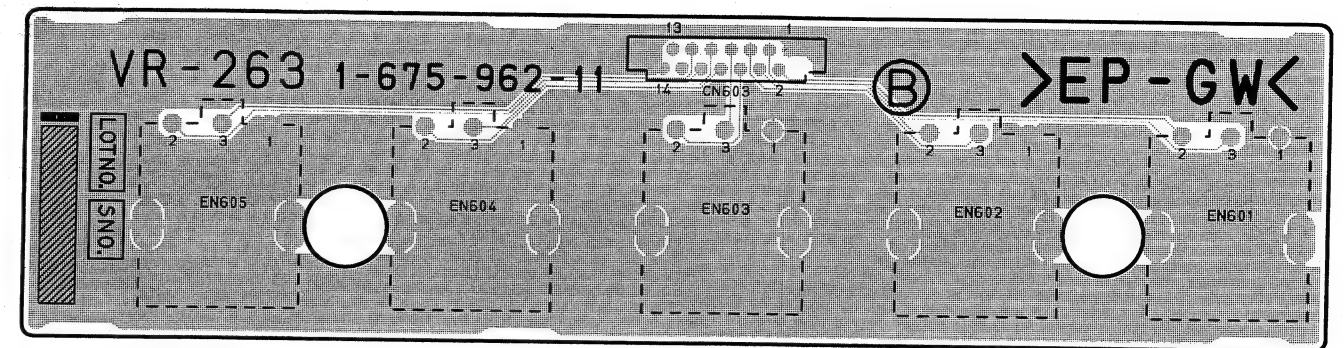

VR-263 -B SIDE-
 SUFFIX: -11

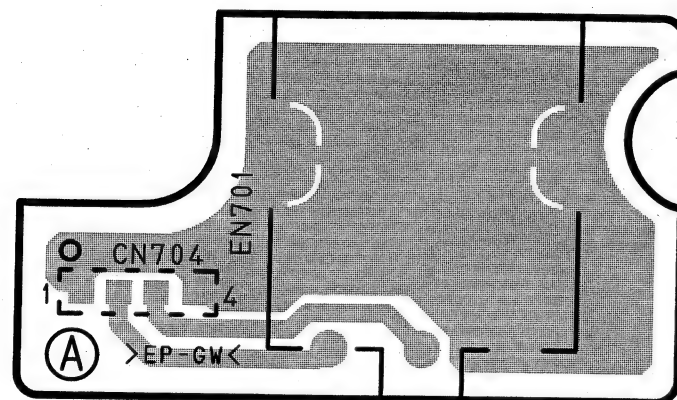

DFS-700 (J) : S/N 30001 and Higher
 DFS-700 (UC) : S/N 10001 and Higher
 DFS-700P (CE) : S/N 40001 and Higher


VR-264 -A SIDE-
 SUFFIX: -11

VR-264 (1-675-963-11)

*:B SIDE

CN704 *A1

EN701 A1

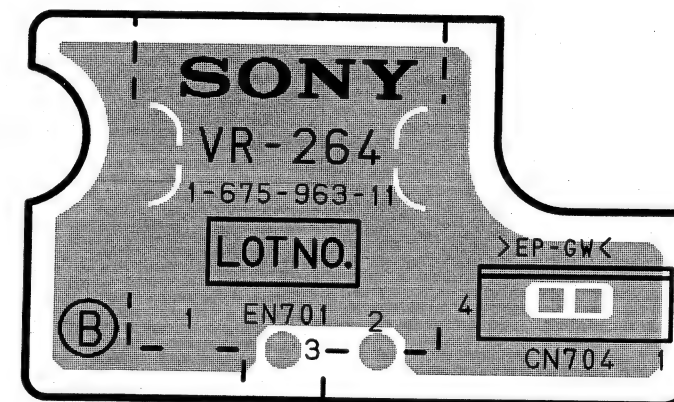


VR-264 -B SIDE-
 SUFFIX: -11

VSE-36 (1-677-105-11)

*:B SIDE


C1	B1	C453	*K7	COR703	A5	IC419	G4	R454	K7	RB404	K5	TP701	C3
C2	B1	C454	*L7			IC420	F4	R501	*B6	RB405	*K5	TP702	C3
C3	B1	C462	*K7	D401	H6	IC451	L7	R502	*B7	RB406	*K4	TP704	F7
C4	*B1	C463	*K7	D402	H7	IC452	K7	R503	*C6	RB407	*K5	TP705	F7
C5	K2	C501	*C5	D403	*H7	IC453	K7	R504	*C6	RB408	*K5	TP706	A4
C6	D3	C502	*C5	D404	H4	IC501	C5	R505	*C6	RB409	*K5	TP707	A4
C7	F2	C503	*C5	D405	H5	IC502	*D6	R506	*B6	RB410	K5	TP708	B1
C8	K1	C504	*C5	D406	H5	IC503	*B6	R507	*C6	RB411	*K5		
C9	B1	C505	*C5	D407	H6	IC504	*B6	R508	C4	RB412	H5	X451	*L7
C10	B1	C506	*C5	D601	A7	IC505	*D5	R509	*B5	RB413	H5		
C11	B1	C507	*C5	D602	A6	IC506	*B5	R510	*B5	RB414	*K6		
C12	*B1	C508	*C5	D603	A7	IC507	*D5	R511	*B5	RB451	K7		
C13	K3	C509	*C5	D604	A6	IC508	*D6	R512	*A5	RB601	*B3		
C14	G7	C510	*C5	D605	A7	IC510	B4	R513	*A5	RB602	*B7		
C15	J3	C511	*C5	D606	A6	IC511	D6	R514	*D6	RB603	*B7		
C16	C5	C512	*C5	D607	A6	IC601	E6	R515	*A5	RB604	*A7		
C101	K1	C513	*C5	D608	A6	IC602	E6	R516	*B4	RB605	*A6		
C102	K2	C514	*C5	D705	F7	IC603	E5	R517	*B5	RB701	*E6		
C103	K2	C515	*C5	D707	E7	IC604	E5	R518	*C6	RB702	*E6		
C104	*L4	C516	*C6			IC605	E4	R519	C6	RB703	*E6		
C105	*B3	C517	*C6	E1	K1	IC606	E5	R520	C5	RB704	*E6		
C106	*L6	C518	*B6	E2	K5	IC607	*D6	R521	B5	RB705	H4		
C107	*L7	C519	*C6	E3	F1	IC608	B3	R522	B5	RB706	H4		
C108	*L3	C520	D5	E4	F3	IC609	*A6	R523	B5	RB707	J4		
C109	*L5	C521	D5	E5	D3	IC611	*B7	R524	*B6	RB708	J4		
C115	*B2	C522	B6	E6	A6	IC612	*D5	R525	*C7	RB709	J4		
C116	*L7	C523	B6	E7	A3	IC613	*C5	R601	*B6	RB710	J4		
C119	*L5	C524	B6	E8	A1	IC614	*E7	R602	*B4	RB711	J4		
C125	*B2	C525	B6	E701	C1	IC615	*C5	R603	*F5	RB712	J4		
C126	*L6	C526	D5	E702	C3	IC616	*E5	R705	C4	RB713	B5		
C129	*L5	C527	D5	E703	E4	IC617	E5	R706	C4	RB714	B5		
C135	*B3	C528	B5	E704	H6	IC701	C3	R707	C4	RB715	B5		
C136	*L7	C529	B5	E705	L5			R709	B6	RB716	B5		
C139	L5	C530	*D5			IS650	D7	R710	B7	RB717	F4		
C201	*E2	C531	*E5	FB1	B1			R711	*C6	RB718	*F5		
C202	*E2	C532	D6	FB2	B1	JC402	*J4	R712	*C6	RB719	*E5		
C203	*E2	C533	D6	FB3	B1	JC403	*J5	R713	*C6	RB720	*E5		
C204	*E1	C535	B4			JC404	*J5	R714	*C6	RB721	*E4		
C205	*E1	C536	*B4	IC101	*L1	JC405	*J5	R715	C6	RB722	*A1		
C206	*F1	C537	*C6	IC102	*L1	JC406	J4	R716	C7	RB723	A1		
C207	*F1	C538	*D6	IC103	*L2	JC407	*J5	R717	*C6	RB724	*A1		
C208	*E4	C539	D6	IC104	L4	JC408	J4	R718	*C6	RB725	A1		
C209	*E3	C601	B6	IC105	B2	JC409	*J5	R719	B6	RB726	*A1		
C210	*E3	C602	*F6	IC106	L6	JC410	*J5	R720	B7	RB727	A1		
C211	*E3	C603	*F6	IC107	L7	JC411	*J5	R721	*B6	RB728	*A1		
C212	*E3	C604	*F5	IC108	L3	JC412	*J5	R722	*B6	RB729	A1		
C213	*F3	C605	*F5	IC109	L5	JC413	*J5	R723	*B6				
C214	*F3	C606	B5	IC201	F2	JC414	*J5	R724	*B6	S401	K4		
C251	*D2	C607	*B3	IC202	E2	JC415	*J5	R725	*B6	S501	D6		
C252	*D3	C608	*E6	IC203	E1	JC451	*K7	R726	*B6	S601	B7		
C253	*C2	C609	*D6	IC204	E1	JC452	*K7	R727	*A3				
C301	*H2	C610	*D7	IC205	E1	JC453	*K7	R728	*A3	TP101	C3		
C302	*K1	C611	*B3	IC206	F1	JC454	*K7	R729	*H7	TP102	C2		
C303	*J1	C612	*B3	IC207	F1	JC455	*L7	R730	*J7	TP103	C2		
C304	*J2	C613	*B4	IC208	F3	JC456	*L7	R731	*C6	TP104	C2		
C305	*K2	C614	A6	IC209	E3	JC501	*B6	R732	*C6	TP105	C2		
C306	*G2	C615	A6	IC210	E3	JC502	*C6	R733	*C6	TP106	L6		
C307	*K2	C617	*B7	IC211	E2	JC601	*E5	R734	*C6	TP107	C2		
C308	*J2	C618	*B7	IC212	E2	JC602	*E6	R735	*C6	TP401	J6		
C309	*J3	C619	D5	IC213	F2	JC603	*C6	R736	*F7	TP402	K6		
C310	*K3	C620	D5	IC214	F2	JC604	*C6	R738	*E7	TP403	K6		
C351	*G1	C621	C5	IC251	D3	JC605	*B6			TP404	H4		
C352	*H3	C622	C5	IC252	*D3	JC606	*B6	RB100	*B2	TP405	H4		
C401	*J5	C623	F7	IC253	D1	JC607	*E5	RB101	L1	TP406	H4		
C402	*J5	C624	E7	IC301	G1	JC608	*E5	RB102	*K1	TP407	H4		
C403	*J5	C625	*F7	IC302	K1	JC609	*E5	RB103	*K2	TP408	H4		
C404	*J5	C626	D5	IC303	J1	JC610	*E5	RB104	*B3	TP409	K6		
C405	*J5	C627	D4	IC304	J1	JC611	*B4	RB105	*B3	TP410	J6		
C406	*J5	C628	D5	IC305	K1	JC612	*F5	RB106	L2	TP411	K5		
C407	*J5	C629	D4	IC306	G3	JC613	*F5	RB107	C2	TP412	K6		
C408	*J5	C630	E7	IC307	K2	JC614	*F5	RB108	C2	TP413	K6		
C409	*J6	C631	F7	IC308	J2	JC615	*F5	RB109	*B2	TP414	J6		
C410	*J7	C632	C4	IC309	J3	JC701	*C6	RB110	*B2	TP415	K5		
C411	*K6	C633	C5	IC310	K3	JC702	*C6	RB111	*B2	TP416	J6		
C412	*K7	C634	D4	IC401	J5	JC703	*C6	RB112	*B3	TP422	K5		
C413	H6	C635	*D4	IC402	J7			RB113	*B3	TP423	K5		
C414	H6	C636	C5	IC403	J7	PS1	B2	RB114	*L6	TP451	J7		
C415	*H7	C637	C4	IC404	K7	PS2	B2	RB115	*L6	TP452	J7		
C416	H4	C638	*E5	IC405	K7			RB116	*L6	TP453	J7		
C417	H5	C639	*E4	IC406	*H6	R101	*B2	RB117	*L6	TP454	J7		
C418	H5	C640	E5	IC407	*H7	R102	*B2	RB118	*L6	TP501	A5		
C419	H6	C704	*C3	IC408	H7	R103	*K6	RB119	*L6	TP502	A5		
C420	*F6	C707	*C3	IC409	*H5	R104	*K5	RB120	*L5	TP503	C6		
C421	*G6			IC410	*H5	R105	*L5	RB121	*L5	TP504	C6		
C422	*G5	CN11	C7	IC411	*H5	R106	*L4	RB122	*L5	TP601	D6		
C423	*F5	CN12	J7	IC412	*H6	R107	*L4	RB123	*L5	TP602	E4		
C424	*F6	CN201	*A3	IC413	F6	R108	*L5	RB124	*L5	TP603	B6		
C425	*G6	CN202	*L3	IC414	G6	R109	B2	RB125	*L5	TP604	C3		
C426	*G4	CN501	A5	IC415	G5	R110	B2	RB201	D1	TP605	C3		
C427	*F4			IC416	F5	R451	K7	RB401	*J6	TP606	C5		
C451	*L7	COR701	A7	IC417	F5	R452	*K7	RB402	K5	TP607	A6		
C452	*K7	COR702	A6	IC418	G5	R453	*K7	RB403	*K5	TP608	C3		

Board layouts : Next Page

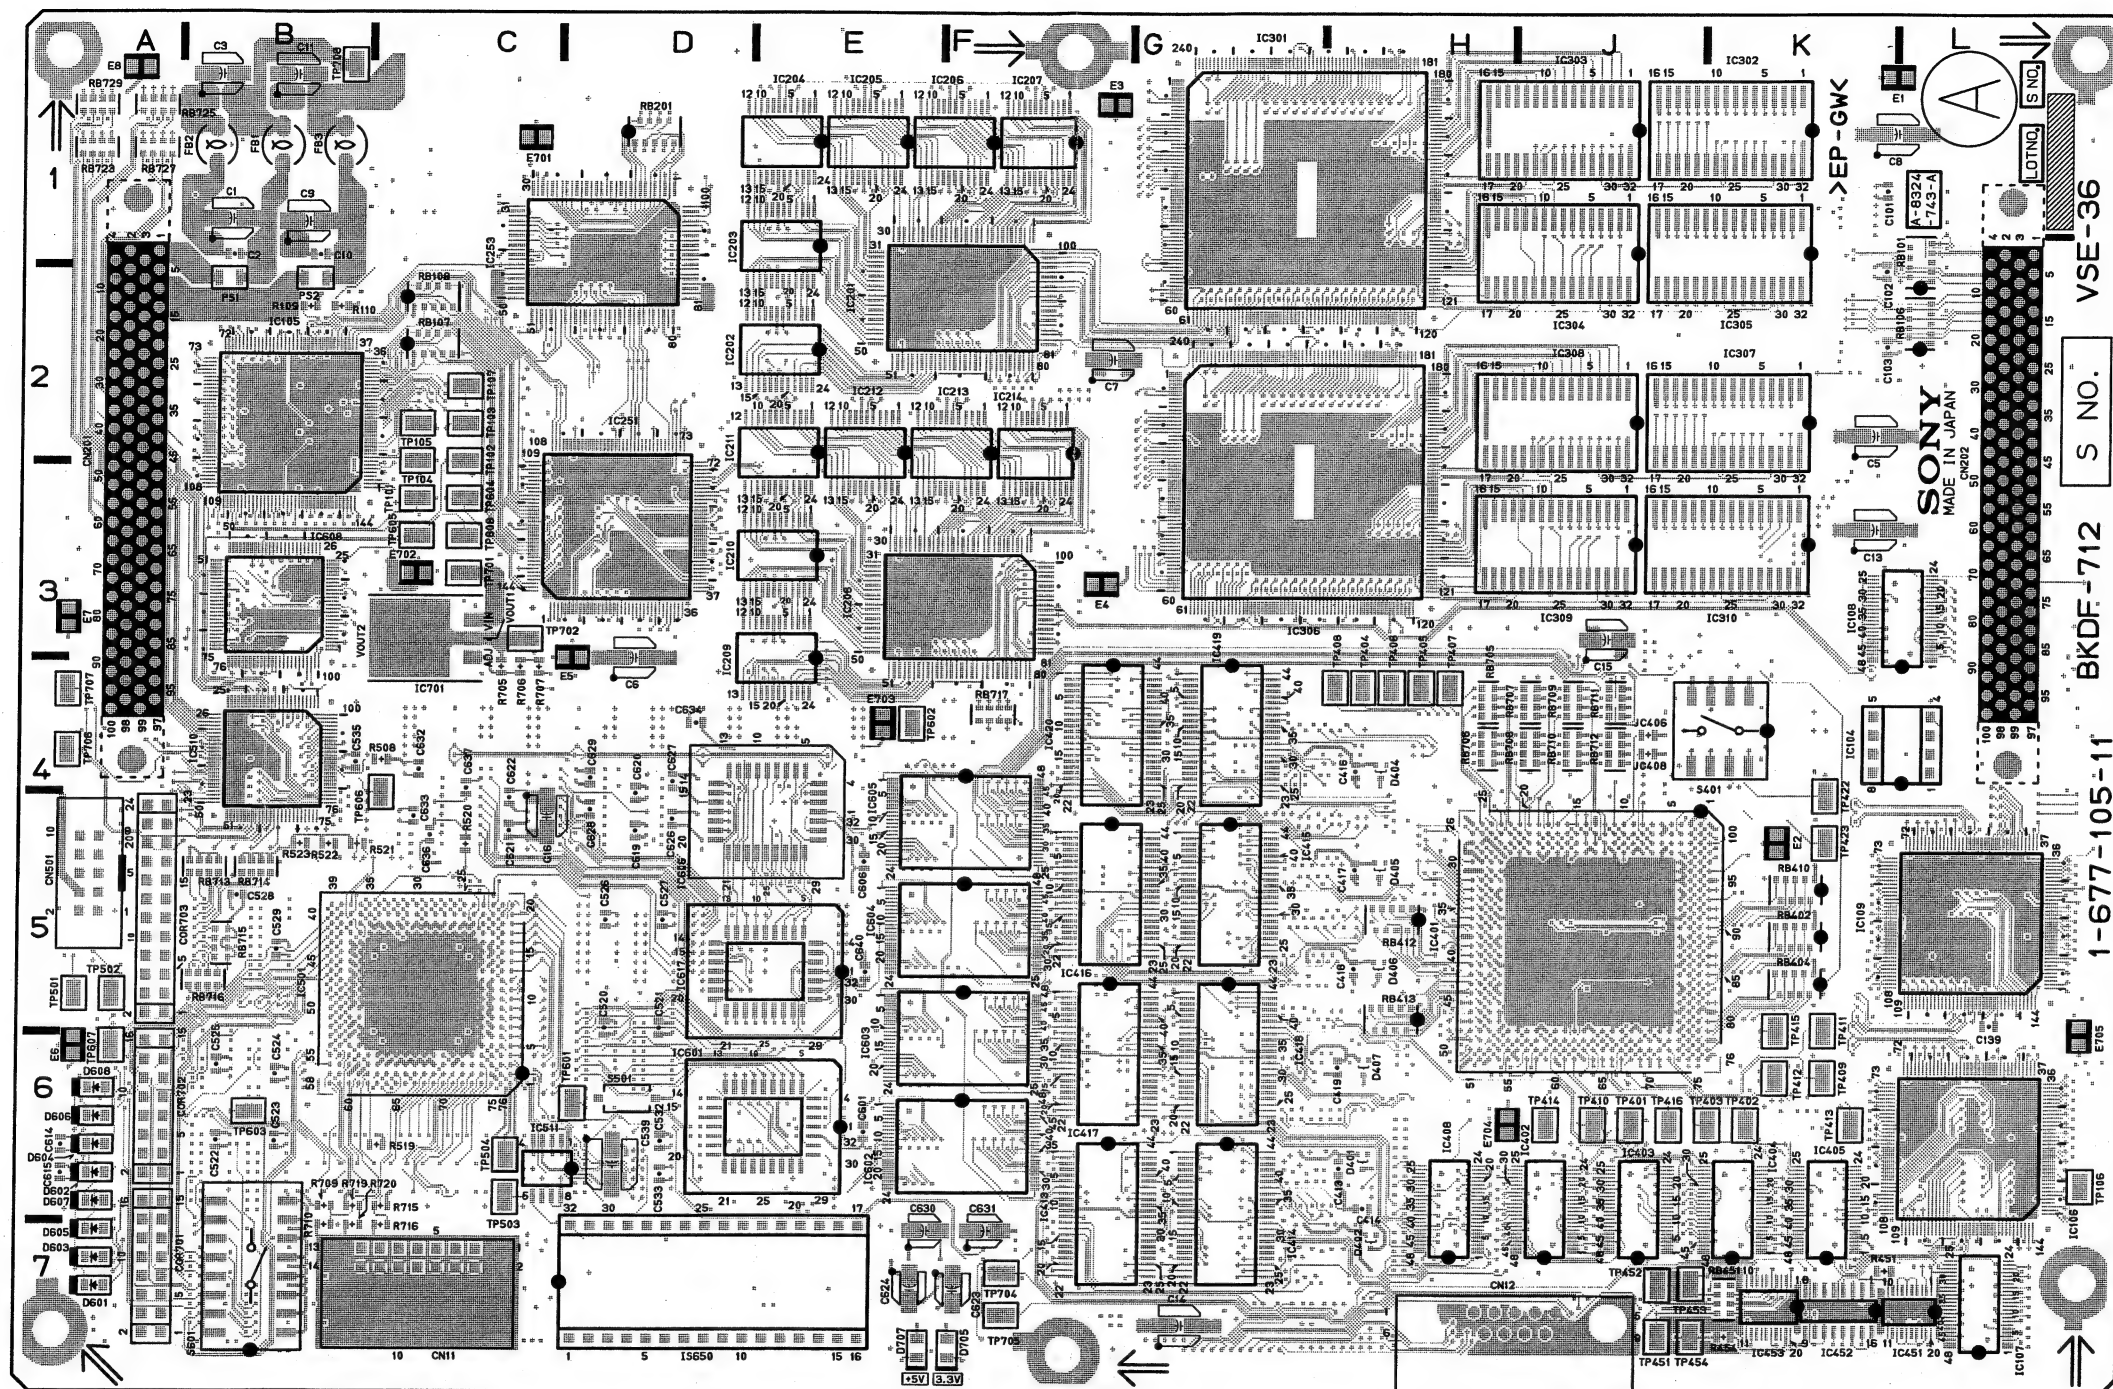

BKDF-712 (J) : S/N 30001 and Higher
BKDF-712 (UC) : S/N 10001 and Higher
BKDF-712 (CE) : S/N 40001 and Higher

VSE-36 -A SIDE-SUFFIX: -11

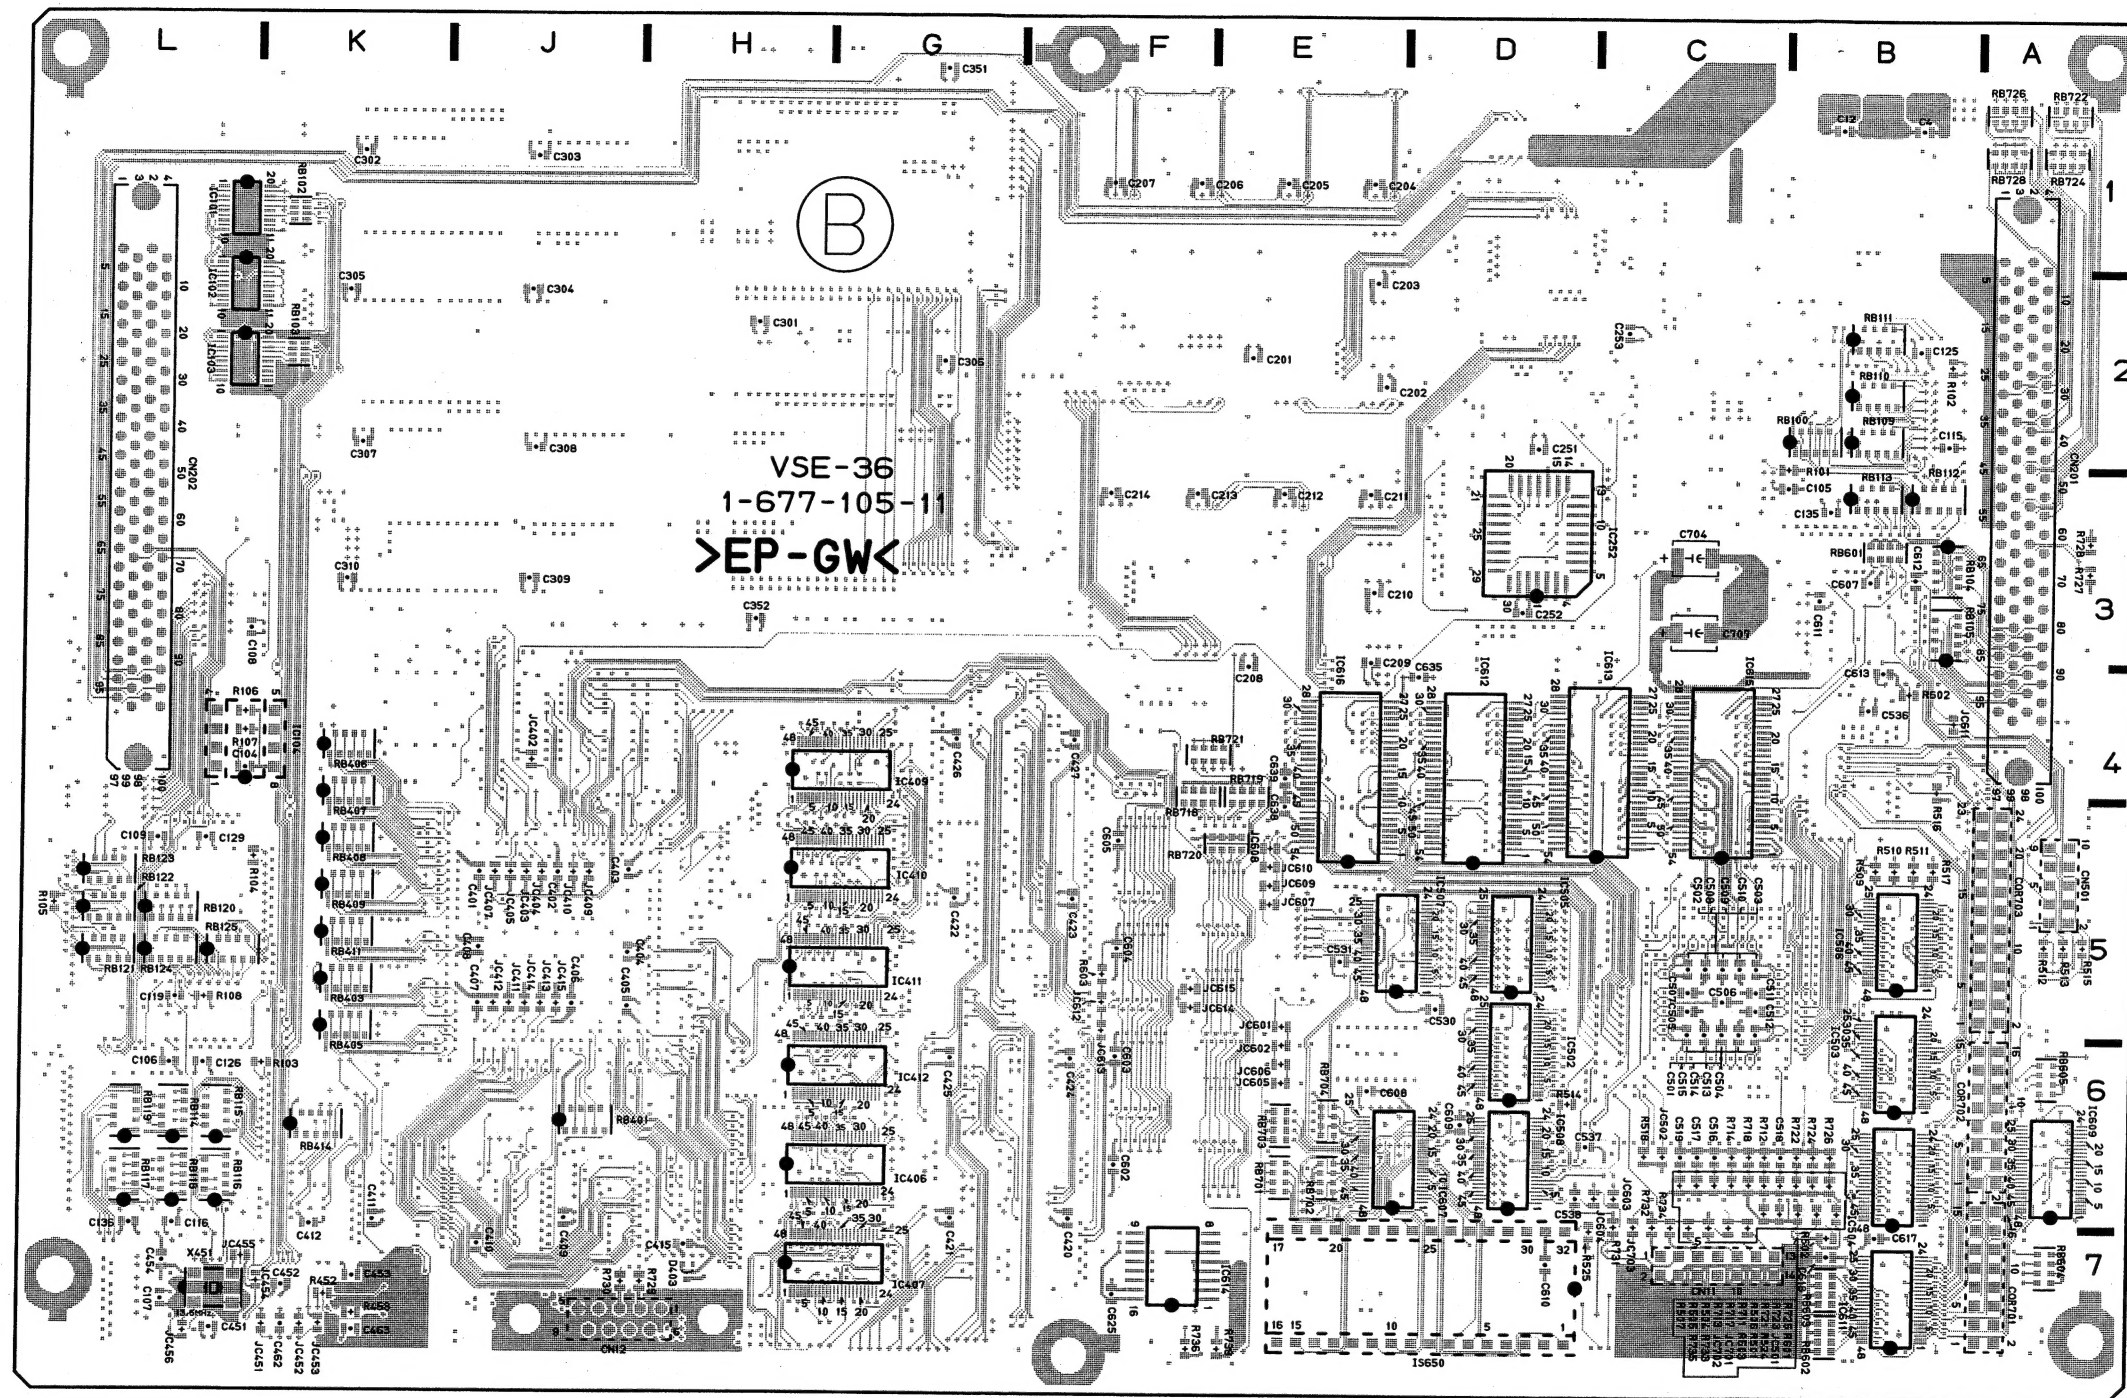


VSE-36 -B SIDE-
SUFFIX: -11

VSW-69 (1-677-096-11)

*:B SIDE

C21	*L5	C324	*H7	C822	*B1	C973	*B10	E903	K15	IC322	H8	IC925	D10	R607	*B6	R997	*D15	RB923	*M1	TP984	H15
C22	*M5	C325	*J7	C823	A1	C974	*C2	E904	E15	IC323	H7	IC926	*F14	R701	*D5	R998	*D14	RB924	*A13		
C23	N2	C326	*J7	C824	*A1	C975	K15	E905	G7	IC324	J7	IC927	B12	R702	*D5	R999	*D14	RB925	*A12	X901	E15
C24	N1	C327	*J8	C825	B9	C976	J15			IC325	J7	IC928	*M1	R703	*D5	R1000	*D14	RB926	C1	X920	B14
C25	*L1	C328	*J8	C826	L15	C977	*B2	F1	B1	IC326	J7	IC929	*C15	R704	*C4	R1001	*D14	RB927	C1		
C26	*L2	C401	*M12	C827	N2	C978	*J15	F2	F1	IC327	J8	IC930	*B12	R705	*C3	R1002	*D15	RB928	B1		
C61	*D5	C402	*N12	C828	F9	C979	K15			IC328	J8	IC931	*C15	R706	*C4	R1003	*D15	RB940	*G11		
C71	*D5	C403	*N13	C831	F1	C980	J15	FB1	C1	IC401	M13	IC932	C14	R707	*C4	R1004	*D14	RB941	*F12		
C72	*B5	C404	*M14	C832	*F1	C981	*C1	FB2	E1	IC402	N12	IC933	A10	R708	*B5	R1005	*D14	RB942	*F12		
C101	*E1	C405	*M15	C833	G1	C982	*B1			IC403	N13	IC934	*K15	R709	*B4	R1006	*D15	RB943	*F12		
C102	*E1	C406	*K13	C834	*G1	C983	*B10	IC21	L4	IC404	M14	IC935	C2	R879	*E8	R1007	*D15	RB944	*F13		
C103	*D1	C407	*M13	C835	B8	C984	*B1	IC22	M4	IC405	M15	IC936	B2	R880	*D8	R1008	*D14	RB945	*F11		
C104	*D2	C408	*K13	C836	L15	C985	*B1	IC23	M2	IC406	*K13	IC937	A10	R901	*D15	R1009	*D14	RB946	*F11		
C105	*C1	C409	*J13	C837	B2	C986	*B2	IC24	M1	IC407	*L13	IC938	B1	R902	*D15	R1010	*D14	RB947	*F12		
C106	*D1	C410	*L15	C838	F9	C987	*B2	IC25	L1	IC408	K13	IC939	B1	R903	*D14	R1011	*D14	RB948	*G11		
C107	*C2	C411	*L14	C859	*E7	C1001	*E9	IC26	L2	IC409	J13	IC940	*C9	R904	*D14	R1012	*D14	RB949	*G10		
C108	*F2	C412	*K15	C860	*D7	C1002	*E10	IC61	D5	IC410	L14	IC941	E10	R905	*D14	R1013	*D14	RB950	*B13		
C109	*F3	C413	*J14	C869	*D7	C1003	C9	IC71	D5	IC411	*L15	IC942	E9	R906	*E14	R1014	*F14	RB951	*D9		
C110	*F4	C450	*L14	C870	*C7	C1004	C9	IC72	B5	IC412	K14	IC943	*C10	R907	*B11	R1015	*E14	RB952	*D9		
C111	*F2	C452	*J14	C879	*E7	C1005	C10	IC91	F10	IC413	*K15	IC944	F10	R908	*B11	R1016	*E15	RB953	*D9		
C112	*D4	C501	*L9	C880	*D7	C1006	C10	IC100	E2	IC501	*L9	IC945	*G11	R909	*B11	R1017	*D15	RB954	*E9		
C113	*D4	C502	*M9	C901	*D14	C1007	*F10	IC101	E1	IC502	*M9	IC946	*G12	R910	*F11	R1018	*E15	RB955	*F9		
C114	*G4	C503	*L9	C902	*D13	C1008	*F11	IC102	E1	IC503	*L10	IC947	*G11	R911	*F11	R1019	*E15	RB956	*E9		
C115	*G3	C504	*M9	C903	*D13	C1009	*F11	IC103	D1	IC504	*M10	IC950	*G14	R912	*F11	R1020	*E15	RB957	*F9		
C116	*G4	C505	*L10	C904	*D14	C1010	*G10	IC104	D1	IC505	M9	IC951	G10	R913	*F11	R1021	*E15	RB958	*D10		
C117	*J4	C506	*M12	C905	*D13	C1011	*F10	IC105	*D1	IC506	M12	IC952	G11	R914	*E14	R1023	*E15	RB959	*D10		
C118	*H4	C507	*M11	C906	*D13	C1012	G11	IC106	D1	IC507	M11	IC953	J13	R915	*F12	RB101	E1	RB960	*D10		
C119	*H3	C508	*L11	C907	*D13	C1013	*G12	IC107	C1	IC508	L11	IC954	H13	R916	*F12	RB102	E1	RB961	*D10		
C120	F2	C509	*L12	C908	*D13	C1014	*G12	IC108	F2	IC509	L12	IC955	*G13	R917	*F11	RB103	D1	RB962	*D9		
C121	H2	C510	*J10	C909	*D14	C1015	*G13	IC109	*F4	IC510	K9	IC956	J14	R918	*F11	RB104	D1	RB963	*E9		
C122	H2	C511	*K12	C910	*D14	C1016	*G10	IC110	F4	IC511	K12	IC957	H14	R919	*E15	RB105	D1	RB964	*E9		
C123	H2	C512	*K11	C911	*D14	C1017	*B9	IC111	*F2	IC512	K11	IC958	B9	R920	*D10	RB106	C1	RB965	*E9		
C124	G2	C513	*J11	C912	*D13	C1018	*G14	IC112	B4	IC513	K11	IC970	F15	R921	*B12	RB107	J1	RB966	*E8		
C125	H2	C514	*J12	C913	*D14	C1019	*G10	IC113	D4	IC514	K12	IC971	*H1	R922	*B12	RB108	J1	RB967	*G1		
C126	H3	C515	*H10	C914	*D13	C1020	*G10	IC114	*G4	IC515	H9			R923	*C14	RB109	H1	RB968	*B10		
C127	H3	C516	*J12	C915	*D14	C1021	*G10	IC115	*G3	IC516	J12	IS999	B15	R924	*C14	RB110	J1	RB969	*B10		
C128	J2	C517	*J11	C916	*D14	C1022	*G13	IC116	G4	IC517	J11			R925	*C14	RB111	J1	RB970	*B10		
C129	J3	C518	*H11	C917	*D14	C1023	*J13	IC117	*H4	IC518	H11	JC901	*D15	R926	*C14	RB112	J1	RB971	*B10		
C130	H2	C519	*H12	C918	*D14	C1024	*H13	IC118	H4	IC519	H12	JC902	*E14	R927	*B14	RB201	*K4	RB972	*B1		
C131	H3	C551	*M9	C919	*E14	C1025	*J14	IC119	*H3	IC601	B6	JC920	*D11	R928	*C14	RB202	*K3	RB973	*B1		
C132	J2	C552	*L9	C920	*E14	C1026	*H14	IC120	*F2	IC602	E5	JC921	*D11	R929	*B14	RB251	*L1	RB974	*B1		
C133	J1	C553	*J9	C921	*E14	C1027	*H14	IC121	*H2	IC603	*C7	JC922	*E9	R930	*C2	RB252	*L2	RB975	*B1		
C134	H2	C601	*E6	C922	C13	C1030	G14	IC122	H2	IC604	*C7	JC923	*E9	R931	*B2	RB253	F2	RB976	*B1		
C135	H1	C602	*E5	C923	D13	C1031	G13	IC123	G2	IC605	*B7	JC924	*D9	R932	*E14	RB254	E1	RB977	*B1		
C136	J2	C603	C7	C924	C14	C1032	G15	IC124	*G3	IC606	*B7	JC925	*D9	R933	*C13	RB255	E1	RB978	*B1		
C137	J1	C604	C7	C925	D14	C1033	G12	IC125	*H3	IC607	*F6	JC926	*D8	R934	*E13	RB256	L1	RB979	*B1		
C157	*E2	C605	B7	C926	E13	C1034	*G15	IC126	H2	IC608	B6	JC927	*D8	R935	*C13	RB601	*N9	RB980	*B9		
C167	*D3	C606	B7	C927	E13	C1035	*G15	IC127	G2	IC609	*D6	JC928	*D8	R936	*C13	RB602	*N9	RB981	*B9		
C177	*D2	C607	*F6	C928	C13	C1036	*H1	IC128	J2	IC701	*B2	JC929	*D8	R937	*C13	RB603	*N10	RB982	*B9		
C187	*E2	C608	*C6	C929	C13	C1037	F15	IC129	J3	IC702	*B2	JC930	*D9	R938	D15	RB604	*N10	RB983	*B11		
C201	*M6	C609	D6	C930	F13	CN1	C1	IC130	H2	IC703	C5	JC931	*D9	R939	*G13	RB605	*N10				
C202	*M6	C611	*E7	C931	F13	CN2	E1	IC131	H3	IC704	*C5	JC932	*D10	R940	*F10	RB606	*N10				
C203	*L6	C618	*B6	C932	F14	CN3	L1	IC132	J2	IC705	C4	JC933	*D10	R941	*F9	RB607	*A4				
C204	*L5	C621	*E6	C933	F14	CN11	D15	IC133	J2	IC706	B4	JC934	*B12	R942	*F11	RB608	*E5				
C205	*M5	C628	*C6	C934	D12	CN12	H15	IC134	H2	IC707	C2	JC935	*B12	R943	*F11	RB609	*E5				
C206	*M6	C631	*E7	C935	D13	CN101	A4	IC135	H2	IC708	*D2	JC936	*D15	R944	*F10	RB610	*D5				
C207	*M3	C638	*C7	C936	D13	CN102	N4	IC136	J2	IC709	*D2	JC937	*D15	R945	*G13	RB611	*C7				
C208	*K4	C701	B2	C937	E13	CN201	C10	IC137	J2	IC710	*C3	JC972	*D15	R946	*G13	RB612	*C5				
C209	J4	C702	B3	C938	*F12	CN202	N10	IC138	M6	IC711	*D4			R947	*G13	RB613	*D6				
C210	J3	C703	*C5	C939	D13	CN901	A11	IC139	N6	IC712	*C2	L1	B1	R948	*G13	RB701	*B2				
C218	*K3	C704	*D5	C940	D12			IC203	*L5	IC801	*K1	L3	F1	R949	*G10	RB702	*B3				
C228	*K3	C705	*C3	C941	D12	COR1	B12	IC204	*L6	IC802	*J1	L920	B14	R950	*G10	RB703	*C5				
C238	*L3	C706	*B4	C942	E12	COR2	B11	IC205	*M5	IC803	*K1			R951	*J13	RB704	*D5				
C251	*M2	C707	*C2	C943	*E13	COR3	B13	IC206	*M5	IC804	*L2	Q970	*G15	R952	*H13	RB705	*B5				
C252	*L2	C708	D2	C944	*F13			IC207	M3	IC805	*J1	Q971	G15	R953	*H14	RB706	*B5				
C253	*E1	C709	D3	C945	*E14	D920	A14	IC208	K3	IC806	*K2			R954	*H14	RB707	*C4				
C262	*K2	C710	*C4	C946	*E14	D921	A13	IC209	*K4	IC807	*K2	R101	*D3	R955	*G15	RB708	*B4				
C272	*K1	C711	*D4	C947	E15	D922	A13	IC210	*K3	IC808	*L2	R102	*E2	R956	*G15	RB709	*B4				
C282	*K1	C712	*C3	C948	*E14	D923	A13	IC211	*M2	IC809	E7	R103	*F3	R957	*G15	RB710	*D2				
C301	*F5	C713	*C4	C950	*E10	D924	A13	IC212	K2	IC810	D7	R104	*F3	R958	*G15	RB711	*D3				
C302	*G5	C715	*C3	C951	*E11	D925	A12	IC213	E2	IC811	*C11	R105	*F2	R959	*G15	RB712	*D3				
C303	*G6	C717	*C2	C952	*D8	D926	A13	IC214	P5	IC812	*A6	R106	*F2	R960	*G15	RB713	*C2				
C304	*J6	C723	*C4	C953	*C11	D927	A12	IC215	G5	IC813	*A7	R107	*G3	R961	*G15	RB714	*C2				
C305	*K5	C725	*C3	C954	*C10	D928	*G15	IC216	G6	IC901	D13	R108	*H3	R962	*B10						

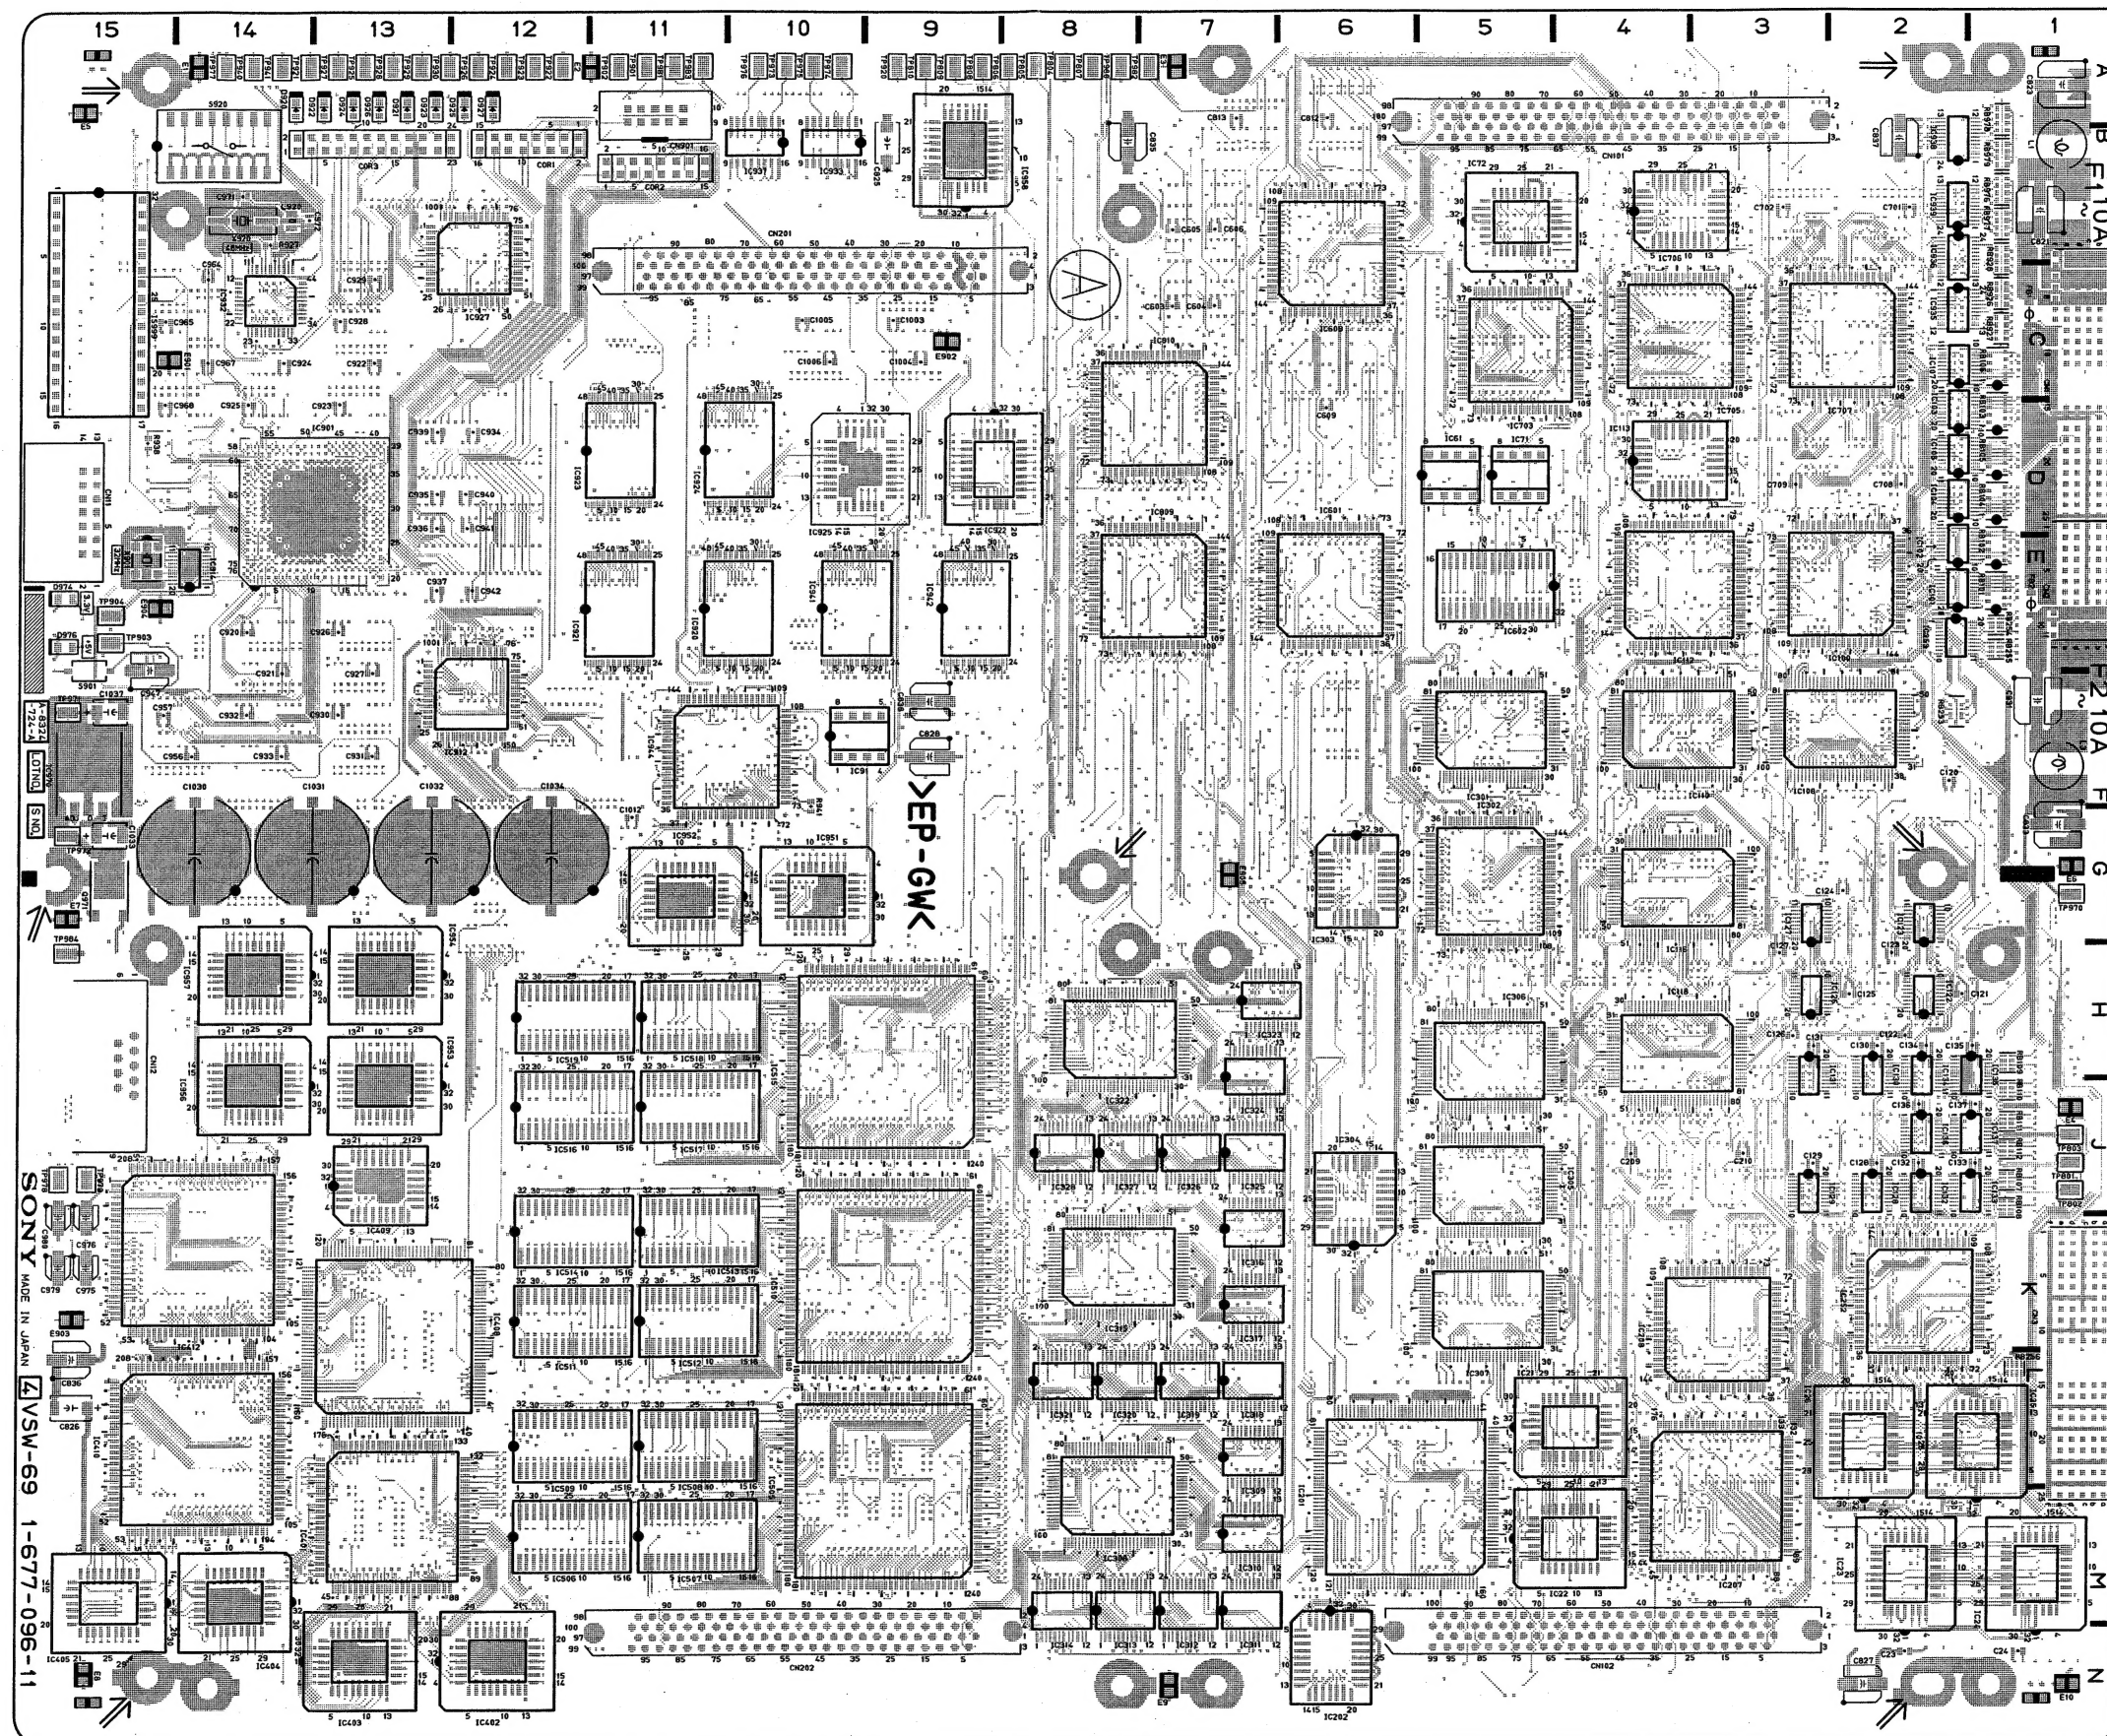

Location list : Previous page

DFS-700 (J) : S/N 30001 and Higher
 DFS-700 (UC) : S/N 10001 and Higher
 DFS-700P (CE) : S/N 40001 and Higher

VSW-69 -A SIDE-
 SUFFIX: -11

